




- Return all middle/Walter/light weight fighters (155,170,185) who at least have one win:
 match (a:Fighter)-[:beats]->(b) with a, b, count(b) as fights where a.weight in ["155", "170", "185"] and fights > 0 return a;

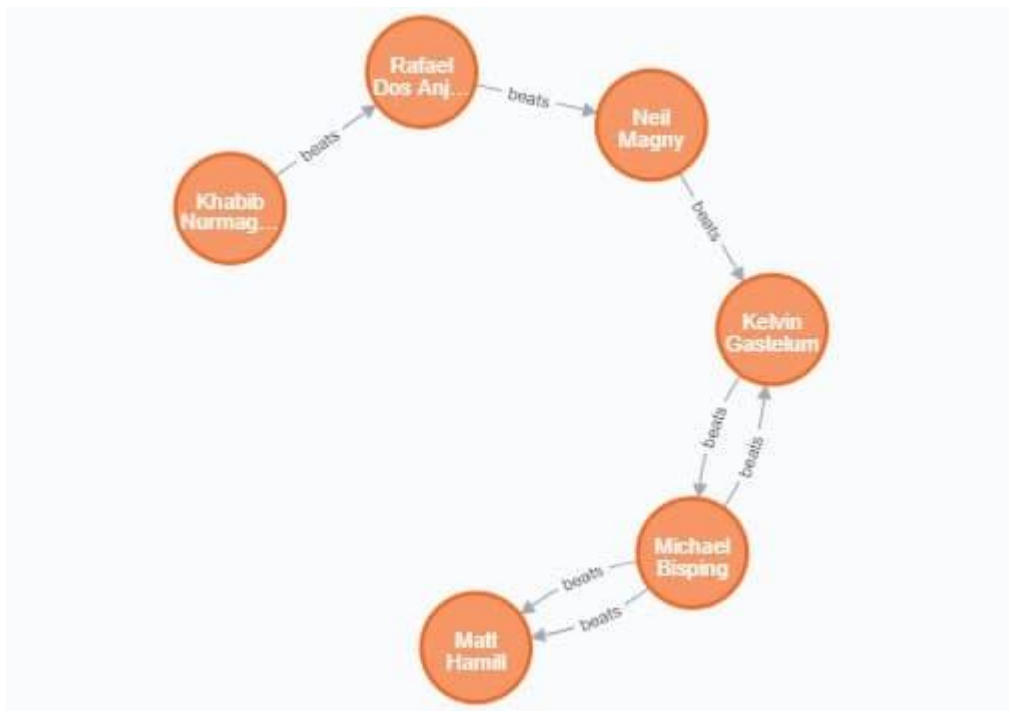


- Return all middle/Walter/light weight fighters (155,170,185) who at least have one win:
 Match (a:Fighter)-[:beats]->(b:Fighter), (b:Fighter)-[:beats]->(a:Fighter) return a;

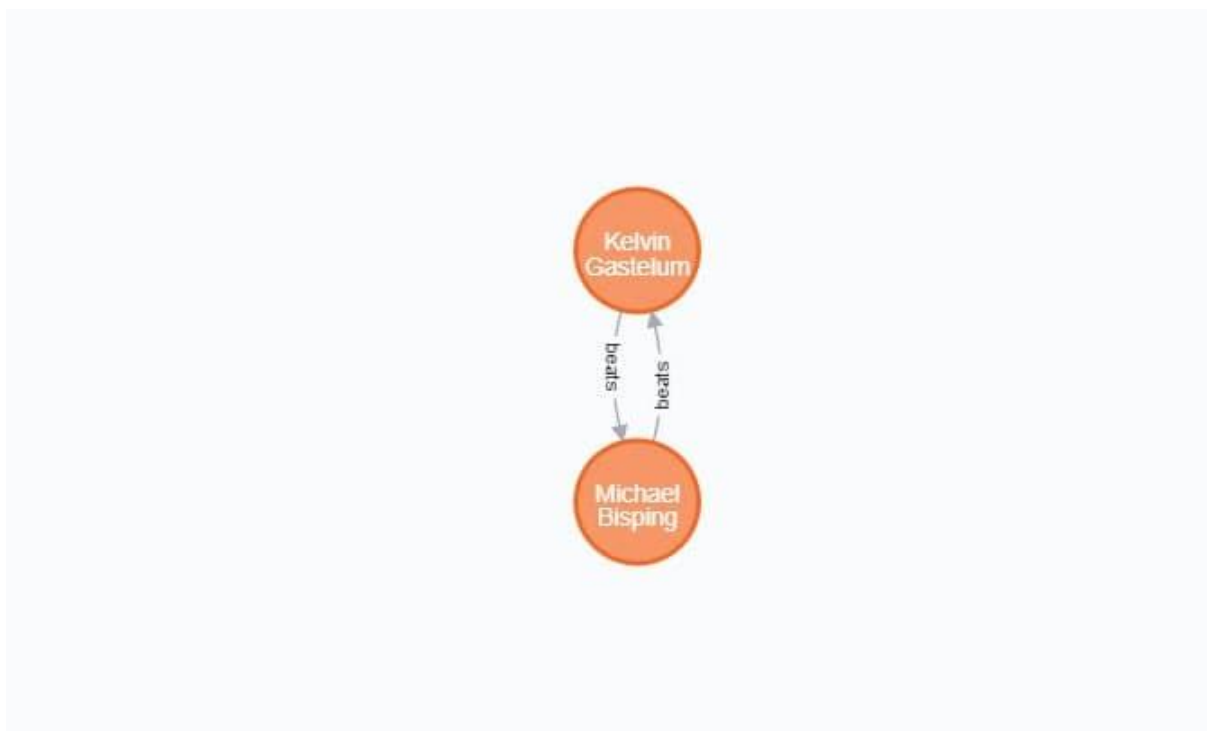

- Return all fighter that can "Khabib Nurmagomedov" beat them and he didn't have a fight with them yet.
`match (a:Fighter)-[:beats * 2..]->(b:Fighter)`
`where a.name = "Khabib Nurmagomedov" return distinct b;`

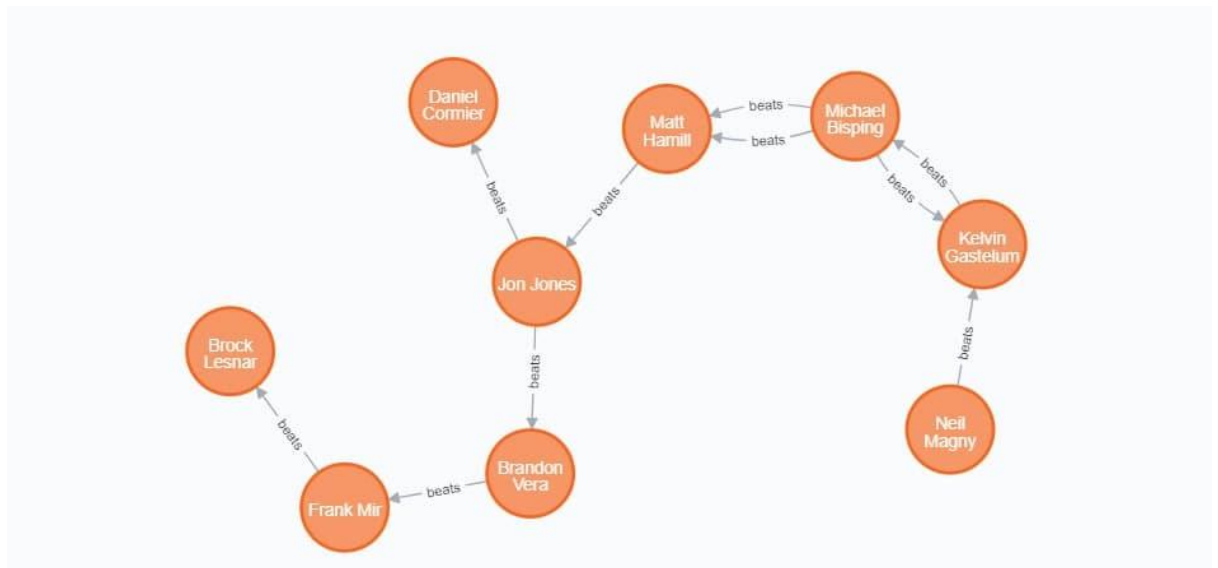

- Return defeated Fighters (0 loss):
`Match (a:Fighter) where not (a:Fighter)-[:beats]->(:Fighter) return a;`

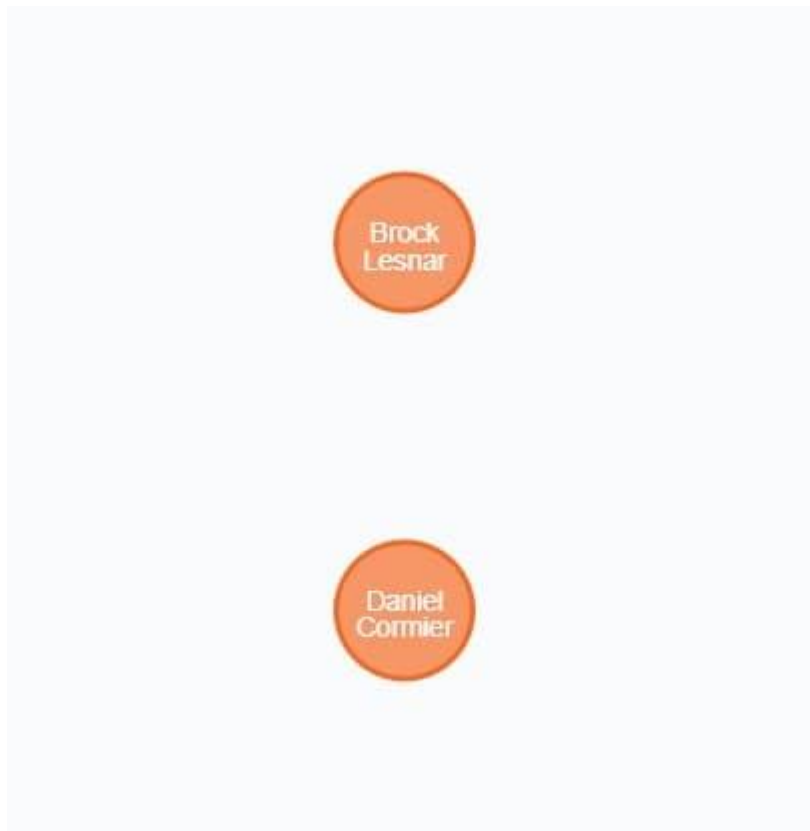

- Return undefeated Fighters:
Match (a:Fighter) where not (a:Fighter)-[:beats]-(:Fighter) return a;



match (a:Fighter) SET a.record = 0;