



# Users and Developers Guide

Version 0.6.1 + svn

April 8, 2014

[scalaris.googlecode.com](http://scalaris.googlecode.com)

---

Copyright 2007-2013 Zuse Institute Berlin.

Licensed under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

# Contents

<b>1. Introduction</b>	<b>5</b>
1.1. Scalaris provides strong consistency and partition tolerance . . . . .	5
1.2. Scientific background . . . . .	6
<b>I. Users Guide</b>	<b>11</b>
<b>2. Download and Installation</b>	<b>12</b>
2.1. Requirements . . . . .	12
2.2. Download . . . . .	12
2.2.1. Development Branch . . . . .	12
2.2.2. Releases . . . . .	12
2.3. Build . . . . .	13
2.3.1. Linux . . . . .	13
2.3.2. Windows . . . . .	13
2.3.3. Java-API . . . . .	13
2.3.4. Python-API . . . . .	14
2.3.5. Ruby-API . . . . .	14
2.4. Installation . . . . .	14
2.5. Testing the Installation . . . . .	15
<b>3. Setting up Scalaris</b>	<b>16</b>
3.1. Runtime Configuration . . . . .	16
3.1.1. Logging . . . . .	16
3.2. Running Scalaris . . . . .	17
3.2.1. Running on a local machine . . . . .	17
3.2.2. Running distributed . . . . .	17
3.3. Custom startup using <code>scalarisctl</code> . . . . .	18
<b>4. Using the system</b>	<b>19</b>
4.1. Application Programming Interfaces (APIs) . . . . .	19
4.1.1. Supported Types . . . . .	20
4.1.2. Supported Operations . . . . .	21
4.1.3. JSON API . . . . .	28
4.1.4. Java API . . . . .	32
4.2. Command Line Interfaces . . . . .	33
4.2.1. Java command line interface . . . . .	33
4.2.2. Python command line interface . . . . .	34
4.2.3. Ruby command line interface . . . . .	34
4.3. Using Scalaris from Erlang . . . . .	34
4.3.1. Running a Scalaris Cluster . . . . .	35
4.3.2. Transaction . . . . .	39

<b>5. Testing the system</b>	<b>41</b>
5.1. Erlang unit tests . . . . .	41
5.2. Java unit tests . . . . .	41
5.3. Python unit tests . . . . .	42
5.4. Interoperability Tests . . . . .	44
<b>6. Troubleshooting</b>	<b>45</b>
6.1. Network . . . . .	45
6.2. Miscellaneous . . . . .	45
 <b>II. Developers Guide</b>	 <b>46</b>
<b>7. General Hints</b>	<b>47</b>
7.1. Coding Guidelines . . . . .	47
7.2. Testing Your Modifications and Extensions . . . . .	47
7.3. Help with Digging into the System . . . . .	47
<b>8. System Infrastructure</b>	<b>48</b>
8.1. Groups of Processes . . . . .	48
8.2. The Communication Layer <code>comm</code> . . . . .	48
8.3. The <code>gen_component</code> . . . . .	48
8.3.1. A basic <code>gen_component</code> including a message handler . . . . .	49
8.3.2. How to start a <code>gen_component</code> ? . . . . .	50
8.3.3. When does a <code>gen_component</code> terminate? . . . . .	51
8.3.4. How to determine whether a process is a <code>gen_component</code> ? . . . . .	51
8.3.5. What happens when unexpected events / messages arrive? . . . . .	51
8.3.6. What if my message handler generates an exception or crashes the process? . . . . .	52
8.3.7. Changing message handlers and implementing state dependent message re- sponsiveness as a state-machine . . . . .	52
8.3.8. Handling several messages atomically . . . . .	52
8.3.9. Halting and pausing a <code>gen_component</code> . . . . .	53
8.3.10. Integration with <code>pid_groups</code> : Redirecting messages to other <code>gen_components</code> . . . . .	53
8.3.11. Replying to ping messages . . . . .	53
8.3.12. The debugging interface of <code>gen_component</code> : Breakpoints and step-wise exe- cution . . . . .	53
8.3.13. Future use and planned extensions for <code>gen_component</code> . . . . .	56
8.4. The Process' Database ( <code>pdb</code> ) . . . . .	56
8.5. Failure Detectors ( <code>fd</code> ) . . . . .	56
8.6. Monitoring Statistics ( <code>monitor</code> , <code>rrd</code> ) . . . . .	57
8.7. Writing Unittests . . . . .	58
8.7.1. Plain unittests . . . . .	58
8.7.2. Randomized Testing using <code>tester.erl</code> . . . . .	58
<b>9. Basic Structured Overlay</b>	<b>59</b>
9.1. Ring Maintenance . . . . .	59
9.2. T-Man . . . . .	59
9.3. Routing Tables . . . . .	59
9.3.1. The routing table process ( <code>rt_loop</code> ) . . . . .	64
9.3.2. Simple routing table ( <code>rt_simple</code> ) . . . . .	65
9.3.3. Chord routing table ( <code>rt_chord</code> ) . . . . .	69

9.4. Local Datastore . . . . .	74
9.5. Cyclon . . . . .	74
9.6. Vivaldi Coordinates . . . . .	74
9.7. Estimated Global Information (Gossiping) . . . . .	74
9.8. Load Balancing . . . . .	74
9.9. Broadcast Trees . . . . .	74
<b>10. Transactions in Scalaris</b>	<b>75</b>
10.1. The Paxos Module . . . . .	75
10.2. Transactions using Paxos Commit . . . . .	75
10.3. Applying the Tx-Modules to replicated DHTs . . . . .	75
<b>11. How a node joins the system</b>	<b>76</b>
11.1. Supervisor-tree of a Scalaris node . . . . .	77
11.2. Starting the sup_dht_node supervisor and general processes of a node . . . . .	78
11.3. Starting the sup_dht_node_core supervisor with a peer and some paxos processes . . . . .	79
11.4. Initializing a dht_node-process . . . . .	80
11.5. Actually joining the ring . . . . .	80
11.5.1. A single node joining an empty ring . . . . .	81
11.5.2. A single node joining an existing (non-empty) ring . . . . .	81
<b>12. How data is transferred (atomically)</b>	<b>90</b>
12.1. Sending data to the predecessor . . . . .	91
12.1.1. Protocol . . . . .	91
12.1.2. Callbacks . . . . .	91
12.2. Sending data to the successor . . . . .	92
12.2.1. Protocol . . . . .	92
12.2.2. Callbacks . . . . .	92
<b>13. Replica Repair</b>	<b>93</b>
13.1. Replica Reconciliation - rr_recon . . . . .	93
13.1.1. Trivial Replica Repair . . . . .	93
13.1.2. Replica Repair with Bloom Filters . . . . .	94
13.1.3. Replica Repair with Merkle Trees . . . . .	95
13.2. Resolve Replicas - rr_resolve . . . . .	96
13.2.1. Updating a list of keys - key_upd . . . . .	96
<b>14. Directory Structure of the Source Code</b>	<b>97</b>
<b>15. Java API</b>	<b>98</b>

# 1. Introduction


Scalaris is a scalable, transactional, distributed key-value store based on the principles of structured peer-to-peer overlay networks. It can be used as a flexible elastic data store backend to build scalable online services. Without system interruption it scales from a few PCs to thousands of servers. Servers can be added or removed on the fly without any service downtime.

Scalaris takes care of

<i>replication and fail-over</i>	for fault-tolerance
<i>self-management</i>	for low maintenance overhead
<i>automatic data partitioning</i>	for elasticity, load balancing and scalability
<i>strong consistency</i>	to ease development of applications on top of it, as inconsistencies have not to be dealt with
<i>transactions</i>	to support safe atomic updates of several data items at once

The Scalaris project was initiated and is mainly developed by [Zuse Institute Berlin \(ZIB\)](http://www.zib.de) and was partly funded by the EU projects Selfman, XtreamOS, Contrail and 4CaaS. Additional information can be found at the project homepage (<http://scalaris.googlecode.com>) and the corresponding project web page at ZIB (<http://www.zib.de/en/das/projekte/projektdetails/article/scalaris.html>).

The conceptual architecture of Scalaris consists of four layers:

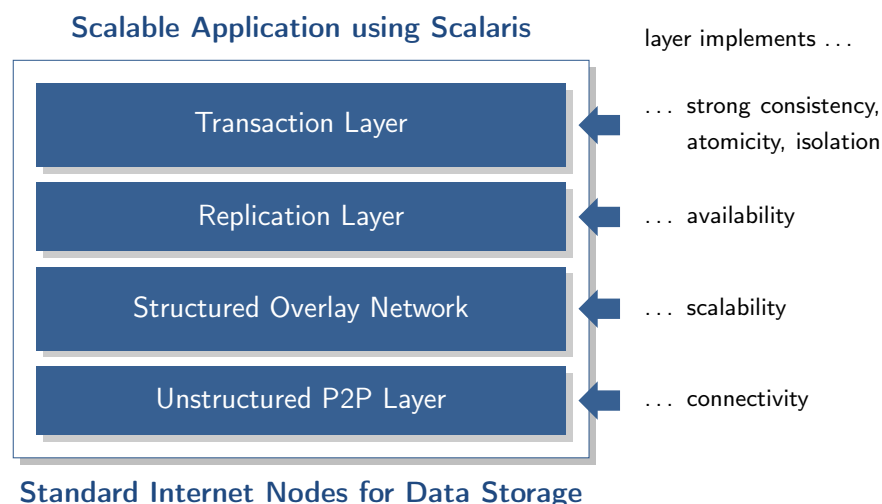

## 1.1. Scalaris provides strong consistency and partition tolerance

In distributed computing the so called CAP theorem says that there are three desirable properties for distributed systems, but one can only have any two of them.

**Strong Consistency.** Any read operation has to return the result of the latest write operation on the same data item.

**Availability.** Items can be read and modified at any time.

**Partition Tolerance.** The network on which the service is running may split into several partitions which cannot communicate with each other. Later on the networks may re-join again.

For example, a service is hosted on one machine in Seattle and one machine in Berlin. This service is partition tolerant if it can tolerate that all Internet connections over the Atlantic (and Pacific) are interrupted for a few hours and then get repaired.

The goal of Scalaris is to provide strong consistency and partition tolerance. We are willing to sacrifice availability to make sure that the stored data is always consistent. I.e. when you are running Scalaris with a replication degree of four and the network splits into two partitions – one partition with three replicas and one partition with one replica – you will be able to continue to use the service only in the larger partition. All requests in the smaller partition will time out or be retried until the two networks merge again. Note, most other key-value stores tend to sacrifice consistency, which may make it hard for the application developer to detect and handle appearing inconsistencies properly.

## 1.2. Scientific background

Scalaris is backed by tons of research. It implements both algorithms from the literature and our own research results and combines all of them to a practical overall system. Several aspects of Scalaris were analyzed or/and developed as part of bachelor, diploma, master or PhD theses.

### Scalaris in General

#### Publications of the Scalaris team

F. Schintke. *XtreemFS & Scalaris*. Science & Technology, pp. 54-55, 2013.

A. Reinefeld, F. Schintke, T. Schütt, S. Haridi. *A Scalable, Transactional Data Store for Future Internet Services*. Towards the Future Internet - A European Research Perspective, G. Tselentis et al. (Eds.) IOS Press, pp. 148-159, 2009.

Thorsten Schütt, Monika Moser, Stefan Plantikow, Florian Schintke, Alexander Reinefeld. *A Transactional Scalable Distributed Data Store*. 1st IEEE International Scalable Computing Challenge, co-located with CCGrid'08, 2008.

Thorsten Schütt, Florian Schintke, Alexander Reinefeld. *Scalaris: Reliable Transactional P2P Key/Value Store*. ACM SIGPLAN Erlang Workshop, 2008.

### Structured Overlay Networks and Routing

The general structure of Scalaris is modelled after Chord. The Chord paper [4] describes the ring structure, the routing algorithms, and basic ring maintenance.

The main routines of our Chord node are in `src/dht_node.erl` and the join protocol is implemented in `src/dht_node_join.erl` (see also Chap. 11 on page 76). Our implementation of the routing algorithms is described in more detail in Sect. 9.3 on page 59 and the actual implementation is in `src/rt_chord.erl`. We also implemented Flexible Routing Tables according to [6] which can be found in `src/rt_frthchord.erl` and `src/rt_gfrthchord.erl`.

## Publications of the Scalaris team

- Magnus Müller. *Flexible Routing Tables in a Distributed Key-Value Store*. Diploma thesis, HU-Berlin, 2013.
- Mikael Höggqvist. *Consistent Key-Based Routing in Decentralized and Reconfigurable Data Services*. Doctoral thesis, HU-Berlin, 2012.
- Philipp Borgers. *Erweiterung eines verteilten Key-Value-Stores (Riak) um einen räumlichen Index*. Bachelor thesis, FU-Berlin, 2012.
- Thorsten Schütt. *Range queries in distributed hash tables*. Doctoral thesis, 2010.
- Christian von Prollius. *Ein Peer-to-Peer System mit Bereichsabfragen in PlanetLab*. Diploma thesis, FU-Berlin, 2008.
- Jeroen Vlek. *Reducing latency: Log b routing for Chord<sup>#</sup>*. Bachelor thesis, Uni Amsterdam, 2008.
- Thorsten Schütt, Florian Schintke, Alexander Reinefeld. *Range Queries on structured overlay networks*. Computer Communications, 31(2), pp. 280-291, 2008.
- Thorsten Schütt, Florian Schintke, Alexander Reinefeld. *A Structured Overlay for Multi-dimensional Range Queries*. Euro-Par Conference, Luc Anne-Marie Kermarrec (Ed.)pp. 503-513, Vol.4641, LNCS, 2007.
- Alexander Reinefeld, Florian Schintke, Thorsten Schütt. *P2P Routing of Range Queries in Skewed Multidimensional Data Sets*. ZIB report ZR-07-23, 2007.
- Thorsten Schütt, Florian Schintke, Alexander Reinefeld. *Structured Overlay without Consistent Hashing*. Sixth Workshop on Global and Peer-to-Peer Computing (GP2PC'06) at Sixth IEEE International Symposium on Cluster Computing and the Grid (CCGrid 2006), 16-19 May 2006, Singapore, p. 8, 2006.
- Thorsten Schütt, Florian Schintke, Alexander Reinefeld. *Chord<sup>#</sup>: Structured Overlay Network for Non-Uniform Load-Distribution*. ZIB report ZR-05-40, 2005.

## Related work

- [6] Hiroya Nagao, Kazuyuki Shudo. *Flexible routing tables: Designing routing algorithms for overlays based on a total order on a routing table set*. In: Peer-to-Peer Computing, IEEE, 2011.
- P. Ganesan, B. Yang, H. Garcia-Molina. *One torus to rule them all: Multi- dimensional queries in P2P systems*. In: WebDB2004, 2004.
- Luc Onana Alima, Sameh El-Ansary, Per Brand and Seif Haridi. *DKS( $N, k, f$ ) A family of Low-Communication, Scalable and Fault-tolerant Infrastructures for P2P applications*. The 3rd International workshop on Global and P2P Computing on Large Scale Distributed Systems, (CCGRID 2003), May 2003.
- [4] Ion Stoica, Robert Morris, David Karger, M. Frans Kaashoek and Hari Balakrishnan. *Chord: A Scalable Peer-to-peer Lookup Service for Internet Applications*. ACM SIGCOMM 2001, San Deigo, CA, August 2001, pp. 149-160. [http://pdos.csail.mit.edu/papers/chord:sigcomm01/chord\\_sigcomm.pdf](http://pdos.csail.mit.edu/papers/chord:sigcomm01/chord_sigcomm.pdf)

## Transactions

The most interesting part is probably the transaction algorithms. The last description of the algorithms and background is in [7].

The implementation consists of the Paxos algorithm in `src/paxos` and the transaction algorithms itself in `src/transactions` (see also Chap. 10 on page 75).

## Publications of the Scalaris team

[7] Florian Schintke, Alexander Reinefeld, Seif Haridi, Thorsten Schütt. *Enhanced Paxos Commit for Transactions on DHTs*. CCGRID, pp. 448-454, 2010.

Florian Schintke. *Management verteilter Daten in Grid- und Peer-to-Peer-Systemen*. Doctoral thesis, HU-Berlin, 2010.

Monika Moser, Seif Haridi, Tallat Shafaat, Thorsten Schütt, Mikael Höggqvist, Alexander Reinefeld. *Transactional DHT Algorithms*. ZIB report ZR-09-34, 2009.

Stefan Plantikow, Alexander Reinefeld, Florian Schintke. *Transactions and Concurrency Control for Peer-to-Peer-Wikis*. In: Making Grids Work, Marco Danelutto, Paraskevi Fragopoulou, Vladimir Getov (Eds.)pp. 337-349, 2008.

B. Mejías, M. Höggqvist, P. Van Roy. *Visualizing Transactional Algorithms for DHTs*. IEEE P2P Conference, 2008.

Monika Moser, Seif Haridi. *Atomic Commitment in Transactional DHTs*. Proceedings of the CoreGRID Symposium, 2007.

S. Plantikow, A. Reinefeld, F. Schintke. *Distributed Wikis on Structured Overlays*. CoreGrid Workshop on Grid Programming Models, Grid and P2P System Architecture, Grid Systems, Tools and Environments, 2007.

S. Plantikow, A. Reinefeld, F. Schintke. *Transactions for Distributed Wikis on Structured Overlays*. DSOM, Alexander Clemm, Lisandro Granville, Rolf Stadler (Eds.)pp. 256-267, Vol.4785, LNCS, 2007.

Stefan Plantikow. *Transaktionen für verteilte Wikis auf strukturierten Overlay-Netzwerken*. Diploma thesis, HU-Berlin, 2007.

## Related work

Björn Kolbeck, Mikael Höggqvist, Jan Stender, Felix Hupfeld. *Please – Lease Coordination Without a Lock Server*. Intl. Parallel and Distributed Processing Symposium, pp. 978-988, 2011.

J. Gray, L. Lamport. *Consensus on transaction commit*. ACM Trans. Database Syst., 31(1):133–160, 2006.

L. Lamport. *Fast Paxos*. Distributed Computing, 19(2):79–103, 2006.

L. Lamport. *Paxos Made Simple*. SIGACT News, 32(4):51–58, December 2001.

L. Lamport. *The Part-Time Parliament*. ACM Trans. Comput. Syst., 16(2):133–169, 1998.

## Ring Maintenance

We changed the ring maintenance algorithm in Scalaris. It is not the standard Chord one, but a variation of T-Man [5]. It is supposed to fix the ring structure faster. In some situations, the standard Chord algorithm is not able to fix the ring structure while T-Man can still fix it. For node sampling, our implementation relies on Cyclon [8].

The T-Man implementation can be found in `src/rm_tman.erl` and the Cyclon implementation in `src/cyclon.erl`.

## Publications of the Scalaris team

Paolo Costa, Guillaume Pierre, Alexander Reinefeld, Thorsten Schütt, Maarten van Steen. *Sloppy Management of Structured P2P Services*. Proceedings of the 3<sup>rd</sup> International Workshop on Hot Topics in Autonomic Computing (HotAC III), co-located with IEEE ICAC’08, 2008.

## Related work



[5] Márk Jelasity, Alberto Montresor, Ozalp Babaoglu. *T-Man: Gossip-based fast overlay topology construction*. Computer Networks (CN) 53(13):2321-2339, 2009.

[8] Spyros Voulgaris, Daniela Gavidia, Maarten van Steen. *CYCLON: Inexpensive Membership Management for Unstructured P2P Overlays*. J. Network Syst. Manage. 13(2): 2005.

## Gossiping and Topology Inference

For some experiments, we implemented so called Vivaldi coordinates [2]. They can be used to estimate the network latency between arbitrary nodes.

The implementation can be found in `src/vivaldi.erl`.

For some algorithms, we use estimates of global information. These estimates are aggregated with the help of gossiping techniques [9].

The implementation can be found in `src/gossip.erl`.

### Publications of the Scalaris team

Marie Hoffmann. *Approximate Algorithms for Distributed Systems*. Master thesis, FU-Berlin, 2012.

Thorsten Schütt, Alexander Reinefeld, Florian Schintke, Marie Hoffmann. *Gossip-based Topology Inference for Efficient Overlay Mapping on Data Centers*. Peer-to-Peer Computing, pp. 147-150, 2009.

### Related work

[9] Márk Jelasity, Alberto Montresor, Ozalp Babaoglu. *Gossip-based aggregation in large dynamic networks*. ACM Trans. Comput. Syst. 23(3), 219-252 (2005).

[2] Frank Dabek, Russ Cox, Frans Kaahoek, Robert Morris. *Vivaldi: A Decentralized Network Coordinate System*. ACM SIGCOMM 2004.

## Load-Balancing

### Publications of the Scalaris team

Mikael Höggqvist, Nico Kruber. *Passive/Active Load Balancing with Informed Node Placement in DHTs*. IWSOS, Thrasyvoulos Spyropoulos, Karin Hummel (Eds.)pp. 101-112, Vol.5918, Lecture Notes in Computer Science, 2009.

Nico Kruber. *DHT Load Balancing with Estimated Global Information*. Diploma thesis, HU-Berlin, 2009.

Mikael Höggqvist, Seif Haridi, Nico Kruber, Alexander Reinefeld, Thorsten Schütt. *Using Global Information for Load Balancing in DHTs*. Workshop on Decentralized Self Management for Grids, P2P, and User Communities, 2008.

Simon Rieche. *Lastbalancierung in Peer-to-Peer Systemen*. Diploma thesis, FU-Berlin, 2003.

### Related work

David R. Karger, Matthias Ruhl. *Simple efficient load-balancing algorithms for peer-to-peer systems*. Theory of Computing Systems, 39(6):787–804, November 2006.

Ashwin R. Bhambe, Mukesh Agrawal, Srinivasan Seshan. *Mercury: supporting scalable multi-attribute range queries*. SIGCOMM Comput. Commun. Rev., 34(4):353–366, 2004.

## Self-Management

### Publications of the Sclaris team

T. Schütt, A. Reinefeld, F. Schintke, C. Hennig. *Self-Adaptation in Large-Scale Systems*. Architectures and Languages for Self-Managing Distributed Systems (SelfMan@SASO), 2009.

P. Van Roy, S. Haridi, A. Reinefeld, J.-B. Stefani, R. Yap, T. Coupaye. *Self Management for Large-Scale Distributed Systems*. Formal Methods for Components and Objects 2007 (FMCO 2007), 2008.

P. Van Roy, A. Ghodsi, S. Haridi, J.-B. Stefani, T. Coupaye, A. Reinefeld, E. Winter, R. Yap. *Self Management of Large-Scale Distributed Systems by Combining Peer-to-Peer Networks and Components*, 2005.

## Other Topics

### Publications of the Sclaris team

#### Data Placement

M. Höggqvist, S. Plantikow. *Towards Explicit Data Placement in Scalable Key/Value Stores*. Architectures and Languages for Self-Managing Distributed Systems (SelfMan@SASO), 2009.

#### Consistency

Tallat Shafaat, Monika Moser, Ali Ghodsi, Thorsten Schütt, Seif Haridi, Alexander Reinefeld. *Key-Based Consistency and Availability in Structured Overlay Networks*. International ICST Conference on Scalable Information Systems, 2008.

Tallat Shafaat, Monika Moser, Ali Ghodsi, Thorsten Schütt, Alexander Reinefeld. *On Consistency of Data in Structured Overlay Networks*. Coregrid Integration Workshop, 2008.

#### Snapshots

Stefan Keidel. *Snapshots in Sclaris*. Diploma thesis, HU-Berlin, 2012.

#### Replication and Replica Repair

Maik Lange. *Redundanzverwaltung in konsistenten verteilten Datenbanken*. Diploma thesis, HU-Berlin, 2012.

Part I.

# Users Guide

## 2. Download and Installation

### 2.1. Requirements

For building and running Scalaris, some third-party software is required which is not included in the Scalaris sources:

- Erlang R13B01 or newer
- OpenSSL (required by Erlang's crypto module)
- GNU-like Make and autoconf (not required on Windows)

To build the Java API (and its command-line client) the following programs are also required:

- Java Development Kit 6
- Apache Ant

Before building the Java API, make sure that JAVA\_HOME and ANT\_HOME are set. JAVA\_HOME has to point to a JDK installation, and ANT\_HOME has to point to an Ant installation.

To build the Python API (and its command-line client) the following programs are also required:

- Python  $\geq$  2.6

### 2.2. Download

The sources can be obtained from <http://code.google.com/p/scalaris>. RPM and DEB packages are available from <http://download.opensuse.org/repositories/home:/scalaris/> for various Linux distributions.

#### 2.2.1. Development Branch

You find the latest development version in the svn repository:

```
# Non-members may check out a read-only working copy anonymously over HTTP.  
svn checkout http://scalaris.googlecode.com/svn/trunk/ scalaris-read-only
```

#### 2.2.2. Releases

Releases can be found under the 'Download' tab on the web-page.

## 2.3. Build

### 2.3.1. Linux

Scalaris uses autoconf for configuring the build environment and GNU Make for building the code.

```
%> ./configure
%> make
%> make docs
```

For more details read README in the main Scalaris checkout directory.

### 2.3.2. Windows

We are currently not supporting Scalaris on Windows. However, we have two small .bat files for building and running Scalaris nodes. It seems to work but we make no guarantees.

- Install Erlang  
<http://www.erlang.org/download.html>
- Install OpenSSL (for crypto module)  
<http://www.slproweb.com/products/Win32OpenSSL.html>
- Checkout Scalaris code from SVN
- adapt the path to your Erlang installation in build.bat
- start a cmd.exe
- go to the Scalaris directory
- run build.bat in the cmd window
- check that there were no errors during the compilation; warnings are fine
- go to the bin sub-directory
- adapt the path to your Erlang installation in firstnode.bat, joining\_node.bat
- run firstnode.bat or one of the other start scripts in the cmd window

build.bat will generate a Emakefile if there is none yet. If you have Erlang < R13B04, you will need to adapt the Emakefile. There will be empty lines in the first three blocks ending with “}”.: add the following to these lines and try to compile again. It should work now.

```
, {d, type_forward_declarations_are_not_allowed}
, {d, forward_or_recursive_types_are_not_allowed}
```

For the most recent description please see the FAQ at <http://code.google.com/p/scalaris/wiki/FAQ>.

### 2.3.3. Java-API

The following commands will build the Java API for Scalaris:

```
%> make java
```

This will build `scalaris.jar`, which is the library for accessing the overlay network. Optionally, the documentation can be build:

```
%> cd java-api
%> ant doc
```

### 2.3.4. Python-API

The Python API for Python 2.\* (at least 2.6) is located in the `python-api` directory. Files for Python 3.\* can be created using `2to3` from the files in `python-api`. The following command will use `2to3` to convert the modules and place them in `python3-api`.

```
%> make python3
```

Both versions of python will compile required modules on demand when executing the scripts for the first time. However, pre-compiled modules can be created with:

```
%> make python
%> make python3
```

### 2.3.5. Ruby-API

The Ruby API for Ruby  $\geq 1.8$  is located in the `ruby-api` directory. Compilation is not necessary.

## 2.4. Installation

For simple tests, you do not need to install Scalaris. You can run it directly from the source directory. Note: `make install` will install Scalaris into `/usr/local` and place `scalarisctl` into `/usr/local/bin`, by default. But it is more convenient to build an RPM and install it. On openSUSE, for example, do the following:

```
export SCALARIS_SVN=http://scalaris.googlecode.com/svn/trunk
for package in main bindings; do
    mkdir -p ${package}
    cd ${package}
    svn export ${SCALARIS_SVN}/contrib/packages/${package}/checkout.sh
    ./checkout.sh
    cp * /usr/src/packages/SOURCES/
    rpmbuild -ba scalaris*.spec
    cd ..
done
```

If any additional packages are required in order to build an RPM, `rpmbuild` will print an error.

Your source and binary RPMs will be generated in `/usr/src/packages/SRPMS` and `RPMS`.

We build RPM and DEB packages for all tagged Scalaris versions as well as snapshots of svn trunk and provide them using the Open Build Service. The latest stable version is available at <http://download.opensuse.org/repositories/home:/scalaris/>. The latest svn snapshot as well as archives of previous versions are available in their respective folders below <http://download.opensuse.org/repositories/home:/scalaris/>. Packages are available for

- Fedora 16, 17,

- Mandriva 2010, 2010.1, 2011,
- openSUSE 11.4, 12.1, Factory, Tumbleweed
- SLE 10, 11, 11SP1, 11SP2,
- CentOS 5.5, 6.2,
- RHEL 5.5, 6,
- Debian 5.0, 6.0 and
- Ubuntu 10.04, 10.10, 11.04, 11.10, 12.04.

An up-to-date list of available repositories can be found at [https://code.google.com/p/scalaris/wiki/FAQ#Prebuild\\_packages](https://code.google.com/p/scalaris/wiki/FAQ#Prebuild_packages).

For those distributions which provide a recent-enough Erlang version, we build the packages using their Erlang package and recommend using the same version that came with the distribution. In this case we do not provide Erlang packages in our repository.

Exceptions are made for openSUSE-based and RHEL-based distributions as well as Debian 5.0:

- For openSUSE, we provide the package from the `devel:languages:erlang` repository.
- For RHEL-based distributions (CentOS 5, RHEL 5, RHEL 6) we included the Erlang package from the EPEL repository of RHEL 6.
- For Debian 5.0 we included the Erlang package of Ubuntu 11.04.

## 2.5. Testing the Installation

After installing Scalaris you can check your installation and perform some basic tests using

```
%> scalarisctl checkinstallation
```

For further details on `scalarisctl` see Section 3.3 on page 18.

## 3. Setting up Scalaris

*Description is based on SVN revision r1810.*

### 3.1. Runtime Configuration

Scalaris reads two configuration files from the working directory: `bin/scalaris.cfg` (mandatory) and `bin/scalaris.local.cfg` (optional). The former defines default settings and is included in the release. The latter can be created by the user to alter settings. A sample file is provided as `bin/scalaris.local.cfg.example` and needs to be altered for a distributed setup (see Section 3.2.2 on page 17). A third way to alter the configuration of Scalaris, e.g. port numbers, is to use parameters for the `scalarisctl` script (ref. Section 3.3 on page 18). The following example changes the port to 14195 and the YAWS port to 8080:

```
%> ./bin/scalarisctl -p 14194 -y 8080
```

The configuration precedence is as follows:

1. configuration parameters of `scalarisctl`
2. `bin/scalaris.local.cfg`
3. `bin/scalaris.cfg`

#### 3.1.1. Logging

Scalaris uses the `log4erl` library (see `contrib/log4erl`) for logging status information and error messages. The log level can be configured in `bin/scalaris.cfg` for both the stdout and file logger. The default value is `warn`; only warnings, errors and severe problems are logged.

```
%% @doc Loglevel: debug < info < warn < error < fatal < none
{log_level, warn}.
{log_level_file, warn}.
```

In some cases, it might be necessary to get more complete logging information, e.g. for debugging. In Chapter 11 on page 76, we are explaining the startup process of Scalaris nodes in more detail, here the `info` level provides more detailed information.

```
%% @doc Loglevel: debug < info < warn < error < fatal < none
{log_level, info}.
{log_level_file, info}.
```



## 3.2. Running Scalaris

A Scalaris deployment can have a *management server* as well as *regular nodes*. The management server is optional and provides a global view on all nodes of a Scalaris deployment which contact this server, i.e. have its address specified in the `mgmt_server` configuration setting. A regular node is either the first node in a system or joins an existing system deployment.

### 3.2.1. Running on a local machine

Open at least two shells. In the first, inside the Scalaris directory, start the first node (`firstnode.bat` on Windows):

```
%> ./bin/firstnode.sh
```

This will start a new Scalaris deployment with a single node, including a management server. On success <http://localhost:8000> should point to the management interface page of the management server. The main page will show you the number of nodes currently in the system. A first Scalaris node should have started and the number should show 1 node. The main page will also allow you to store and retrieve key-value pairs but should not be used by applications to access Scalaris. See Section 4.1 on page 19 for application APIs.

In a second shell, you can now start a second Scalaris node. This will be a ‘regular node’:

```
%> ./bin/joining_node.sh
```

The second node will read the configuration file and use this information to contact a number of known nodes (set by the `known_hosts` configuration setting) and join the ring. It will also register itself with the management server. The number of nodes on the web page should have increased to two by now.

Optionally, a third and fourth node can be started on the same machine. In a third shell:

```
%> ./bin/joining_node.sh 2
```

In a fourth shell:

```
%> ./bin/joining_node.sh 3
```

This will add two further nodes to the deployment. The `./bin/joining_node.sh` script accepts a number as its parameter which will be added to the started node’s name, i.e. 1 will lead to a node named `node1`. The web pages at <http://localhost:8000> should show the additional nodes.

### 3.2.2. Running distributed

Scalaris can be installed on other machines in the same way as described in Section 2.4 on page 14. In the default configuration, nodes will look for the management server on 127.0.0.1 on port 14195. To run Scalaris distributed over several nodes, each node requires a `bin/scalaris.local.cfg` pointing to the node running the management server (if available) and containing a list of known nodes. Without a list of known nodes, a joining node will not know where to join.

In the following example, the `mgmt_server`’s location is defined as an IP address plus a TCP port and its Erlang-internal process name. If the deployment should not use a management server, replace the setting with an invalid address, e.g. ‘ null ’.

File `scalaris.local.cfg`:

```
1 % Insert the appropriate IP-addresses for your setup
2 % as comma separated integers:
3 % IP Address, Port, and label of the boot server
4 {mgmt_server, {{127,0,0,1}, 14195, mgmt_server}}.
5
6 % IP Address, Port, and label of a node which is already in the system
7 {known_hosts, [{{127,0,0,1}, 14195, service_per_vm}}}.
```

If you are starting the management server using `firstnode.sh`, it will listen on port 14195 and you only have to change the the IP address in the configuration file. Otherwise the other nodes will not find the management server. Calling `./bin/joining_node.sh` on a remote machine will start the node and automatically contact the configured management server.

### 3.3. Custom startup using `scalarisctl`

On Linux you can also use the `scalarisctl` script to start a management server and ‘regular’ nodes directly.

```
%> ./bin/scalarisctl -h
```

```
usage: scalarisctl [options] [services] <cmd>
options:
  -h          - print this help message
  -d          - daemonize
  --screen    - if daemonized, put an interactive session into screen
  -e <params> - pass additional parameters to erl
  -f          - first node (to start a new Scalaris instead of joining one)
                (not with -q)
  -q          - elect first node from known hosts (not with -f)
  -n <name>   - Erlang process name (default 'node')
  -c <cookie> - Erlang cookie to use (for distributed Erlang)
                (default 'chocolate chip cookie')
  -p <port>   - TCP port for the Scalaris node
  -y <port>   - TCP port for the built-in webserver (YAWS)
  -k <key>    - join at the given key
  -v          - verbose
  --dist-erl-port <port>
                - (single) port distributed erlang listens on
  --nodes-per-vm <number>
                - number of Scalaris nodes to start inside the VM

services:
  -m          - global Scalaris management server
  -s          - Scalaris node (see also -f)

commands:
  checkinstallation
                - test installation
  start        - start services (see -m and -s)
  stop         - stop a scalaris process defined by its name (see -n)
  restart      - restart a scalaris process by its name (see -n)

  list         - list locally running Erlang VMs
  debug        - connect to a running node via an Erlang shell
  dbg-check-ring <ring-size> <timeout>
                - checks whether Scalaris has <ring-size> nodes and the
                  ring maintenance has settled (requires a mgmt_server)
```

## 4. Using the system

*Description is based on SVN revision r1936.*

Scalaris can be used with one of the provided command line interfaces or by using one of the APIs in a custom program. The following sections will describe the APIs in general, each API in more detail and the use of our command line interfaces.

### 4.1. Application Programming Interfaces (APIs)

Currently we offer the following APIs:

- an *Erlang API* running on the node Scalaris is run  
(functions can be called using remote connections with distributed Erlang)
- a *Java API* using Erlang's JInterface library  
(connections are established using distributed Erlang)
- a generic *JSON API*  
(offered by an integrated HTTP server running on each Scalaris node)
- a *Python API* for Python  $\geq 2.6$  using JSON to talk to Scalaris.
- a *Ruby API* for Ruby  $\geq 1.8$  using JSON to talk to Scalaris.

Each API contains methods for accessing functions from the three layers Scalaris is composed of. Table 4.1 shows the modules and classes of Erlang, Java, Python and Ruby and their mapping to these layers. Details about the supported operations and how to access them in each of the APIs are provided in Section 4.1.2 on page 21. A more detailed discussion about the generic JSON API including examples of JSON calls is shown in Section 4.1.3 on page 28.

	Erlang module	Java class in de.zib.scalariz	JSON file in <URL>/api/	Python / Ruby class in module scalaris
Transaction Layer	api_tx	Transaction, TransactionSingleOp	tx.yaws	Transaction, TransactionSingleOp
	api_pubsub	PubSub	pubsub.yaws	PubSub
Replication Layer	api_rdht	ReplicatedDHT	rdht.yaws	ReplicatedDHT
P2P Layer	api_dht			
	api_dht_raw		dht_raw.yaws	
	api_vm	ScalarisVM		
	api_monitor	Monitor	monitor.yaws	

Table 4.1.: Layered API structure

	Erlang	Java	JSON	Python	Ruby
boolean	<code>boolean()</code>	<code>bool</code> , <code>Boolean</code>	<code>true</code> , <code>false</code>	<code>True</code> , <code>False</code>	<code>true</code> , <code>false</code>
integer	<code>integer()</code>	<code>int</code> , <code>Integer</code> <code>long</code> , <code>Long</code> <code>BigInteger</code>	<code>int</code>	<code>int</code>	<code>Fixnum</code> , <code>Bignum</code>
float	<code>float()</code>	<code>double</code> , <code>Double</code>	<code>int frac</code> <code>int exp</code> <code>int frac exp</code>	<code>float</code>	<code>Float</code>
string	<code>string()</code>	<code>String</code>	<code>string</code>	<code>str</code>	<code>String</code>
binary	<code>binary()</code>	<code>byte[]</code>	<code>string</code> (base64-encoded)	<code>bytearray</code>	<code>String</code>
list(type)	<code>[type()]</code>	<code>List&lt;Object&gt;</code>	<code>array</code>	<code>list</code>	<code>Array</code>
JSON	<code>json_obj()</code> *	<code>Map&lt;String, Object&gt;</code>	<code>object</code>	<code>dict</code>	<code>Hash</code>
custom	<code>any()</code>	<code>OtpErlangObject</code>	<code>/</code>	<code>/</code>	<code>/</code>

\*

```

json_obj() :: {struct, [Key::atom() | string(), Value::json_val()]}
json_val() :: string() | number() | json_obj() | {array, [any()]} | true | false | null

```

Table 4.2.: Types supported by the Sclaris APIs

#### 4.1.1. Supported Types

Different programming languages have different types. In order for our APIs to be compatible with each other, only a subset of the available types is officially supported.

Keys are always strings. In order to avoid problems with different encodings on different systems, we suggest to only use ASCII characters.

For *values* we distinguish between *native*, *composite* and *custom* types (refer to Table 4.2 for the mapping to the language-specific types of each API).

*Native* types are

- boolean values
- integer numbers
- floating point numbers
- strings and
- binary objects (a number of bytes).

*Composite* types are

- lists of the following elements:
  - native types (*except binary objects!*),
  - composite types
- objects in JavaScript Object Notation (JSON)<sup>1</sup>

*Custom* types include any Erlang term not covered by the previous types. Special care needs to be taken using custom types as they may not be accessible through every API or may be misinterpreted by an API. The use of them is discouraged.

<sup>1</sup>see <http://json.org/>

### 4.1.2. Supported Operations

Most operations are available to all APIs, but some (especially convenience methods) are API- or language-specific. The following paragraphs provide a brief overview of what is available to which API. For a full reference, see the documentation of the specific API.

#### Transaction Layer

**Read** Reads the value stored at a given key using quorum read.

```
Erlang    api_tx:read(Key)
Java:     TransactionSingleOp.read(Key)
JSON:     tx.yaws/read(Key)
Python:   TransactionSingleOp.read(Key)
Ruby:     TransactionSingleOp.read(Key)
```

**Write** Writes a value to a given key.

```
Erlang    api_tx:write(Key, Value)
Java:     TransactionSingleOp.write(Key, Value)
JSON:     tx.yaws/write(Key, Value)
Python:   TransactionSingleOp.write(Key, Value)
Ruby:     TransactionSingleOp.write(Key, Value)
```

**“Add to” & “Delete from” List Operations** For the list stored at a given key, first add all elements from a given list, then remove all elements from a second given list.

```
Erlang    api_tx:add_del_on_list(Key, ToAddList, ToRemoveList)
Java:     TransactionSingleOp.addDelOnList(Key, ToAddList, ToRemoveList)
JSON:     tx.yaws/add_del_on_list(Key, ToAddList, ToRemoveList)
Python:   TransactionSingleOp.add_del_on_list(Key, ToAddList, ToRemoveList)
Ruby:     TransactionSingleOp.add_del_on_list(Key, ToAddList, ToRemoveList)
```

**Add to a number** Adds a given number to the number stored at a given key.

```
Erlang    api_tx:add_on_nr(Key, ToAddNumber)
Java:     TransactionSingleOp.addOnNr(Key, ToAddNumber)
JSON:     tx.yaws/add_on_nr(Key, ToAddList, ToAddNumber)
Python:   TransactionSingleOp.add_on_nr(Key, ToAddNumber)
Ruby:     TransactionSingleOp.add_on_nr(Key, ToAddNumber)
```

**Atomic Test and Set** Writes the given (new) value to a key if the current value is equal to the given old value.

```
Erlang    api_tx:test_and_set(Key, OldValue, NewValue)
Java:     TransactionSingleOp.testAndSet(Key, OldValue, NewValue)
JSON:     tx.yaws/add_on_nr(Key, OldValue, NewValue)
Python:   TransactionSingleOp.test_and_set(Key, OldValue, NewValue)
Ruby:     TransactionSingleOp.test_and_set(Key, OldValue, NewValue)
```

**Bulk Operations** Executes multiple requests, i.e. operations, where each of them will be committed.

*Collecting requests and executing all of them in a single call yields better performance than executing all on their own.*

```
Erlang    api_tx:req_list_commit_each(RequestList)
Java:     TransactionSingleOp.req_list(RequestList)
JSON:     tx.yaws/req_list_commit_each(RequestList)
Python:   TransactionSingleOp.req_list(RequestList)
Ruby:     TransactionSingleOp.req_list(RequestList)
```

### Transaction Layer (with TLog)

**Read (with TLog)** Reads the value stored at a given key using quorum read as an additional part of a previous transaction or for starting a new one (*no auto-commit!*).

```
Erlang    api_tx:read(TLog, Key)
Java:     Transaction.read(Key)
JSON:     n/a - use req_list
Python:   Transaction.read(Key)
Ruby:     Transaction.read(Key)
```

**Write (with TLog)** Writes a value to a given key as an additional part of a previous transaction or for starting a new one (*no auto-commit!*).

```
Erlang    api_tx:write(TLog, Key, Value)
Java:     Transaction.write(Key, Value)
JSON:     n/a - use req_list
Python:   Transaction.write(Key, Value)
Ruby:     Transaction.write(Key, Value)
```

**“Add to” & “Delete from” List Operations (with TLog)** For the list stored at a given key, first add all elements from a given list, then remove all elements from a second given list as an additional part of a previous transaction or for starting a new one (*no auto-commit!*).

```
Erlang    api_tx:add_del_on_list(TLog, Key, ToAddList, ToRemoveList)
Java:     Transaction.addDelOnList(Key, ToAddList, ToRemoveList)
JSON:     n/a - use req_list
Python:   Transaction.add_del_on_list(Key, ToAddList, ToRemoveList)
Ruby:     Transaction.add_del_on_list(Key, ToAddList, ToRemoveList)
```

**Add to a number (with TLog)** Adds a given number to the number stored at a given key as an additional part of a previous transaction or for starting a new one (*no auto-commit!*).

```
Erlang    api_tx:add_on_nr(TLog, Key, ToAddNumber)
Java:     Transaction.addOnNr(Key, ToAddNumber)
JSON:     n/a - use req_list
Python:   Transaction.add_on_nr(Key, ToAddNumber)
Ruby:     Transaction.add_on_nr(Key, ToAddNumber)
```

**Atomic Test and Set (with TLog)** Writes the given (new) value to a key if the current value is equal to the given old value as an additional part of a previous transaction or for starting a new one (*no auto-commit!*).

```
Erlang  api_tx:test_and_set(TLog, Key, OldValue, NewValue)
Java:   Transaction.testAndSet(Key, OldValue, NewValue)
JSON:   tx.yaws/test_and_set(Key, OldValue, NewValue)
Python: Transaction.test_and_set(Key, OldValue, NewValue)
Ruby:   Transaction.test_and_set(Key, OldValue, NewValue)
```

**Bulk Operations (with TLog)** Executes multiple requests, i.e. operations, as an additional part of a previous transaction or for starting a new one (*no auto-commit!*). Only one commit request is allowed per call!

*Collecting requests and executing all of them in a single call yields better performance than executing all on their own.*

```
Erlang  api_tx:req_list(RequestList), api_tx:req_list(TLog, RequestList)
Java:   Transaction.req_list(RequestList)
JSON:   tx.yaws/req_list(RequestList), req_list(TLog, RequestList)
Python: Transaction.req_list(RequestList)
Ruby:   Transaction.req_list(RequestList)
```

## Transaction Layer (Pub/Sub)

Scalaris implements a simple Publish/Subscribe system. Subscribers can subscribe URLs for some topic. If an event is published to that topic, a JSON-RPC is sent to that URL, i.e. a JSON object of the following form:

```
{
  "method": "notify",
  "params": [<topic>, <content>],
  "id"     : <number>
}
```

**Publish** Publishes an event under a given topic.

```
Erlang  api_pubsub:publish(Topic, Content)
Java:   PubSub.publish(Topic, Content)
JSON:   pubsub.yaws/publish(Topic, Content)
Python: PubSub.publish(Topic, Content)
Ruby:   PubSub.publish(Topic, Content)
```

**Subscribe** Subscribes a URL for a topic.

```
Erlang  api_pubsub:subscribe(Topic, URL)
Java:   PubSub.subscribe(Topic, URL)
JSON:   pubsub.yaws/subscribe(Topic, URL)
Python: PubSub.subscribe(Topic, URL)
Ruby:   PubSub.subscribe(Topic, URL)
```

**Unsubscribe** Subscribes a URL from a topic.

```
Erlang  api_pubsub:unsubscribe(Topic, URL)
Java:   PubSub.unsubscribe(Topic, URL)
JSON:   pubsub.yaws/unsubscribe(Topic, URL)
Python: PubSub.unsubscribe(Topic, URL)
Ruby:   PubSub.unsubscribe(Topic, URL)
```

**Get Subscribers** Gets a list of subscribed URLs for a given topic.

```
Erlang  api_pubsub:get_subscribers(Topic)
Java:   PubSub.getSubscribers(Topic)
JSON:   pubsub.yaws/get_subscribers(Topic)
Python: PubSub.get_subscribers(Topic)
Ruby:   PubSub.get_subscribers(Topic)
```

## Replication Layer

**Delete** Tries to delete a value at a given key.

*Warning: This can only be done outside the transaction layer and is thus not absolutely safe. Refer to the following thread on the mailing list: [http://groups.google.com/group/scalaris/browse\\_thread/thread/ff1d9237e218799](http://groups.google.com/group/scalaris/browse_thread/thread/ff1d9237e218799).*

```
Erlang  api_rdht:delete(Key), api_rdht:delete(Key, Timeout)
Java:   ReplicatedDHT.delete(Key), ReplicatedDHT.delete(Key, Timeout)
JSON:   rdht.yaws/delete(Key), rdht.yaws/delete(Key, Timeout)
Python: ReplicatedDHT.delete(Key), ReplicatedDHT.delete(Key, Timeout)
Ruby:   ReplicatedDHT.delete(Key), ReplicatedDHT.delete(Key, Timeout)
```

**Get Replica Keys** Gets the (hashed) keys used for the replicas of a given (user) key (ref. Section [P2P Layer](#)).

```
Erlang  api_rdht:get_replica_keys(Key)
Java:   n/a
JSON:   n/a
Python: n/a
Ruby:   n/a
```

## P2P Layer

**Hash Key** Generates the hash of a given (user) key.

```
Erlang  api_dht:hash_key(Key)
Java:   n/a
JSON:   n/a
Python: n/a
Ruby:   n/a
```

**Get Replica Keys** Gets the (hashed) keys used for the replicas of a given (hashed) key.



Erlang    `api_dht_raw:get_replica_keys(HashedKey)`  
Java:    `n/a`  
JSON:    `n/a`  
Python:  `n/a`  
Ruby:    `n/a`

**Range Read**   Reads all Key-Value pairs in a given range of (hashed) keys.

Erlang    `api_dht_raw:range_read(StartHashedKey, EndHashedKey)`  
Java:    `n/a`  
JSON:    `dht_raw.yaws/range_read(StartHashedKey, EndHashedKey)`  
Python:  `n/a`  
Ruby:    `n/a`

## **P2P Layer (VM Management)**

**Get Scalaris Version**   Gets the version of Scalaris running in the requested Erlang VM.

Erlang    `api_vm:get_version()`  
Java:    `ScalarisVM.getVersion()`  
JSON:    `n/a`  
Python:  `n/a`  
Ruby:    `n/a`

**Get Node Info**   Gets various information about the requested Erlang VM and the running Scalaris code, e.g. Scalaris version, erlang version, memory use, uptime.

Erlang    `api_vm:get_info()`  
Java:    `ScalarisVM.getInfo()`  
JSON:    `n/a`  
Python:  `n/a`  
Ruby:    `n/a`

**Get Information about Different VMs**   Get connection info about other Erlang VMs running Scalaris nodes. Note: This info is provided by the cyclon service built into Scalaris.

Erlang    `api_vm:get_other_vms(MaxVMs)`  
Java:    `ScalarisVM.getOtherVMs(MaxVMs)`  
JSON:    `n/a`  
Python:  `n/a`  
Ruby:    `n/a`

**Get Number of Scalaris Nodes in the VM**   Gets the number of Scalaris nodes running inside the Erlang VM.

Erlang    `api_vm:number_of_nodes()`  
Java:    `ScalarisVM.getNumberOfNodes()`  
JSON:    `n/a`  
Python:  `n/a`  
Ruby:    `n/a`

**Get Scalaris Nodes** Gets a list of Scalaris nodes running inside the Erlang VM.

```
Erlang    api_vm:get_nodes()
Java:     ScalarisVM.getNodes()
JSON:     n/a
Python:   n/a
Ruby:     n/a
```

**Add Scalaris Nodes** Starts additional Scalaris nodes inside the Erlang VM.

```
Erlang    api_vm:add_nodes(Number)
Java:     ScalarisVM.addNodes(Number)
JSON:     n/a
Python:   n/a
Ruby:     n/a
```

**Shutdown Scalaris Nodes** Gracefully kill some Scalaris nodes inside the Erlang VM. This will first move the data from the nodes to other nodes and then shut them down.

```
Erlang    api_vm:shutdown_node(Name),
           api_vm:shutdown_nodes(Count), api_vm:shutdown_nodes_by_name(Names)
Java:     ScalarisVM.shutdownNode(Name),
           ScalarisVM.shutdownNodes(Number), ScalarisVM.shutdownNodesByName(Names)
JSON:     n/a
Python:   n/a
Ruby:     n/a
```

**Kill Scalaris Nodes** Immediately kills some Scalaris nodes inside the Erlang VM.

```
Erlang    api_vm:kill_node(Name),
           api_vm:kill_nodes(Count), api_vm:kill_nodes_by_name(Names)
Java:     ScalarisVM.killNode(Name),
           ScalarisVM.killNodes(Number), ScalarisVM.killNodesByName(Names)
JSON:     n/a
Python:   n/a
Ruby:     n/a
```

**Shutdown the Erlang VM** Gracefully shuts down all Scalaris nodes in the Erlang VM and then exits.

```
Erlang    api_vm:shutdown_vm()
Java:     ScalarisVM.shutdownVM()
JSON:     n/a
Python:   n/a
Ruby:     n/a
```

**Kill the Erlang VM** Immediately kills all Scalaris nodes in the Erlang VM and then exits.

Erlang    `api_vm:kill_vm()`  
Java:    `ScalarisVM.killVM()`  
JSON:    n/a  
Python:  n/a  
Ruby:    n/a

## P2P Layer (Monitoring)

**Get Node Info** Gets some information about the node, e.g. Scalaris version, Erlang version, number of Scalaris nodes in the VM.

Erlang    `api_monitor:get_node_info()`  
Java:    `Monitor.getNodeInfo()`  
JSON:    `monitor.yaws/get_node_info()`  
Python:  n/a  
Ruby:    n/a

**Get Node Performance** Gets some performance information about the node, e.g. the average latency and standard deviation of transactional operations.

Erlang    `api_monitor:get_node_performance()`  
Java:    `Monitor.getNodePerformance()`  
JSON:    `monitor.yaws/get_node_performance()`  
Python:  n/a  
Ruby:    n/a

**Get Service Info** Gets some information about the whole Scalaris ring (may be estimated if no management server is used). Includes the overall load and the total number of nodes in the ring.

Erlang    `api_monitor:get_service_info()`  
Java:    `Monitor.getServiceInfo()`  
JSON:    `monitor.yaws/get_service_info()`  
Python:  n/a  
Ruby:    n/a

**Get Service Performance** Gets some performance information about the whole Scalaris ring, e.g. the average latency and standard deviation of transactional operations. Both are aggregated and may be estimates.

Erlang    `api_monitor:get_service_performance()`  
Java:    `Monitor.getServicePerformance()`  
JSON:    `monitor.yaws/get_service_performance()`  
Python:  n/a  
Ruby:    n/a

## Convenience Methods / Classes

**Connection Pool** Implements a thread-safe pool of connections to Scalaris instances. Can be instantiated with a fixed maximum number of connections. Connections are either taken from a

pool of available connections or are created on demand. If finished, a connection can be put back into the pool.

Erlang	n/a
Java:	ConnectionPool
JSON:	n/a
Python:	ConnectionPool
Ruby:	n/a

**Connection Policies** Defines policies on how to select a node to connect to from a set of possible nodes and whether and how to automatically re-connect.

Erlang	n/a
Java:	ConnectionPolicy
JSON:	n/a
Python:	n/a
Ruby:	n/a

### 4.1.3. JSON API

Scalaris supports a JSON API for transactions. To minimize the necessary round trips between a client and Scalaris, it uses request lists, which contain all requests that can be done in parallel. The request list is then send to a Scalaris node with a POST message. The result contains a list of the results of the requests and - in case of a transaction - a TransLog. To add further requests to the transaction, the TransLog and another list of requests may be send to Scalaris. This process may be repeated as often as necessary. To finish the transaction, the request list can contain a 'commit' request as the last element, which triggers the validation phase of the transaction processing. Request lists are also supported for single read/write operations, i.e. every single operation is committed on its own.

The JSON-API can be accessed via the Scalaris-Web-Server running on port 8000 by default and pages under <URL>/api/. For backwards-compatibility the page <URL>/jsonrpc.yaws provides some functions otherwise provided by the different pages under <URL>/api/ but beware that this may be removed in future. Other examples include <http://localhost:8000/api/tx.yaws>. See Table 4.1 on page 19 for a mapping of the layers to the different pages. Requests are issued by sending a JSON object with header "Content-type"="application/json" to this URL. The result will then be returned as a JSON object with the same content type. The following table shows how both objects look like:

#### Request

```
{
  "jsonrpc": "2.0",
  "method"  : "<method>",
  "params"  : [<params>],
  "id"      : <number>
}
```

#### Result

```
{
  "result" : <result_object>,
  "id"     : <number>
}
```

The id in the request can be an arbitrary number which identifies the request and is returned in the result. The following operations (shown as <method>(<params>)) are currently supported (the given result is the <result\_object> mentioned above):

generic, e.g. for testing - <URL>/api/\*.yaws

- `nop(Value)` - no operation, result:

```
"ok"
```

single operations, e.g. `read/write` - <URL>/api/tx.yaws:

- `req_list_commit_each(<req_list_ce>)` - commit each request in the list, result:

```
{["status": "ok"] or {"status": "ok", "value": <json_value>} or  
 {"status": "fail", "reason": "timeout" or "abort" or "not_found" or  
   "not_a_list" or "not_a_number"} or  
 {"status": "fail", "reason": "key_changed", "value": <json_value>}]}
```

- `read(<key>)` - read the value at key, result:

```
{"status": "ok", "value": <json_value>} or  
{"status": "fail", "reason": "timeout" or "not_found"}
```

- `write(<key>, <json_value>)` - write value (inside `json_value`) to key, result:

```
{"status": "ok"} or  
{"status": "fail", "reason": "timeout" or "abort"}
```

- `add_del_on_list(<key>, ToAdd, ToRemove)` - adding to / removing from a list (for the list at key adds all values in the ToAdd list and then removes all values in the ToRemove list; if there is no value at key, uses an empty list - both value lists are `<value>[]`), result:

```
{"status": "ok"} or  
{"status": "fail", "reason": "timeout" or "abort" or "not_a_list"}
```

- `add_on_nr(<key>, <value>)` - adding to a number (adds value to the number at key - both values must be numbers), result:

```
{"status": "ok"} or  
{"status": "fail", "reason": "timeout" or "abort" or "not_a_number"}
```

- `test_and_set(<key>, OldValue, NewValue)` - atomic test-and-set (write NewValue to key if the current value is OldValue - both values are `<json_value>`), result:

```
{"status": "ok"} or  
{"status": "fail", "reason": "timeout" or "abort" or "not_found"} or  
{"status": "fail", "reason": "key_changed", "value": <json_value>}
```

transactions - <URL>/api/tx.yaws:

- `req_list(<req_list>)` - process a list of requests, result:

```
{"tlog": <tlog>,  
 "results": [{"status": "ok"} or {"status": "ok", "value": <json_value>} or  
 {"status": "fail", "reason": "timeout" or "abort" or "not_found" or  
   "not_a_list" or "not_a_number"} or  
 {"status": "fail", "reason": "key_changed", "value": <json_value>}]}
```

- `req_list(<tlog>, <req_list>)` - process a list of requests with a previous translog, result:

```
{"tlog": <tlog>,  
 "results": [{"status": "ok"} or {"status": "ok", "value": <json_value>} or
```

```

{"status": "fail", "reason": "timeout" or "abort" or "not_found" or
                             "not_a_list" or "not_a_number"} or
{"status": "fail", "reason": "key_changed", "value": <json_value>}}

```

replication layer functions - <URL>/api/rdht.yaws:

- delete(<key>) - delete the value at key, default timeout 2s, result:

```

{"ok": <number>, "results": ["ok" or "locks_set" or "undef"]} or
{"failure": "timeout", "ok": <number>, "results": ["ok" or "locks_set" or "undef"]}

```

- delete(<key>, Timeout) - delete the value at key with a timeout of Timeout Milliseconds, result:

```

{"ok": <number>, "results": ["ok" or "locks_set" or "undef"]} or
{"failure": "timeout", "ok": <number>, "results": ["ok" or "locks_set" or "undef"]}

```

raw DHT functions - <URL>/api/dht\_raw.yaws:

- range\_read(From, To) - read a range of (raw) keys, result:

```

{"status": "ok" or "timeout",
 "value": [{ "key": <key>, "value": <json_value>, "version": <version> }]}

```

publish/subscribe - <URL>/api/pubsub.yaws:

- publish(Topic, Content) - publish Content to Topic (<key>), result:

```

{"status": "ok"}

```

- subscribe(Topic, URL) - subscribe URL to Topic (<key>), result:

```

{"status": "ok"} or
{"status": "fail", "reason": "timeout" or "abort"}

```

- unsubscribe(Topic, URL) - unsubscribe URL from Topic (<key>), result:

```

{"status": "ok"} or
{"status": "fail", "reason": "timeout" or "abort" or "not_found"}

```

- get\_subscribers(Topic) - get subscribers of Topic (<key>), result:

```

[<urls>]

```

monitor - <URL>/api/monitor.yaws:

- get\_node\_info() - gets some information about the node, result:

```

{"status": "ok" or "timeout",
 "value": [{ "scalaris_version": <version_string>,
              "erlang_version": <version_string>,
              "dht_nodes": <number> }]}

```

- get\_node\_performance() - gets some performance information about the node, result:

```

{"status": "ok" or "timeout",
 "value": [{ "latency_avg": <perf_data>, "latency_stddev": <perf_data> }]}

```

- `get_service_info()` - gets some information about the Scalaris ring, result:

```
{ "status": "ok" or "timeout",
  "value": [ { "total_load": <number>, "nodes": <number> } ] }
```

- `get_service_performance()` - gets some performance information about the Scalaris ring, result:

```
{ "status": "ok" or "timeout",
  "value": [ { "latency_avg": <perf_data>, "latency_stddev": <perf_data> } ] }
```

Note:

```
<json_value> = { "type": "as_is" or "as_bin", "value": <value> }
<operation> = { "read": <key> } or { "write", { <key>: <json_value> } } or
              { "add_del_on_list": { "key": <key>, "add": [ <value> ], "del": [ <value> ] } } or
              { "add_on_nr": { <key>: <value> } } or
              { "test_and_set": { "key": <key>, "old": <json_value>, "new": <json_value> } }
<req_list_ce> = [ <operation> ]
<req_list> = [ <operation> or { "commit", _ } ]
<perf_data> = { <number>: <perf_val>, ... }
```

The <value> inside <json\_value> is either a base64-encoded string representing a binary object (type = "as\_bin") or the value itself (type = "as\_is").

## JSON-Example

The following example illustrates the message flow:

### Client

Make a transaction, that sets two keys →

```
{ "jsonrpc": "2.0",
  "method": "req_list",
  "params": [
    [ { "write": { "keyA": { "type": "as_is", "value": "valueA" } } },
      { "write": { "keyB": { "type": "as_is", "value": "valueB" } } },
      { "commit": "" } ]
  ],
  "id": 0
}
```

### Scalaris node

←

Scalaris sends results back

```
{ "error": null,
  "result": {
    "results": [ { "status": "ok" }, { "status": "ok" }, { "status": "ok" } ],
    "tlog": <TLOG> // this is the translog for further operations!
  },
  "id": 0
}
```

In a second transaction: Read the two keys →

```
{ "jsonrpc": "2.0",
  "method": "req_list",
  "params": [
    [ { "read": "keyA" },
      { "read": "keyB" } ]
  ],
  "id": 0
}
```

←

Scalaris sends results back

```
{
  "error": null,
  "result": {
    "results": [
      { "status": "ok", "value": { "type": "as_is", "value": "valueA" } },
      { "status": "ok", "value": { "type": "as_is", "value": "valueB" } }
    ],
    "tlog": <TLOG>
  },
  "id": 0
}
```

Calculate something with the read values →  
 and make further requests, here a write  
 and the commit for the whole transaction. Also include the latest translog we

```
{
  "jsonrpc": "2.0",
  "method": "req_list",
  "params": [
    <TLOG>,
    [ { "write": { "keyA": { "type": "as_is", "value": "valueA2" } } },
      { "commit": "" } ]
  ],
  "id": 0
}
```

←

Scalaris sends results back

```
{
  "error": null,
  "result": {
    "results": [ { "status": "ok" }, { "status": "ok" } ],
    "tlog": <TLOG>
  },
  "id": 0
}
```

Examples of how to use the JSON API are the Python and Ruby API which use JSON to communicate with Scalaris.

#### 4.1.4. Java API

The `scalaris.jar` provides a Java command line client as well as a library for Java programs to access Scalaris. The library provides several classes:

- `TransactionSingleOp` provides methods for reading and writing values.
- `Transaction` provides methods for reading and writing values in transactions.
- `PubSub` provides methods for a simple topic-based pub/sub implementation on top of Scalaris.
- `ReplicatedDHT` provides low-level methods for accessing the replicated DHT of Scalaris.

For details regarding the API we refer the reader to the Javadoc:

```
%> cd java-api
%> ant doc
%> firefox doc/index.html
```



## 4.2. Command Line Interfaces

### 4.2.1. Java command line interface

As mentioned above, the `scalaris.jar` file contains a small command line interface client. For convenience, we provide a wrapper script called `scalaris` which sets up the Java environment:

```
%> ./java-api/scalaris --noconfig --help
```

```
../java-api/scalaris [script options] [options]
Script Options:
  --help, -h          print this message and scalaris help
  --noconfig          suppress sourcing of config files in $HOME/.scalaris/
                      and ${prefix}/etc/scalaris/
  --execdebug        print scalaris exec line generated by this
                      launch script
  --noerl            do not ask erlang for its (local) host name

usage: scalaris [Options]
  -h,--help          print this message
  -v,--verbose       print verbose information,
                      e.g. the properties read
                      gets the local host's name as
                      known to Java (for debugging
                      purposes)
  -lh,--localhost    run selected mini
                      benchmark(s) [1|...|18|all]
                      (default: all benchmarks, 500
                      operations, 10 threads per
                      Scalaris node)
  -b,--minibench <[ops]> <[tpn]> <[benchs]>
                      print monitoring information
                      read an item
                      write an item
                      atomic test and set, i.e.
                      write <key> to <new> if the
                      current value is <old>
                      delete an item (default
                      timeout: 2000ms)
                      WARNING: This function can
                      lead to inconsistent data
                      (e.g. deleted items can
                      re-appear). Also when
                      re-creating an item the
                      version before the delete can
                      re-appear.
  -m,--monitor <node>
  -r,--read <key>
  -w,--write <key> <value>
  --test-and-set <key> <old> <new>
  -d,--delete <key> <[timeout]>
                      publish a new message for the
                      given topic
  -p,--publish <topic> <message>
  -s,--subscribe <topic> <url>
  -u,--unsubscribe <topic> <url>
  -g,--getsubscribers <topic>
  -jmx,--jmxservice <node>
                      subscribe to a topic
                      unsubscribe from a topic
                      get subscribers of a topic
                      starts a service exposing
                      Scalaris monitoring values
                      via JMX
```

read, write, delete and similar operations can be used to read, write and delete from/to the overlay, respectively. `getsubscribers`, `publish`, and `subscribe` are the PubSub functions. The others provide debugging and testing functionality.

```
%> ./java-api/scalaris -write foo bar
write(foo, bar)
%> ./java-api/scalaris -read foo
read(foo) == bar
```

Per default, the scalaris script tries to connect to a management server at localhost. You can change the node it connects to (and further connection properties) by adapting the values defined in `java-api/scalaris.properties`.

### 4.2.2. Python command line interface

```
%> ./python-api/scalaris_client.py --help
```

```
usage: ../python-api/scalaris_client.py [Options]
-r,--read <key>
    read an item
-w,--write <key> <value>
    write an item
--test-and-set <key> <old_value> <new_value>
    atomic test and set, i.e. write <key> to
    <new_value> if the current value is <old_value>
-d,--delete <key> [<timeout>]
    delete an item (default timeout: 2000ms)
    WARNING: This function can lead to inconsistent
    data (e.g. deleted items can re-appear).
    Also if an item is re-created, the version
    before the delete can re-appear.
-p,--publish <topic> <message>
    publish a new message for the given topic
-s,--subscribe <topic> <url>
    subscribe to a topic
-g,--getsubscribers <topic>
    get subscribers of a topic
-u,--unsubscribe <topic> <url>
    unsubscribe from a topic
-h,--help
    print this message
-b,--minibench [<ops> [<threads_per_node> [<benchmarks>]]]
    run selected mini benchmark(s)
    [1|...|9|all] (default: all benchmarks, 500
    operations each, 10 threads per Scalaris node)
```

### 4.2.3. Ruby command line interface

```
%> ../ruby-api/scalaris_client.rb --help
```

```
Usage: scalaris_client [options]
-r, --read KEY          read key KEY
-w, --write KEY,VALUE   write key KEY to VALUE
--test-and-set KEY,OLDVALUE,NEWVALUE
                        write key KEY to NEWVALUE if the current value is OLDVALUE
--add-del-on-list KEY,TOADD,TOREMOVE
                        add and remove elements from the value at key KEY
--add-on-nr KEY,VALUE   add VALUE to the value at key KEY
-h, --help              Show this message
```

## 4.3. Using Scalaris from Erlang

In this section, we will describe how to use Scalaris with two small examples. After having build Scalaris as described in 2, Scalaris can be run from the source directory directly.

### 4.3.1. Running a Scalaris Cluster

In this example, we will set up a simple Scalaris cluster consisting of up to five nodes running on a single computer.

**Adapt the configuration.** The first step is to adapt the configuration to your needs. We use the sample local configuration from 3.1, copy it to `bin/scalaris.local.cfg` and add a number of different known hosts. Note that the management server will run on the same port as the first node started in the example, hence we adapt its port as well.

```
{listen_ip, {127,0,0,1}}.  
{mgmt_server, {{127,0,0,1},14195,mgmt_server}}.  
{known_hosts, [{127,0,0,1},14195, service_per_vm},  
                {{127,0,0,1},14196, service_per_vm},  
                {{127,0,0,1},14197, service_per_vm},  
                {{127,0,0,1},14198, service_per_vm}  
                % Although we will be using 5 nodes later, only 4 are added as known nodes.  
                ]}.  
}]}
```

**Bootstrapping.** In a shell (from now on called S1), start the first node ("premier"):

```
./bin/scalarisctl -m -n premier@127.0.0.1 -p 14195 -y 8000 -s -f start
```

The `-m` and `-f` options instruct `scalarisctl` to start the management server and the first\_node (see Section 3.3 on page 18 for further details on `scalarisctl`). Note that the command above will produce some output about unknown nodes. This is expected, as some nodes defined in the configuration file above are not started yet.

After you run the above command and no further error occurred, you can query the locally available nodes using `scalarisctl`. Enter into a new shell (called MS):

```
./bin/scalarisctl list  
epmd: up and running on port 4369 with data:  
name premier at port 47235
```

Scalaris also contains a webserver. You can access it by pointing your browser to <http://127.0.0.1:8000> (or the respective IP address of the node). With the above example, you can see the first node ("premier") and its management role.

**Adding Nodes.** We will now add four additional nodes to the cluster. Use a new shell (S2 to S5) for each of the following commands. Each newly added node is a "real" Scalaris node and could run on another physical computer than the other nodes.

```
./bin/scalarisctl -n second@127.0.0.1 -p 14196 -y 8001 -s start  
./bin/scalarisctl -n n3@127.0.0.1 -p 14197 -y 8002 -s start  
./bin/scalarisctl -n n4@127.0.0.1 -p 14198 -y 8003 -s start  
./bin/scalarisctl -n n5@127.0.0.1 -p 14199 -y 8004 -s start
```

Note that the last added nodes should not report a node as not reachable.

The management server should now report that the nodes have indeed joined Scalaris successfully. Query `scalarisctl`:

```
./bin/scalarisctl list
epmd: up and running on port 4369 with data:
name n5 at port 47801
name n4 at port 54614
name n3 at port 41710
name second at port 44329
name premier at port 44862
```

The actual output might differ, as the port numbers are assigned by the operating system.

Each node offers a web console. Point your browser to any url for <http://127.0.0.1:8001> to <http://127.0.0.1:8004>. Observe that all nodes claim the cluster ring to consist of 5 nodes.

The web interface of node premier differs from the other interfaces. This is due to the fact that the management server is running on this node, adding additional information to the web interface.

**Entering Data Using the Web Interface.** A node's web interface can be used to query and enter data into Scalaris. To try this, point your browser to <http://127.0.0.1:8000> (or any of the other nodes) and use the provided HTML form.

1. Lookup key hello. This will return `{fail,not_found}`
2. Add new keys k1 and k2 with values v1 and v2, respectively. Then, lookup that key on the current and one of the other nodes. This should return `{ok,"v1"}` and `{ok, "v2"}` on both nodes.
3. Update the key k1 by adding it on any node with value v1updated.
4. Update the key k2 by adding it on any node with value v2updated. Lookup the key again and you should receive `{ok, v2updated}`

**Simulating Node Failure.** To simulate a node failure, we will simply stop n4 using `scalarisctl`:

```
./bin/scalarisctl -n n4@127.0.0.1 stop
```

Other nodes will notice the crash of n4. By querying the available nodes in the shell MS again, you will now see only 4 nodes.

Although the node n4 left the system, the data in the system is still consistent. Try to query the keys you added above. You should receive the values for each.

We will start a new node with the name n4 again:

```
./bin/scalarisctl -n n4@127.0.0.1 -p 14198 -y 8003 -s start
```

The node list (again, query `scalarisctl` in shell MS) will report n4 as alive again. You can still lookup the keys from above and should also receive the same result for the queries.

After running the above, we went from a five-node cluster to a 4-node cluster and back to a five-node cluster without any data loss due to a leaving node. The system was not unavailable for users and would have served any user requests without violating the data consistency or availability.

**Controlling Scalaris Using the Erlang Shell.** The calls to `scalarisctl` above which started a new Scalaris node ended within an Erlang shell. Each of those shells can be used to control a local Scalaris node and issue queries to the distributed database. Enter shell S1 and hit <return> to see the Erlang shell prompt. Now, enter the following commands and check that the output is similar

to the one provided here. You can stop the Erlang shell using `quit()`., which then also stops the corresponding `Scalaris` node.

```
(premier@127.0.0.1)1> api_tx:read("k0").
{fail,not_found}
(premier@127.0.0.1)2> api_tx:read("k1").
{ok,"v1updated"}
(premier@127.0.0.1)3> api_tx:read("k2").
{ok,"v2updated"}
(premier@127.0.0.1)4> api_tx:read(<<"k1">>).
{ok,"v1updated"}
(premier@127.0.0.1)5> api_tx:read(<<"k2">>).
{ok,"v2updated"}
(premier@127.0.0.1)6> api_tx:write(<<"k3">>,<<"v3">>).
{ok}
(premier@127.0.0.1)7> api_tx:read(<<"k3">>).
{ok,<<"v3">>}
(premier@127.0.0.1)8> api_tx:read("k3").
{ok,<<"v3">>}
(premier@127.0.0.1)9> api_tx:write(<<"k4">>,{1,2,3,four}).
{ok}
(premier@127.0.0.1)10> api_tx:read("k4").
{ok,{1,2,3,four}}
```

**Attaching a Client to `Scalaris`.** Now we will connect a true client to our 5 nodes `Scalaris` cluster. This client will not be a `Scalaris` node itself and thus represents a user application interacting with `Scalaris`.

We use a new shell to run an Erlang shell to do remote API calls to the server nodes.

```
erl -name client@127.0.0.1 -hidden -setcookie 'chocolate chip cookie'
```

The requests to `Scalaris` will be done using `rpc:call/4`. A production system would have some more sophisticated client side module, dispatching requests automatically to server nodes, for example.

```
(client@127.0.0.1)1> net_adm:ping('n3@127.0.0.1').
pong
(client@127.0.0.1)2> rpc:call('n3@127.0.0.1', api_tx, read, [<<"k0">>]).
{fail,not_found}
(client@127.0.0.1)3> rpc:call('n3@127.0.0.1', api_tx, read, [<<"k4">>]).
{ok,{1,2,3,four}}
(client@127.0.0.1)4> rpc:call('n4@127.0.0.1', api_tx, read, [<<"k4">>]).
{ok,{1,2,3,four}}
(client@127.0.0.1)5> rpc:call('n5@127.0.0.1', api_tx, write, [<<"num5">>,55]).
{ok}
(client@127.0.0.1)6> rpc:call('n3@127.0.0.1', api_tx, read, [<<"num5">>]).
{ok,55}
(client@127.0.0.1)7> rpc:call('n2@127.0.0.1', api_tx, add_on_nr, [<<"num5">>,2]).
{badrpc,nodedown}
(client@127.0.0.1)8> rpc:call('second@127.0.0.1', api_tx, add_on_nr, [<<"num5">>,2]).
{ok}
(client@127.0.0.1)9> rpc:call('n3@127.0.0.1', api_tx, read, [<<"num5">>]).
{ok,57}
(client@127.0.0.1)10> rpc:call('n4@127.0.0.1', api_tx, test_and_set, [<<"num5">>,57,59]).
{ok}
(client@127.0.0.1)11> rpc:call('n5@127.0.0.1', api_tx, read, [<<"num5">>]).
{ok,59}
(client@127.0.0.1)12> rpc:call('n4@127.0.0.1', api_tx, test_and_set, [<<"num5">>,57,55]).
{fail,{key_changed,59}}
(client@127.0.0.1)13> rpc:call('n3@127.0.0.1', api_tx, read, [<<"num5">>]).
{ok,59}
(client@127.0.0.1)14> rpc:call('n5@127.0.0.1', api_tx, test_and_set,
[<<"k2">>,"v2updated",<<"v2updatedTWICE">>]).
{ok}
```

```
(client@127.0.0.1)15> rpc:call('n4@127.0.0.1', api_tx, read, [<<"k2">>]).
{ok,<<"v2updatedTWICE">>}}
(client@127.0.0.1)16> rpc:call('n3@127.0.0.1', api_tx, add_on_nr, [<<"num5">>,-4]).
{ok}
(client@127.0.0.1)17> rpc:call('n4@127.0.0.1', api_tx, read, [<<"num5">>]).
{ok,55}
(client@127.0.0.1)18> q().
ok
```

To show that the above calls actually worked with Scalaris, connect another client to the cluster and read updates made by the first:

```
erl -name clientagain@127.0.0.1 -hidden -setcookie 'chocolate chip cookie'
```

```
(clientagain@127.0.0.1)1> net_adm:ping('n5@127.0.0.1').
pong
(clientagain@127.0.0.1)2> rpc:call('n4@127.0.0.1', api_tx, read, [<<"k0">>]).
{fail,not_found}
(clientagain@127.0.0.1)3> rpc:call('n4@127.0.0.1', api_tx, read, [<<"k1">>]).
{ok,"v1updated"}
(clientagain@127.0.0.1)4> rpc:call('n3@127.0.0.1', api_tx, read, [<<"k2">>]).
{ok,<<"v2updatedTWICE">>}}
(clientagain@127.0.0.1)5> rpc:call('second@127.0.0.1', api_tx, read, [<<"num5">>]).
{ok,55}
```

**Shutting Down Scalaris.** Firstly, we list the available nodes using `scalarisctl` using the shell MS.

```
./bin/scalarisctl list
epmd: up and running on port 4369 with data:
name n4 at port 52504
name n5 at port 47801
name n3 at port 41710
name second at port 44329
name premier at port 44862
```

Secondly, we shut down each of the nodes:

```
./bin/scalarisctl -n second@127.0.0.1 stop
'second@127.0.0.1'
./bin/scalarisctl -n n3@127.0.0.1 stop
'n3@127.0.0.1'
./bin/scalarisctl -n n4@127.0.0.1 stop
'n4@127.0.0.1'
./bin/scalarisctl -n n5@127.0.0.1 stop
'n5@127.0.0.1'
```

Only the first node remains:

```
./bin/scalarisctl list
epmd: up and running on port 4369 with data:
name premier at port 44862

./bin/scalarisctl -n premier@127.0.0.1 stop
'premier@127.0.0.1'
./bin/scalarisctl list
epmd: up and running on port 4369 with data:
(nothing)
```

The Scalaris API offers more transactional operations than just single-key read and write. The next part of this section will describe how to build transaction logs for atomic operations and how

Scalaris handles conflicts in concurrently running transactions. See the module `api_tx` for more functions to access the data layer of Scalaris.

### 4.3.2. Transaction

In this section, we will describe how to build transactions using `api_tx:req_list(Tlog, List)` on the client side.

The setup is similar to the five nodes cluster in the previous section. To simplify the example all API calls are typed inside the Erlang shells of nodes `n4` and `n5`.

Consider two concurrent transactions A and B. A is a long-running operation, whereas B is only a short transaction. In the example, A starts before B and B ends before A. B is "timely" nested in A and disturbs A.

**Single Read Operations.** We first issue two read operations on nodes `n4`, `n5` to see that we are working on the same state for key `k1`:

```
(n4@127.0.0.1)10> api_tx:read(<<"k1">>).  
{ok,<<"v1">>}  
(n5@127.0.0.1)17> api_tx:read(<<"k1">>).  
{ok,<<"v1">>}
```

**Create Transaction Logs and Add Operations.** Now, we create two transaction logs for the transactions and add the operations which are to be run atomically. A will be created on node `n5`, B on `n4`:

```
(n5@127.0.0.1)18> T5longA0 = api_tx:new_tlog().  
[]  
(n5@127.0.0.1)19> {T5longA1, R5longA1} = api_tx:req_list(T5longA0, [{read, <<"k1">>}]).  
[{76,<<"k1">>,1,75,'$empty'},[{ok,<<"v1">>}]]  
(n4@127.0.0.1)11> T4shortB0 = api_tx:new_tlog().  
[]  
(n4@127.0.0.1)12> {T4shortB1, R4shortB1} = api_tx:req_list(T4shortB0, [{read, <<"k1">>}]).  
[{76,<<"k1">>,1,75,'$empty'},[{ok,<<"v1">>}]]  
(n4@127.0.0.1)13> {T4shortB2, R4shortB2} = api_tx:req_list(T4shortB1,  
                                                         [{write, <<"k1">>, <<"v1Bshort">>}]).  
[{77,<<"k1">>,1,75, <<131,109,0,0,0,8,118,49,66,115,104,111,114,116>>}],  
 [ok]]  
(n4@127.0.0.1)14> {T4shortB3, R4shortB3} = api_tx:req_list(T4shortB2, [{read, <<"k1">>}]).  
[{77,<<"k1">>,1,75, <<131,109,0,0,0,8,118,49,66,115,104,111,114,116>>}],  
 [ok,<<"v1Bshort">>]]
```

To finish the transaction log for B, we add `{commit}`. This operation should return an `ok`:

```
(n4@127.0.0.1)15> {T4shortB4, R4shortB4} = api_tx:req_list(T4shortB3, [{commit}]).  
[[],[{ok}]]  
(n4@127.0.0.1)16> [R4shortB1,R4shortB2,R4shortB3,R4shortB4].  
[{ok,<<"v1">>}],[{ok}],[{ok,<<"v1Bshort">>}],[{ok}]]
```

This concludes the creation of B. Now we will try to commit the long running transaction A after reading the key `k1` again. This and further attempts to write the key will fail, as the transaction B wrote this key since A started.

```
(n5@127.0.0.1)20> {T5longA2, R5longA2} = api_tx:req_list(T5longA1, [{read, <<"k1">>}]).  
[{76,<<"k1">>,2,{fail,abort},' $empty'}],  
 [ok,<<"v1Bshort">>]] % <-- SEE #### FAIL and ABORT ####
```

```

(n5@127.0.0.1)21> {T5longA3, R5longA3} = api_tx:req_list(T5longA2,
[{write, <<"k1">>, <<"v1Along">>}]).
[{76, <<"k1">>, 2, {fail, abort}, '$empty'}, [{ok}]]
(n5@127.0.0.1)22> {T5longA4, R5longA4} = api_tx:req_list(T5longA3, [{read, <<"k1">>}]).
[{76, <<"k1">>, 2, {fail, abort}, '$empty'},
[{ok, <<"v1Bshort">>}]]
(n5@127.0.0.1)23> {T5longA5, R5longA5} = api_tx:req_list(T5longA4, [{commit}]).
[[], [{fail, abort, [<<"k1">>]}]] % <-- SEE #### FAIL and ABORT ####
(n4@127.0.0.1)17> api_tx:read(<<"k1">>).
{ok, <<"v1Bshort">>}
(n5@127.0.0.1)24> api_tx:read(<<"k1">>).
{ok, <<"v1Bshort">>}

```

As expected, the first coherent commit B constructed on n4 has won.

Note that in a real system, operations in `api_tx:req_list(Tlog, List)` should be grouped together with a trailing `{commit}` as far as possible. The individual separation of all reads, writes and commits was done here on purpose to study the transactional behaviour.



## 5. Testing the system

*Description is based on SVN revision r1618.*

### 5.1. Erlang unit tests

There are some unit tests in the `test` directory which test `Scalaris` itself (the Erlang code). You can call them by running `make test` in the main directory. The results are stored in a local `index.html` file.

The tests are implemented with the `common-test` package from the Erlang system. For running the tests we rely on `run_test`, which is part of the `common-test` package, but (on `erlang < R14`) is not installed by default. `configure` will check whether `run_test` is available. If it is not installed, it will show a warning and a short description of how to install the missing file.

Note: for the unit tests, we are setting up and shutting down several overlay networks. During the shut down phase, the runtime environment will print extensive error messages. These error messages do not indicate that tests failed! Running the complete test suite takes about 10-20 minutes, depending on your machine.

If the test suite is interrupted before finishing, the results may not have been linked into the `index.html` file. They are however stored in the `ct_run.ct@...` directory.

### 5.2. Java unit tests

The Java unit tests can be run by executing `make java-test` in the main directory. This will start a `Scalaris` node with the default ports and test all Java functions part of the Java API. A typical run will look like the following:

```
%> make java-test
[...]
tools.test:
[junit] Running de.zib.tools.PropertyLoaderTest
[junit] Testsuite: de.zib.tools.PropertyLoaderTest
[junit] Tests run: 3, Failures: 0, Errors: 0, Time elapsed: 0.113 sec
[junit] Tests run: 3, Failures: 0, Errors: 0, Time elapsed: 0.113 sec
[junit]
[junit] ----- Standard Output -----
[junit] Working Directory = <scalarisdir>/java-api/classes
[junit] -----
[...]
scalaris.test:
[junit] Running de.zib.sclaris.ConnectionTest
[junit] Testsuite: de.zib.sclaris.ConnectionTest
[junit] Tests run: 7, Failures: 0, Errors: 0, Time elapsed: 0.366 sec
[junit] Tests run: 7, Failures: 0, Errors: 0, Time elapsed: 0.366 sec
[junit]
[junit] Running de.zib.sclaris.DefaultConnectionPolicyTest
[junit] Testsuite: de.zib.sclaris.DefaultConnectionPolicyTest
[junit] Tests run: 12, Failures: 0, Errors: 0, Time elapsed: 0.314 sec
```

```

[junit] Tests run: 12, Failures: 0, Errors: 0, Time elapsed: 0.314 sec
[junit]
[junit] Running de.zib.scalarish.PeerNodeTest
[junit] Testsuite: de.zib.scalarish.PeerNodeTest
[junit] Tests run: 5, Failures: 0, Errors: 0, Time elapsed: 0.077 sec
[junit] Tests run: 5, Failures: 0, Errors: 0, Time elapsed: 0.077 sec
[junit]
[junit] Running de.zib.scalarish.PubSubTest
[junit] Testsuite: de.zib.scalarish.PubSubTest
[junit] Tests run: 33, Failures: 0, Errors: 0, Time elapsed: 4.105 sec
[junit] Tests run: 33, Failures: 0, Errors: 0, Time elapsed: 4.105 sec
[junit]
[junit] ----- Standard Error -----
[junit] 2011-03-25 15:07:04.412: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:04.558: INFO::Started SelectChannelConnector@127.0.0.1:59235
[junit] 2011-03-25 15:07:05.632: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:05.635: INFO::Started SelectChannelConnector@127.0.0.1:41335
[junit] 2011-03-25 15:07:05.635: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:05.643: INFO::Started SelectChannelConnector@127.0.0.1:38552
[junit] 2011-03-25 15:07:05.643: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:05.646: INFO::Started SelectChannelConnector@127.0.0.1:34704
[junit] 2011-03-25 15:07:06.864: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:06.864: INFO::Started SelectChannelConnector@127.0.0.1:57898
[junit] 2011-03-25 15:07:06.864: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:06.865: INFO::Started SelectChannelConnector@127.0.0.1:47949
[junit] 2011-03-25 15:07:06.865: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:06.866: INFO::Started SelectChannelConnector@127.0.0.1:53886
[junit] 2011-03-25 15:07:07.090: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:07.093: INFO::Started SelectChannelConnector@127.0.0.1:33141
[junit] 2011-03-25 15:07:07.094: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:07.096: INFO::Started SelectChannelConnector@127.0.0.1:39119
[junit] 2011-03-25 15:07:07.096: INFO::jetty-7.3.0.v20110203
[junit] 2011-03-25 15:07:07.097: INFO::Started SelectChannelConnector@127.0.0.1:41603
[junit] -----
[junit] Running de.zib.scalarish.ReplicatedDHTTest
[junit] Testsuite: de.zib.scalarish.ReplicatedDHTTest
[junit] Tests run: 6, Failures: 0, Errors: 0, Time elapsed: 0.732 sec
[junit] Tests run: 6, Failures: 0, Errors: 0, Time elapsed: 0.732 sec
[junit]
[junit] Running de.zib.scalarish.TransactionSingleOpTest
[junit] Testsuite: de.zib.scalarish.TransactionSingleOpTest
[junit] Tests run: 28, Failures: 0, Errors: 0, Time elapsed: 0.632 sec
[junit] Tests run: 28, Failures: 0, Errors: 0, Time elapsed: 0.632 sec
[junit]
[junit] Running de.zib.scalarish.TransactionTest
[junit] Testsuite: de.zib.scalarish.TransactionTest
[junit] Tests run: 18, Failures: 0, Errors: 0, Time elapsed: 0.782 sec
[junit] Tests run: 18, Failures: 0, Errors: 0, Time elapsed: 0.782 sec
[junit]

test:

BUILD SUCCESSFUL
Total time: 10 seconds
'jtest_boot@csr-pc9.zib.de'

```

### 5.3. Python unit tests

The Python unit tests can be run by executing `make python-test` in the main directory. This will start a Scalaris node with the default ports and test all Python functions part of the Python API. A typical run will look like the following:

```

%> make python-test
[...]
testDoubleClose (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testRead_NotConnected (TransactionSingleOpTest.TestTransactionSingleOp) ... ok

```

```

testRead_NotFound (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetList1 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetList2 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetList_NotConnected (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetList_NotFound (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetString1 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetString2 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetString_NotConnected (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTestAndSetString_NotFound (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTransactionSingleOp1 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testTransactionSingleOp2 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testWriteList1 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testWriteList2 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testWriteList_NotConnected (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testWriteString1 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testWriteString2 (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testWriteString_NotConnected (TransactionSingleOpTest.TestTransactionSingleOp) ... ok
testAbort_Empty (TransactionTest.TestTransaction) ... ok
testAbort_NotConnected (TransactionTest.TestTransaction) ... ok
testCommit_Empty (TransactionTest.TestTransaction) ... ok
testCommit_NotConnected (TransactionTest.TestTransaction) ... ok
testDoubleClose (TransactionTest.TestTransaction) ... ok
testRead_NotConnected (TransactionTest.TestTransaction) ... ok
testRead_NotFound (TransactionTest.TestTransaction) ... ok
testTransaction1 (TransactionTest.TestTransaction) ... ok
testTransaction3 (TransactionTest.TestTransaction) ... ok
testWriteList1 (TransactionTest.TestTransaction) ... ok
testWriteString (TransactionTest.TestTransaction) ... ok
testWriteString_NotConnected (TransactionTest.TestTransaction) ... ok
testWriteString_NotFound (TransactionTest.TestTransaction) ... ok
testDelete1 (ReplicatedDHTTest.TestReplicatedDHT) ... ok
testDelete2 (ReplicatedDHTTest.TestReplicatedDHT) ... ok
testDelete_notExistingKey (ReplicatedDHTTest.TestReplicatedDHT) ... ok
testDoubleClose (ReplicatedDHTTest.TestReplicatedDHT) ... ok
testReplicatedDHT1 (ReplicatedDHTTest.TestReplicatedDHT) ... ok
testReplicatedDHT2 (ReplicatedDHTTest.TestReplicatedDHT) ... ok
testDoubleClose (PubSubTest.TestPubSub) ... ok
testGetSubscribersOtp_NotConnected (PubSubTest.TestPubSub) ... ok
testGetSubscribers_NotExistingTopic (PubSubTest.TestPubSub) ... ok
testPubSub1 (PubSubTest.TestPubSub) ... ok
testPubSub2 (PubSubTest.TestPubSub) ... ok
testPublish1 (PubSubTest.TestPubSub) ... ok
testPublish2 (PubSubTest.TestPubSub) ... ok
testPublish_NotConnected (PubSubTest.TestPubSub) ... ok
testSubscribe1 (PubSubTest.TestPubSub) ... ok
testSubscribe2 (PubSubTest.TestPubSub) ... ok
testSubscribe_NotConnected (PubSubTest.TestPubSub) ... ok
testSubscription1 (PubSubTest.TestPubSub) ... ok
testSubscription2 (PubSubTest.TestPubSub) ... ok
testSubscription3 (PubSubTest.TestPubSub) ... ok
testSubscription4 (PubSubTest.TestPubSub) ... ok
testUnsubscribe1 (PubSubTest.TestPubSub) ... ok
testUnsubscribe2 (PubSubTest.TestPubSub) ... ok
testUnsubscribe_NotConnected (PubSubTest.TestPubSub) ... ok
testUnsubscribe_NotExistingTopic (PubSubTest.TestPubSub) ... ok
testUnsubscribe_NotExistingUrl (PubSubTest.TestPubSub) ... ok

```

```

-----
Ran 58 tests in 12.317s

```

```

OK

```

```

'jtest_boot@csr-pc9.zib.de'

```

## 5.4. Interoperability Tests

In order to check whether the common types described in Section 4.1 on page 19 are fully supported by the APIs and yield to the appropriate types in another API, we implemented some interoperability tests. They can be run by executing `make interop-test` in the main directory. This will start a Scalaris node with the default ports, write test data using both the Java and the Python APIs and let each API read the data it wrote itself as well as the data the other API read. On success it will print

```
%> make interop-test
[...]  
all tests successful
```

## 6. Troubleshooting

*Description is based on SVN revision r1618.*

### 6.1. Network

Scalaris uses a couple of TCP ports for communication. It does not use UDP at the moment.

	HTTP Server	Inter-node communication
default (see bin/scalaris.cfg)	8000	14195–14198
first node (bin/firstnode.sh)	8000	14195
joining node 1 (bin/joining_node.sh)	8001	14196
other joining nodes (bin/joining_node.sh <ID>)	8000 + <ID>	14195 + <ID>
standalone mgmt server (bin/mgmt-server.sh)	7999	14194

Please make sure that at least 14195 and 14196 are not blocked by firewalls in order to be able to start at least one first and one joining node on each machine..

### 6.2. Miscellaneous

For up-to-date information about frequently asked questions and troubleshooting, please refer to our FAQs at <https://code.google.com/p/scalaris/wiki/FAQ> and our mailing list at <http://groups.google.com/group/scalaris>.

# Part II.

## Developers Guide

## 7. General Hints

### 7.1. Coding Guidelines

- Keep the code short
- Use `gen_component` to implement additional processes
- Don't use `receive` by yourself (Exception: to implement single threaded user API calls (`cs_api`, `yaws_calls`, etc))
- Don't use `erlang:now/0`, `erlang:send_after/3`, `receive after` etc. in performance critical code, consider using `msg_delay` instead.
- Don't use `timer:tc/3` as it catches exceptions. Use `util:tc/3` instead.

### 7.2. Testing Your Modifications and Extensions

- Run the testsuites using `make test`
- Run the java api test using `make java-test` (Scalaris output will be printed if a test fails; if you want to see it during the tests, start a `bin/firstnode.sh` and run the tests by `cd java; ant test`)
- Run the Ruby client by starting Scalaris and running `cd contrib; ./jsonrpc.rb`

### 7.3. Help with Digging into the System

- use `ets:i/0,1` to get details on the local state of some processes
- consider changing `pdb.erl` to use `ets` instead of `erlang:put/get`
- Have a look at `strace -f -p PID` of beam process
- Get message statistics via the Web-interface
- enable/disable tracing for certain modules
- Use `etop` and look at the total memory size and atoms generated
- send processes `sleep` or `kill` messages to test certain behaviour (see `gen_component.erl`)
- use `mgmt_server:number_of_nodes(). flush().`
- use `admin_checkring(). flush().`

## 8. System Infrastructure

### 8.1. Groups of Processes

- What is it? How to distinguish from Erlangs internal named processes?
- Joining a process group
- Why do we do this... (managing several independent nodes inside a single Erlang VM for testing)

### 8.2. The Communication Layer `comm`

- in general
- format of messages (tuples)
- use messages with cookies (server and client side)
- What is a message tag?

### 8.3. The `gen_component`

*Description is based on SVN revision r2675.*

The generic component model implemented by `gen_component` allows to add some common functionality to all the components that build up the Scalaris system. It supports:

**event-handlers:** message handling with a similar syntax as used in [3].

**FIFO order of messages:** components cannot be inadvertently locked as we do not use selective receive statements in the code.

**sleep and halt:** for testing components can sleep or be halted.

**debugging, breakpoints, stepwise execution:** to debug components execution can be steered via breakpoints, step-wise execution and continuation based on arriving events and user defined component state conditions.

**basic profiling,**

**state dependent message handlers:** depending on its state, different message handlers can be used and switched during runtime. Thereby a kind of state-machine based message handling is supported.

**prepared for `pid_groups`:** allows to send events to named processes inside the same group as the actual component itself (`send_to_group_member`) when just holding a reference to any group member, and

**unit-testing of event-handlers:** as message handling is separated from the main loop of the component, the handling of individual messages and thereby performed state manipulation can easily be tested in unit-tests by directly calling message handlers.



In Scalaris all Erlang processes should be implemented as `gen_component`. The only exception are functions interfacing to the client, where a transition from asynchronous to synchronous request handling is necessary and that are executed in the context of a client's process or a process that behaves as a proxy for a client (`cs_api`).

### 8.3.1. A basic `gen_component` including a message handler

To implement a `gen_component`, the component has to provide the `gen_component` behaviour:

File `gen_component.erl`:

```

125 -ifdef(have_callback_support).
126 -callback init(Args::term()) -> user_state().
127 -else.
128 -spec behaviour_info(atom()) -> [{atom(), arity()}] | undefined.
129 behaviour_info(callbacks) ->
130     [
131         {init, 1} %% initialize component
132         %% note: can use arbitrary on-handler, but by default on/2 is used:
133         %% {on, 2} %% handle a single message
134         %% on(Msg, UserState) -> NewUserState | unknown_event | kill
135     ];
136 behaviour_info(_Other) -> undefined.
137 -endif.

```

This is illustrated by the following example:

File `msg_delay.erl`:

```

92 %% initialize: return initial state.
93 -spec init([]) -> state().
94 init([]) ->
95     ?TRACE("msg_delay:init for pid group ~p~n", [pid_groups:my_groupname()]),
96     %% For easier debugging, use a named table (generates an atom)
97     %% TableName = erlang:list_to_atom(pid_groups:my_groupname() ++ "_msg_delay"),
98     %% TimeTable = pdb:new(TableName, [set, protected, named_table]),
99     %% use random table name provided by ets to *not* generate an atom
100     TimeTable = pdb:new(?MODULE, [set]),
101     comm:send_local(self(), {msg_delay_periodic}),
102     _State = {TimeTable, _Round = 0}.
103
104 -spec on(message(), state()) -> state().
105 on({msg_delay_req, Seconds, Dest, Msg} = _FullMsg,
106     {TimeTable, Counter} = State) ->
107     ?TRACE("msg_delay:on(~.0p, ~.0p)~n", [_FullMsg, State]),
108     Future = trunc(Counter + Seconds),
109     EMsg = case erlang:get(trace_mpath) of
110         undefined -> Msg;
111         PState -> trace_mpath:epidemic_reply_msg(PState, comm:this(), Dest, Msg)
112     end,
113     case pdb:get(Future, TimeTable) of
114         undefined ->
115             pdb:set({Future, [{Dest, EMsg}]}, TimeTable);
116         {_, MsgQueue} ->
117             pdb:set({Future, [{Dest, EMsg} | MsgQueue]}, TimeTable)
118     end,
119     State;
120
121 %% periodic trigger
122 on({msg_delay_periodic} = Trigger, {TimeTable, Counter} = _State) ->
123     ?TRACE("msg_delay:on(~.0p, ~.0p)~n", [Trigger, State]),
124     % triggers are not allowed to be infected!
125     ?DBG_ASSERT2(not trace_mpath:infected(), trigger_infected),
126     _ = case pdb:take(Counter, TimeTable) of
127         undefined -> ok;
128         {_, MsgQueue} ->

```

```

129     _ = [ case Msg of
130         {'$gen_component', trace_mpath, PState, _From, _To, OrigMsg} ->
131             case element(2, PState) of %% element 2 is the logger
132                 {proto_sched, _} ->
133                     log:log("msg_delay: proto_sched not ready for delayed messages, so
134                         %% these messages should not be
135                         %% accepted to the database of
136                         %% msg_delay anyway, but instead
137                         %% should be immediately delivered
138                         %% to proto_sched for the 'delayed'
139                         %% messages pool (which is not
140                         %% implemented yet) (see send_local,
141                         %% send_local_as_client)
142                         %% erlang:throw(redirect_proto_sched_msgs_at_submission_please)
143                     ok;
144                 _ ->
145                     trace_mpath:start(PState),
146                     comm:send_local(Dest, OrigMsg),
147                     trace_mpath:stop()
148             end;
149         _ ->
150             ?DBG_ASSERT2(not trace_mpath:infected(), infected_with_uninfected_msg),
151             comm:send_local(Dest, Msg)
152         end || {Dest, Msg} <- MsgQueue ]
153     end,
154     _ = comm:send_local_after(1000, self(), Trigger),
155     {TimeTable, Counter + 1};
156
157 on({web_debug_info, Requestor}, {TimeTable, Counter} = State) ->
158     KeyValueList =
159         [{"queued messages (in 0-10s, messages):", ""}] |
160         [begin
161             Future = trunc(Counter + Seconds),
162             Queue = case pdb:get(Future, TimeTable) of
163                 undefined -> none;
164                 {_, Q} -> Q
165             end,
166             {webhelpers:safe_html_string("~p", [Seconds]),
167              webhelpers:safe_html_string("~p", [Queue])}
168         end || Seconds <- lists:seq(0, 10)],
169     comm:send_local(Requestor, {web_debug_info_reply, KeyValueList}),
170     State.

```

`your_gen_component:init/1` is called during start-up of a `gen_component` and should return the initial state to be used for this `gen_component`. Later, the current state of the component can be retrieved using `gen_component:get_state/1`.

To react on messages / events, a message handler is used. The default message handler is given to `gen_component:start_link/3` or `gen_component:start_link/4` as well as `gen_component:start/3`, `gen_component:start/4` or `gen_component:start/5`. It can be changed by calling `gen_component:change_handler/2` (see Section 8.3.7). When an event / message for the component arrives, this handler is called with the event itself and the current state of the component. In the handler, the state of the component may be adjusted depending upon the event. The handler itself may trigger new events / messages for itself or other components and has finally to return the updated state of the component or the atoms `unknown_event` or `kill`. It must neither call `receive` nor `timer:sleep/1` nor `erlang:exit/1`.

### 8.3.2. How to start a `gen_component`?

A `gen_component` can be started using one of:

```

gen_component:start(Module, Args, GenCOptions = [])
gen_component:start_link(Module, Args, GenCOptions = [])

```

Module: the name of the module your component is implemented in

Args: List of parameters passed to `Module:init/1` for initialization

GenCOptions: optional parameter. List of options for `gen_component`

`{pid_groups_join_as, ProcessGroup, ProcessName}`: registers the new process with the given process group (also called instanceid) and name using `pid_groups`.

`{erlang_register, ProcessName}`: registers the process as a named Erlang process.

`{wait_for_init}`: wait for `Module:init/1` to return before returning to the caller.

These functions are compatible to the Erlang/OTP supervisors. They spawn a new process for the component which itself calls `Module:init/1` with the given `Args` to initialize the component. `Module:init/1` should return the initial state for your component. For each message sent to this component, the default message handler `Module:on(Message, State)` will be called, which should react on the message and return the updated state of your component.

`gen_component:start()` and `gen_component:start_link()` return the pid of the spawned process as `{ok, Pid}`.

### 8.3.3. When does a `gen_component` terminate?

A `gen_component` can be stopped using:

`gen_component:kill(Pid)` or by returning `kill` from the current message handler.

### 8.3.4. How to determine whether a process is a `gen_component`?

A `gen_component` can be detected by:

`gen_component:is_gen_component(Pid)`, which returns a boolean.

### 8.3.5. What happens when unexpected events / messages arrive?

Your message handler (default is `your_gen_component:on/2`) should return `unknown_event` in the final clause (`your_gen_component:on(_, _)`). `gen_component` then will nicely report on the unhandled message, the component's name, its state and currently active message handler, as shown in the following example:

```
# bin/boot.sh
[...]  
(boot@localhost)10> pid_groups ! {no_message}.  
{no_message}  
[error] unknown message: {no_message} in Module: pid_groups and  
handler on in State null  
(boot@localhost)11>
```

The `pid_groups` (see Section 8.1) is a `gen_component` which registers itself as named Erlang process with the `gen_component` option `erlang_register` and therefore can be addressed by its name in the Erlang shell. We send it a `{no_message}` and `gen_component` reports on the unhandled message. The `pid_groups` module itself continues to run and waits for further messages.

### 8.3.6. What if my message handler generates an exception or crashes the process?

`gen_component` catches exceptions generated by message handlers and reports them with a stack trace, the message, that generated the exception, and the current state of the component.

If a message handler terminates the process via `erlang:exit/1`, this is out of the responsibility scope of `gen_component`. As usual in Erlang, all linked processes will be informed. If for example `gen_component:start_link/2` or `/3` was used for starting the `gen_component`, the spawning process will be informed, which may be an Erlang supervisor process taking further actions.

### 8.3.7. Changing message handlers and implementing state dependent message responsiveness as a state-machine

Sometimes it is beneficial to handle messages depending on the state of a component. One possibility to express this is implementing different clauses depending on the state variable, another is introducing case clauses inside message handlers to distinguish between current states. Both approaches may become tedious, error prone, and may result in confusing source code.

Sometimes the use of several different message handlers for different states of the component leads to clearer arranged code, especially if the set of handled messages changes from state to state. For example, if we have a component with an initialization phase and a production phase afterwards, we can handle in the first message handler messages relevant during the initialization phase and simply queue all other requests for later processing using a common default clause.

When initialization is done, we handle the queued user requests and switch to the message handler for the production phase. The message handler for the initialization phase does not need to know about messages occurring during production phase and the message handler for the production phase does not need to care about messages used during initialization. Both handlers can be made independent and may be extended later on without any adjustments to the other.

One can also use this scheme to implement complex state-machines by changing the message handler from state to state.

To switch the message handler `gen_component:change_handler(State, new_handler)` is called as the last operation after a message in the active message handler was handled, so that the return value of `gen_component:change_handler/2` is propagated to `gen_component`. The new handler is given as an atom, which is the name of the 2-ary function in your component module to be called.

#### Starting with non-default message handler.

It is also possible to change the message handler right from the start in your `your_gen_component:init/1` to avoid the default message handler `your_gen_component:on/2`. Just create your initial state as usual and call `gen_component:change_handler(State, my_handler)` as the final call in your `your_gen_component:init/1`. We prepared `gen_component:change_handler/2` to return `State` itself, so this will work properly.

### 8.3.8. Handling several messages atomically

The message handler is called for each message separately. Such a single call is atomic, i.e. the component does not perform any other action until the called message handler finishes. Sometimes, it is necessary to execute two or more calls to the message handler atomically (without other

interleaving messages). For example if a message A contains another message B as payload, it may be necessary to handle A and B directly one after the other without interference of other messages. So, after handling A you want to call your message handler with B.

In most cases, you could just do so by calculating the new state as result of handling message A first and then calling the message handler with message B and the new state by yourself.

It is safer to use `gen_component:post_op(2)` in such cases: When *B* contains a special message, which is usually handled by the `gen_component` module itself (like `send_to_group_member`, `kill`, `sleep`), the direct call to the message handler would not achieve the expected result. By calling `gen_component:post_op(B, NewState)` to return the new state after handling message A, message B will be handled directly after the current message A.

### 8.3.9. Halting and pausing a `gen_component`

Using `gen_component:kill(Pid)` and `gen_component:sleep(Pid, Time)` components can be terminated or paused.

### 8.3.10. Integration with `pid_groups`: Redirecting messages to other `gen_components`

Each `gen_component` by itself is prepared to support `comm:send_to_group_member/3` which forwards messages inside a group of processes registered via `pid_groups` (see Section 8.1) by their name. So, if you hold a `Pid` of one member of a process group, you can send messages to other members of this group, if you know their registered Erlang name. You do not necessarily have to know their individual `Pid`.

*In consequence, no `gen_component` can individually handle messages of the form `{send_to_group_member, _, _}` as such messages are consumed by `gen_component` itself.*

### 8.3.11. Replying to ping messages

Each `gen_component` replies automatically to `{ping, Pid}` requests with a `{pong}` send to the given `Pid`. Such messages are generated, for example, by `vivaldi_latency` which is used by our `vivaldi` module.

*In consequence, no `gen_component` can individually handle messages of the form: `{ping, _}` as such messages are consumed by `gen_component` itself.*

### 8.3.12. The debugging interface of `gen_component`: Breakpoints and step-wise execution

We equipped `gen_component` with a debugging interface, which especially is beneficial, when testing the interplay between several `gen_components`. It supports breakpoints (bp) which can pause the `gen_component` depending on the arriving messages or depending on user defined conditions. If a breakpoint is reached, the execution can be continued step-wise (message by message) or until the next breakpoint is reached.

We use it in our unit tests to steer protocol interleavings and to perform tests using random protocol interleavings between several processes (see `paxos_SUITE`). It allows also to reproduce given protocol interleavings for better testing.

## Managing breakpoints.

Breakpoints are managed by the following functions:

`gen_component:bp_set(Pid, MsgTag, BPName)`: For the component running under `Pid` a breakpoint `BPName` is set. It is reached, when a message with a message tag `MsgTag` is next to be handled by the component (See `comm:get_msg_tag/1` and Section 8.2 for more information on message tags). The `BPName` is used as a reference for this breakpoint, for example to delete it later.

`gen_component:bp_set_cond(Pid, Cond, BPName)`: The same as `gen_component:bp_set/3` but a user defined condition implemented in `{Module, Function, Params = 2}` = `Cond` is checked by calling `Module:Function(Message, State)` to decide whether a breakpoint is reached or not. `Message` is the next message to be handled by the component and `State` is the current state of the component. `Module:Function/2` should return a boolean.

`gen_component:bp_del(Pid, BPName)`: The breakpoint `BPName` is deleted. If the component is in this breakpoint, it will not be released by this call. This has to be done separately by `gen_component:bp_cont/1`. But the deleted breakpoint will no longer be considered for newly entering a breakpoint.

`gen_component:bp_barrier(Pid)`: Delay all further handling of breakpoint requests until a breakpoint is actually entered.

*Note, that the following call sequence may not catch the breakpoint at all, as during the sleep the component not necessarily consumes a ping message and the set breakpoint 'sample\_bp' may already be deleted before a ping message arrives.*

```
gen_component:bp_set(Pid, ping, sample_bp),
timer:sleep(10),
gen_component:bp_del(Pid, sample_bp),
gen_component:bp_cont(Pid).
```

*To overcome this, `gen_component:bp_barrier/1` can be used:*

```
gen_component:bp_set(Pid, ping, sample_bp),
gen_component:bp_barrier(Pid),
%% After the bp_barrier request, following breakpoint requests
%% will not be handled before a breakpoint is actually entered.
%% The gen_component itself is still active and handles messages as usual
%% until it enters a breakpoint.
gen_component:bp_del(Pid, sample_bp),
% Delete the breakpoint after it was entered once (ensured by bp_barrier).
% Release the gen_component from the breakpoint and continue.
gen_component:bp_cont(Pid).
```

None of the calls in the sample listing above is blocking. It just schedules all the operations, including the `bp_barrier`, for the `gen_component` and immediately finishes. The actual events of entering and continuing the breakpoint in the `gen_component` happens independently later on, when the next ping message arrives.

## Managing execution.

The execution of a `gen_component` can be managed by the following functions:

`gen_component:bp_step(Pid)`: This is the only blocking breakpoint function. It waits until the `gen_component` is in a breakpoint and has handled a single message. It returns the module,

the active message handler, and the handled message as a tuple `{Module, On, Message}`. This function does not actually finish the breakpoint, but just lets a single message pass through. For further messages, no breakpoint condition has to be valid, the original breakpoint is still active. To leave a breakpoint, use `gen_component:bp_cont/1`.

`gen_component:bp_cont(Pid)`: Leaves a breakpoint. `gen_component` runs as usual until the next breakpoint is reached.

If no further breakpoints should be entered after continuation, you should delete the registered breakpoint using `gen_component:bp_del/2` before continuing the execution with `gen_component:bp_cont/1`. To ensure, that the breakpoint is entered at least once, `gen_component:bp_barrier/1` should be used before deleting the breakpoint (see the example above). Otherwise it could happen, that the delete request arrives at your `gen_component` before it was actually triggered. The following continuation request would then unintentional apply to an unrelated breakpoint that may be entered later on.

`gen_component:runnable(Pid)`: Returns whether a `gen_component` has messages to handle and is runnable. If you know, that a `gen_component` is in a breakpoint, you can use this to check, whether a `gen_component:bp_step/1` or `gen_component:bp_cont/1` is applicable to the component.

## Tracing handled messages – getting a message interleaving protocol.

We use the debugging interface of `gen_component` to test protocols with random interleaving. First we start all the components involved, set breakpoints on the initialization messages for a new Paxos consensus and then start a single Paxos instance on all of them. The outcome of the Paxos consensus is a `learner_decide` message. So, in `paxos_SUITE:step_until_decide/3` we look for runnable processes and select randomly one of them to perform a single step until the protocol finishes with a decision.

File `paxos_SUITE.erl`:

```

235 -spec prop_rnd_interleave(1..4, 4..16, {pos_integer(), pos_integer(), pos_integer()})
236     -> true.
237 prop_rnd_interleave(NumProposers, NumAcceptors, Seed) ->
238     ct:pal("Called with: paxos_SUITE:prop_rnd_interleave(~p, ~p, ~p).~n",
239         [NumProposers, NumAcceptors, Seed]),
240     Majority = NumAcceptors div 2 + 1,
241     {Proposers, Acceptors, Learners} =
242         make(NumProposers, NumAcceptors, 1, "rnd_interleave"),
243     %% set bp on all processes
244     _ = [ gen_component:bp_set(comm:make_local(X), ?proposer_initialize, bp)
245         || X <- Proposers ],
246     _ = [ gen_component:bp_set(comm:make_local(X), acceptor_initialize, bp)
247         || X <- Acceptors ],
248     _ = [ gen_component:bp_set(comm:make_local(X), learner_initialize, bp)
249         || X <- Learners ],
250     %% start paxos instances
251     _ = [ proposer:start_paxosid(X, paxidrndinterl, Acceptors,
252         proposal, Majority, NumProposers, Y)
253         || {X,Y} <- lists:zip(Proposers, lists:seq(1, NumProposers)) ],
254     _ = [ acceptor:start_paxosid(X, paxidrndinterl, Learners)
255         || X <- Acceptors ],
256     _ = [ learner:start_paxosid(X, paxidrndinterl, Majority,
257         comm:this(), cpaxidrndinterl)
258         || X <- Learners ],
259     %% randomly step through protocol
260     OldSeed = random:seed(Seed),
261     Steps = step_until_decide(Proposers ++ Acceptors ++ Learners, cpaxidrndinterl, 0),
262     ct:pal("Needed ~p steps~n", [Steps]),
263     _ = case OldSeed of

```



```

264         undefined -> ok;
265         _ -> random:seed(OldSeed)
266     end,
267     _ = [ gen_component:kill(comm:make_local(X))
268           || X <- lists:flatten([Proposers, Acceptors, Learners]) ],
269     true.
270
271 step_until_decide(Processes, PaxId, SumSteps) ->
272     %% io:format("Step ~p~n", [SumSteps]),
273     Runnable = [ X || X <- Processes, gen_component:runnable(comm:make_local(X)) ],
274     case Runnable of
275     [] ->
276         ct:pal("No runnable processes of ~p~n", [length(Processes)]),
277         timer:sleep(5), step_until_decide(Processes, PaxId, SumSteps);
278     _ ->
279         Num = random:uniform(length(Runnable)),
280         _ = gen_component:bp_step(comm:make_local(lists:nth(Num, Runnable))),
281         receive
282             {learner_decide, cpaxidrndinterl, _, _Res} = _Any ->
283                 %% io:format("Received ~p~n", [_Any]),
284                 SumSteps
285         after 0 -> step_until_decide(Processes, PaxId, SumSteps + 1)
286         end
287     end.

```

To get a message interleaving protocol, we either can output the results of each `gen_component:bp_step/1` call together with the `Pid` we selected for stepping, or alter the definition of the macro `TRACE_BP_STEPS` in `gen_component`, when we execute all `gen_components` locally in the same Erlang virtual machine.

File `gen_component.erl`:

```

40 %-define(TRACE_BP_STEPS(X,Y), io:format(X,Y)).      %% output on console
41 %-define(TRACE_BP_STEPS(X,Y), log:pal(X,Y)).        %% output even if called by unittest
42 %-define(TRACE_BP_STEPS(X,Y), io:format(user,X,Y)). %% clean output even if called by unittest
43 -define(TRACE_BP_STEPS(X,Y), ok).

```

### 8.3.13. Future use and planned extensions for `gen_component`

`gen_component` could be further extended. For example it could support hot-code upgrade or could be used to implement algorithms that have to be run across several components of *Scalaris* like snapshot algorithms or similar extensions.

## 8.4. The Process' Database (pdb)

- How to use it and how to switch from `erlang:put/set` to `ets` and implied limitations.

## 8.5. Failure Detectors (fd)

- uses Erlang monitors locally
- is independent of component load
- uses heartbeats between Erlang virtual machines
- uses a single proxy heartbeat server per Erlang virtual machine, which itself uses Erlang monitors to monitor locally



- uses dynamic timeouts to implement an eventually perfect failure detector.

## 8.6. Monitoring Statistics (monitor, rrd)

*Description is based on SVN revision r2546.*

The monitor module offers several methods to gather meaningful statistics using the `rrd()` data type defined in `rrd`.

`rrd()` records work with time slots, i.e. a fixed slot length is given at creation and items which should be inserted will be either put into the current slot, or a new slot will be created. Each data item thus needs a time stamp associated with it. It must not be a real time, but can also be a virtual time stamp.

The `rrd` module thus offers two different APIs: one with transparent time handling, e.g. `rrd:create/3`, `rrd:add_now/2`, and one with manual time handling, e.g. `rrd:create/4`, `rrd:add/3`.

To allow different evaluations of the stored data, the following types of data are supported:

- **gauge**: only stores the newest value of a time slot, e.g. for thermometers,
- **counter**: sums up all values inside a time slot,
- **timing**: records time spans and stores values to easily calculate e.g. the sum, the standard deviation, the number of events, the min and max,
- **timing\_with\_hist**: similar to **timing** but also records a more detailed (approximated) histogram of the data,
- **event**: records each event (including its time stamp) inside a time slot in a list (this should be rarely used as the amount of data stored may be very big).

The monitor offers functions to conveniently store and retrieve such values. It is also started as a process in each `dht_node` and `basic_services` group as well as inside each `clients_group`. This process ultimately stores the whole `rrd()` structure. There are three paradigms how values can be stored:

1. Values are gathered in the process that is generating the values. Inside this process, the `rrd()` is stored in the erlang dictionary. Whenever a new time slot is started, the values will be reported to the monitor process of the gathering process' group.
2. Values are gathered in the process that is generating the values. Inside this process, the `rrd()` is handled manually. After changing the `rrd()`, a manual check for reporting needs to be issued using `monitor:check_report/4`.
3. Values are immediately send to the monitor process where it undergoes the same procedures until it is finally stored and available to other processes. This is especially useful if the process generating the values does not live long or does not regularly create new data, e.g. the client.

The following example illustrates the first mode, i.e. gathering data in the generating process. It has been taken from the `cyclon` module which uses a counter data type:

```
% initialise the monitor with an empty rrd() using a 60s monitoring interval
monitor:proc_set_value(?MODULE, 'shuffle', rrd:create(60 * 1000000, 3, counter)),
% update the value by adding one
monitor:proc_set_value(?MODULE, 'shuffle', fun(Old) -> rrd:add_now(1, Old) end),
% check regularly whether to report the data to the monitor:
monitor:proc_check_timeslot(?MODULE, 'shuffle')
```

The first two parameters of `monitor:proc_set_value/3` define the name of a monitored value, the module's name and a unique key. The second can be either an `rrd()` or an update fun. The `monitor:proc_check_timeslot/3` function can be used if your module does not regularly create new data. In this case, the monitor process would not have the latest data for others to retrieve. This function forces a check and creates the new time slot if needed (thus reporting the data).

This is how forwarding works (taken from `api_tx`):

```
monitor:client_monitor_set_value(  
  ?MODULE, 'req_list',  
  fun(Old) ->  
    Old2 = case Old of  
      % 10s monitoring interval, only keep newest in the client process  
      undefined -> rrd:create(10 * 1000000, 1, {timing, ms});  
      _ -> Old  
    end,  
    rrd:add_now(TimeInUs / 1000, Old2)  
  end),
```

As in this case there is no safe way of initialising the value, it is more useful to provide an update fun to `monitor:client_monitor_set_value/3`. This function is only useful for the client processes as it reports to the monitor in the `clients_group` (recall that client processes do not belong to any group). All other processes should use `monitor:monitor_set_value/3` with the same semantics.

## 8.7. Writing Unittests

### 8.7.1. Plain unittests

### 8.7.2. Randomized Testing using `tester.erl`

## 9. Basic Structured Overlay

### 9.1. Ring Maintenance

### 9.2. T-Man

### 9.3. Routing Tables

*Description is based on SVN revision r4005.*

Each node of the ring can perform searches in the overlay.

A search is done by a lookup in the overlay, but there are several other demands for communication between peers. Scalaris provides a general interface to route a message to the (other) peer, which is currently responsible for a given key.

File `api_dht_raw.erl`:

```
34 -spec unreliable_lookup(Key::?RT:key(), Msg::comm:message()) -> ok.
35 unreliable_lookup(Key, Msg) ->
36     comm:send_local(pid_groups:find_a(dht_node),
37         {?lookup_aux, Key, 0, Msg}).
38
39 -spec unreliable_get_key(Key::?RT:key()) -> ok.
40 unreliable_get_key(Key) ->
41     unreliable_lookup(Key, {?get_key, comm:this(), noid, Key}).
42
43 -spec unreliable_get_key(CollectorPid::comm:myid(),
44     ReqId::{rdht_req_id, pos_integer()},
45     Key::?RT:key()) -> ok.
46 unreliable_get_key(CollectorPid, ReqId, Key) ->
47     unreliable_lookup(Key, {?get_key, CollectorPid, ReqId, Key}).
```

The message `Msg` could be a `get_key` which retrieves content from the responsible node or a `get_node` message, which returns a pointer to the node.

All currently supported messages are listed in the file `dht_node.erl`.

The message routing is implemented in `dht_node_lookup.erl`

File `dht_node_lookup.erl`:

```
37 %% @doc Find the node responsible for Key and send him the message Msg.
38 -spec lookup_aux(State::dht_node_state:state(), Key::intervals:key(),
39     Hops::non_neg_integer(), Msg::comm:message()) -> ok.
40 lookup_aux(State, Key, Hops, Msg) ->
41     case config:read(leases) of
42     true ->
43         lookup_aux_leases(State, Key, Hops, Msg);
44     _ ->
45         lookup_aux_chord(State, Key, Hops, Msg)
46     end.
47
48 -spec lookup_aux_chord(State::dht_node_state:state(), Key::intervals:key(),
```

```

49         Hops::non_neg_integer(), Msg::comm:message()) -> ok.
50 lookup_aux_chord(State, Key, Hops, Msg) ->
51     Neighbors = dht_node_state:get(State, neighbors),
52     WrappedMsg = ?RT:wrap_message(Key, Msg, State, Hops),
53     case intervals:in(Key, nodelist:succ_range(Neighbors)) of
54     true -> % found node -> terminate
55         P = node:pidX(nodelist:succ(Neighbors)),
56         comm:send(P, {?lookup_fin, Key, Hops + 1, WrappedMsg}, [{shepherd, self()}]);
57     - ->
58         P = ?RT:next_hop(State, Key),
59         comm:send(P, {?lookup_aux, Key, Hops + 1, WrappedMsg}, [{shepherd, self()}])
60     end.
61
62 -spec lookup_aux_leases(State::dht_node_state:state(), Key::intervals:key(),
63     Hops::non_neg_integer(), Msg::comm:message()) -> ok.
64 lookup_aux_leases(State, Key, Hops, Msg) ->
65     case leases:is_responsible(State, Key) of
66     true ->
67         comm:send_local(dht_node_state:get(State, monitor_proc),
68             {lookup_hops, Hops}),
69         DHTNode = pid_groups:find_a(dht_node),
70         %log:log("aux -> fin: ~p ~p~n", [self(), DHTNode]),
71         comm:send_local(DHTNode,
72             {?lookup_fin, Key, Hops + 1, Msg});
73     maybe ->
74         DHTNode = pid_groups:find_a(dht_node),
75         %log:log("aux -> fin: ~p ~p~n", [self(), DHTNode]),
76         comm:send_local(DHTNode,
77             {?lookup_fin, Key, Hops + 1, Msg});
78     false ->
79         WrappedMsg = ?RT:wrap_message(Key, Msg, State, Hops),
80         %log:log("lookup_aux_leases route ~p~n", [self()]),
81         P = ?RT:next_hop(State, Key),
82         %log:log("lookup_aux_leases route ~p -> ~p~n", [self(), P]),
83         comm:send(P, {?lookup_aux, Key, Hops + 1, WrappedMsg}, [{shepherd, self()}])
84     end.
85
86 %% @doc Find the node responsible for Key and send him the message Msg.
87 -spec lookup_fin(State::dht_node_state:state(), Key::intervals:key(),
88     Hops::non_neg_integer(), Msg::comm:message()) -> dht_node_state:state().
89 lookup_fin(State, Key, Hops, Msg) ->
90     case config:read(leases) of
91     true ->
92         lookup_fin_leases(State, Key, Hops, Msg);
93     - ->
94         lookup_fin_chord(State, Key, Hops, Msg)
95     end.
96
97 -spec lookup_fin_chord(State::dht_node_state:state(), Key::intervals:key(),
98     Hops::non_neg_integer(), Msg::comm:message()) -> dht_node_state:state().
99 lookup_fin_chord(State, Key, Hops, Msg) ->
100     MsgFwd = dht_node_state:get(State, msg_fwd),
101     FwdList = [P || {I, P} <- MsgFwd, intervals:in(Key, I)],
102     case FwdList of
103     [] ->
104         case dht_node_state:is_db_responsible__no_msg_fwd_check(Key, State) of
105         true ->
106             %comm:send_local(dht_node_state:get(State, monitor_proc),
107                 {lookup_hops, Hops}),
108             %Unwrap = ?RT:unwrap_message(Msg, State),
109             %gen_component:post_op(Unwrap, State);
110             deliver(State, Msg, false, Hops);
111         false ->
112             % it is possible that we received the message due to a
113             % forward while sliding and before the other node removed
114             % the forward -> do not warn then
115             SlidePred = dht_node_state:get(State, slide_pred),
116             SlideSucc = dht_node_state:get(State, slide_succ),
117             Neighbors = dht_node_state:get(State, neighbors),
118             case ((SlidePred /= null andalso
119                 slide_op:get_sendORreceive(SlidePred) == 'send' andalso

```

```

120             intervals:in(Key, slide_op:get_interval(SlidePred)))
121         orelse
122             (SlideSucc /= null andalso
123              slide_op:get_sendORreceive(SlideSucc) == 'send' andalso
124              intervals:in(Key, slide_op:get_interval(SlideSucc)))
125         orelse
126             intervals:in(Key, nodelist:succ_range(Neighbors))) of
127         true -> ok;
128         false ->
129             DBRange = dht_node_state:get(State, db_range),
130             DBRange2 = [begin
131                 case intervals:is_continuous(Interval) of
132                     true -> {intervals:get_bounds(Interval), Id};
133                     _ -> {Interval, Id}
134                 end
135             end || {Interval, Id} <- DBRange],
136             log:log(warn,
137                 "[ ~.0p ] Routing is damaged!! Trying again...~n myrange:~p~n
db_range:~p~n msgfwd:~p~n Key:~p",
138                 [self(), intervals:get_bounds(nodelist:node_range(Neighbors)),
139                 DBRange2, MsgFwd, Key])
140             end,
141             lookup_aux(State, Key, Hops, Msg),
142             State
143         end;
144         [Pid] -> comm:send(Pid, {?lookup_fin, Key, Hops + 1, Msg}),
145             State
146     end.
147
148 -spec lookup_fin_leases(State::dht_node_state:state(), Key::intervals:key(),
149                         Hops::non_neg_integer(), Msg::comm:message()) -> dht_node_state:state().
150 lookup_fin_leases(State, Key, Hops, Msg) ->
151     case leases:is_responsible(State, Key) of
152     true ->
153         deliver(State, Msg, true, Hops);
154     maybe ->
155         deliver(State, Msg, false, Hops);
156     false ->
157         log:log("lookup_fin fail: ~p", [self()]),
158         lookup_aux(State, Key, Hops, Msg),
159         State
160     end.

```

Each node is responsible for a certain key interval. The function `intervals:in/2` is used to decide, whether the key is between the current node and its successor. If that is the case, the final step is delivers a `lookup_fin` message to the local node. Otherwise, the message is forwarded to the next nearest known peer (listed in the routing table) determined by `?RT:next_hop/2`.

`rt_beh.erl` is a generic interface for routing tables. It can be compared to interfaces in Java. In Erlang interfaces can be defined using a so called 'behaviour'. The files `rt_simple` and `rt_chord` implement the behaviour '`rt_beh`'.

The macro `?RT` is used to select the current implementation of routing tables. It is defined in `include/scalaris.hrl`.

File `scalaris.hrl`:

```

24 %%The RT macro determines which kind of routingtable is used. Uncomment the
25 %%one that is desired.
26
27 %%Standard Chord routingtable
28 -define(RT, rt_chord).
29 % first valid key:
30 -define(MINUS_INFINITY, 0).
31 -define(MINUS_INFINITY_TYPE, 0).
32 % first invalid key:
33 -define(PLUS_INFINITY, 16#10000000000000000000000000000000).
34 -define(PLUS_INFINITY_TYPE, 16#10000000000000000000000000000000).

```

```

35
36 %%Simple routingtable
37 %-define(RT, rt_simple).
38
39 %% Flexible Routing Tables
40 %% Standard flexible routingtable
41 %-define(RT, rt_frtchord).
42 %% Grouped Flexible Routing Table
43 %-define(RT, rt_gfrtchord).

```

The functions, that have to be implemented for a routing mechanism are defined in the following file:

File `rt_beh.erl`:

```

28 -ifdef(have_callback_support).
29 -include("scalaris.hrl").
30 -include("client_types.hrl").
31 -type rt() :: term().
32 -type external_rt() :: term().
33 -type key() :: term().
34
35 -callback empty_ext(nodelist:neighborhood()) -> external_rt().
36 -callback init(nodelist:neighborhood()) -> rt().
37 -callback hash_key(client_key() | binary()) -> key().
38 -callback get_random_node_id() -> key().
39 -callback next_hop(dht_node_state:state(), key()) -> comm:mypid().
40
41 -callback init_stabilize(nodelist:neighborhood(), rt()) -> rt().
42 -callback update(OldRT::rt(), OldNeighbors::nodelist:neighborhood(),
43                 NewNeighbors::nodelist:neighborhood())
44                 -> {trigger_rebuild, rt()} | {ok, rt()}.
45 -callback filter_dead_node(rt(), comm:mypid()) -> rt().
46
47 -callback to_pid_list(rt()) -> [comm:mypid()].
48 -callback get_size(rt() | external_rt()) -> non_neg_integer().
49 -callback get_replica_keys(key()) -> [key()].
50 -callback get_key_segment(key()) -> pos_integer().
51
52 -callback n() -> number().
53 -callback get_range(Begin::key(), End::key() | ?PLUS_INFINITY_TYPE) -> number().
54 -callback get_split_key(Begin::key(), End::key() | ?PLUS_INFINITY_TYPE,
55                         SplitFraction::{Num::non_neg_integer(), Denom::pos_integer()})
56                         -> key() | ?PLUS_INFINITY_TYPE.
57 -callback get_random_in_interval(intervals:simple_interval2()) -> key().
58
59 -callback dump(RT::rt()) -> KeyValueList::{[Index::string(), Node::string()]}.
60
61 -callback to_list(dht_node_state:state()) -> nodelist:sodelist().
62 -callback export_rt_to_dht_node(rt(), Neighbors::nodelist:neighborhood()) -> external_rt().
63 -callback handle_custom_message(comm:message(), rt_loop:state_active()) -> rt_loop:state_active() | undefined.
64
65 -callback check(OldRT::rt(), NewRT::rt(), Neighbors::nodelist:neighborhood(),
66                ReportToFD::boolean()) -> ok.
67 -callback check(OldRT::rt(), NewRT::rt(), OldNeighbors::nodelist:neighborhood(),
68                NewNeighbors::nodelist:neighborhood(), ReportToFD::boolean()) -> ok.
69
70 -callback check_config() -> boolean().
71 -callback wrap_message(Key::key(), Msg::comm:message(), State::dht_node_state:state(), Hops::non_neg_integer()) ->
72                 comm:message().
73
74
75 -else.
76 -spec behaviour_info(atom()) -> [{atom(), arity()}] | undefined.
77 behaviour_info(callbacks) ->
78 [
79     % create a default routing table
80     {empty_ext, 1},
81     % initialize a routing table
82     {init, 1},

```

```

83 % mapping: key space -> identifier space
84 {hash_key, 1}, {get_random_node_id, 0},
85 % routing
86 {next_hop, 2},
87 % trigger for new stabilization round
88 {init_stabilize, 2},
89 % adapt RT to changed neighborhood
90 {update, 3},
91 % dead nodes filtering
92 {filter_dead_node, 2},
93 % statistics
94 {to_pid_list, 1}, {get_size, 1},
95 % gets all (replicated) keys for a given (hashed) key
96 % (for symmetric replication)
97 {get_replica_keys, 1},
98 % get the segment of the ring a key belongs to (1-4)
99 {get_key_segment, 1},
100 % address space size, range and split key
101 % (may all throw 'throw:not_supported' if unsupported by the RT)
102 {n, 0}, {get_range, 2}, {get_split_key, 3},
103 % get a random key within the requested interval
104 {get_random_in_interval, 1},
105 % for debugging and web interface
106 {dump, 1},
107 % for bulkowner
108 {to_list, 1},
109 % convert from internal representation to version for dht_node
110 {export_rt_to_dht_node, 2},
111 % handle messages specific to a certain routing-table implementation
112 {handle_custom_message, 2},
113 % common methods
114 {check, 4}, {check, 5},
115 {check_config, 0},
116 % wrap and unwrap lookup messages
117 {wrap_message, 4},
118 {unwrap_message, 2}
119 ];
120 behaviour_info(_Other) ->
121     undefined.
122 -endif.

```

empty/1 gets a successor and generates an empty routing table for use inside the routing table implementation. The data structure of the routing table is undefined. It can be a list, a tree, a matrix ...

empty\_ext/1 similarly creates an empty external routing table for use by the dht\_node. This process might not need all the information a routing table implementation requires and can thus work with less data.

hash\_key/1 gets a key and maps it into the overlay's identifier space.

get\_random\_node\_id/0 returns a random node id from the overlay's identifier space. This is used for example when a new node joins the system.

next\_hop/2 gets a dht\_node's state (including the external routing table representation) and a key and returns the node, that should be contacted next when searching for the key, i.e. the known node nearest to the id.

init\_stabilize/2 is called periodically to rebuild the routing table. The parameters are the identifier of the node, its successor and the old (internal) routing table state. This method may send messages to the routing\_table process which need to be handled by the handle\_custom\_message/handler since they are implementation-specific.

update/7 is called when the node's ID, predecessor and/or successor changes. It updates the (internal) routing table with the (new) information.

filter\_dead\_node/2 is called by the failure detector and tells the routing table about dead nodes. This function gets the (internal) routing table and a node to remove from it. A new routing

table state is returned.

to\_pid\_list/1 get the PIDs of all (internal) routing table entries.

get\_size/1 get the (internal or external) routing table's size.

get\_replica\_keys/1 Returns for a given (hashed) Key the (hashed) keys of its replicas. This used for implementing symmetric replication.

n/0 gets the number of available keys. An implementation may throw `throw:not_supported` if the operation is unsupported by the routing table.

dump/1 dump the (internal) routing table state for debugging, e.g. by using the web interface. Returns a list of `{Index, Node_as_String}` tuples which may just as well be empty.

to\_list/1 convert the (external) representation of the routing table inside a given `dht_node_state` to a sorted list of known nodes from the routing table, i.e. first=succ, second=next known node on the ring, ... This is used by bulk-operations to create a broadcast tree.

export\_rt\_to\_dht\_node/2 convert the internal routing table state to an external state. Gets the internal state and the node's neighborhood for doing so.

handle\_custom\_message/2 handle messages specific to the routing table implementation. `rt_loop` will forward unknown messages to this function.

check/5, check/6 check for routing table changes and send an updated (external) routing table to the `dht_node` process.

check\_config/0 check that all required configuration parameters exist and satisfy certain restrictions.

wrap\_message/1 wraps a message send via a `dht_node_lookup:lookup_aux/4`.

unwrap\_message/2 unwraps a message send via `dht_node_lookup:lookup_aux/4` previously wrapped by `wrap_message/1`.

### 9.3.1. The routing table process (rt\_loop)

The `rt_loop` module implements the process for all routing tables. It processes messages and calls the appropriate methods in the specific routing table implementations.

File `rt_loop.erl`:

```
40 -opaque(state_active() :: {Neighbors :: nodelist:neighborhood(),
41                               RTState :: ?RT:rt()}).
42 -type(state_inactive() :: {inactive,
43                               MessageQueue :: msg_queue:msg_queue()}).
44 %% -type(state() :: state_active() | state_inactive()).
```

If initialized, the node's id, its predecessor, successor and the routing table state of the selected implementation (the macro `RT` refers to).

File `rt_loop.erl`:

```
159 % Message handler to manage the trigger
160 on_active({trigger_rt}, State) ->
161     msg_delay:send_trigger(get_base_interval(), {trigger_rt}),
162     gen_component:post_op({periodic_rt_rebuild}, State);
163
164 % Actual periodic rebuilding of the RT
165 on_active({periodic_rt_rebuild}, {Neighbors, OldRT}) ->
166     % start periodic stabilization
167     % log:log(debug, "[ RT ] stabilize"),
168     NewRT = ?RT:init_stabilize(Neighbors, OldRT),
169     ?RT:check(OldRT, NewRT, Neighbors, true),
170     new_state(Neighbors, NewRT);
```



Periodically (see `pointer_base_stabilization_interval` config parameter) a trigger message is sent to the `rt_loop` process that starts the periodic stabilization implemented by each routing table.

File `rt_loop.erl`:

```

144 % update routing table with changed ID, pred and/or succ
145 on_active({update_rt, OldNeighbors, NewNeighbors}, {_Neighbors, OldRT}) ->
146     case ?RT:update(OldRT, OldNeighbors, NewNeighbors) of
147         {trigger_rebuild, NewRT} ->
148             ?RT:check(OldRT, NewRT, OldNeighbors, NewNeighbors, true),
149             % trigger immediate rebuild
150             gen_component:post_op({periodic_rt_rebuild}, new_state(NewNeighbors, NewRT))
151         ;
152         {ok, NewRT} ->
153             ?RT:check(OldRT, NewRT, OldNeighbors, NewNeighbors, true),
154             new_state(NewNeighbors, NewRT)
155     end;

```

Every time a node's neighborhood changes, the `dht_node` sends an `update_rt` message to the routing table which will call `?RT:update/7` that decides whether the routing table should be rebuilt. If so, it will stop any waiting trigger and schedule an immediate (periodic) stabilization.

### 9.3.2. Simple routing table (`rt_simple`)

One implementation of a routing table is the `rt_simple`, which routes via the successor. Note that this is inefficient as it needs a linear number of hops to reach its goal. A more robust implementation, would use a successor list. This implementation is also not very efficient in the presence of churn.

#### Data types

First, the data structure of the routing table is defined:

File `rt_simple.erl`:

```

26 -type key_t() :: 0..16#FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF. % 128 bit numbers
27 -type rt_t() :: Succ::node:node_type().
28 -type external_rt_t() :: Succ::node:node_type().
29 -type custom_message() :: none().

```

The routing table only consists of a node (the successor). Keys in the overlay are identified by integers  $\geq 0$ .

#### A simple `rm_beh` behaviour

File `rt_simple.erl`:

```

41 %% @doc Creates an "empty" routing table containing the successor.
42 -spec empty(nodelist:neighborhood()) -> rt_t().
43 empty(Neighbors) -> nodelist:succ(Neighbors).

```

File `rt_simple.erl`:

```

254 -spec empty_ext(nodelist:neighborhood()) -> external_rt_t().
255 empty_ext(Neighbors) -> empty(Neighbors).

```

The empty routing table (internal or external) consists of the successor.

File `rt_simple.erl`:

Keys are hashed using MD5 and have a length of 128 bits.

File `rt_simple.erl`:

```
65 %% @doc Generates a random node id, i.e. a random 128-bit number.
66 -spec get_random_node_id() -> key().
67 get_random_node_id() ->
68     case config:read(key_creator) of
69         random -> hash_key_(randoms:getRandomString());
70         random_with_bit_mask ->
71             {Mask1, Mask2} = config:read(key_creator_bitmask),
72             (hash_key_(randoms:getRandomString()) band Mask2) bor Mask1
73     end.
```

Random node id generation uses the helpers provided by the `randoms` module.

File `rt_simple.erl`:

```
259 %% @doc Returns the next hop to contact for a lookup.
260 -spec next_hop(dht_node_state:state(), key()) -> comm:mypid().
261 next_hop(State, _Key) -> node:pidX(dht_node_state:get(State, succ)).
```

Next hop is always the successor.

File `rt_simple.erl`:

```
81 %% @doc Triggered by a new stabilization round, renews the routing table.
82 -spec init_stabilize(nodelist:neighborhood(), rt()) -> rt().
83 init_stabilize(Neighbors, _RT) -> empty(Neighbors).
```

`init_stabilize/2` resets its routing table to the current successor.

File `rt_simple.erl`:

```
87 %% @doc Updates the routing table due to a changed node ID, pred and/or succ.
88 -spec update(OldRT::rt(), OldNeighbors::nodelist:neighborhood(),
89             NewNeighbors::nodelist:neighborhood()) -> {ok, rt()}.
90 update(_OldRT, _OldNeighbors, NewNeighbors) ->
91     {ok, nodelist:succ(NewNeighbors)}.
```

`update/7` updates the routing table with the new successor.

File `rt_simple.erl`:

```
95 %% @doc Removes dead nodes from the routing table (rely on periodic
96 %%     stabilization here).
97 -spec filter_dead_node(rt(), comm:mypid()) -> rt().
98 filter_dead_node(RT, _DeadPid) -> RT.
```

`filter_dead_node/2` does nothing, as only the successor is listed in the routing table and that is reset periodically in `init_stabilize/2`.

File `rt_simple.erl`:

```
102 %% @doc Returns the pids of the routing table entries.
103 -spec to_pid_list(rt()) -> [comm:mypid()].
104 to_pid_list(Succ) -> [node:pidX(Succ)].
```

to\_pid\_list/1 returns the pid of the successor.

File rt\_simple.erl:

```
108 %% @doc Returns the size of the routing table.
109 -spec get_size(rt() | external_rt()) -> non_neg_integer().
110 get_size(_RT) -> 1.
```

The size of the routing table is always 1.

File rt\_simple.erl:

```
174 %% @doc Returns the replicas of the given key.
175 -spec get_replica_keys(key()) -> [key()].
176 get_replica_keys(Key) ->
177     [Key,
178      Key bxor 16#40000000000000000000000000000000,
179      Key bxor 16#80000000000000000000000000000000,
180      Key bxor 16#C0000000000000000000000000000000
181     ].
```

This get\_replica\_keys/1 implements symmetric replication.

File rt\_simple.erl:

```
114 %% @doc Returns the size of the address space.
115 -spec n() -> integer().
116 n() -> n_().
117 %% @doc Helper for n/0 to make dialyzer happy with internal use of n/0.
118 -spec n_() -> 16#10000000000000000000000000000000.
119 n_() -> 16#FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF + 1.
```

There are  $2^{128}$  available keys.

File rt\_simple.erl:

```
189 %% @doc Dumps the RT state for output in the web interface.
190 -spec dump(RT::rt()) -> KeyValueType::[{Index::string(), Node::string()}].
191 dump(Succ) -> [{"0", webhelpers:safe_html_string("~p", [Succ])}].
```

dump/1 lists the successor.

File rt\_simple.erl:

```
272 %% @doc Converts the (external) representation of the routing table to a list
273 %%      in the order of the fingers, i.e. first=succ, second=shortest finger,
274 %%      third=next longer finger,...
275 -spec to_list(dht_node_state:state()) -> nodelist:nodelist().
276 to_list(State) -> [dht_node_state:get(State, succ)].
```

to\_list/1 lists the successor from the external routing table state.

File rt\_simple.erl:

```
265 %% @doc Converts the internal RT to the external RT used by the dht_node. Both
266 %%      are the same here.
267 -spec export_rt_to_dht_node(rt(), Neighbors::nodelist:neighborhood()) -> external_rt().
268 export_rt_to_dht_node(RT, _Neighbors) -> RT.
```

export\_rt\_to\_dht\_node/2 states that the external routing table is the same as the internal table.

File rt\_simple.erl:

```

211 %% @doc There are no custom messages here.
212 -spec handle_custom_message
213       (custom_message() | any(), rt_loop:state_active()) -> unknown_event.
214 handle_custom_message(_Message, _State) -> unknown_event.

```

Custom messages could be send from a routing table process on one node to the routing table process on another node and are independent from any other implementation.

File `rt_simple.hrl`:

```

218 %% @doc Notifies the dht_node and failure detector if the routing table changed.
219 %%       Provided for convenience (see check/5).
220 -spec check(OldRT::rt(), NewRT::rt(), Neighbors::nodelist:neighborhood(),
221           ReportToFD::boolean()) -> ok.
222 check(OldRT, NewRT, Neighbors, ReportToFD) ->
223     check(OldRT, NewRT, Neighbors, Neighbors, ReportToFD).
224
225 %% @doc Notifies the dht_node if the (external) routing table changed.
226 %%       Also updates the failure detector if ReportToFD is set.
227 %%       Note: the external routing table only changes the internal RT has
228 %%       changed.
229 -spec check(OldRT::rt(), NewRT::rt(), OldNeighbors::nodelist:neighborhood(),
230           NewNeighbors::nodelist:neighborhood(), ReportToFD::boolean()) -> ok.
231 check(OldRT, NewRT, _OldNeighbors, NewNeighbors, ReportToFD) ->
232     case OldRT == NewRT of
233     true -> ok;
234     _ ->
235         Pid = pid_groups:get_my(dht_node),
236         RT_ext = export_rt_to_dht_node(NewRT, NewNeighbors),
237         comm:send_local(Pid, {rt_update, RT_ext}),
238         % update failure detector:
239         case ReportToFD of
240         true ->
241             NewPids = to_pid_list(NewRT),
242             OldPids = to_pid_list(OldRT),
243             fd:update_subscriptions(OldPids, NewPids);
244         _ -> ok
245         end
246     end.

```

Checks whether the routing table changed and in this case sends the `dht_node` an updated (external) routing table state. Optionally the failure detector is updated. This may not be necessary, e.g. if `check` is called after a crashed node has been reported by the failure detector (the failure detector already unsubscribes the node in this case).

File `rt_simple.hrl`:

```

218 %% @doc Notifies the dht_node and failure detector if the routing table changed.
219 %%       Provided for convenience (see check/5).
220 -spec check(OldRT::rt(), NewRT::rt(), Neighbors::nodelist:neighborhood(),
221           ReportToFD::boolean()) -> ok.
222 check(OldRT, NewRT, Neighbors, ReportToFD) ->
223     check(OldRT, NewRT, Neighbors, Neighbors, ReportToFD).
224
225 %% @doc Notifies the dht_node if the (external) routing table changed.
226 %%       Also updates the failure detector if ReportToFD is set.
227 %%       Note: the external routing table only changes the internal RT has
228 %%       changed.
229 -spec check(OldRT::rt(), NewRT::rt(), OldNeighbors::nodelist:neighborhood(),
230           NewNeighbors::nodelist:neighborhood(), ReportToFD::boolean()) -> ok.
231 check(OldRT, NewRT, _OldNeighbors, NewNeighbors, ReportToFD) ->
232     case OldRT == NewRT of
233     true -> ok;
234     _ ->
235         Pid = pid_groups:get_my(dht_node),
236         RT_ext = export_rt_to_dht_node(NewRT, NewNeighbors),
237         comm:send_local(Pid, {rt_update, RT_ext}),

```

```

238         % update failure detector:
239         case ReportToFD of
240             true ->
241                 NewPids = to_pid_list(NewRT),
242                 OldPids = to_pid_list(OldRT),
243                 fd:update_subscriptions(OldPids, NewPids);
244             _ -> ok
245         end
246     end.

```

File `rt_simple.erl`:

```

280 %% @doc Wrap lookup messages. This is a noop in rt_simple.
281 -spec wrap_message(Key::key_t(), Msg::comm:message(), State::dht_node_state:state(),
282                 Hops::non_neg_integer()) -> comm:message().
283 wrap_message(_Key, Msg, _State, _Hops) -> Msg.

```

Wraps a message send via `dht_node_lookup:lookup/4` if needed. This routing algorithm does not need callbacks when finishing the lookup, so it does not need to wrap the message.

File `rt_simple.erl`:

```

287 %% @doc Unwrap lookup messages. This is a noop in rt_simple.
288 -spec unwrap_message(Msg::comm:message(), State::dht_node_state:state()) -> comm:message().
289 unwrap_message(Msg, _State) -> Msg.

```

Unwraps a message previously wrapped with `rt_simple:wrap_message/1`. As that function does not wrap messages, `rt_simple:unwrap_message/2` doesn't have to do anything as well.

### 9.3.3. Chord routing table (`rt_chord`)

The file `rt_chord.erl` implements Chord's routing.

#### Data types

File `rt_chord.erl`:

```

26 -type key_t() :: 0..16#FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF. % 128 bit numbers
27 -type rt_t() :: gb_tree().
28 -type external_rt_t() :: gb_tree().
29 -type index() :: {pos_integer(), non_neg_integer()}.
30 -type custom_message() ::
31     {rt_get_node, Source_PID::comm:mypid(), Index::index()} |
32     {rt_get_node_response, Index::index(), Node::node:node_type()}.

```

The routing table is a `gb_tree`. Identifiers in the ring are integers. Note that in Erlang integer can be of arbitrary precision. For Chord, the identifiers are in  $[0, 2^{128})$ , i.e. 128-bit strings.

#### The `rm_beh` behaviour for Chord (excerpt)

File `rt_chord.erl`:

```

46 %% @doc Creates an empty routing table.
47 -spec empty(nodelist:neighborhood()) -> rt().
48 empty(_Neighbors) -> gb_trees:empty().

```

File `rt_chord.erl`:

```
412 -spec empty_ext(nodelist:neighborhood()) -> external_rt().
413 empty_ext(_Neighbors) -> gb_trees:empty().
```

`empty/1` returns an empty `gb_tree`, same for `empty_ext/1`.

`rt_chord:hash_key/1`, `rt_chord:get_random_node_id/0`, `rt_chord:get_replica_keys/1` and `rt_chord:n/0` are implemented like their counterparts in `rt_simple.erl`.

File `rt_chord.erl`:

```
417 %% @doc Returns the next hop to contact for a lookup.
418 %%     If the routing table has less entries than the rt_size_use_neighbors
419 %%     config parameter, the neighborhood is also searched in order to find a
420 %%     proper next hop.
421 %%     Note, that this code will be called from the dht_node process and
422 %%     it will thus have an external_rt!
423 -spec next_hop(dht_node_state:state(), key()) -> comm:mypid().
424 next_hop(State, Id) ->
425     Neighbors = dht_node_state:get(State, neighbors),
426     case intervals:in(Id, nodelist:succ_range(Neighbors)) of
427     true -> node:pidX(nodelist:succ(Neighbors));
428     _ ->
429         % check routing table:
430         RT = dht_node_state:get(State, rt),
431         RTSize = get_size(RT),
432         NodeRT = case util:gb_trees_largest_smaller_than(Id, RT) of
433             {value, _Key, N} ->
434                 N;
435             nil when RTSize == 0 ->
436                 nodelist:succ(Neighbors);
437             nil -> % forward to largest finger
438                 {_Key, N} = gb_trees:largest(RT),
439                 N
440         end,
441         FinalNode =
442             case RTSize < config:read(rt_size_use_neighbors) of
443             false -> NodeRT;
444             _ ->
445                 % check neighborhood:
446                 nodelist:largest_smaller_than(Neighbors, Id, NodeRT)
447             end,
448         node:pidX(FinalNode)
449     end.
```

If the (external) routing table contains at least one item, the next hop is retrieved from the `gb_tree`. It will be the node with the largest id that is smaller than the id we are looking for. If the routing table is empty, the successor is chosen. However, if we haven't found the key in our routing table, the next hop will be our largest finger, i.e. entry.

File `rt_chord.erl`:

```
85 %% @doc Starts the stabilization routine.
86 -spec init_stabilize(nodelist:neighborhood(), rt()) -> rt().
87 init_stabilize(Neighbors, RT) ->
88     % calculate the longest finger
89     case first_index(Neighbors) of
90     null -> ok;
91     {Key, Index} ->
92         % trigger a lookup for Key
93         api_dht_raw:unreliable_lookup(
94             Key, {?send_to_group_member, routing_table,
95                 {rt_get_node, comm:this(), Index}})
96     end,
97     RT.
```

The routing table stabilization is triggered for the first index and then runs asynchronously, as we do not want to block the `rt_loop` to perform other request while recalculating the routing table.

We have to find the node responsible for the calculated finger and therefore perform a lookup for the node with a `rt_get_node` message, including a reference to ourselves as the reply-to address and the index to be set.

The lookup performs an overlay routing by passing the message until the responsible node is found. There, the message is delivered to the `routing_table` process. The remote node sends the requested information back directly. It includes a reference to itself in a `rt_get_node_response` message. Both messages are handled by `rt_chord:handle_custom_message/2`:

File `rt_chord.erl`:

```

342 %% @doc Chord reacts on 'rt_get_node_response' messages in response to its
343 %%      'rt_get_node' messages.
344 -spec handle_custom_message(custom_message(), rt_loop:state_active()) ->
345                                     rt_loop:state_active() | unknown_event.
346 handle_custom_message({rt_get_node, Source_PID, Index}, State) ->
347     MyNode = nodelist:node(rt_loop:get_neighb(State)),
348     comm:send(Source_PID, {rt_get_node_response, Index, MyNode}, ?SEND_OPTIONS),
349     State;
350 handle_custom_message({rt_get_node_response, Index, Node}, State) ->
351     OldRT = rt_loop:get_rt(State),
352     Neighbors = rt_loop:get_neighb(State),
353     case stabilize(Neighbors, OldRT, Index, Node) of
354     {NewRT, true} ->
355         check_do_update(OldRT, NewRT, rt_loop:get_neighb(State), true);
356     {NewRT, false} -> ok
357     end,
358     rt_loop:set_rt(State, NewRT);
359 handle_custom_message(_Message, _State) ->
360     unknown_event.

```

File `rt_chord.erl`:

```

198 %% @doc Updates one entry in the routing table and triggers the next update.
199 %%      Changed indicates whether a new node was inserted (the RT structure may
200 %%      change independently from this indicator!).
201 -spec stabilize(Neighbors::nodelist:neighborhood(), OldRT::rt(), Index::index(),
202               Node::node:node_type()) -> {NewRT::rt(), Changed::boolean()}.
203 stabilize(Neighbors, RT, Index, Node) ->
204     MyId = nodelist:nodeid(Neighbors),
205     Succ = nodelist:succ(Neighbors),
206     case (node:id(Succ) /= node:id(Node)) % reached succ?
207     andalso (not intervals:in(           % there should be nothing shorter
208                 node:id(Node),           % than succ
209                 nodelist:succ_range(Neighbors))) of
210     true ->
211         NextIndex = next_index(Index),
212         NextKey = calculateKey(MyId, NextIndex),
213         CurrentKey = calculateKey(MyId, Index),
214         case CurrentKey /= NextKey of
215         true ->
216             Msg = {rt_get_node, comm:this(), NextIndex},
217             api_dht_raw:unreliable_lookup(
218                 NextKey, {?send_to_group_member, routing_table, Msg});
219         _ -> ok
220         end,
221         Changed = (Index == first_index() orelse
222             (gb_trees:lookup(prev_index(Index), RT) /= {value, Node})),
223         {gb_trees:enter(Index, Node, RT), Changed};
224     _ ->
225         {RT, false}
226     end.

```

stabilize/5 assigns the received routing table entry and triggers the routing table stabilization for the the next shorter entry using the same mechanisms as described above.

If the shortest finger is the successor, then filling the routing table is stopped, as no further new entries would occur. It is not necessary, that Index reaches 1 to make that happen. If less than  $2^{128}$  nodes participate in the system, it may happen earlier.

File `rt_chord.erl`:

```

230 %% @doc Updates the routing table due to a changed node ID, pred and/or succ.
231 -spec update(OldRT::rt(), OldNeighbors::nodelist:neighborhood(),
232             NewNeighbors::nodelist:neighborhood())
233         -> {ok | trigger_rebuild, rt()}.
234 update(OldRT, OldNeighbors, NewNeighbors) ->
235     OldPred = nodelist:pred(OldNeighbors),
236     NewPred = nodelist:pred(NewNeighbors),
237     OldSucc = nodelist:succ(OldNeighbors),
238     NewSucc = nodelist:succ(NewNeighbors),
239     NewNodeId = nodelist:nodeid(NewNeighbors),
240     % if only the ID of a succ or pred changed but both are still the same
241     % process, only re-build if the new node ID is not between Pred and Succ
242     % any more (which should not happen since this must come from a slide!)
243     % if not rebuild, update the node IDs though
244     case node:same_process(OldPred, NewPred) andalso
245         node:same_process(OldSucc, NewSucc) andalso
246         intervals:in(NewNodeId, node:mk_interval_between_nodes(NewPred, NewSucc)) of
247     true ->
248         NewRT = gb_trees:map(
249             fun(_K, N) ->
250                 case node:same_process(N, NewPred) of
251                     true ->
252                         node:newer(N, NewPred);
253                     false ->
254                         case node:same_process(N, NewSucc) of
255                             true -> node:newer(N, NewSucc);
256                             false -> N
257                         end
258                     end
259                 end, OldRT),
260         {ok, NewRT};
261     false ->
262         % to be on the safe side ...
263         {trigger_rebuild, empty(NewNeighbors)}
264     end.

```

Tells the `rt_loop` process to rebuild the routing table starting with an empty (internal) routing table state.

File `rt_chord.erl`:

```

101 %% @doc Removes dead nodes from the routing table.
102 -spec filter_dead_node(rt(), comm:mypid()) -> rt().
103 filter_dead_node(RT, DeadPid) ->
104     DeadIndices = [Index || {Index, Node} <- gb_trees:to_list(RT),
105                             node:same_process(Node, DeadPid)],
106     lists:foldl(fun(Index, Tree) -> gb_trees:delete(Index, Tree) end,
107                 RT, DeadIndices).

```

`filter_dead_node` removes dead entries from the `gb_tree`.

File `rt_chord.erl`:

```

453 -spec export_rt_to_dht_node(rt(), Neighbors::nodelist:neighborhood()) -> external_rt().
454 export_rt_to_dht_node(RT, Neighbors) ->
455     Id = nodelist:nodeid(Neighbors),
456     Pred = nodelist:pred(Neighbors),
457     Succ = nodelist:succ(Neighbors),

```



```

458     Tree = gb_trees:enter(node:id(Succ), Succ,
459                           gb_trees:enter(node:id(Pred), Pred, gb_trees:empty())),
460     util:gb_trees_foldl(fun (_K, V, Acc) ->
461                           % only store the ring id and the according node structure
462                           case node:id(V) == Id of
463                             true  -> Acc;
464                             false -> gb_trees:enter(node:id(V), V, Acc)
465                           end
466     end, Tree, RT).

```

export\_rt\_to\_dht\_node converts the internal gb\_tree structure based on indices into the external representation optimised for look-ups, i.e. a gb\_tree with node ids and the nodes themselves.

File rt\_chord.hrl:

```

364 %% @doc Notifies the dht_node and failure detector if the routing table changed.
365 %%     Provided for convenience (see check/5).
366 -spec check(OldRT::rt(), NewRT::rt(), Neighbors::nodelist:neighborhood(),
367            ReportToFD::boolean()) -> ok.
368 check(OldRT, OldRT, _Neighbors, _ReportToFD) ->
369     ok;
370 check(OldRT, NewRT, Neighbors, ReportToFD) ->
371     check_do_update(OldRT, NewRT, Neighbors, ReportToFD).
372
373 %% @doc Notifies the dht_node if the (external) routing table changed.
374 %%     Also updates the failure detector if ReportToFD is set.
375 %%     Note: the external routing table also changes if the Pred or Succ
376 %%     change.
377 -spec check(OldRT::rt(), NewRT::rt(), OldNeighbors::nodelist:neighborhood(),
378            NewNeighbors::nodelist:neighborhood(), ReportToFD::boolean()) -> ok.
379 check(OldRT, NewRT, OldNeighbors, NewNeighbors, ReportToFD) ->
380     case nodelist:pred(OldNeighbors) == nodelist:pred(NewNeighbors) andalso
381         nodelist:succ(OldNeighbors) == nodelist:succ(NewNeighbors) andalso
382         OldRT == NewRT of
383         true -> ok;
384         _ -> check_do_update(OldRT, NewRT, NewNeighbors, ReportToFD)
385     end.
386
387 %% @doc Helper for check/4 and check/5.
388 -spec check_do_update(OldRT::rt(), NewRT::rt(), NewNeighbors::nodelist:neighborhood(),
389                    ReportToFD::boolean()) -> ok.
390 check_do_update(OldRT, NewRT, NewNeighbors, ReportToFD) ->
391     Pid = pid_groups:get_my(dht_node),
392     RT_ext = export_rt_to_dht_node(NewRT, NewNeighbors),
393     case Pid of
394         failed -> ok;
395         _ -> comm:send_local(Pid, {rt_update, RT_ext})
396     end,
397     % update failure detector:
398     case ReportToFD of
399         true ->
400             NewPids = to_pid_list(NewRT),
401             OldPids = to_pid_list(OldRT),
402             fd:update_subscriptions(OldPids, NewPids);
403         _ -> ok
404     end.

```

Checks whether the routing table changed and in this case sends the dht\_node an updated (external) routing table state. Optionally the failure detector is updated. This may not be necessary, e.g. if check is called after a crashed node has been reported by the failure detector (the failure detector already unsubscribes the node in this case).

File rt\_chord.erl:

```

480 %% @doc Wrap lookup messages. This is a noop in Chord.
481 -spec wrap_message(Key::key_t(), Msg::comm:message(), State::dht_node_state:state(),
482                  Hops::non_neg_integer()) -> comm:message().

```

```
483 wrap_message(_Key, Msg, _State, _Hops) -> Msg.
```

Wraps a message send via `dht_node_lookup:lookup/4` if needed. This routing algorithm does not need callbacks when finishing the lookup, so it does not need to wrap the message.

File `rt_chord.erl`:

```
487 %% @doc Unwrap lookup messages. This is a noop in Chord.  
488 -spec unwrap_message(Msg::comm:message(), State::dht_node_state:state()) -> comm:message().  
489 unwrap_message(Msg, _State) -> Msg.
```

Unwraps a message previously wrapped with `rt_chord:wrap_message/1`. As that function does not wrap messages, `rt_chord:unwrap_message/2` doesn't have to do anything as well.

## 9.4. Local Datastore

## 9.5. Cyclon

## 9.6. Vivaldi Coordinates

## 9.7. Estimated Global Information (Gossiping)

## 9.8. Load Balancing

## 9.9. Broadcast Trees

## 10. Transactions in Scalaris

### 10.1. The Paxos Module

### 10.2. Transactions using Paxos Commit

### 10.3. Applying the Tx-Modules to replicated DHTs

Introduces transaction processing on top of a Overlay

# 11. How a node joins the system

*Description is based on SVN revision r1370.*

After starting a new Scalaris-System as described in Section 3.2.1 on page 17, ten additional local nodes can be started by typing `api_vm:add_nodes(10)` in the Erlang-Shell that is opened during startup <sup>1</sup>.

```
scalaris> ./bin/firstnode.sh
[...]
```

```
(firstnode@csr-pc9)1> api_vm:add_nodes(10)
```

In the following we will trace what this function does in order to add additional nodes to the system. The function `api_vm:add_nodes(pos_integer())` is defined as follows.

File `api_vm.erl`:

```
65 %% @doc Adds Number Scalaris nodes to this VM.
66 -spec add_nodes(non_neg_integer()) -> {[pid_groups:groupname()], [{error, term()}]}.
67 add_nodes(Number) when is_integer(Number) andalso Number >= 0 ->
68     Result = {Ok, _Failed} = admin:add_nodes(Number),
69     % at least wait for the successful nodes to have joined, i.e. left the join phases
70     util:wait_for(
71         fun() ->
72             DhtModule = config:read(dht_node),
73             NotReady = [Name || Name <- Ok,
74                             not DhtModule:is_alive(
75                                 gen_component:get_state(
76                                     pid_groups:pid_of(Name, dht_node)))]],
77             [] == NotReady
78         end),
79     Result.
```

It uses the `admin:add_nodes/1` function to actually add the given number of nodes and then waits for all nodes to successfully complete their join phases.

File `admin.erl`:

```
45 % @doc add new Scalaris nodes on the local node
46 -spec add_node_at_id(?RT:key()) -> pid_groups:groupname() | {error, term()}.
47 add_node_at_id(Id) ->
48     add_node([{{dht_node, id}, Id}, {skip_psv_lb}]).
49
50 -spec add_node([tuple()]) -> pid_groups:groupname() | {error, term()}.
51 add_node(Options) ->
52     DhtNodeId = randoms:getRandomString(),
53     Group = pid_groups:new("dht_node_"),
54     Desc = sup:supervisor_desc(
55         DhtNodeId, config:read(dht_node_sup), start_link,
56         [{Group,
57           [{my_sup_dht_node_id, DhtNodeId} | Options]}]),
58     Sup = erlang:whereis(main_sup),
59     case sup:start_sup_as_child([" +"], Sup, Desc) of
60         {ok, _Child, Group} ->
61             DhtNodePid = pid_groups:pid_of(Group, dht_node),
```

<sup>1</sup>Increase the log level to info to get more detailed startup logs. See Section 3.1.1 on page 16

```


62         comm:send_local(DhtNodePid, {join, start}),
63         Group;
64     {error, already_present}      -> add_node(Options); % try again, different Id
65     {error, {already_started, _}} -> add_node(Options); % try again, different Id
66     {error, _Error} = X          -> X
67 end.
68
69 -spec add_nodes(non_neg_integer()) -> {[pid_groups:groupname()], [{error, term()}]}.
70 add_nodes(0) -> {[], []];
71 add_nodes(Count) ->
72     Results = [add_node([]) || _X <- lists:seq(1, Count)],
73     lists:partition(fun(E) -> not is_tuple(E) end, Results).

```

The function `admin:add_nodes/1` calls `admin:add_node([])` `Count` times. This function starts a new child with the given options for the main supervisor `main_sup`. In particular, it sets a random ID that is passed to the new node as its suggested ID to join at. To actually perform the start, the function `sup_dht_node:start_link/1` is called by the Erlang supervisor mechanism. For more details on the OTP supervisor mechanism see Chapter 18 of the Erlang book [1] or the online documentation at <http://www.erlang.org/doc/man/supervisor.html>.

## 11.1. Supervisor-tree of a Scalaris node

When a new Erlang VM with a Scalaris node is started, a `sup_scalaris` supervisor is started that creates further workers and supervisors according to the following scheme (processes starting order: left to right, top to bottom):

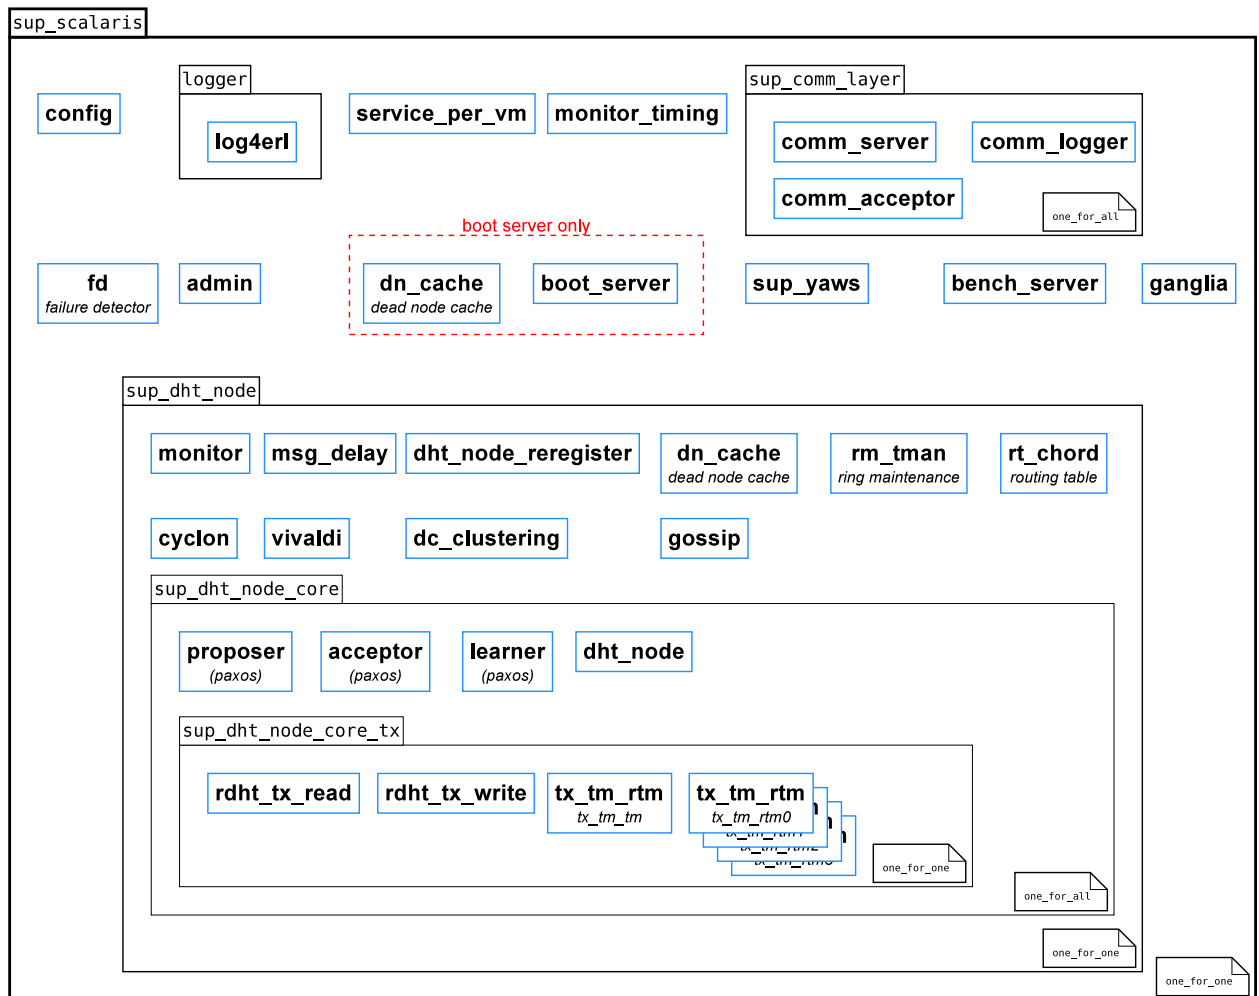

When new nodes are started using `admin:add_node/1`, only new `sup_dht_node` supervisors are started.

## 11.2. Starting the `sup_dht_node` supervisor and general processes of a node

Starting supervisors is a two step process: a call to `supervisor:start_link/2,3`, e.g. from a custom supervisor's own `start_link` method, will start the supervisor process. It will then call `Module:init/1` to find out about the restart strategy, maximum restart frequency and child processes. Note that `supervisor:start_link/2,3` will not return until `Module:init/1` has returned and all child processes have been started.

Let's have a look at `sup_dht_node:init/1`, the 'DHT node supervisor'.

File `sup_dht_node.erl`:

```

42 -spec init([pid_groups:groupname(), tuple()])
43     -> {ok, {one_for_one, MaxRetries::pos_integer(),
44             PeriodInSeconds::pos_integer()}, []}.
45 init([DHTNodeGroup, _Options] = X) ->
46     pid_groups:join_as(DHTNodeGroup, ?MODULE),
47     mgmt_server:connect(),
48     supspec(X).

```

The return value of the `init/1` function specifies the child processes of the supervisor and how to start them. Here, we define a list of processes to be observed by a `one_for_one` supervisor. The processes are: `Monitor`, `Delayer`, `Reregister`, `DeadNodeCache`, `RingMaintenance`, `RoutingTable`, `Cyclon`, `Vivaldi`, `DC_Clustering`, `Gossip` and a `SupDHTNodeCore_AND` process in this order.

The term `{one_for_one, 10, 1}` specifies that the supervisor should try 10 times to restart each process before giving up. `one_for_one` supervision means, that if a single process stops, only that process is restarted. The other processes run independently.

When the `sup_dht_node:init/1` is finished the supervisor module starts all the defined processes by calling the functions that were defined in the returned list.

For a join of a new node, we are only interested in the starting of the `SupDHTNodeCore_AND` process here. At that point in time, all other defined processes are already started and running.

### 11.3. Starting the `sup_dht_node_core` supervisor with a peer and some paxos processes

Like any other supervisor the `sup_dht_node_core` supervisor calls its `sup_dht_node_core:init/1` function:

File `sup_dht_node_core.erl`:

```
41 -spec init([pid_groups:groupname(), Options::tuple()]) ->
42     {ok, {one_for_all, MaxRetries::pos_integer(),
43           PeriodInSeconds::pos_integer(),
44           [ProcessDescr::supervisor:child_spec()]} }.
45 init([DHTNodeGroup, _Options] = X) ->
46     pid_groups:join_as(DHTNodeGroup, ?MODULE),
47     supspec(X).
```

It defines five processes, that have to be observed using a `one_for_all`-supervisor, which means, that if one fails, all have to be restarted. The `dht_node` module implements the main component of a full `Scalaris` node which glues together all the other processes. Its `dht_node:start_link/2` function will get the following parameters: (a) the processes' group that is used with the `pid_groups` module and (b) a list of options for the `dht_node`. The process group name was calculated a bit earlier in the code. *Exercise: Try to find where.*

File `dht_node.erl`:

```
498 %% @doc spawns a scalaris node, called by the scalaris supervisor process
499 -spec start_link(pid_groups:groupname(), tuple()) -> {ok, pid()}.
500 start_link(DHTNodeGroup, Options) ->
501     gen_component:start_link(?MODULE, fun ?MODULE:on/2, Options,
502                               [{pid_groups_join_as, DHTNodeGroup, dht_node},
503                                {wait_for_init},
504                                {spawn_opts, [{fullsweep_after, 0},
505                                              {min_heap_size, 131071}]}]).
```

Like many other modules, the `dht_node` module implements the `gen_component` behaviour. This behaviour was developed by us to enable us to write code which is similar in syntax and semantics to the examples in [3]. Similar to the supervisor behaviour, a module implementing this behaviour has to provide an `init/1` function, but here it is used to initialize the state of the component. This function is described in the next section.

Note: `?MODULE` is a predefined Erlang macro, which expands to the module name, the code belongs to (here: `dht_node`).

## 11.4. Initializing a dht\_node-process

File `dht_node.erl`:

```
451 %% @doc joins this node in the ring and calls the main loop
452 -spec init(Options::[tuple()])
453     -> dht_node_state:state() |
454     {'$gen_component', [{on_handler, Handler::gen_component:handler()}], State::dht_node_join:
455 init(Options) ->
456     {my_sup_dht_node_id, MySupDhtNode} = lists:keyfind(my_sup_dht_node_id, 1, Options),
457     erlang:put(my_sup_dht_node_id, MySupDhtNode),
458     % start trigger here to prevent infection when tracing e.g. node joins
459     % (otherwise the trigger would be started at the end of the join and thus
460     % be infected forever)
461     rm_loop:init_first(),
462     dht_node_move:send_trigger(),
463
464     Id = case {is_first(Options), config:read(leases)} of
465         {true, true} ->
466             msg_delay:send_trigger(1, {l_on_cseq, renew_leases}),
467             l_on_cseq:id(intervals:all());
468         {true, _} ->
469             % get my ID (if set, otherwise chose a random ID):
470             case lists:keyfind({dht_node, id}, 1, Options) of
471                 {{dht_node, id}, IdX} -> IdX;
472                 _ -> ?RT:get_random_node_id()
473             end;
474         {false, true} ->
475             msg_delay:send_trigger(1, {l_on_cseq, renew_leases}),
476             % get my ID (if set, otherwise chose a random ID):
477             case lists:keyfind({dht_node, id}, 1, Options) of
478                 {{dht_node, id}, IdX} -> IdX;
479                 _ -> ?RT:get_random_node_id()
480             end;
481         {false, _} ->
482             case lists:keyfind({dht_node, id}, 1, Options) of
483                 {{dht_node, id}, IdX} -> IdX;
484                 _ -> ?RT:get_random_node_id()
485             end
486     end,
487     case is_first(Options) of
488         true ->
489             TmpState = dht_node_join:join_as_first(Id, 0, Options),
490             %% we have to inject the first lease by hand, as otherwise
491             %% no routing will work.
492             l_on_cseq:add_first_lease_to_db(Id, TmpState);
493         _ -> dht_node_join:join_as_other(Id, 0, Options)
494     end.
```

The `gen_component` behaviour registers the `dht_node` in the process dictionary. Formerly, the process had to do this itself, but we moved this code into the behaviour. If an ID was given to `dht_node:init/1` function as a `{{dht_node, id}, KEY}` tuple, the given `Id` will be used. Otherwise a random key is generated. Depending on whether the node is the first inside a VM marked as first or not, the according function in `dht_node_join` is called. Also the pid of the node's supervisor is kept for future reference.

## 11.5. Actually joining the ring

After retrieving its identifier, the node starts the join protocol which processes the appropriate messages calling `dht_node_join:process_join_state(Message, State)`. On the existing node, join messages will be processed by `dht_node_join:process_join_msg(Message, State)`.



### 11.5.1. A single node joining an empty ring

File `dht_node_join.erl`:

```
108 -spec join_as_first(Id::?RT:key(), IdVersion::non_neg_integer(), Options::[tuple()])
109     -> dht_node_state:state().
110 join_as_first(Id, IdVersion, _Options) ->
111     comm:init_and_wait_for_valid_pid(),
112     log:log(info, "[ Node ~w ] joining as first: (~.0p, ~.0p)",
113         [self(), Id, IdVersion]),
114     Me = node:new(comm:this(), Id, IdVersion),
115     % join complete, State is the first "State"
116     finish_join(Me, Me, Me, db_dht:new(), msg_queue:new()).
```

If the ring is empty, the joining node will be the only node in the ring and will thus be responsible for the whole key space. It will trigger all known nodes to initialize the comm layer and then finish the join. `dht_node_join:finish_join/5` just creates a new state for a Scalaris node consisting of the given parameters (the node as itself, its predecessor and successor, an empty database and the queued messages that arrived during the join). It then activates all dependent processes and creates a routing table from this information.

The `dht_node_state:state()` type is defined in

File `dht_node_state.erl`:

```
87 -record(state, {rt           = ?required(state, rt)           :: ?RT:external_rt(),
88                 rm_state    = ?required(state, rm_state)    :: rm_loop:state(),
89                 join_time   = ?required(state, join_time)   :: erlang_timestamp(),
90                 db          = ?required(state, db)           :: db_dht:db(),
91                 tx_tp_db    = ?required(state, tx_tp_db)     :: any(),
92                 proposer    = ?required(state, proposer)    :: pid(),
93                 % slide with pred (must not overlap with 'slide with succ'):
94                 slide_pred  = null :: slide_op:slide_op() | null,
95                 % slide with succ (must not overlap with 'slide with pred'):
96                 slide_succ  = null :: slide_op:slide_op() | null,
97                 % additional range to respond to during a move:
98                 db_range    = []  :: [{intervals:interval(), slide_op:id()}],
99                 bulkowner_reply_timer = null :: null | reference(),
100                 bulkowner_reply_ids = []  :: [uid:global_uid()],
101                 monitor_proc = ?required(state, monitor_proc) :: pid(),
102                 prbr_kv_db  = ?required(state, prbr_kv_db)   :: prbr:state(),
103                 txid_db1    = ?required(state, txid_db1)     :: prbr:state(),
104                 txid_db2    = ?required(state, txid_db2)     :: prbr:state(),
105                 txid_db3    = ?required(state, txid_db3)     :: prbr:state(),
106                 txid_db4    = ?required(state, txid_db4)     :: prbr:state(),
107                 lease_db1   = ?required(state, lease_db1)    :: prbr:state(),
108                 lease_db2   = ?required(state, lease_db2)    :: prbr:state(),
109                 lease_db3   = ?required(state, lease_db3)    :: prbr:state(),
110                 lease_db4   = ?required(state, lease_db4)    :: prbr:state(),
111                 lease_list  = ?required(state, lease_list)   :: lease_list:lease_list(),
112                 snapshot_state = null :: snapshot_state:snapshot_state() | null,
113                 mr_state    = ?required(state, mr_state)     :: orddict:orddict(),
114                 mr_master_state = ?required(state, mr_master_state) :: orddict:orddict()
115             }).
116 -opaque state() :: #state{}.
```


### 11.5.2. A single node joining an existing (non-empty) ring

If a node joins an existing ring, its join protocol will step through the following four phases:

- **phase2** finding nodes to contact with the help of the configured `known_hosts`
- **phase2b** getting the number of Ids to sample (may be skipped)

- **phase3** lookup nodes responsible for all sampled IDs
- **phase4** joining a selected node and setting up item movements

The following figure shows a (non-exhaustive) overview of the transitions between the phases in the normal case. We will go through these step by step and discuss what happens if errors occur.

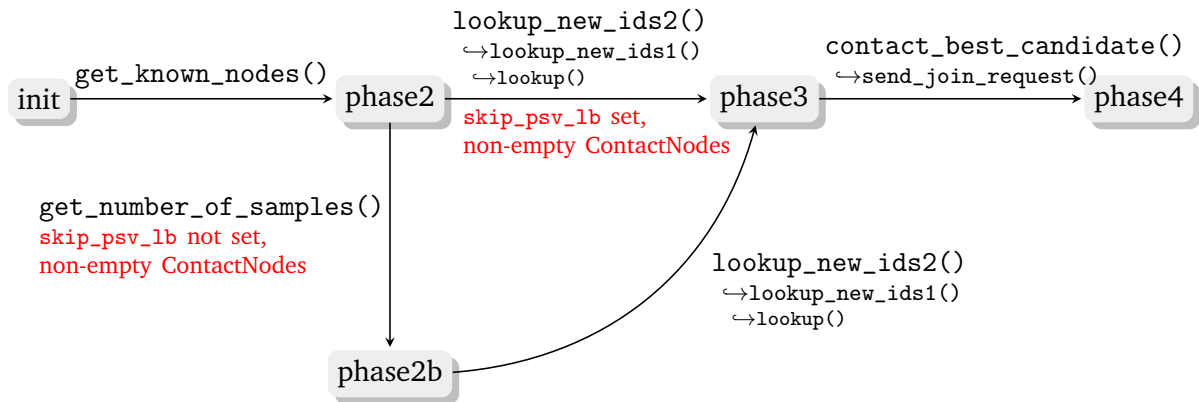

At first all nodes set in the `known_hosts` configuration parameter are contacted. Their responses are then handled in phase 2. In order to separate the join state from the ordinary `dht_node` state, the `gen_component` is instructed to use the `dht_node:on_join/2` message handler which delegates every message to `dht_node_join:process_join_state/2`.

File `dht_node_join.erl`:

```

120 -spec join_as_other(Id::?RT:key(), IdVersion::non_neg_integer(), Options::[tuple()])
121     -> {'$gen_component', [{on_handler, Handler::gen_component:handler()}],
122         State::{join, phase2(), msg_queue:msg_queue()}}.
123 join_as_other(Id, IdVersion, Options) ->
124     comm:init_and_wait_for_valid_pid(),
125     log:log(info, "[ Node ~w ] joining, trying ID: (~.0p, ~.0p)",
126         [self(), Id, IdVersion]),
127     JoinUUID = uid:get_pids_uid(),
128     gen_component:change_handler(
129         {join, {phase1, JoinUUID, Options, IdVersion, [], [Id], []},
130             msg_queue:new()}),
131     fun ?MODULE:process_join_state/2).
  
```

## Phase 2 and 2b

Phase 2 collects all `dht_node` processes inside the contacted VMs. It therefore mainly processes `get_dht_nodes_response` messages and integrates all received nodes into the list of available connections. The next step depends on whether the `{skip_psv_lb}` option for skipping any passive load balancing algorithm has been given to the `dht_node` or not. If it is present, the node will only use the ID that has been initially passed to `dht_node_join:join_as_other/3`, issue a lookup for the responsible node and move to phase 3. Otherwise, the passive load balancing's `lb_psv_*:-get_number_of_samples/1` method will be called asking for the number of IDs to sample. Its answer will be processed in phase 2b.

`get_dht_nodes_response` messages arriving in phase 2b or later will be processed anyway and received `dht_node` processes will be integrated into the connections. These phases' operations will not be interrupted and nothing else is changed though.

File `dht_node_join.erl`:

```

167 % in phase 2 add the nodes and do lookups with them / get number of samples
168 process_join_state({get_dht_nodes_response, Nodes} = _Msg,
169                   {join, JoinState, QueuedMessages})
170     when element(1, JoinState) == phase2 ->
171         ?TRACE_JOIN1(_Msg, JoinState),
172         JoinOptions = get_join_options(JoinState),
173         %% additional nodes required when firstnode jumps and he's the only known host
174         DhtNodes = Nodes ++ proplists:get_value(bootstrap_nodes, JoinOptions, []),
175         Connections = [{null, Node} || Node <- DhtNodes, Node /= comm:this()],
176         JoinState1 = add_connections(Connections, JoinState, back),
177         NewJoinState = phase2_next_step(JoinState1, Connections),
178         ?TRACE_JOIN_STATE(NewJoinState),
179         {join, NewJoinState, QueuedMessages};
180
181 % in all other phases, just add the provided nodes:
182 process_join_state({get_dht_nodes_response, Nodes} = _Msg,
183                   {join, JoinState, QueuedMessages})
184     when element(1, JoinState) == phase2b orelse
185         element(1, JoinState) == phase3 orelse
186         element(1, JoinState) == phase4 ->
187         ?TRACE_JOIN1(_Msg, JoinState),
188         Connections = [{null, Node} || Node <- Nodes, Node /= comm:this()],
189         JoinState1 = add_connections(Connections, JoinState, back),
190         ?TRACE_JOIN_STATE(JoinState1),
191         {join, JoinState1, QueuedMessages};

```

Phase 2b will handle `get_number_of_samples` messages from the passive load balance algorithm. Once received, new (unique) IDs will be sampled randomly so that the total number of join candidates (selected IDs together with fully processed candidates from further phases) is at least as high as the given number of samples. Afterwards, lookups will be created for all previous IDs as well as the new ones and the node will move to phase 3.

File `dht_node_join.erl`:

```

217 % note: although this message was send in phase2b, also accept message in
218 % phase2, e.g. messages arriving from previous calls
219 process_join_state({join, get_number_of_samples, Samples, Conn} = _Msg,
220                   {join, JoinState, QueuedMessages})
221     when element(1, JoinState) == phase2 orelse
222         element(1, JoinState) == phase2b ->
223         ?TRACE_JOIN1(_Msg, JoinState),
224         % prefer node that send get_number_of_samples as first contact node
225         JoinState1 = reset_connection(Conn, JoinState),
226         % (re-)issue lookups for all existing IDs and
227         % create additional samples, if required
228         NewJoinState = lookup_new_ids2(Samples, JoinState1),
229         ?TRACE_JOIN_STATE(NewJoinState),
230         {join, NewJoinState, QueuedMessages};
231
232 % ignore message arriving in other phases:
233 process_join_state({join, get_number_of_samples, _Samples, Conn} = _Msg,
234                   {join, JoinState, QueuedMessages}) ->
235     ?TRACE_JOIN1(_Msg, JoinState),
236     NewJoinState = reset_connection(Conn, JoinState),
237     ?TRACE_JOIN_STATE(NewJoinState),
238     {join, NewJoinState, QueuedMessages};

```

Lookups will make Scalaris find the node currently responsible for a given ID and send a request to simulate a join to this node, i.e. a `get_candidate` message. Note that during such an operation, the joining node would become the existing node's predecessor. The simulation will be delegated to the passive load balance algorithm the joining node requested, as set by the `join_lb_psv` configuration parameter.

File `dht_node_join.erl`:

```

550 process_join_msg({join, get_candidate, Source_PID, Key, LbPsv, Conn} = _Msg, State) ->
551     ?TRACE1(_Msg, State),
552     call_lb_psv(LbPsv, create_join, [State, Key, Source_PID, Conn]);

```

### Phase 3

The result of the simulation will be send in a `get_candidate_response` message and will be processed in phase 3 of the joining node. It will be integrated into the list of processed candidates. If there are no more IDs left to process, the best among them will be contacted. Otherwise further `get_candidate_response` messages will be awaited. Such messages will also be processed in the other phases where the candidate will be simply added to the list.

File `dht_node_join.erl`:

```

270 process_join_state({join, get_candidate_response, OrigJoinId, Candidate, Conn} = _Msg,
271     {join, JoinState, QueuedMessages})
272     when element(1, JoinState) == phase3 ->
273     ?TRACE_JOIN1(_Msg, JoinState),
274     JoinState0 = reset_connection(Conn, JoinState),
275     JoinState1 = remove_join_id(OrigJoinId, JoinState0),
276     JoinState2 = integrate_candidate(Candidate, JoinState1, front),
277     NewJoinState =
278         case get_join_ids(JoinState2) of
279             [] -> % no more join ids to look up -> join with the best:
280                 contact_best_candidate(JoinState2);
281             [_|_] -> % still some unprocessed join ids -> wait
282                 JoinState2
283         end,
284     ?TRACE_JOIN_STATE(NewJoinState),
285     {join, NewJoinState, QueuedMessages};
286
287 % In phase 2 or 2b, also add the candidate but do not continue.
288 % In phase 4, add the candidate to the end of the candidates as they are sorted
289 % and the join with the first has already started (use this candidate as backup
290 % if the join fails). Do not start a new join.
291 process_join_state({join, get_candidate_response, OrigJoinId, Candidate, Conn} = _Msg,
292     {join, JoinState, QueuedMessages})
293     when element(1, JoinState) == phase2 orelse
294         element(1, JoinState) == phase2b orelse
295         element(1, JoinState) == phase4 ->
296     ?TRACE_JOIN1(_Msg, JoinState),
297     JoinState0 = reset_connection(Conn, JoinState),
298     JoinState1 = remove_join_id(OrigJoinId, JoinState0),
299     JoinState2 = case get_phase(JoinState1) of
300         phase4 -> integrate_candidate(Candidate, JoinState1, back);
301         _ -> integrate_candidate(Candidate, JoinState1, front)
302     end,
303     ?TRACE_JOIN_STATE(JoinState2),
304     {join, JoinState2, QueuedMessages};

```

If `dht_node_join:contact_best_candidate/1` is called and candidates are available (there should be at this stage!), it will sort the candidates by using the passive load balance algorithm, send a `join_request` message and continue with phase 4.

File `dht_node_join.erl`:

```

849 %% @doc Contacts the best candidate among all stored candidates and sends a
850 %%     join_request (Timeouts = 0).
851 -spec contact_best_candidate(JoinState::phase_2_4())
852     -> phase2() | phase2b() | phase4().
853 contact_best_candidate(JoinState) ->
854     JoinState1 = sort_candidates(JoinState),
855     send_join_request(JoinState1, 0).

```

File dht\_node\_join.erl:

```
859 %% @doc Sends a join request to the first candidate. Timeouts is the number of
860 %%      join_request_timeout messages previously received.
861 %%      PreCond: the id has been set to the ID to join at and has been updated
862 %%              in JoinState.
863 -spec send_join_request(JoinState::phase_2_4(), Timeouts::non_neg_integer())
864     -> phase2() | phase2b() | phase4().
865 send_join_request(JoinState, Timeouts) ->
866     case get_candidates(JoinState) of
867     [] -> % no candidates -> start over (can happen, e.g. when join candidates are busy):
868         start_over(JoinState);
869     [BestCand | _] ->
870         Id = node_details:get(lb_op:get(BestCand, n1_new), new_key),
871         IdVersion = get_id_version(JoinState),
872         NewSucc = node_details:get(lb_op:get(BestCand, n1succ_new), node),
873         Me = node:new(comm:this(), Id, IdVersion),
874         CandId = lb_op:get(BestCand, id),
875         MyMTE = case dht_node_move:use_incremental_slides() of
876             true -> dht_node_move:get_max_transport_entries();
877             false -> unknown
878         end,
879         Msg = {join, join_request, Me, CandId, MyMTE},
880         ?TRACE_SEND(node:pidX(NewSucc), Msg),
881         comm:send(node:pidX(NewSucc), Msg),
882         msg_delay:send_local(
883             get_join_request_timeout() div 1000, self(),
884             {join, join_request_timeout, Timeouts, CandId, get_join_uuid(JoinState)}),
885         set_phase(phase4, JoinState)
886     end.
```

The join\_request message will be received by the existing node which will set up a slide operation with the new node. If it is not responsible for the key (anymore), it will deny the request and reply with a {join, join\_response, not\_responsible, Node} message. If it is responsible for the ID and is not participating in a slide with its current predecessor, it will set up a slide with the joining node:

File dht\_node\_join.erl:

```
556 process_join_msg({join, join_request, NewPred, CandId, MaxTransportEntries} = _Msg, State)
557     when (not is_atom(NewPred)) -> % avoid confusion with not_responsible message
558     ?TRACE1(_Msg, State),
559     TargetId = node:id(NewPred),
560     JoinType = {join, 'send'},
561     MyNode = dht_node_state:get(State, node),
562     Command = dht_node_move:check_setup_slide_not_found(
563         State, JoinType, MyNode, NewPred, TargetId),
564     case Command of
565     {ok, JoinType} ->
566         MoveFullId = uid:get_global_uid(),
567         State1 = dht_node_move:exec_setup_slide_not_found(
568             Command, State, MoveFullId, NewPred, TargetId, join,
569             MaxTransportEntries, null, nomsg, {none}),
570         % set up slide, now send join_response:
571         MyOldPred = dht_node_state:get(State1, pred),
572         % no need to tell the ring maintenance -> the other node will trigger an update
573         % also this is better in case the other node dies during the join
574         %%      rm_loop:notify_new_pred(comm:this(), NewPred),
575         SlideOp = dht_node_state:get(State1, slide_pred),
576         Msg = {join, join_response, MyNode, MyOldPred, MoveFullId, CandId,
577             slide_op:get_target_id(SlideOp), slide_op:get_next_op(SlideOp)},
578         dht_node_move:send(node:pidX(NewPred), Msg, MoveFullId),
579         State1;
580     {abort, ongoing_slide, JoinType} ->
581         ?TRACE("[ ~.0p ] ~n rejecting join_request from ~.0p due to a running slide~n",
582             [self(), NewPred]),
583         ?TRACE_SEND(node:pidX(NewPred), {join, join_response, busy, CandId}),
584         comm:send(node:pidX(NewPred), {join, join_response, busy, CandId}),
585         State;
```

```

586     {abort, _Reason, JoinType} -> % all other errors:
587     ?TRACE("~p", [Command]),
588     ?TRACE_SEND(node:pidX(NewPred),
589               {join, join_response, not_responsible, CandId}),
590     comm:send(node:pidX(NewPred),
591              {join, join_response, not_responsible, CandId}),
592     State
593 end;

```

## Phase 4

The joining node will receive the `join_response` message in phase 4 of the join protocol. If everything is ok, it will notify its ring maintenance process that it enters the ring, start all required processes and join the slide operation set up by the existing node in order to receive some of its data.

If the join candidate's node is not responsible for the candidate's ID anymore or the candidate's ID already exists, the next candidate is contacted until no further candidates are available and the join protocol starts over using `dht_node_join:start_over/1`.

Note that the `join_response` message will actually be processed in any phase. Therefore, if messages arrive late, the join can be processed immediately and the rest of the join protocol does not need to be executed again.

File `dht_node_join.erl`:

```

343 process_join_state({join, join_response, Reason, CandId} = _Msg,
344                  {join, JoinState, QueuedMessages} = State)
345   when element(1, JoinState) == phase4 andalso
346     (Reason == not_responsible orelse Reason == busy) ->
347     ?TRACE_JOIN1(_Msg, JoinState),
348     % the node we contacted is not responsible for the selected key anymore
349     % -> try the next candidate, if the message is related to the current candidate
350     case get_candidates(JoinState) of
351     [] -> % no candidates -> should not happen in phase4!
352         log:log(error, "[ Node ~w ] empty candidate list in join phase 4, "
353                    "starting over", [self()]),
354         NewJoinState = start_over(JoinState),
355         ?TRACE_JOIN_STATE(NewJoinState),
356         {join, NewJoinState, QueuedMessages};
357     [Candidate | _Rest] ->
358         case lb_op:get(Candidate, id) == CandId of
359         false -> State; % unrelated/old message
360         _ ->
361             if Reason == not_responsible ->
362                 log:log(info,
363                        "[ Node ~w ] node contacted for join is not "
364                        "responsible for the selected ID (anymore), "
365                        "trying next candidate",
366                        [self()]);
367                 Reason == busy ->
368                     log:log(info,
369                            "[ Node ~w ] node contacted for join is busy, "
370                            "trying next candidate",
371                            [self()])
372             end,
373         NewJoinState = try_next_candidate(JoinState),
374         ?TRACE_JOIN_STATE(NewJoinState),
375         {join, NewJoinState, QueuedMessages}
376     end
377 end;
378
379 % in other phases remove the candidate from the list (if it still exists):
380 process_join_state({join, join_response, Reason, CandId} = _Msg,
381                  {join, JoinState, QueuedMessages})

```

```

382     when (Reason == not_responsible orelse Reason == busy) ->
383         ?TRACE_JOIN1(_Msg, JoinState),
384         {join, remove_candidate(CandId, JoinState), QueuedMessages};
385
386 % note: accept (delayed) join_response messages in any phase
387 process_join_state({join, join_response, Succ, Pred, MoveId, CandId, TargetId, NextOp} = _Msg,
388                   {join, JoinState, QueuedMessages} = State) ->
389     ?TRACE_JOIN1(_Msg, JoinState),
390     % only act on related messages, i.e. messages from the current candidate
391     Phase = get_phase(JoinState),
392     State1 = case get_candidates(JoinState) of
393     [] when Phase == phase4 ->
394         % no candidates -> should not happen in phase4!
395         log:log(error, "[ Node ~w ] empty candidate list in join phase 4, "
396                      "starting over", [self()]),
397         reject_join_response(Succ, Pred, MoveId, CandId),
398         NewJoinState = start_over(JoinState),
399         ?TRACE_JOIN_STATE(NewJoinState),
400         {join, NewJoinState, QueuedMessages};
401     [] ->
402         % in all other phases, ignore the delayed join_response if no
403         % candidates exist
404         reject_join_response(Succ, Pred, MoveId, CandId),
405         State;
406     [Candidate | _Rest] ->
407         CandidateNode = node_details:get(lb_op:get(Candidate, n1succ_new), node),
408         CandidateNodeSame = node:same_process(CandidateNode, Succ),
409         case lb_op:get(Candidate, id) == CandId of
410         false ->
411             % ignore old/unrelated message
412             log:log(warn, "[ Node ~w ] ignoring old or unrelated "
413                          "join_response message", [self()]),
414             reject_join_response(Succ, Pred, MoveId, CandId),
415             State;
416         _ when not CandidateNodeSame ->
417             % id is correct but the node is not (should never happen!)
418             log:log(error, "[ Node ~w ] got join_response but the node "
419                          "changed, trying next candidate", [self()]),
420             reject_join_response(Succ, Pred, MoveId, CandId),
421             NewJoinState = try_next_candidate(JoinState),
422             ?TRACE_JOIN_STATE(NewJoinState),
423             {join, NewJoinState, QueuedMessages};
424         _ ->
425             MyId = TargetId,
426             MyIdVersion = get_id_version(JoinState),
427             case MyId == node:id(Succ) orelse MyId == node:id(Pred) of
428             true ->
429                 log:log(warn, "[ Node ~w ] chosen ID already exists, "
430                          "trying next candidate", [self()]),
431                 reject_join_response(Succ, Pred, MoveId, CandId),
432                 % note: can not keep Id, even if skip_psv_lb is set
433                 JoinState1 = remove_candidate_front(JoinState),
434                 NewJoinState = contact_best_candidate(JoinState1),
435                 ?TRACE_JOIN_STATE(NewJoinState),
436                 {join, NewJoinState, QueuedMessages};
437             _ ->
438                 ?TRACE("[ ~.Op ]~n joined MyId:~.Op, MyIdVersion:~.Op~n "
439                        "Succ: ~.Op~n Pred: ~.Op~n",
440                        [self(), MyId, MyIdVersion, Succ, Pred]),
441                 Me = node:new(comm:this(), MyId, MyIdVersion),
442                 log:log(info, "[ Node ~w ] joined between ~w and ~w",
443                        [self(), Pred, Succ]),
444                 rm_loop:notify_new_succ(node:pidX(Pred), Me),
445                 rm_loop:notify_new_pred(node:pidX(Succ), Me),
446
447                 finish_join_and_slide(Me, Pred, Succ, db_dht:new(),
448                                     QueuedMessages, MoveId, NextOp)
449             end
450         end
451     end,
452     State1;

```



File dht\_node\_join.erl:

```
921 %% @doc Finishes the join and sends all queued messages.
922 -spec finish_join(Me::node:node_type(), Pred::node:node_type(),
923                 Succ::node:node_type(), DB::db_dht:db(),
924                 QueuedMessages::msg_queue:msg_queue())
925         -> dht_node_state:state().
926 finish_join(Me, Pred, Succ, DB, QueuedMessages) ->
927     RMState = rm_loop:init(Me, Pred, Succ),
928     Neighbors = rm_loop:get_neighbors(RMState),
929     % wait for the ring maintenance to initialize and tell us its table ID
930     rt_loop:activate(Neighbors),
931     cyclon:activate(),
932     vivaldi:activate(),
933     dc_clustering:activate(),
934     gossip:activate(nodelist:node_range(Neighbors)),
935     dht_node_reregister:activate(),
936     msg_queue:send(QueuedMessages),
937     NewRT_ext = ?RT:empty_ext(Neighbors),
938     service_per_vm:register_dht_node(node:pidX(Me)),
939     dht_node_state:new(NewRT_ext, RMState, DB).
940
941 -spec reject_join_response(Succ::node:node_type(), Pred::node:node_type(),
942                           MoveFullId::slide_op:id(), CandId::lb_op:id()) -> ok.
943 reject_join_response(Succ, _Pred, MoveId, _CandId) ->
944     % similar to dht_node_move:abort_slide/9 - keep message in sync!
945     Msg = {move, slide_abort, pred, MoveId, ongoing_slide},
946     ?TRACE_SEND(node:pidX(Succ), Msg),
947     dht_node_move:send_no_slide(node:pidX(Succ), Msg, 0).
948
949 %% @doc Finishes the join by setting up a slide operation to get the data from
950 %% the other node and sends all queued messages.
951 -spec finish_join_and_slide(Me::node:node_type(), Pred::node:node_type(),
952                            Succ::node:node_type(), DB::db_dht:db(),
953                            QueuedMessages::msg_queue:msg_queue(),
954                            MoveId::slide_op:id(), NextOp::slide_op:next_op())
955         -> {'$gen_component', [{on_handler, Handler::gen_component:handler()}],
956         State::dht_node_state:state()}.
957 finish_join_and_slide(Me, Pred, Succ, DB, QueuedMessages, MoveId, NextOp) ->
958     State = finish_join(Me, Pred, Succ, DB, QueuedMessages),
959     State1 = dht_node_move:exec_setup_slide_not_found(
960         {ok, {join, 'rcv'}}, State, MoveId, Succ, node:id(Me), join,
961         unknown, null, nomsg, NextOp),
962     gen_component:change_handler(State1, fun dht_node:on/2).
```

The macro ?RT maps to the configured routing algorithm. It is defined in include/scalaris.hrl. For further details on the routing see Chapter 9.3 on page 59.

## Timeouts and other errors

The following table summarizes the timeout messages send during the join protocol on the joining node. It shows in which of the phases each of the messages is processed and describes (in short) what actions are taken. All of these messages are influenced by their respective config parameters, e.g. join\_timeout parameter in the config files defines an overall timeout for the whole join operation. If it takes longer than join\_timeout ms, a {join, timeout} will be send and processed as given in this table.



	known_hosts. _timeout	get_number_of. _samples. _timeout	lookup. _timeout	join_request. _timeout	timeout
<b>phase2</b>	get known nodes from configured VMs	ignore	ignore	ignore	
<b>phase2b</b>	ignore	remove contact node, re-start join → phase 2 or 2b	ignore	ignore	
<b>phase3</b>	ignore	ignore	remove contact node, lookup remaining IDs → phase 2 or 3	ignore	
<b>phase3b</b>	ignore	ignore	ignore	ignore	re-start join → phase 2 or 2b
<b>phase4</b>	ignore	ignore	ignore	timeouts < 3? <sup>2</sup> → contact candidate otherwise: remove candidate no candidates left? → phase 2 or 2b otherwise: → contact next one → phase 3b or 4	

On the existing node, there is only one timeout message which is part of the join protocol: the `join_response_timeout`. It will be send when a slide operation is set up and if the timeout hits before the next message exchange, it will increase the slide operation's number of timeouts. The slide will be aborted if at least `join_response_timeouts` timeouts have been received. This parameter is set in the config file.

#### Misc. (all phases)

Note that join-related messages arriving in other phases than those handling them will be ignored. Any other messages during a `dht_node`'s join will be queued and re-send when the join is complete.

<sup>2</sup>set by the `join_request_timeouts` config parameter

## 12. How data is transferred (atomically)

*Description is based on SVN revision r4750.*

A data transfer from a node to one of its (two) neighbours is also called a *slide*. A slide operation is defined in the `slide_op` module, the protocol is mainly implemented in `dht_node_move`. Parts of the slide are dependent on the ring maintenance implementation and are split off into modules implementing the `slide_beh` behaviour.

Though the protocols are mainly symmetric, we distinguish between sending data to the predecessor and sending data to the successor, respectively. In the following protocol visualisations, arrows denote message exchanges, pseudo-code for operations that are being executed is put at the side of each time bar. Functions in green are those implemented in the `slide_beh` behaviour, if annotated with an arrow pointing to itself, this callback is asynchronous. During the protocol, the slide operation goes through several phases which are shown in black boxes.

In general, a slide consists of three steps:

1. set up slide
2. send data & start recording changes, i.e. delta
3. send delta & transfer responsibility

The latter two may be repeated to execute incremental slides which further reduce periods of unavailability. During this period, no node is responsible for the range to transfer and messages are thus delayed until the receiving node gains responsibility.

## 12.1. Sending data to the predecessor

### 12.1.1. Protocol



### 12.1.2. Callbacks

	slide_chord	slide_leases
← <b>prepare_rcv_data</b>	<i>nothing to do</i>	<i>nothing to do</i>
→ <b>prepare_send_data</b>	add DB range	<i>nothing to do</i>
← <b>update_rcv_data</b>	set MSG forward, change my ID	<i>nothing to do</i>
→ <b>prepare_send_delta</b>	wait until pred up-to-date, then: remove DB range	split own lease into two ranges, locally disable lease sent to pred
← <b>finish_delta</b>	remove MSG forward	<i>nothing to do</i>
→ <b>finish_delta_ack</b>	<i>nothing to do</i>	hand over the lease to pred, notify pred of owner change

## 12.2. Sending data to the successor

### 12.2.1. Protocol



### 12.2.2. Callbacks

	slide_chord	slide_leases
→ <b>prepare_rcv_data</b>	set MSG forward	<i>nothing to do</i>
← <b>prepare_send_data</b>	add DB range, change my ID	<i>nothing to do</i>
→ <b>update_rcv_data</b>	<i>nothing to do</i>	<i>nothing to do</i>
← <b>prepare_send_delta</b>	remove DB range	split own lease into two ranges, locally disable lease sent to succ
→ <b>finish_delta</b>	remove MSG forward, add DB range, wait until pred up-to-date then: remove DB range	<i>nothing to do</i>
← <b>finish_delta_ack</b>	<i>nothing to do</i>	hand over the lease to succ, notify succ of owner change


# 13. Replica Repair

Description is based on SVN revision r6345.

## 13.1. Replica Reconciliation - rr\_recon


### 13.1.1. Trivial Replica Repair

#### Protocol

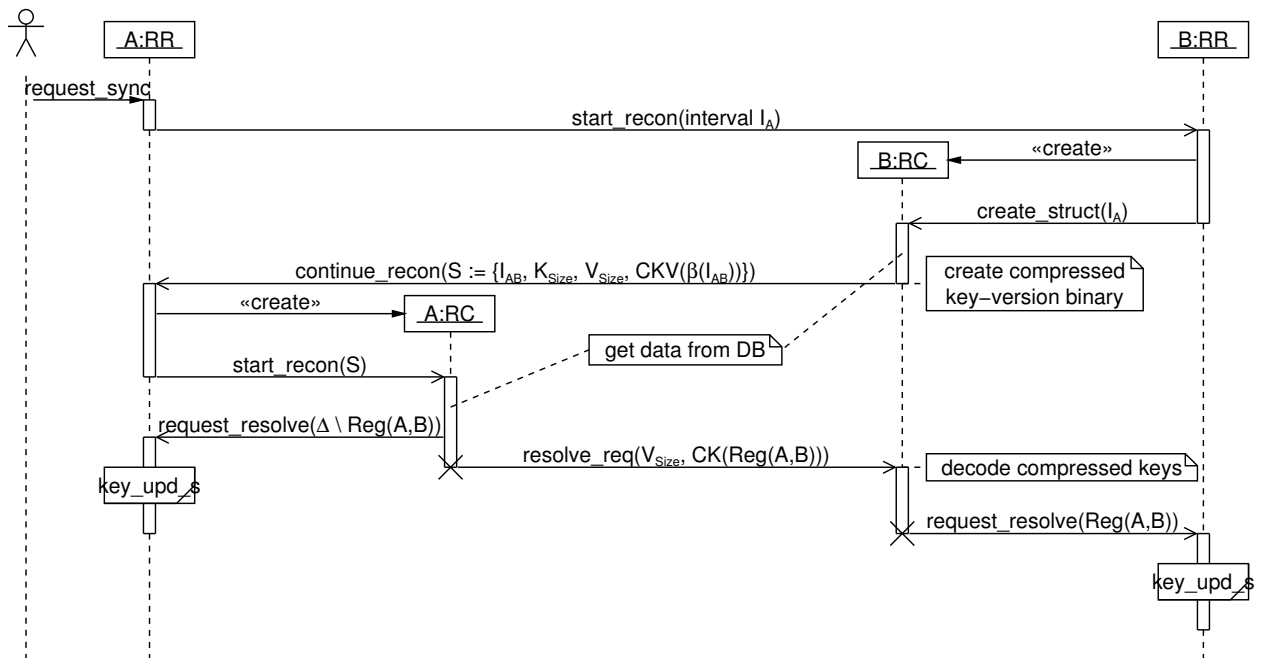


### 13.1.2. Replica Repair with Bloom Filters

#### Protocol

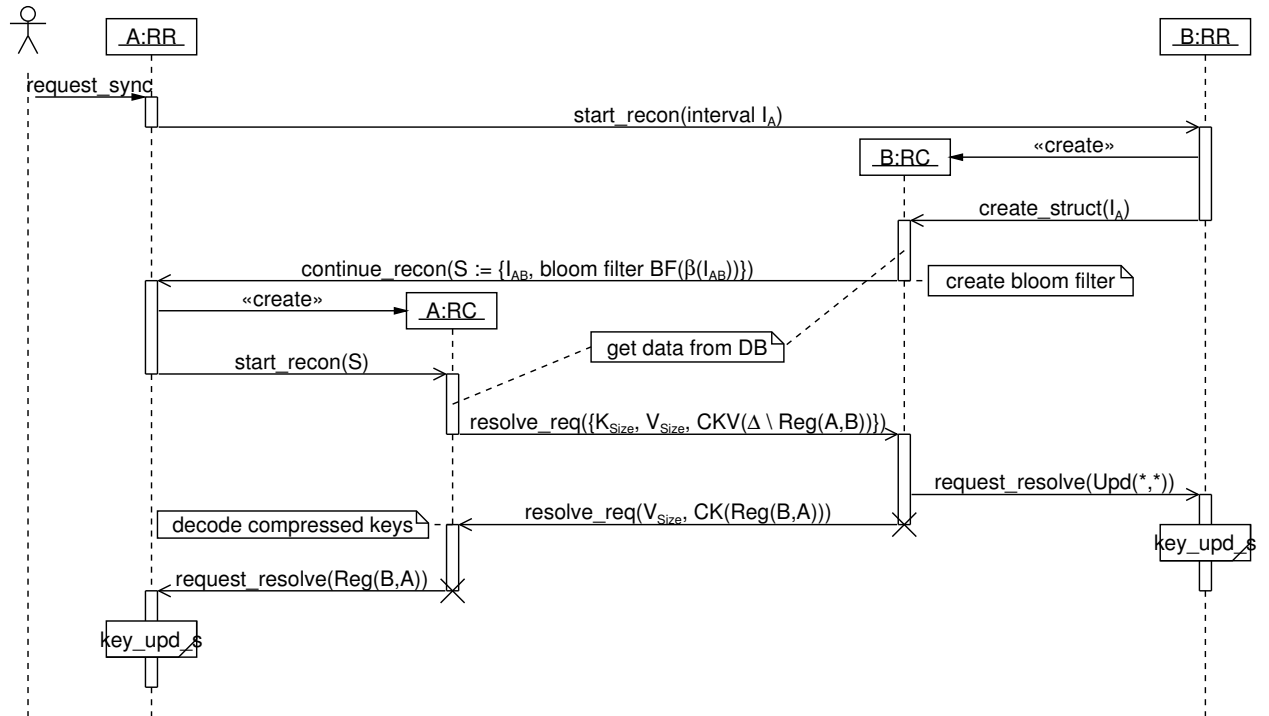


### 13.1.3. Replica Repair with Merkle Trees

#### Protocol

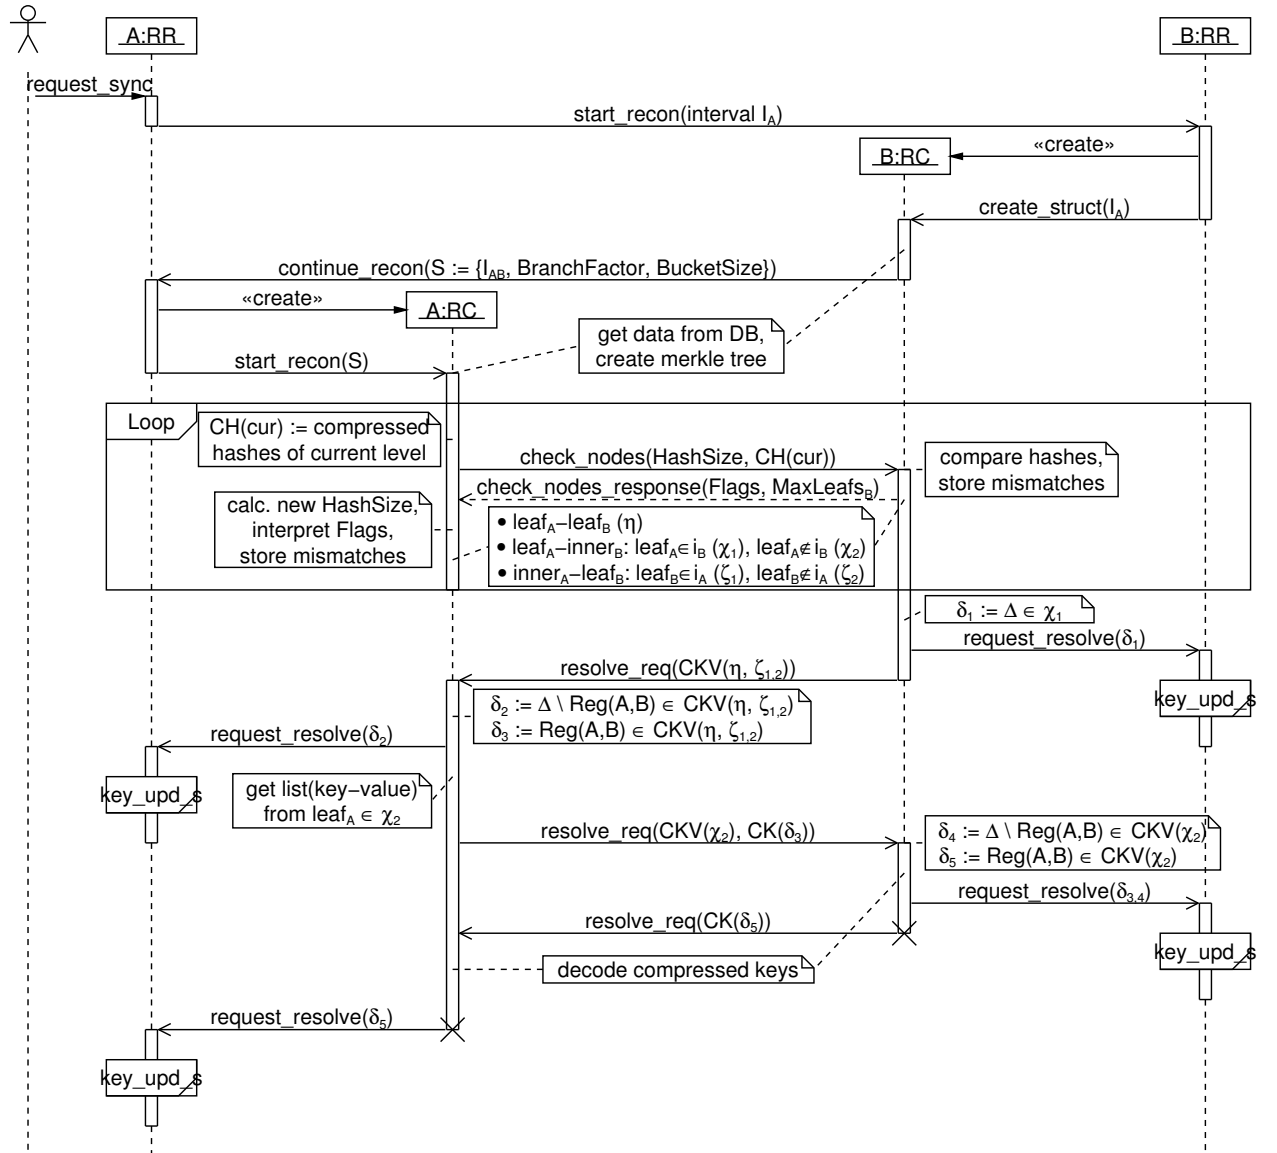

## 13.2. Resolve Replicas - rr\_resolve

### 13.2.1. Updating a list of keys - key\_upd

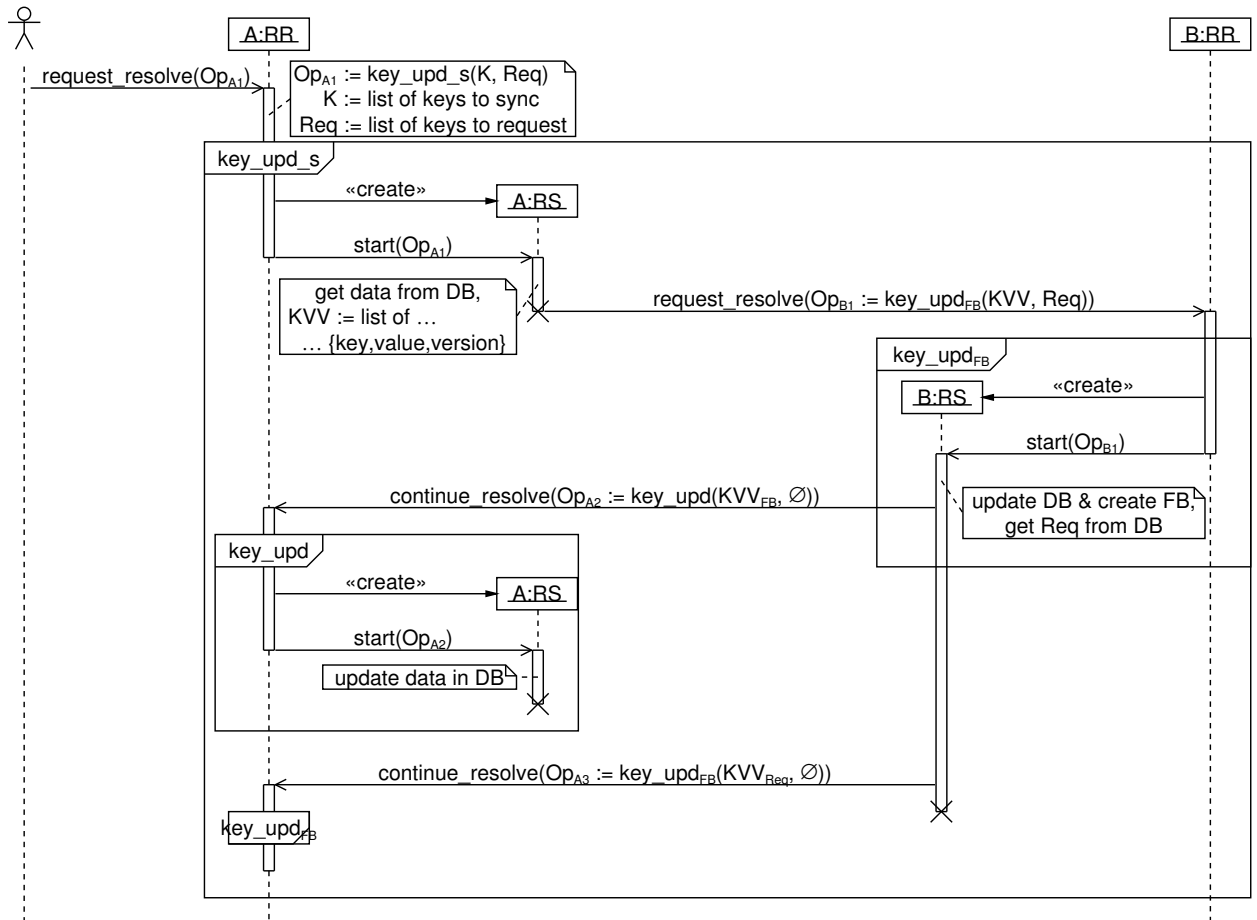



## 14. Directory Structure of the Source Code

The directory tree of Scalaris is structured as follows:

<code>bin</code>	contains shell scripts needed to work with Scalaris (e.g. start the management server, start a node, ...)
<code>contrib</code>	necessary third party packages (yaws and log4erl)
<code>doc</code>	generated Erlang documentation
<code>docroot</code>	root directory of the node's webserver
<code>ebin</code>	the compiled Erlang code (beam files)
<code>java-api</code>	a Java API to Scalaris
<code>log</code>	log files
<code>src</code>	contains the Scalaris source code
<code>test</code>	unit tests for Scalaris
<code>user-dev-guide</code>	contains the sources for this document

## 15. Java API

For the Java API documentation, we refer the reader to the documentation generated by javadoc or doxygen. The following commands create the documentation:

```
%> cd java-api  
%> ant doc  
%> doxygen
```

The documentation can then be found in `java-api/doc/index.html` (javadoc) and `java-api/doc-doxygen/html/index.html` (doxygen).

The API is divided into four classes:

- `de.zib.scalariz.Transaction` for (multiple) operations inside a transaction
- `de.zib.scalariz.TransactionSingleOp` for single transactional operations
- `de.zib.scalariz.ReplicatedDHT` for non-transactional (inconsistent) access to the replicated DHT items, e.g. deleting items
- `de.zib.scalariz.PubSub` for topic-based publish/subscribe operations

# Bibliography

- [1] Joe Armstrong. *Programming Erlang: Software for a Concurrent World*. Pragmatic Programmers, ISBN: 978-1-9343560-0-5, July 2007
- [2] Frank Dabek, Russ Cox, Frans Kaahoeke, Robert Morris. *Vivaldi: A Decentralized Network Coordinate System*. ACM SIGCOMM 2004.
- [3] Rachid Guerraoui and Luis Rodrigues. *Introduction to Reliable Distributed Programming*. Springer-Verlag, 2006.
- [4] Ion Stoica, Robert Morris, David Karger, M. Frans Kaashoek and Hari Balakrishnan. *Chord: A Scalable Peer-to-peer Lookup Service for Internet Applications*. ACM SIGCOMM 2001, San Deigo, CA, August 2001, pp. 149-160. [http://pdos.csail.mit.edu/papers/chord:sigcomm01/chord\\_sigcomm.pdf](http://pdos.csail.mit.edu/papers/chord:sigcomm01/chord_sigcomm.pdf)
- [5] Márk Jelasity, Alberto Montresor, Ozalp Babaoglu. *T-Man: Gossip-based fast overlay topology construction*. Computer Networks (CN) 53(13):2321-2339, 2009.
- [6] Hiroya Nagao, Kazuyuki Shudo. *Flexible routing tables: Designing routing algorithms for overlays based on a total order on a routing table set*. In: Peer-to-Peer Computing, IEEE, 2011.
- [7] F. Schintke, A. Reinefeld, S. Haridi, T. Schütt. *Enhanced Paxos Commit for Transactions on DHTs*. 10th IEEE/ACM Int. Conf. on Cluster, Cloud and Grid Computing, pp. 448-454, May 2010.
- [8] Spyros Voulgaris, Daniela Gavidia, Maarten van Steen. *CYCLON: Inexpensive Membership Management for Unstructured P2P Overlays*. J. Network Syst. Manage. 13(2): 2005.
- [9] Márk Jelasity, Alberto Montresor, Ozalp Babaoglu. *Gossip-based aggregation in large dynamic networks*. ACM Trans. Comput. Syst. 23(3), 219-252 (2005).

# Index

?RT  
  next\_hop, 61  
  update, 65

admin  
  add\_node, 77, 78  
  add\_nodes, 76, 77

api\_tx, 58

api\_vm  
  add\_nodes, 76

comm, 3, 48, 48  
  get\_msg\_tag, 54  
  send\_to\_group\_member, 53

cs\_api, 49

cyclon, 25, 57

dht\_node, 63–65, 68, 73, 79, 82  
  init, 80  
  on\_join, 82

dht\_node\_join, 80  
  contact\_best\_candidate, 84, 84  
  finish\_join, 81, 88  
  finish\_join\_and\_slide, 88  
  join\_as\_other, 82  
  process\_join\_msg, 80  
  process\_join\_state, 80, 82  
  send\_join\_request, 85  
  start\_over, 86

dht\_node\_move, 90

dht\_node\_state  
  state, 81

erlang  
  exit, 50, 52  
  now, 47  
  send\_after, 47

ets  
  i, 47

fd, 56

gen\_component, 3, 47, 48, 48–56  
  bp\_barrier, 54, 55  
  bp\_cont, 54, 55  
  bp\_del, 54, 55  
  bp\_set, 54  
  bp\_set\_cond, 54  
  bp\_step, 54–56  
  change\_handler, 50, 52, 52  
  get\_state, 50  
  is\_gen\_component, 51  
  kill, 51, 53  
  post\_op, 53  
  runnable, 55  
  sleep, 53  
  start, 50, 51  
  start\_link, 50–52

intervals  
  in, 61

lb\_psv\_\*  
  get\_number\_of\_samples, 82

monitor, 57, 57  
  check\_report, 57  
  client\_monitor\_set\_value, 58  
  monitor\_set\_value, 58  
  proc\_check\_timeslot, 58  
  proc\_set\_value, 58

msg\_delay, 47

paxos\_SUITE, 53  
  step\_until\_decide, 55

pdb, 56

pid\_groups, 3, 48, 48, 51, 53, 79

randoms, 66

rm\_beh, 65, 69

routing\_table, 71

rr\_recon, 4, 93

rr\_resolve, 4, 96

rrd, 57, 57  
  add, 57  
  add\_now, 57  
  create, 57

rt\_beh, 59

- check, 64
- check\_config, 64
- dump, 64
- empty, 63
- empty\_ext, 63
- export\_rt\_to\_dht\_node, 64
- filter\_dead\_node, 63
- get\_random\_node\_id, 63
- get\_replica\_keys, 64
- get\_size, 64
- handle\_custom\_message, 64
- hash\_key, 63
- init\_stabilize, 63
- n, 64
- next\_hop, 63
- to\_list, 64
- to\_pid\_list, 64
- unwrap\_message, 64
- update, 63
- wrap\_message, 64
- rt\_chord, 69
  - empty, 69
  - empty\_ext, 69
  - export\_rt\_to\_dht\_node, 72
  - filter\_dead\_node, 72
  - get\_random\_node\_id, 70
  - get\_replica\_keys, 70
  - handle\_custom\_message, 71, 71
  - hash\_key, 70
  - init\_stabilize, 70
  - n, 70
  - next\_hop, 70
  - stabilize, 71
  - unwrap\_message, 74
  - update, 72
  - wrap\_message, 73
- rt\_loop, 64, 64, 72
- rt\_simple, 65
  - dump, 67
  - empty, 65
  - empty\_ext, 65
  - export\_rt\_to\_dht\_node, 67
  - filter\_dead\_node, 66
  - get\_random\_node\_id, 66
  - get\_replica\_keys, 67
  - get\_size, 67
  - handle\_custom\_message, 67
  - hash\_key, 66
  - init\_stabilize, 66
  - n, 67
  - next\_hop, 66
  - to\_list, 67
  - to\_pid\_list, 66
  - unwrap\_message, 69
  - update, 66
  - wrap\_message, 69
- slide\_beh, 90
- slide\_op, 90
- sup\_dht\_node
  - init, 78, 79
  - start\_link, 77
- sup\_dht\_node\_core, 79
- sup\_scalaris, 77
- supervisor
  - start\_link, 78
- timer
  - sleep, 50
  - tc, 47
- util
  - tc, 47
- vivaldi, 53
- vivaldi\_latency, 53
- your\_gen\_component
  - init, 50, 52
  - on, 51, 52