Pairwise Fst

2025-03-14

```
res_dir <- "../results/s08_FST/"
```

Load and group gt

```
mad_bor_g1000_sum <-
  gt_load("../data/intermediate/rbind_data/mad_bor_g1000_sum_neo_clean_ld_imputed.gt")
mad_bor_g1000_sum <- mad_bor_g1000_sum %>% group_by(population)
```

Loci and sample count

```
nrow(mad_bor_g1000_sum)
```

```
## [1] 2742
```

```
count_loci(mad_bor_g1000_sum)
```

```
## [1] 138753
```

Impute

```
gt_set_imputed(mad_bor_g1000_sum, TRUE)
```

Replace names

```
mad_bor_g1000_sum <- mad_bor_g1000_sum %>%
  mutate(population = case_when(
    population == "Sakalava_Tsimihety" ~ "Sakalava/Tsimihety",
    population == "Diego" ~ "Diego Mixed",
    TRUE ~ population
  ))
```

Pairwise Fst

```
fst_matrix <- mad_bor_g1000_sum %>%
  pairwise_pop_fst(by_locus = FALSE, method = "WC84", type = "pairwise")
```


```
# subset fst matrix
sub <- c(
  "Betsimisaraka", "Merina", "Diego Mixed", "Sakalava/Tsimihety",
  "Betsileo", "Vezo", "Mikea", "Temoro", "Mozambique_Chopi", "Borneo"
)

fst_matrix <- as.data.frame(fst_matrix)
fst_matrix_sub <- as.data.frame(fst_matrix)
rm <- names(fst_matrix_sub)[(names(fst_matrix_sub) %in% sub)]
fst_matrix_sub <- fst_matrix_sub[, rm]

fst_matrix_sub <-
  subset(
    fst_matrix_sub,
    rownames(fst_matrix_sub) %in% c(
      "Betsimisaraka", "Merina", "Diego Mixed",
      "Sakalava/Tsimihety", "Betsileo",
      "Vezo", "Mikea", "Temoro",
      "Mozambique_Chopi", "Borneo"
    )
  )
```

```
ggheatmap(fst_matrix_sub) +
  scale_fill_viridis_c(expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
```

```
## > heatmap built with `geom_tile()`
```

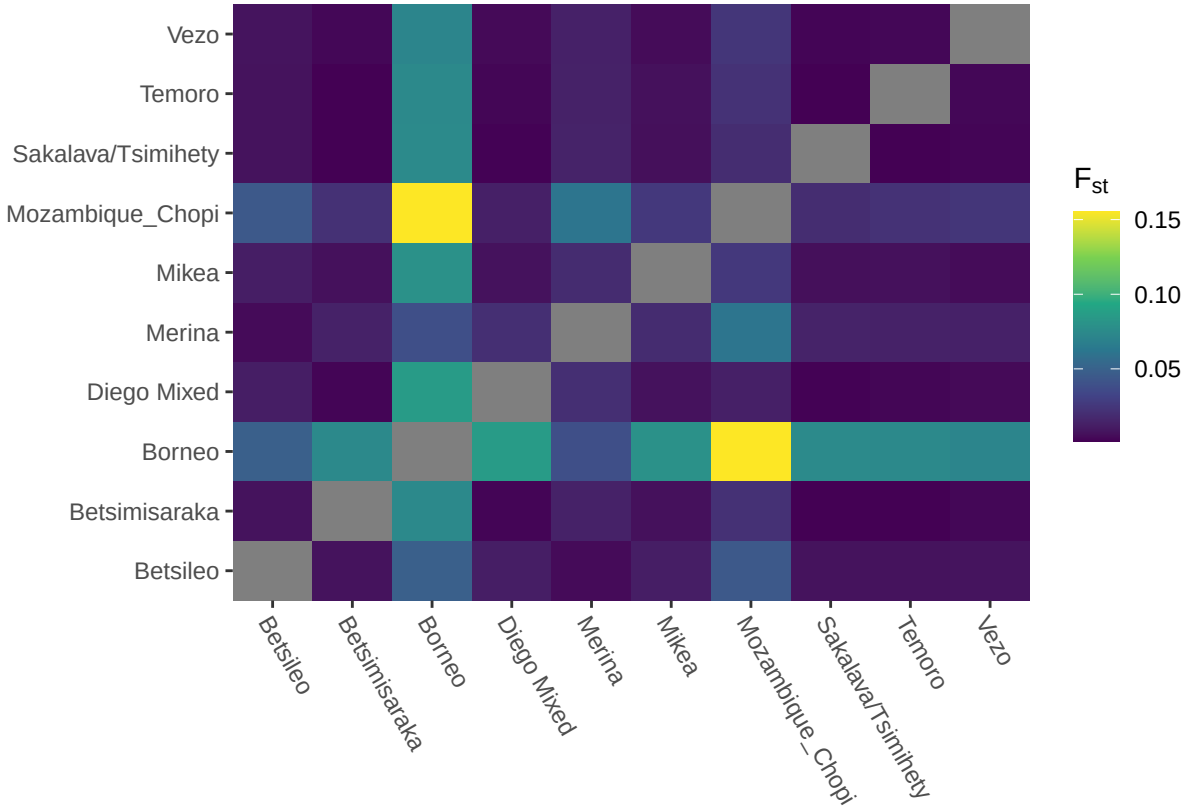



```
sub <- c(
  "Betsimisaraka", "Merina", "Diego Mixed", "Sakalava/Tsimihety",
  "Betsileo", "Vezo", "Mikea", "Temoro"
)

fst_matrix_sub <- as.data.frame(fst_matrix)
rm <- names(fst_matrix_sub)[(names(fst_matrix_sub) %in% sub)]
fst_matrix_sub <- fst_matrix_sub[, rm]


fst_matrix_sub <-
  subset(
    fst_matrix_sub,
    rownames(fst_matrix_sub) %in% c(
      "Betsimisaraka", "Merina", "Diego Mixed",
      "Sakalava/Tsimihety", "Betsileo",
      "Vezo", "Mikea", "Temoro"
    )
  )

fst_merina_together <- ggheatmap(fst_matrix_sub) +
  scale_fill_viridis_c(expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
fst_merina_together
```

```
## > heatmap built with `geom_tile()`
```

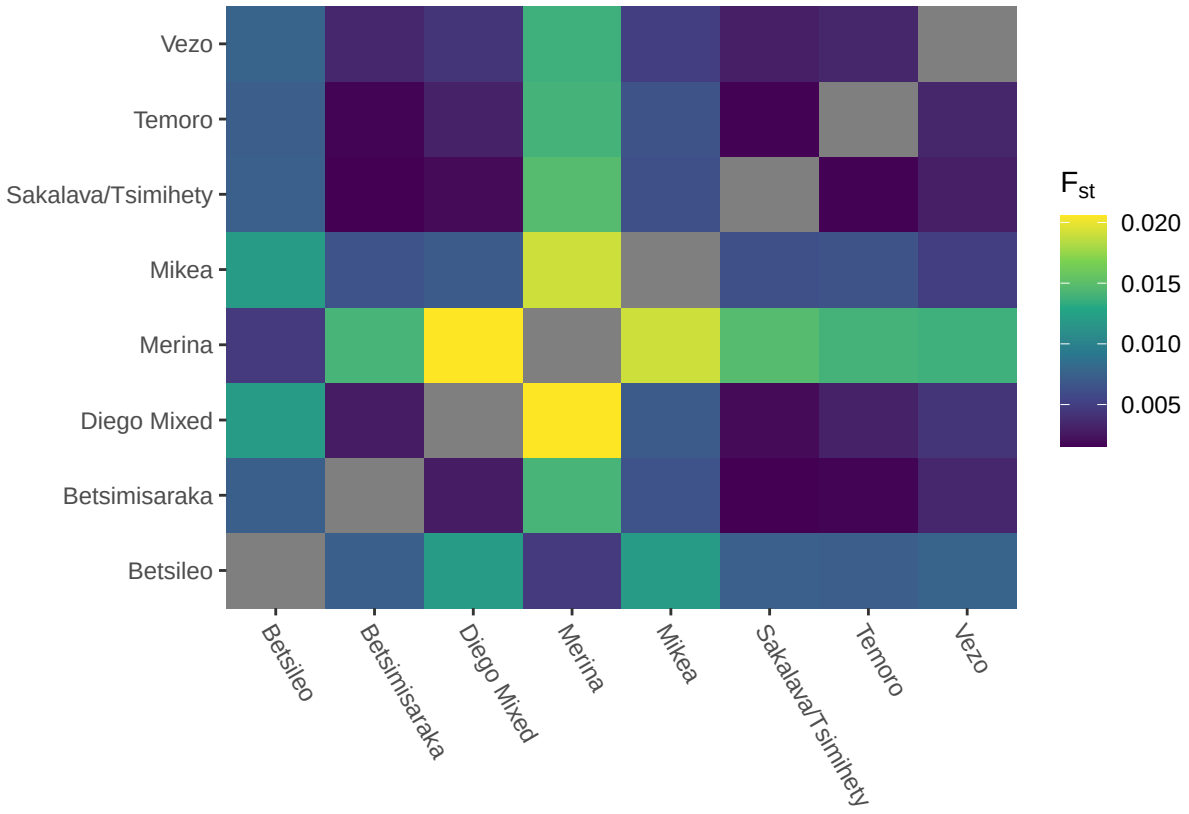


```
ggsave(paste0(res_dir, "fst_merina_together.jpg"),
  width = 7, height = 5, dpi = 300
)
```

```
print(fst_matrix_sub)
```

```
##                      Betsileo Betsimisaraka Diego Mixed      Merina
## Betsileo                   NA   0.007281773 0.011951855 0.004660291
## Betsimisaraka      0.007281773            NA 0.002808587 0.014059109
## Diego Mixed        0.011951855   0.002808587          NA 0.020509224
## Merina             0.004660291   0.014059109 0.020509224          NA
## Mikea              0.011929788   0.006454394 0.007039943 0.019011900
## Sakalava/Tsimihety 0.007427342   0.001594556 0.001915894 0.014672318
## Temoro             0.007249656   0.001717849 0.003127292 0.013903355
## Vezo               0.007665601   0.003381163 0.004360215 0.013714143
##                          Mikea Sakalava/Tsimihety      Temoro        Vezo
## Betsileo           0.011929788        0.007427342 0.007249656 0.007665601
## Betsimisaraka      0.006454394        0.001594556 0.001717849 0.003381163
## Diego Mixed        0.007039943        0.001915894 0.003127292 0.004360215
## Merina             0.019011900        0.014672318 0.013903355 0.013714143
## Mikea                       NA        0.006261933 0.006524685 0.004929416
## Sakalava/Tsimihety 0.006261933                 NA 0.001630676 0.002955113
## Temoro             0.006524685        0.001630676          NA 0.003449774
## Vezo               0.004929416        0.002955113 0.003449774          NA
```

Population level FST for Merina subsets

```
# Load fastmixture Q matrix
qmats <- readRDS("../data/intermediate/fastmixture/fastmixture_m.RData")
mad_bor_g1000_sum <-
  gt_load("../data/intermediate/rbind_data/mad_bor_g1000_sum_neo_clean_ld.gt")
```

```
# tidy with the gt
mad_bor_g1000_sum <- augment(get_q_matrix(qmats, k = 3, run = 1),
  data = mad_bor_g1000_sum
)
# filter to merina
merina <- mad_bor_g1000_sum %>% filter(population == "Merina")
# split groups
merina$population <- ifelse(merina$.Q3 > 0.5, "Merina A", "Merina B")
merina <- merina[, c("id", "population")]

# match V2 and merina$id and replace the population column in
# merina_fam with the population column in merina
matching_m <- match(mad_bor_g1000_sum$id, merina$id)
mad_bor_g1000_sum$population <- ifelse(!is.na(matching_m),
  merina$population[matching_m],
  mad_bor_g1000_sum$population
)
```

Pairwise Fst

```
# rename mad_bor_g1000_sum$population "Sakalava_Tsimihety" to "Sakalava/Tsimihety"
mad_bor_g1000_sum$population[mad_bor_g1000_sum$population == "Sakalava_Tsimihety"] <- "Sakalava/Tsimihe
# rename mad_bor_g1000_sum$population "Diego" to "Diego Mixed"
mad_bor_g1000_sum$population[mad_bor_g1000_sum$population == "Diego"] <- "Diego Mixed"
mad_bor_g1000_sum <- mad_bor_g1000_sum %>%
  filter(population %in% c(
    "Betsimisaraka", "Merina A", "Merina B", "Diego Mixed",
    "Sakalava/Tsimihety", "Betsileo", "Vezo",
    "Mikea", "Temoro"
  ))

mad_bor_g1000_sum <- mad_bor_g1000_sum %>% group_by(population)
```


```
fst_matrix <- mad_bor_g1000_sum %>%
  pairwise_pop_fst(by_locus = FALSE, method = "WC84", type = "pairwise")
```

Pairwise Fst heatmap with dendrogram and Merina split

```
# https://bioinformatics.ccr.cancer.gov/docs/data-visualization-with-r/Lesson5_intro_to_ggplot/
pheatmap(fst_matrix,
  color = viridis(256),
  angle_col = 45,
  filename = paste0(res_dir, "fst_dendrogram_merina_split.jpg"),
  width = 7, height = 5, dpi = 300
)
```

Other heatmap versions


```
heatmap(fst_matrix, col = viridis(256)) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
```

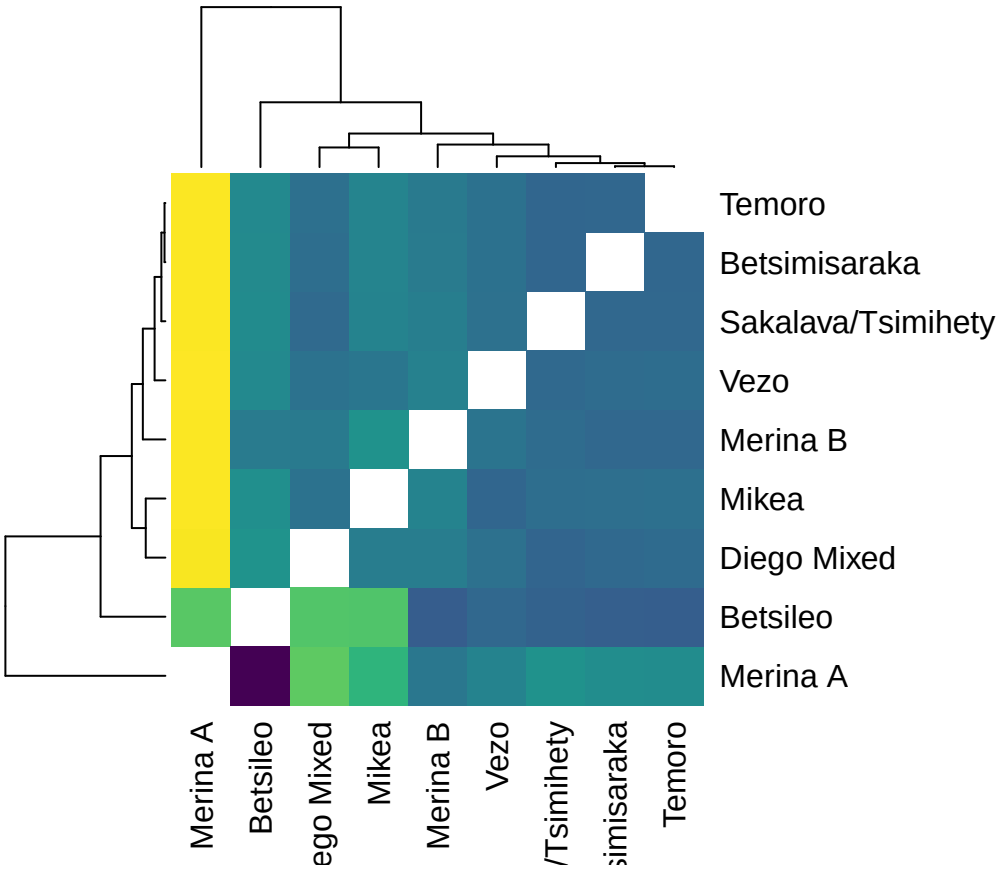


```
## NULL
```

```
ggheatmap(fst_matrix) +
  scale_fill_viridis_c(name = expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
```

```
## > heatmap built with `geom_tile()`
```

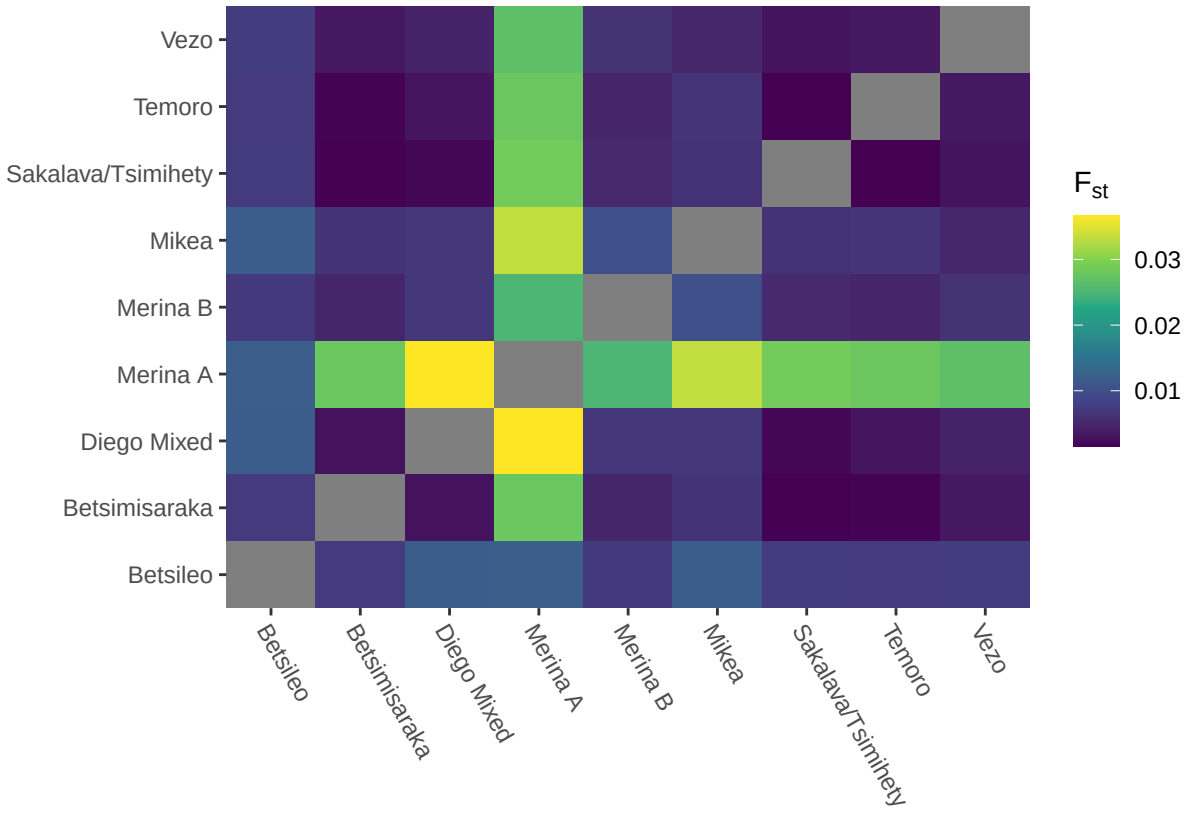



```
#https://stackoverflow.com/questions/38727324/adding-a-dendrogram-to-a-ggplot2-heatmap
#https://yunuuuu.github.io/ggalign-book/complexheatmap-single-heatmap.html

ggheatmap(fst_matrix) +
  scale_fill_viridis_c(name = expression("F"[st])) +
  anno_right(size = unit(15, "mm")) +
  align_dendro(reorder_dendrogram = TRUE) +
  theme(axis.text.y = element_blank()) +

  anno_top(size = unit(15, "mm")) +
  align_dendro(reorder_dendrogram = TRUE) +
  theme(axis.text.x = element_blank()) +

  quad_active() +
  theme(
    plot.margin = margin(),
    axis.text.x = element_text(angle = -60, hjust = 0)
  )
```


```
## > heatmap built with `geom_tile()`
```

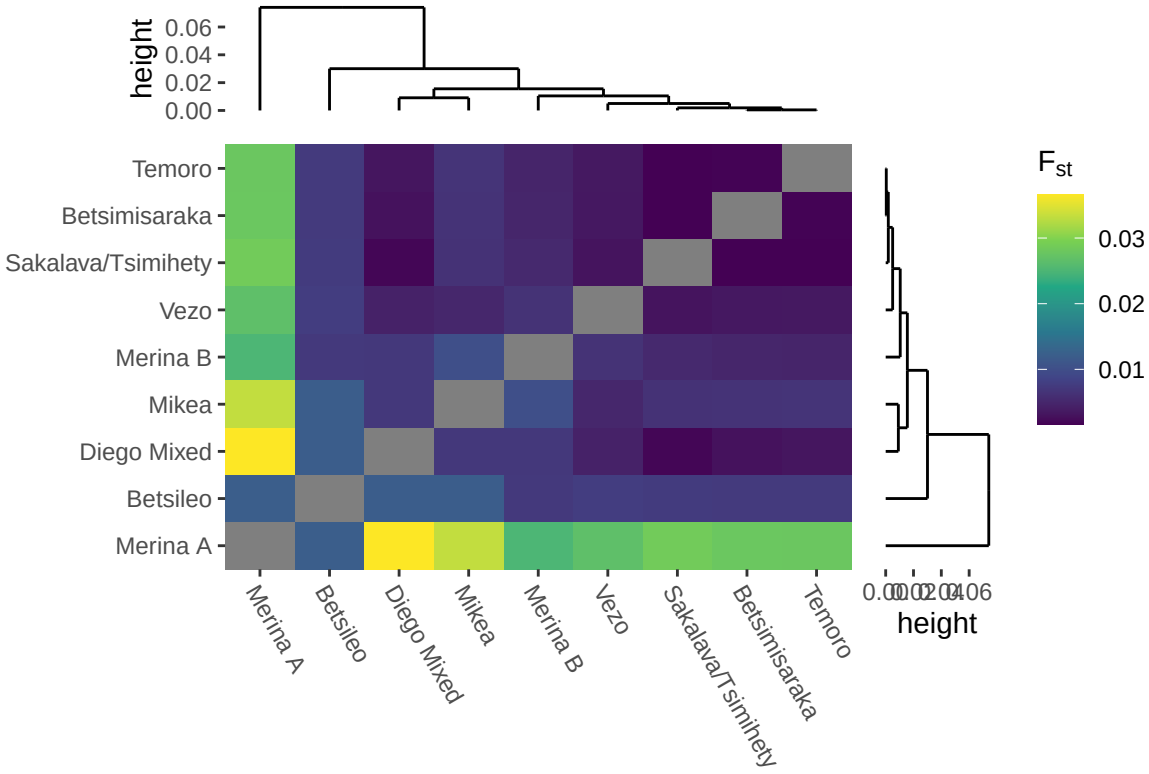

Merina split with no dendrogram

```
fst_merina_split <- ggheatmap(fst_matrix) +
  scale_fill_viridis_c(name = expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
fst_merina_split
```

```
## > heatmap built with `geom_tile()`
```

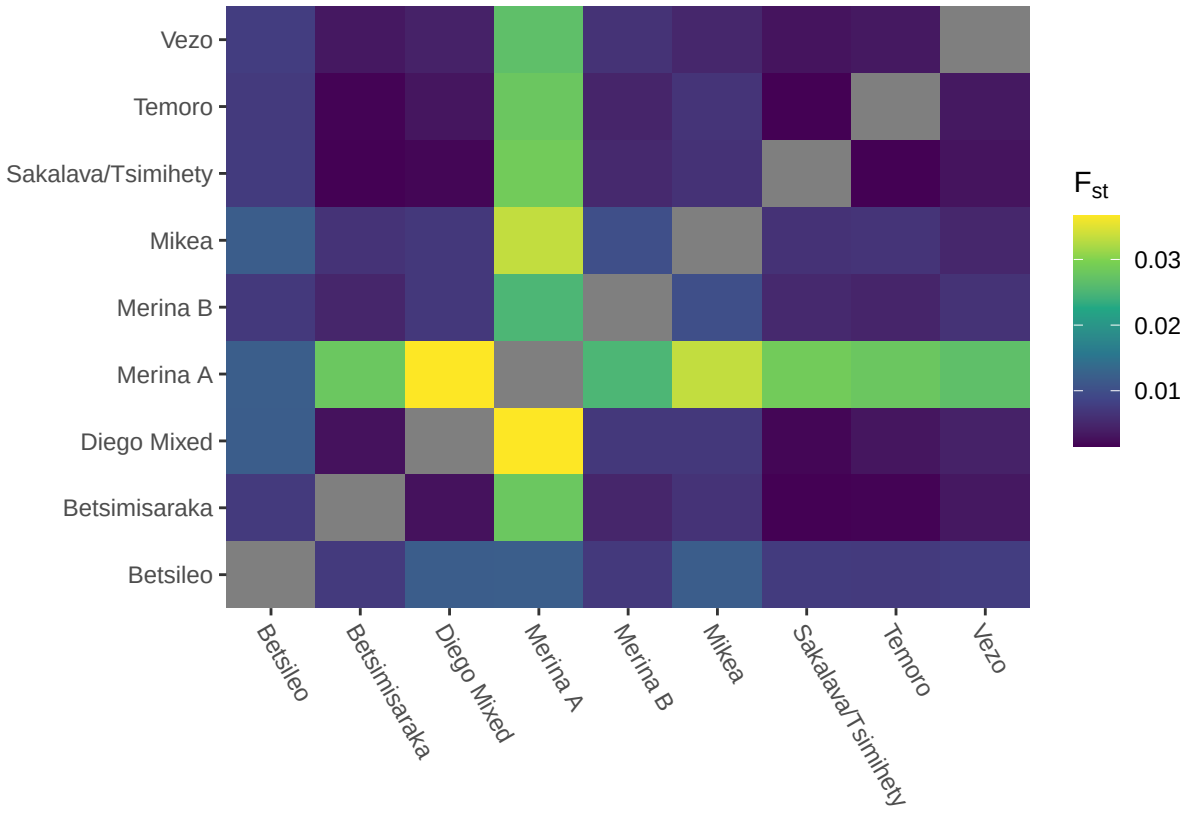


```
ggsave(paste0(res_dir, "fst_merina_split.jpg"),
  width = 7, height = 5, dpi = 300
)
```

Recording R environment

Part of ensuring our workflow is reproducible is to keep track of the R environment. We will automatically save our R environment into a file called `r_environment.json`.