Pairwise Fst

2025-03-14

```
res_dir <- "../results/s08_FST/"
```

Load and group gt

```
mad_bor_g1000_sum <-
  gt_load("../data/intermediate/rbind_data/mad_bor_g1000_sum_neo_clean_ld_imputed.gt")
mad_bor_g1000_sum <- mad_bor_g1000_sum %>% group_by(population)
```

Loci and sample count

```
nrow(mad_bor_g1000_sum)
```

```
## [1] 2744
```

```
count_loci(mad_bor_g1000_sum)
```

```
## [1] 198196
```

Impute

```
gt_set_imputed(mad_bor_g1000_sum, TRUE)
```

Replace names

```
mad_bor_g1000_sum <- mad_bor_g1000_sum %>%
  mutate(population = case_when(
    population == "Sakalava_Tsimihety" ~ "Sakalava/Tsimihety",
    population == "Diego" ~ "Diego Mixed",
    TRUE ~ population
  ))
```

Pairwise Fst

```
fst_matrix <- mad_bor_g1000_sum %>%
  pairwise_pop_fst(by_locus = FALSE, method = "WC84", type = "pairwise")
```


```
# subset fst matrix
sub <- c(
  "Betsimisaraka", "Merina", "Diego Mixed", "Sakalava/Tsimihety",
  "Betsileo", "Vezo", "Mikea", "Temoro", "Mozambique_Chopi", "Borneo"
)

fst_matrix <- as.data.frame(fst_matrix)
fst_matrix_sub <- as.data.frame(fst_matrix)
rm <- names(fst_matrix_sub)[(names(fst_matrix_sub) %in% sub)]
fst_matrix_sub <- fst_matrix_sub[, rm]

fst_matrix_sub <-
  subset(
    fst_matrix_sub,
    rownames(fst_matrix_sub) %in% c(
      "Betsimisaraka", "Merina", "Diego Mixed",
      "Sakalava/Tsimihety", "Betsileo",
      "Vezo", "Mikea", "Temoro",
      "Mozambique_Chopi", "Borneo"
    )
  )
```

```
ggheatmap(fst_matrix_sub) +
  scale_fill_viridis_c(expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
```

```
## > heatmap built with `geom_tile()`
```

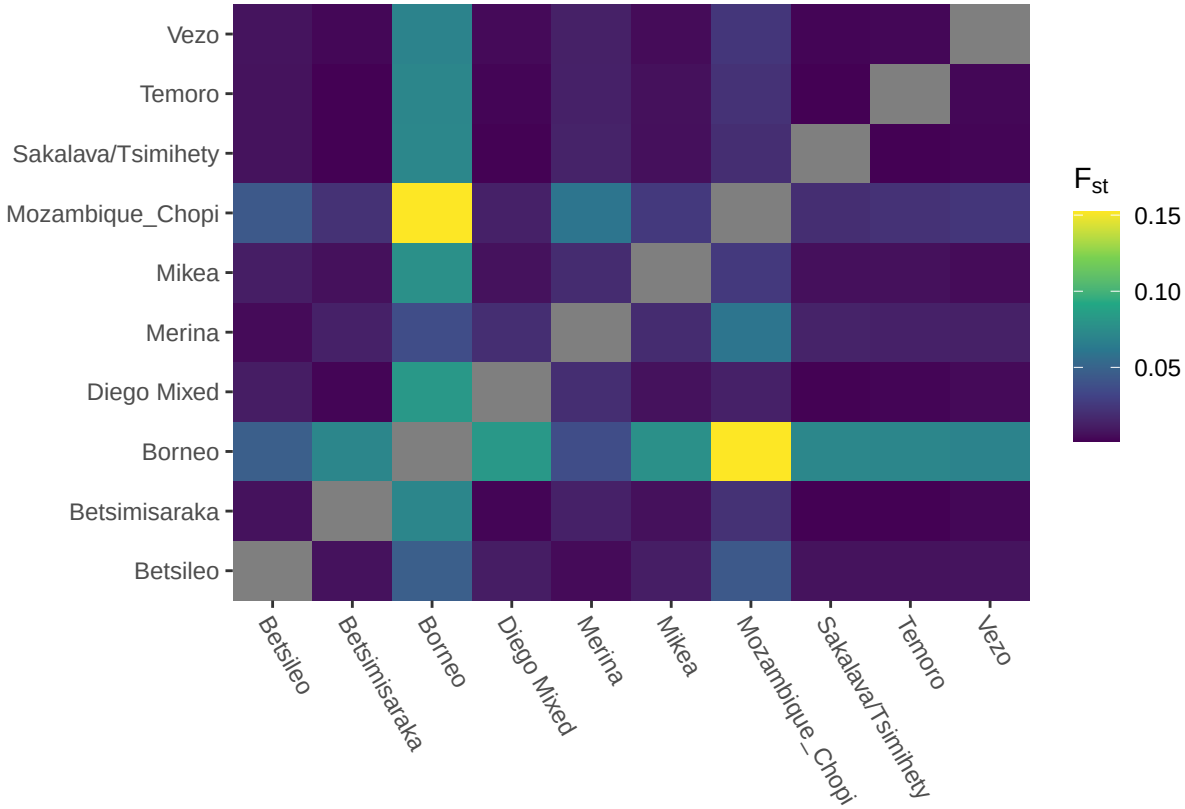



```
sub <- c(
  "Betsimisaraka", "Merina", "Diego Mixed", "Sakalava/Tsimihety",
  "Betsileo", "Vezo", "Mikea", "Temoro"
)

fst_matrix_sub <- as.data.frame(fst_matrix)
rm <- names(fst_matrix_sub)[(names(fst_matrix_sub) %in% sub)]
fst_matrix_sub <- fst_matrix_sub[, rm]


fst_matrix_sub <-
  subset(
    fst_matrix_sub,
    rownames(fst_matrix_sub) %in% c(
      "Betsimisaraka", "Merina", "Diego Mixed",
      "Sakalava/Tsimihety", "Betsileo",
      "Vezo", "Mikea", "Temoro"
    )
  )

fst_merina_together <- ggheatmap(fst_matrix_sub) +
  scale_fill_viridis_c(expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
fst_merina_together
```

```
## > heatmap built with `geom_tile()`
```

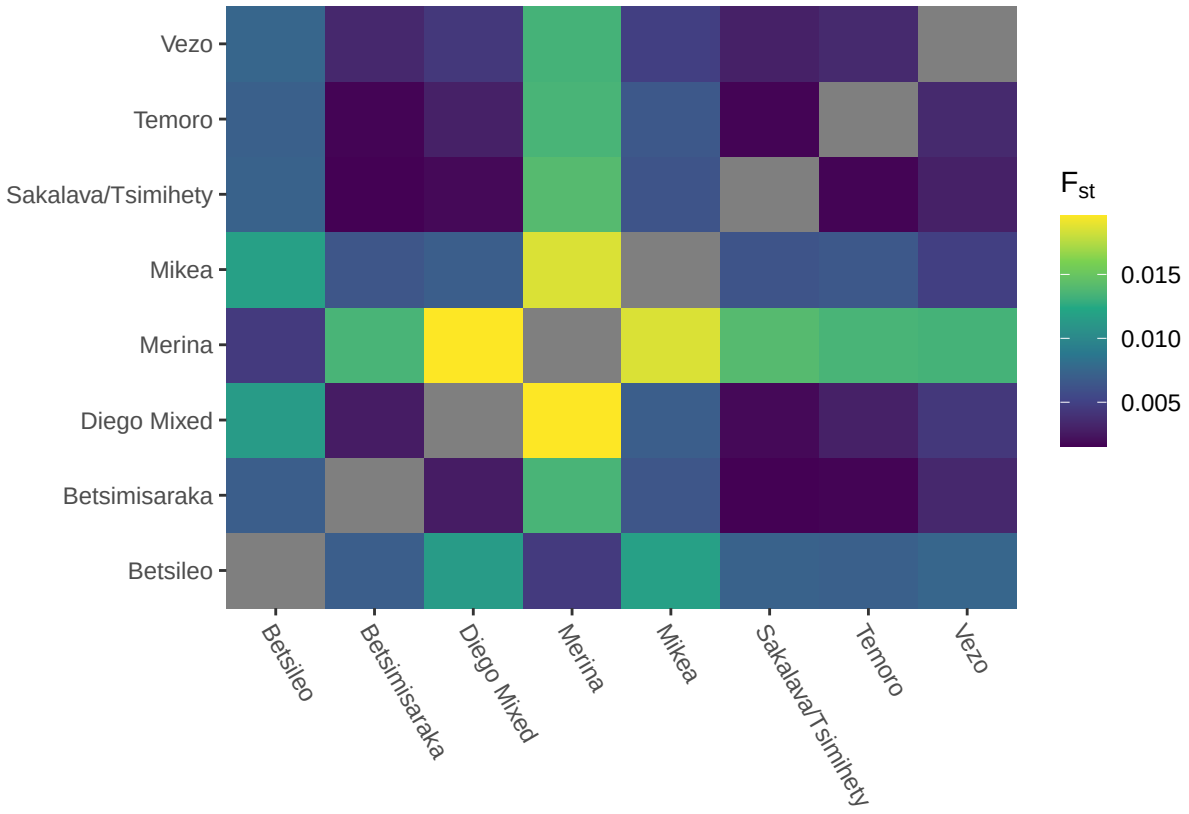


```
ggsave(paste0(res_dir, "fst_merina_together.jpg"),
 width = 7, height = 5, dpi = 300
)
```

```
print(fst_matrix_sub)
```

```
##                      Betsileo Betsimisaraka Diego Mixed      Merina
## Betsileo                   NA   0.006938240 0.011408492 0.004543445
## Betsimisaraka      0.006938240            NA 0.002708546 0.013443895
## Diego Mixed        0.011408492   0.002708546          NA 0.019549327
## Merina             0.004543445   0.013443895 0.019549327          NA
## Mikea              0.011741217   0.006362411 0.006938704 0.018494238
## Sakalava/Tsimihety 0.007204705   0.001584122 0.001863413 0.014011642
## Temoro             0.007057056   0.001684712 0.002960115 0.013440671
## Vezo               0.007493045   0.003357342 0.004372498 0.013305260
##                           Mikea Sakalava/Tsimihety      Temoro        Vezo
## Betsileo           0.011741217        0.007204705 0.007057056 0.007493045
## Betsimisaraka      0.006362411        0.001584122 0.001684712 0.003357342
## Diego Mixed        0.006938704        0.001863413 0.002960115 0.004372498
## Merina             0.018494238        0.014011642 0.013440671 0.013305260
## Mikea                       NA        0.006247245 0.006502478 0.004855969
## Sakalava/Tsimihety 0.006247245                 NA 0.001694304 0.002960526
## Temoro             0.006502478        0.001694304          NA 0.003485504
## Vezo               0.004855969        0.002960526 0.003485504          NA
```

Population level FST for Merina subsets

```
# # Load fastmixture Q matrix
# qmats <- readRDS("../data/intermediate/fastmixture/fastmixture_m.RData")
# mad_bor_g1000_sum <-
#   gt_load("../data/intermediate/rbind_data/mad_bor_g1000_sum_neo_clean_ld.gt")
```

```
# # tidy with the gt
# mad_bor_g1000_sum <- augment(get_q_matrix(qmats, k = 2, run = 1),
#   data = mad_bor_g1000_sum
# )
# # filter to merina
# merina <- mad_bor_g1000_sum %>% filter(population == "Merina")
# # split groups
# merina$population <- ifelse(merina$.Q1 > 0.5, "Merina A", "Merina B")
# merina <- merina[, c("id", "population")]
#
# # match V2 and merina$id and replace the population column in
# # merina_fam with the population column in merina
# matching_m <- match(mad_bor_g1000_sum$id, merina$id)
# mad_bor_g1000_sum$population <- ifelse(!is.na(matching_m),
#   merina$population[matching_m],
#   mad_bor_g1000_sum$population
# )
```

```
qmats <- read_q_files("../data/intermediate/admixture")

fam <- read.table(
  "../data/intermediate/admixture/admixture_supervised_subset.fam",
  header = FALSE
)

mad_bor_g1000_sum <-
  gt_load("../data/intermediate/rbind_data/mad_bor_g1000_sum_neo_clean_ld.gt")

qmats$id <- fam$V2

# subset mad_bor_g1000_sum to only individuals in qmats$id
mad_bor_g1000_sum_sub <- mad_bor_g1000_sum %>%
  filter(id %in% qmats$id)

# tidy with the gt
mad_bor_g1000_sum_sub <- augment(get_q_matrix(qmats, k = 2, run = 1),
  data = mad_bor_g1000_sum_sub
)
# filter to merina
merina <- mad_bor_g1000_sum_sub %>% filter(population == "Merina")
# split groups
# .Q3 representing Asian ancestry and .Q2 representing African ancestry
merina$population <- ifelse(merina$.Q1 > 0.5, "Merina A", "Merina B")
merina <- merina[, c("id", "population")]
```

```r
# match V2 and merina$id and replace the population column in merina_fam with
# the population column in merina
matching_m <- match(mad_bor_g1000_sum$id, merina$id)
mad_bor_g1000_sum$population <- ifelse(!is.na(matching_m),
  merina$population[matching_m], mad_bor_g1000_sum$population
)

# count number of MerinaA
cat("Merina group > 0.5", length(which(mad_bor_g1000_sum$population == "Merina A")))
```

```
## Merina group > 0.5 23
```

```r
cat("Merina group < 0.5", length(which(mad_bor_g1000_sum$population == "Merina B")))
```

```
## Merina group < 0.5 11
```

Pairwise Fst

```r
# rename mad_bor_g1000_sum$population "Sakalava_Tsimihety" to "Sakalava/Tsimihety"
mad_bor_g1000_sum$population[mad_bor_g1000_sum$population == "Sakalava_Tsimihety"] <- "Sakalava/Tsimihe
# rename mad_bor_g1000_sum$population "Diego" to "Diego Mixed"
mad_bor_g1000_sum$population[mad_bor_g1000_sum$population == "Diego"] <- "Diego Mixed"
mad_bor_g1000_sum <- mad_bor_g1000_sum %>%
  filter(population %in% c(
    "Betsimisaraka", "Merina A", "Merina B", "Diego Mixed",
    "Sakalava/Tsimihety", "Betsileo", "Vezo",
    "Mikea", "Temoro"
  ))

mad_bor_g1000_sum <- mad_bor_g1000_sum %>% group_by(population)
```


```r
fst_matrix <- mad_bor_g1000_sum %>%
  pairwise_pop_fst(by_locus = FALSE, method = "WC84", type = "pairwise")
```

Pairwise Fst heatmap with dendrogram and Merina split

```r
# https://bioinformatics.ccr.cancer.gov/docs/data-visualization-with-r/Lesson5_intro_to_ggplot/
pheatmap(fst_matrix,
  color = viridis(256),
  angle_col = 45,
  filename = paste0(res_dir, "fst_dendrogram_merina_split.jpg"),
  width = 7, height = 5, dpi = 300
)
```

Other heatmap versions


```
heatmap(fst_matrix, col = viridis(256)) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
```

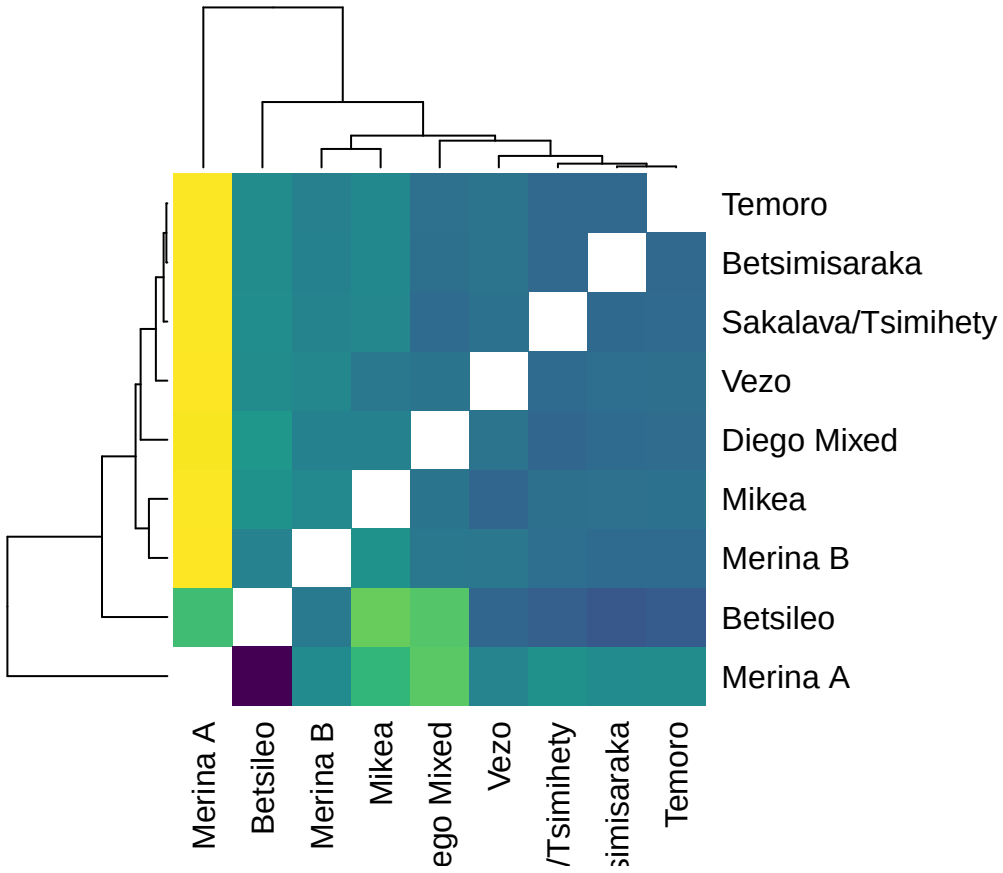


```
## NULL
```

```
ggheatmap(fst_matrix) +
  scale_fill_viridis_c(name = expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
```

```
## > heatmap built with `geom_tile()`
```

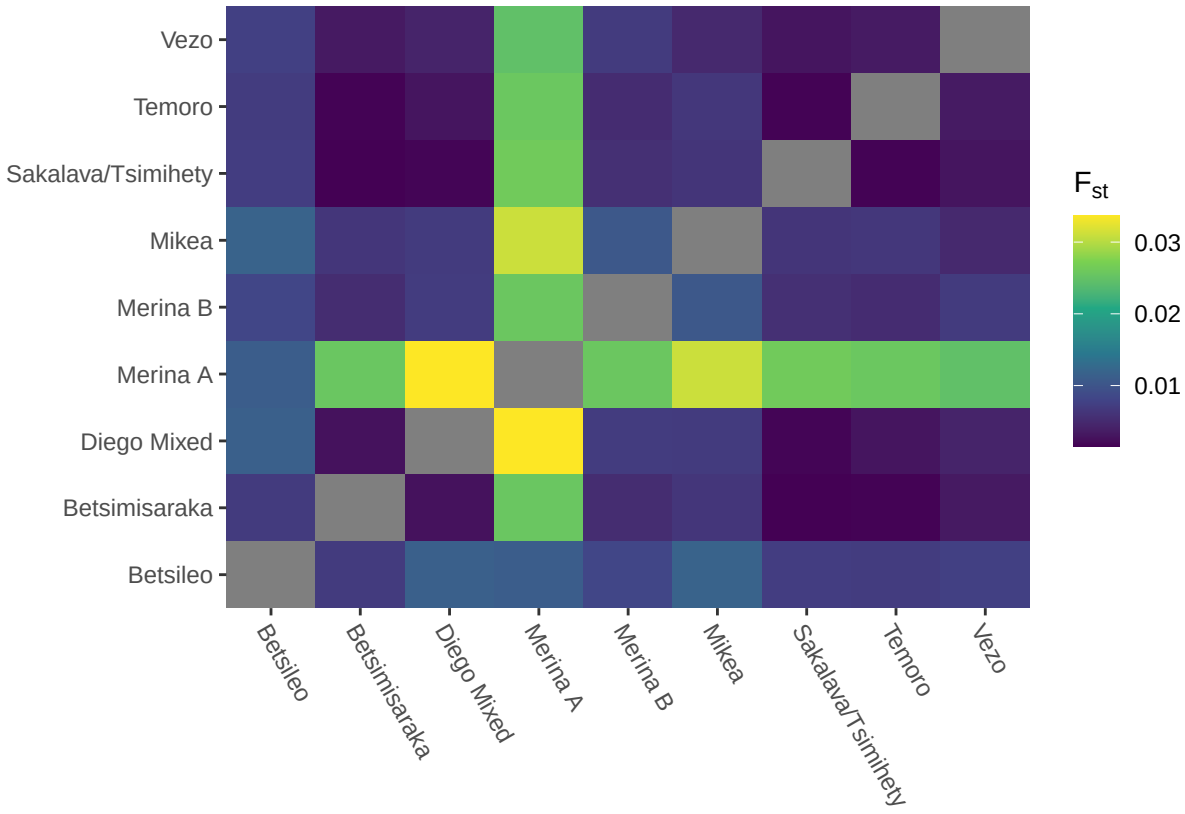



```
# https://stackoverflow.com/questions/38727324/adding-a-dendrogram-to-a-ggplot2-heatmap
# https://yunuuuu.github.io/ggalign-book/complexheatmap-single-heatmap.html

ggheatmap(fst_matrix) +
  scale_fill_viridis_c(name = expression("F"[st])) +
  anno_right(size = unit(15, "mm")) +
  align_dendro(reorder_dendrogram = TRUE) +
  theme(axis.text.y = element_blank()) +

  anno_top(size = unit(15, "mm")) +
  align_dendro(reorder_dendrogram = TRUE) +
  theme(axis.text.x = element_blank()) +

  quad_active() +
  theme(
    plot.margin = margin(),
    axis.text.x = element_text(angle = -60, hjust = 0)
  )
```


```
## > heatmap built with `geom_tile()`
```

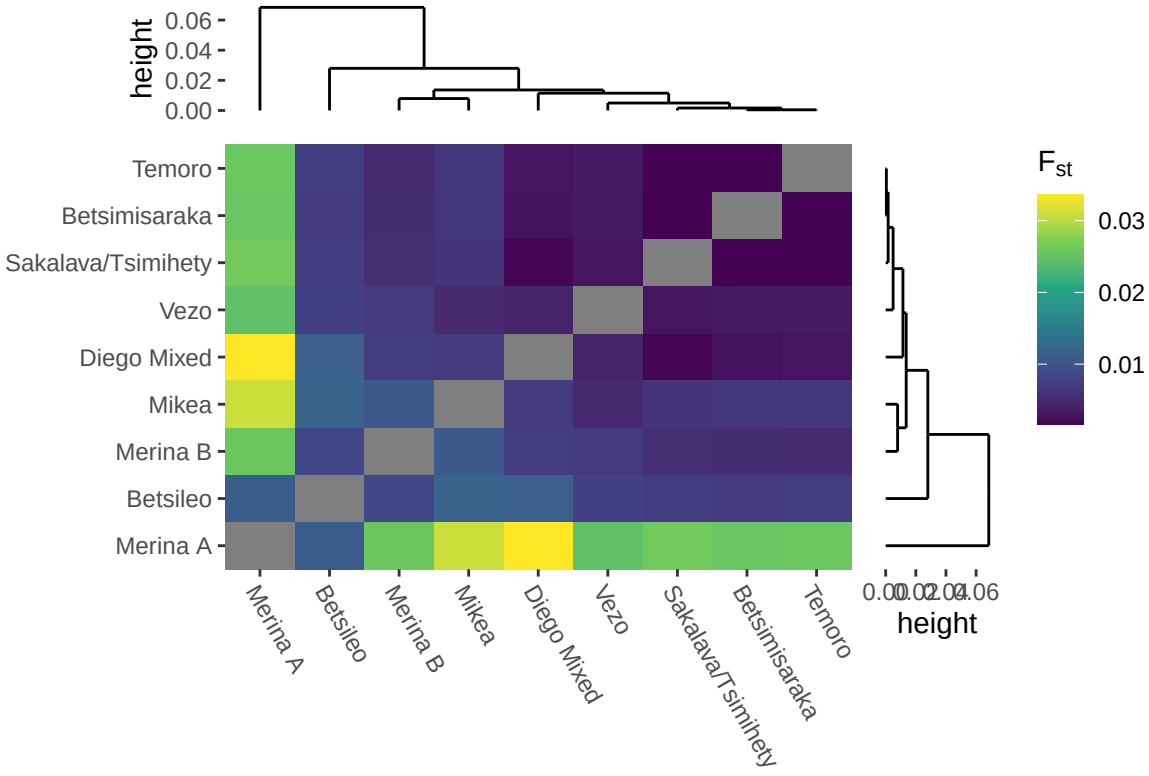

Merina split with no dendrogram

```
fst_merina_split <- ggheatmap(fst_matrix) +
  scale_fill_viridis_c(name = expression("F"[st])) +
  theme(axis.text.x = element_text(angle = -60, hjust = 0))
fst_merina_split
```

```
## > heatmap built with `geom_tile()`
```

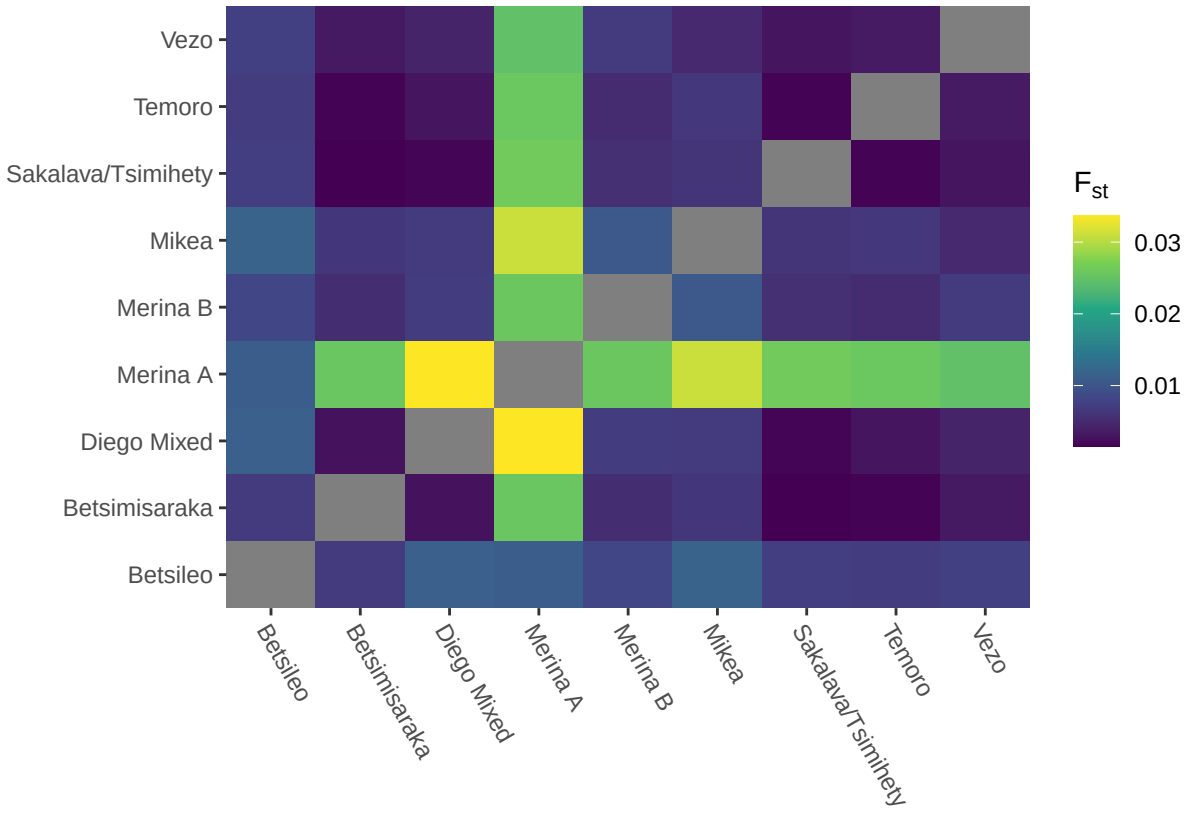


```
ggsave(paste0(res_dir, "fst_merina_split.jpg"),
 width = 7, height = 5, dpi = 300
)
```

Recording R environment

Part of ensuring our workflow is reproducible is to keep track of the R environment. We will automatically save our R environment into a file called `r_environment.json`.