

IC platform UI workflow guide

This document explains how to build, edit, run, and monitor workflows in the Instance Controller Platform UI, using the recommended lifecycle and the current screenshots.

1. Workflow basics

A workflow is specific to one repository. Each workflow can have two trigger types: **manual** and **push**. Enabling a push trigger requires the selection of the branch that should trigger the workflow automatically.

Workflows are built from reusable job blocks. These blocks can be arranged in any order, but the recommended lifecycle is:

Order	Job	Purpose
1	Build	Builds an image based on a selected commit.
2	Spin-up	Starts an instance on a specific built commit.
3	Test	Runs the test suite against the selected instance, whether it is a spun-up one or an existing instance.
4	Approval	Acts as a gate where a human decides whether workflow execution should continue or stop.
5	Release	Updates an instance to a specific commit.

This order is only a recommendation, not a restriction. We recommend it because it forms a practical prebuilt lifecycle from build to deployment.

× **Create Workflow**

* Name :

w1

* Triggers :

push ×

▼

* Branch :

Select a branch

▼

Submit

Workflow creation view with the recommended job order: Build, Spin-up, Test, Approval, Release.

2. Creating and editing a workflow


After a workflow is created, it can be edited later. In the workflows list, the **yellow spider-net icon** opens the workflow editor. Each job has its own configuration, so build, spin-up, test, approval, and release behavior can be configured independently.

When creating or editing a workflow, the trigger configuration should match the intended use: manual only, push only, or both.

3. Running a workflow

Once a workflow has been defined, it can be run manually. Some inputs are configured per run rather than per workflow. The most important examples are the selected **branch/commit** and the **test configuration overrides**.

After the branch or commit has been selected, the values from the test YAML file become available as defaults that can be adjusted for this run.

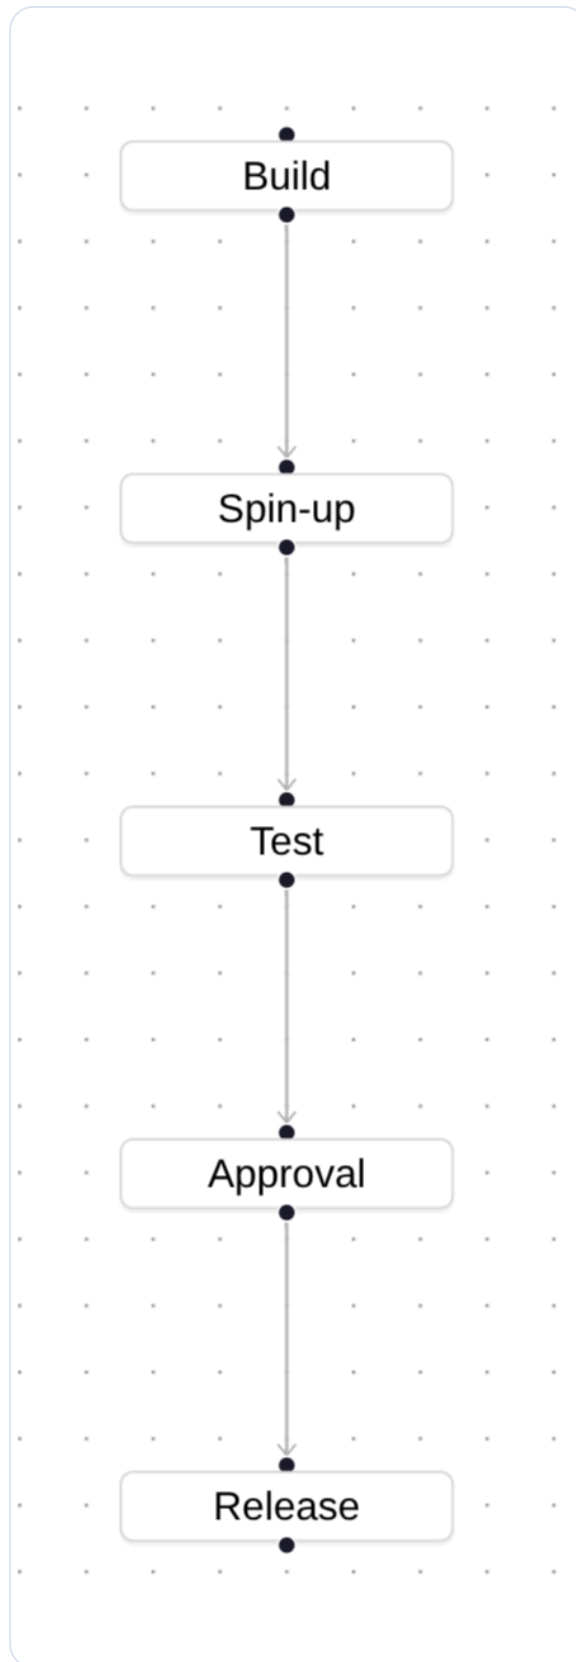

Run dialog with per-run inputs such as branch, commit, and test configuration.

4. Configuring test overrides in the UI

The test configuration view is split into multiple steps. Once the branch or commit is selected, the YAML-based test defaults are loaded and can be adjusted for the current run.

4.1 Test tree view

The first view is a tree view where the tests to be run are selected.

✕ Run Workflow

Please select a branch below

main

☐ Latest Commit ☒ Select Commit

Please select one commit below

Marco Bertolino: trigger pipeline c2cdb43

Test groups, receivers, report settings, and exact test selection are configured per run.

Test Job 141

Spin-up build

* Tests Entrypoint

Tests

Test Selection

Loaded from c2cdb43b911fdb86cc2ab5a4e59f0012ba2e73bf. Selecting a file or class selects all test nodeids below it.

☒ test_creation.py

☒ CreationTest

☒ test_evaluation_date

☒ test_checkin_counts

☒ test_checkin_ranks

☒ test_creation.py

☒ CreationTest

☒ test_evaluation_date

☒ test_checkin_counts

☒ test_checkin_ranks

☐ test_checkins.py

☐ TestCheckIns

☐ test_checkin_counts

☐ test_checkin_ranks

☐ test_evaluation.py

☐ TestEvaluation

☐ test_evaluation_date

☐ test_three_employee_rows_created

☐ test_model_helpers.py

☐ test_employee_upload_converts_supported_month_names

☐ test_employee_upload_unknown_month_returns_none

☐ test_model_string_helpers_describe_records

Run Workflow

Tree view for selecting the exact tests that should be part of the run.

4.2 Group assignment

The second view is used to assign tests to logical groups. This supports grouped reporting and grouped receiver behavior.

Group Assignment for This Run

Every selected test must belong to exactly one group for this run. Newly selected untracked tests appear in **Unassigned** until you choose a group.

Unassigned (2)

test_checkins.py / TestCheckIns / test_checkin_counts	Assign to group ▾
test_checkins.py / TestCheckIns / test_checkin_ranks	Assign to group ▾

creation (3)

test_creation.py / CreationTest / test_evaluation_date	creation ▾
test_creation.py / CreationTest / test_checkin_counts	creation ▾
test_creation.py / CreationTest / test_checkin_ranks	creation ▾

creation2 (3)

test_creation.py / CreationTest / test_evaluation_date	creation2 ▾
test_creation.py / CreationTest / test_checkin_counts	creation2 ▾
test_creation.py / CreationTest / test_checkin_ranks	creation2 ▾

creation3 (0)

No selected tests assigned.

Group assignment view where selected tests are mapped to logical test groups.

4.3 Receivers

After group assignment, default receivers and group receivers can be defined. Global receivers always receive all configured group results. Group receivers are added for their group and do not replace the global receivers.

Default Receivers

Default receivers receive every configured group report. Group receivers are added for their group.

Receiver 1

Name

WellPassEOM QA

Email

m.bertolino+wellpasseom@excellence-cloud.com

+ Add receiver

Test Group 1

* Group Name

creation

Description

End-to-end creation flow: employee uploads → ranking → monthly report.

Group Receivers

Group receivers are added for this group. Default receivers still receive this group report.

Receiver 1

Name

WellPass creation

Email


m.bertolino+creation@excellence-cloud.com

Default receiver and group receiver configuration for report delivery.

5. Monitoring workflow runs

After workflows are defined, all runs can be listed from the workflow run view. From there, the run button starts new executions, and the logs action opens the current state of a run together with the available job logs.

The logs page shows the current state of each job and, when available, the detailed execution steps.

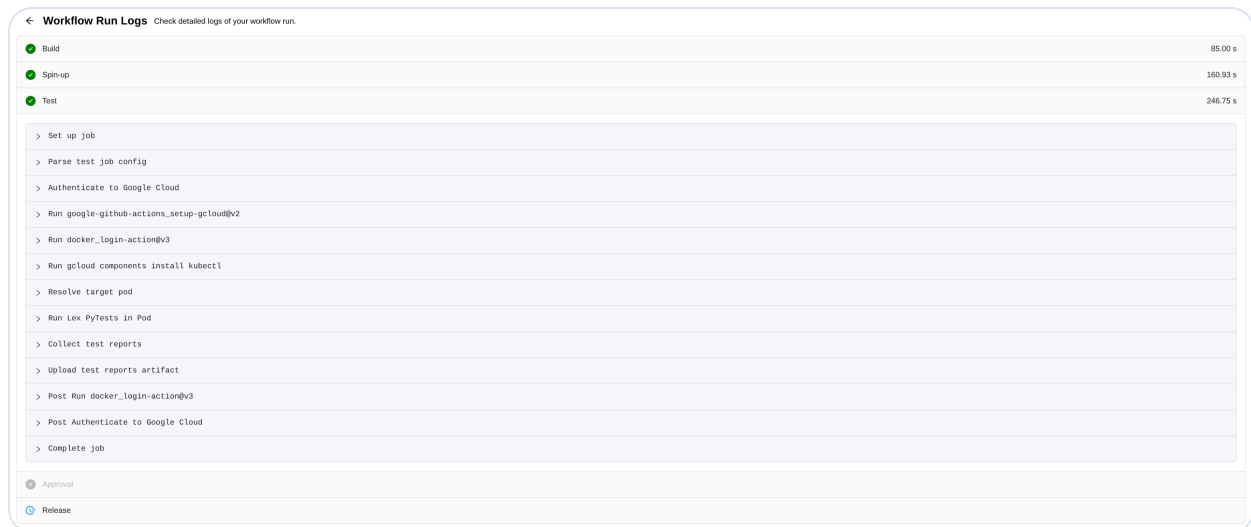

The screenshot shows a 'Workflow Run Logs' interface. At the top, there's a header with a back arrow and the text 'Workflow Run Logs Check detailed logs of your workflow run.' Below this is a table with three rows: 'Build' (85.00 s), 'Spin-up' (160.93 s), and 'Test' (246.75 s). Each row has a green status icon. Below the table is a large section for the 'Test' job, showing a list of steps with expandable details (indicated by '>' icons). The steps include: 'Set up job', 'Parse test job config', 'Authenticate to Google Cloud', 'Run google-github-actions/setup-gcloud@v2', 'Run docker_login-action@v3', 'Run gcloud components install kubectl', 'Resolve target pod', 'Run Lex PyTests in Pod', 'Collect test reports', 'Upload test reports artifact', 'Post Run docker_login-action@v3', 'Post Authenticate to Google Cloud', and 'Complete job'. At the bottom of the logs section, there are two buttons: 'Approval' (disabled, grey) and 'Release' (active, blue).

Job	Status	Duration
Build	Success	85.00 s
Spin-up	Success	160.93 s
Test	Success	246.75 s

Test Job Steps:

- > Set up job
- > Parse test job config
- > Authenticate to Google Cloud
- > Run google-github-actions/setup-gcloud@v2
- > Run docker_login-action@v3
- > Run gcloud components install kubectl
- > Resolve target pod
- > Run Lex PyTests in Pod
- > Collect test reports
- > Upload test reports artifact
- > Post Run docker_login-action@v3
- > Post Authenticate to Google Cloud
- > Complete job

Buttons: Approval, Release

Workflow run logs with job status, durations, and detailed job-step logs.

6. Approval gate

If a workflow contains an Approval job, the run pauses until a human explicitly approves or disapproves the next step. This is useful between testing and release when a manual checkpoint is required.



The screenshot shows the 'Workflow Run Logs' interface with the 'Approval' job highlighted. The 'Approval' job has a yellow status icon and a duration of 145.61 s. Below the job name, there is a button labeled 'Approve / Disapprove' with a blue checkmark and a red X icon. At the bottom of the logs section, there are two buttons: 'Approval' (disabled, grey) and 'Release' (active, blue).

Job	Status	Duration
Build	Success	86.71 s
Spin-up	Success	122.41 s
Test	Success	145.61 s
Approval	Pending	

Buttons: Approve / Disapprove, Release

Approval gate during a run, where workflow execution can be continued or stopped.

7. Summary

- Workflows are repo-specific and support manual and push triggers.
- If push is used, a branch must also be selected.
- The recommended lifecycle is Build → Spin-up → Test → Approval → Release.
- Branch or commit selection unlocks the YAML-based test override configuration for each run.
- Runs can be monitored through the logs view, including approval handling and job-level logs.