
SETUP & USER GUIDE

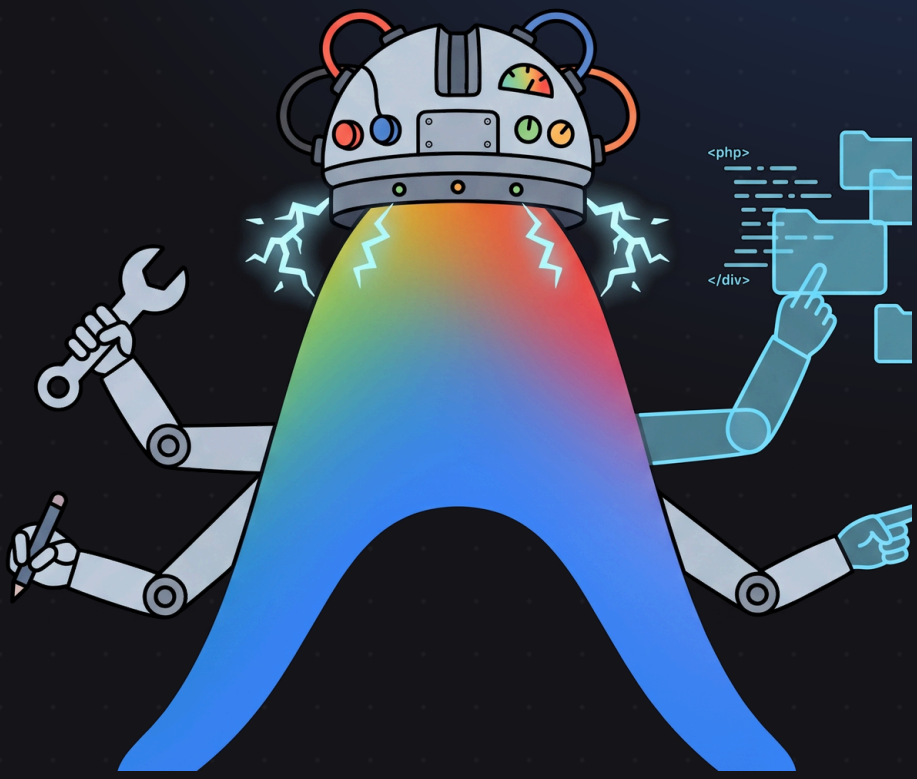

Antigravity
Universal AI Bridge

Use the Web AI model you already pay for, directly inside Antigravity IDE.

- Gemini
- Claude
- ChatGPT
- DeepSeek

POWERED BY

Trignod.ai

GUIDE

Contents

Everything you need to install the bridge, connect your Web AI tab, and get the most out of it. Follow the setup chapters in order, once. After that, daily use takes only a single click.

01 **Overview** What the bridge is and how it works 3

02 **Package & Prerequisites** What's in the folder, what you need 4

03 **Setup** Extract, install the extension, link the MCP server 5

04 **Using the Bridge** Dedicate a tab and start working 7

05 **Switching Models & Sessions** Provider switching and Delta Mode 8

06 **Troubleshooting** Fixes for the two most common issues 9

07 **Quick Reference** One-page cheat sheet 10

How to read this guide

NOTE
Blue boxes add useful background information.

TIP
Green boxes show shortcuts and things that save time.

HEADS UP
Orange boxes point out where setup commonly goes wrong.


01 · OVERVIEW

One bridge. Your best model.

The Antigravity Universal AI Bridge connects your Antigravity IDE directly to your active, paid Web AI sessions: **Gemini**, **Claude**, **ChatGPT**, and **DeepSeek**.

It forces the IDE's local model to act strictly as a **context gatherer and file executor**, while all complex coding, debugging, and architectural reasoning is delegated to the Web AI model you prefer. The code that comes back is applied to your workspace files automatically, so there is no manual copy-and-paste between the browser and the editor.

How it works

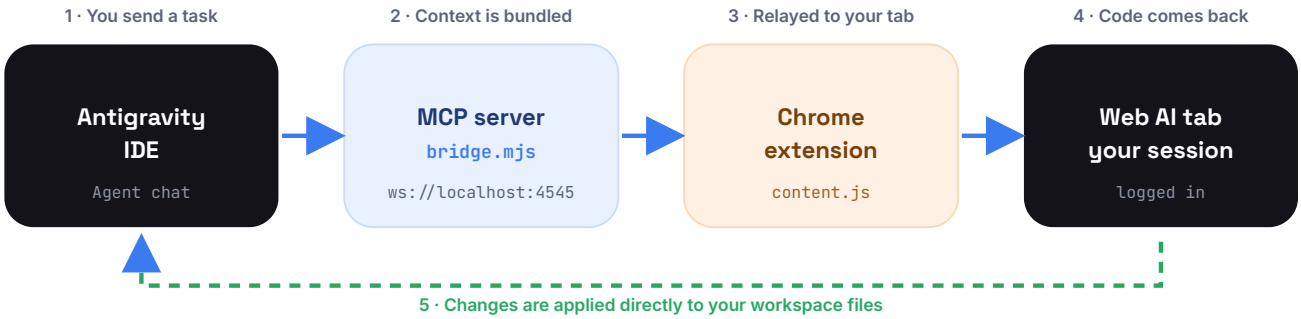

Key features

Universal support

Gemini, Claude, ChatGPT, and DeepSeek. Switch the active "Architect" with a single click.

Delta tracking

Full context is sent once per chat session. Follow-ups send only what changed.

Context discovery

Finds files like STATE.md, ARCHITECTURE.md, ROADMAP.md, REQUIREMENTS.md, and .cursorrules.

Zero-ban-risk design

A human-in-the-loop WebSocket protocol inside your real, logged-in browser session.

Automatic rule injection

Injects the required system rules into your global configuration (`~/.gemini/GEMINI.md`) so the IDE model acts as a context gatherer and executor, not a code author.

02 · PACKAGE & PREREQUISITES

What you need

Folder structure

Inside the extracted `gemini-bridge` folder you will find the following:

```
gemini-bridge/
├── extension/
│   ├── manifest.json    ← Chrome Extension
│   ├── content.js       ← Chrome Extension
│   └── bridge.mjs       ← Local MCP server script
├── node_modules/        ← Pre-installed dependencies
├── package.json
└── package-lock.json
```

extension/

The Chrome Extension files (`manifest.json` , `content.js`) and the local MCP server script (`bridge.mjs`).

node_modules/

Pre-installed Node.js dependencies required to run the bridge out of the box.

package files

`package.json` and `package-lock.json` describe those dependencies.

Prerequisites

Make sure all three of these are available before you start.

Node.js

Installed on your system. Version 18 or higher is recommended.

Google Chrome

Or any Chromium-based browser.

Antigravity IDE

The IDE you will connect the bridge to.

TIP

No terminal is needed for a standard install. Because `node_modules` is already included, every required library is pre-installed.

03 · SETUP

Install in three steps

1 Extract the folder

About one minute · no terminal required

1. Extract the `gemini-bridge.zip` archive to a **permanent location** on your computer, for example `D:/gemini-bridge`.


2. **No terminal required.** The `node_modules` folder is already included, so all required libraries are pre-installed. You do not need to run `npm install` or any other terminal command.

> **NOTE**
> Only if `node_modules` was deleted to save space, open a terminal inside the `gemini-bridge` folder and run `npm install` once.

2 Install the Chrome extension

About two minutes

1. Open Google Chrome and go to the extensions page:

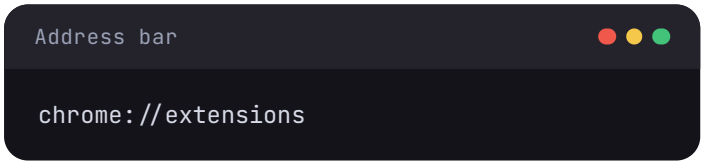

2. Enable **Developer mode** using the toggle switch in the **top-right** corner.

3. Click the **Load unpacked** button in the **top-left** corner.

4. Select the `extension` folder inside your extracted `gemini-bridge` directory, for example `D:/gemini-bridge/extension`.

5. Make sure the **Antigravity Universal AI Bridge** extension is **enabled**.

3 Link the MCP server in Antigravity IDE

About two minutes

1. Open **Antigravity IDE**.

2. Go to **Manage MCPs** (MCP Servers settings) and click **View raw config**, or open your `mcp_config.json` file.

3. Add the `gemini-web-pro` server configuration, **updating the file path** to match where you extracted the folder on your computer:

mcp_config.json

```
{
  "mcpServers": {
    "gemini-web-pro": {
      "command": "node",
      "args": ["D:/gemini-bridge/extension/bridge.mjs"]
    }
  }
}
```

HEADS UP · CHECK YOUR PATH

If you placed `bridge.mjs` directly in the root `gemini-bridge` folder instead of inside `extension`, set the path to `"D:/gemini-bridge/bridge.mjs"`.

4. Save the configuration file and click the **Refresh** button in the **Manage MCP servers** window.

Automatic rule injection

Once the MCP server starts, it automatically injects the required System Rules into your global configuration at `~/.gemini/GEMINI.md`. **No manual rule copying or prompt setup is required.**

Setup checklist

- Folder extracted to a permanent location
- Chrome extension loaded and enabled
- `gemini-web-pro` added to `mcp_config.json` with the correct path
- Configuration saved and **Refresh** clicked in Manage MCP servers

Dedicate a tab. Start working.

1 Open your Web AI provider

Open a new tab in Google Chrome and go to any supported platform:

PROVIDER	ADDRESS
Gemini	`https://gemini.google.com`
Claude	`https://claude.ai`
ChatGPT	`https://chatgpt.com`
DeepSeek	`https://chat.deepseek.com`

2 Dedicate the active tab

At the top center of the AI webpage you will see a floating status button. **Click it once** and it turns green.

Click to dedicate (Provider) to Antigravity	Standby
(Provider) Connected to Antigravity	This tab is the active Architect
Processing Antigravity Task...	A task is being handled
Connecting...	The IDE hasn't started the MCP server yet

3 Start working in Antigravity

Return to Antigravity IDE, type your task or bug-fix request in the **Agent chat**, and press **Proceed**. Antigravity then:


- automatically gathers your project context, `.gemini` / `.claude` / `.gsd` skills, and target files;
- sends them to your dedicated browser tab (**Processing Antigravity Task...**);
- retrieves the complete code solution; and
- applies the changes directly to your workspace files.

05 · SWITCHING MODELS & SESSIONS

Switch in one click. Save tokens.

Instant provider switching

If you have several AI tabs open (for example Gemini and Claude), click the floating button on the tab you want to use next so it turns green. The previous tab **automatically disconnects** and returns to standby.

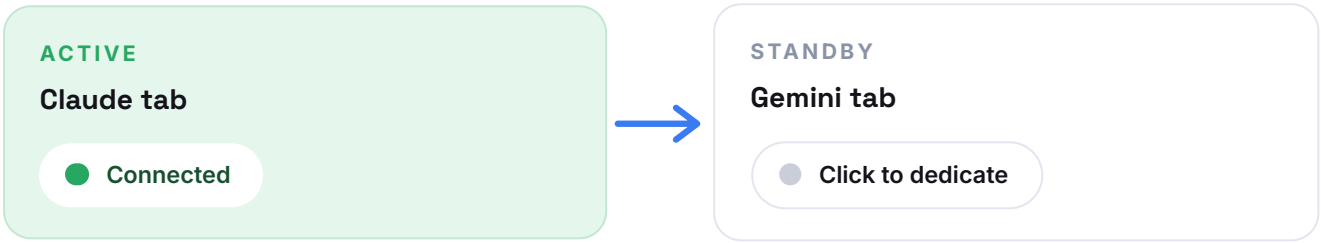

Clicking the button on the Gemini tab makes it the active tab and moves Claude back to standby.

Smart token saving (Delta Mode)

Full project memory and skills are sent **only on the first message** of a web chat session. Follow-up tasks in the same chat transmit only recent updates and modified files.

FIRST MESSAGE IN A CHAT

Project memory · Skills · Core files · Your task

FOLLOW-UP MESSAGES IN THE SAME CHAT

Updates · Modified files

TIP · NEED A FRESH START?

To send a fresh, full-context bundle, simply open a **New Chat** in your browser tab.

Same chat

Fast follow-ups. Only the delta is sent, which saves tokens and speeds up responses.

New chat

The full context bundle is sent again: project memory, skills, and core files.

06 · TROUBLESHOOTING

When something goes wrong

Most issues come down to one of two causes. Find your symptom below.

ERROR

`EADDRINUSE: address already in use ::: 4545`

What it means Another instance of the bridge server is already running in the background.

How to fix it

1. Open your **Task Manager** and end any running **Node.js** processes.
2. Click **Refresh** in Antigravity's **Manage MCPs** screen.

SYMPTOM

The floating button stays yellow Connecting...

What it means Antigravity IDE has not started the MCP server yet.

How to fix it

1. Verify that the path in `mcp_config.json` points to the **exact location** of `bridge.mjs` on your computer.
2. Click **Refresh** in the **Manage MCPs** tab.

NOTE

If you placed `bridge.mjs` in the root `gemini-bridge` folder instead of `extension`, the path in your config must be `D:/gemini-bridge/bridge.mjs` (adjusted to your own drive and folder).

07 · QUICK REFERENCE

Cheat sheet

Setup in 3 steps

- **Extract** `gemini-bridge.zip` to a permanent folder
- **Load** the `extension` folder at `chrome://extensions` (Developer mode, Load unpacked)
- **Add** `gemini-web-pro` to `mcp_config.json`, save, then Refresh

Daily use


- Open a supported AI site in Chrome
- Click the floating button once until it turns **green**
- Type your task in the Agent chat and press **Proceed**

Status button colors

COLOR	MEANING
White	Standby. Click to dedicate this tab to Antigravity.
Green	Connected. This tab is the active Architect.
Blue	Processing an Antigravity task.
Yellow	Connecting. The IDE has not started the MCP server yet.

Key paths and values

ITEM	VALUE
Extension folder	`gemini-bridge/extension`
MCP server script	`gemini-bridge/extension/bridge.mjs`
MCP server name	`gemini-web-pro`
Config file	`mcp_config.json`
Injected rules file	`~/.gemini/GEMINI.md`
Bridge port	`4545`

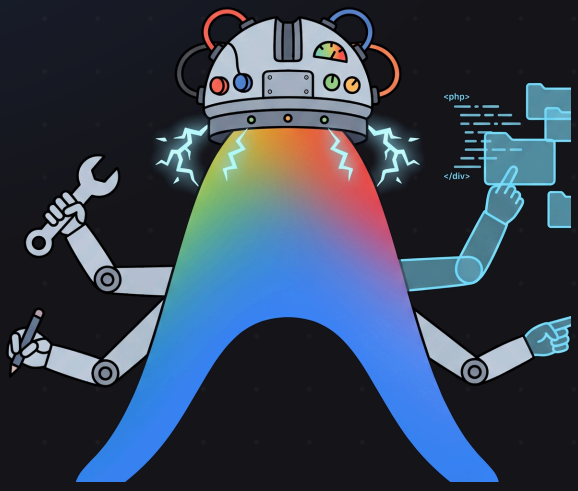

Same tools. Same subscription.

A much stronger brain.

POWERED BY

Trignod.ai