



3803ICT
Data Analytics

Lab 08 – Network Data Analytics

Trimester 1 - 2020

Table of Contents

1. Centrality Analysis	3
2. Community Analysis	3
2.1. Clique Percolation Method.....	3
2.2. Efficient Implementation	4
2.3. Test with large dataset	4
3. Information Diffusion	5
3.1. Diffusion process	5
3.2. Influence maximization	5
4. Graph Modularity and Louvain Algorithm (OPTIONAL)	6
4.1. Compute Modularity	6
4.2. Naïve Louvain algorithm.....	6
4.3. Efficient Louvain algorithm.....	7
4.4. Efficiency comparison	7

Complete the code with TODO tag in the Jupyter notebooks.

1. Centrality Analysis

In this exercise, you will implement the pagerank centrality.


Name: Zachary's Karate Club

Type: Graph

Number of nodes: 34

Number of edges: 78

Average degree: 4.5882

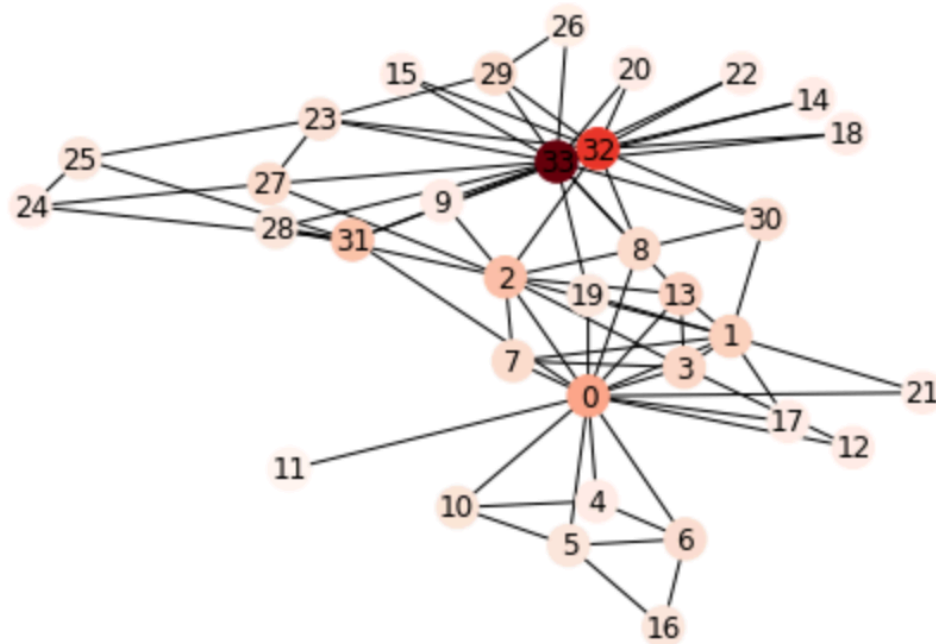


2. Community Analysis

2.1. Clique Percolation Method

One well-known algorithm for detecting overlapping communities is called the Clique Percolation Method (CPM).


Name: Zachary's Karate Club
 Type: Graph
 Number of nodes: 34
 Number of edges: 78
 Average degree: 4.5882
 ---0.000205993652344 seconds---

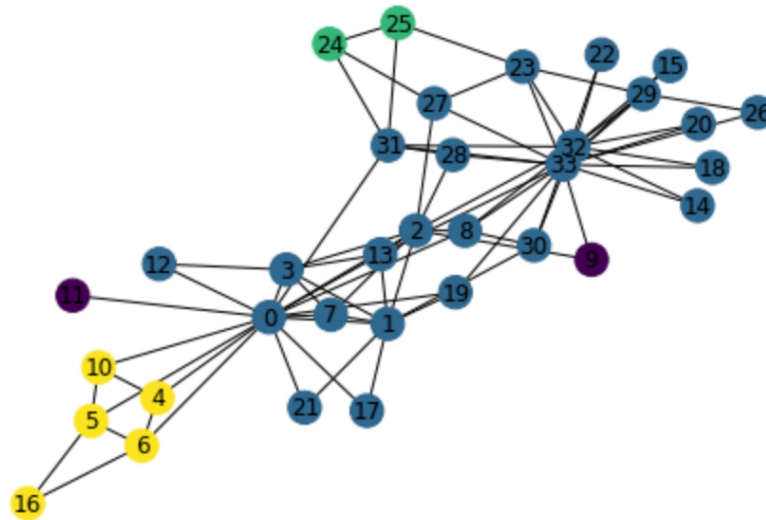

2.2. Efficient Implementation

That implementation is correct but expensive---it requires $O(N^2)$ clique comparisons, where N is the number of cliques (which is often much larger than the number of nodes!). If we use a python dictionary to index which nodes belong to which cliques, then we can easily compare only those cliques that share at least one node in common. This implementation is a bit longer but should be more efficient.

---0.0001540184021 seconds---

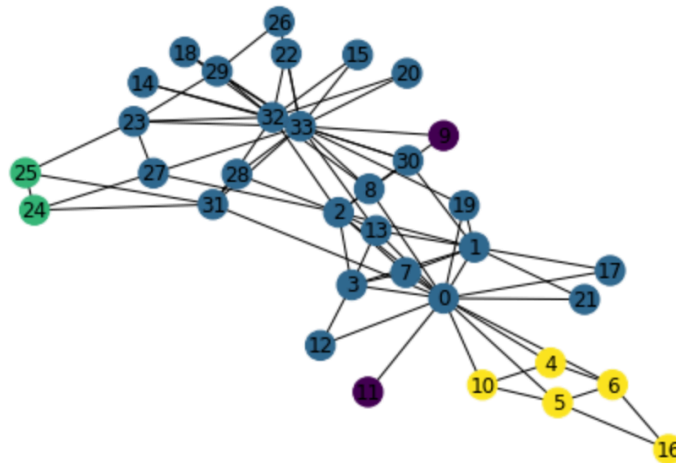

2.3. Test with large dataset

Now we test with a real large-scale network data at <https://snap.stanford.edu/data/com-Amazon.html>


Name:
 Type: Graph
 Number of nodes: 334863
 Number of edges: 925872
 Average degree: 5.5299
 ---0.0001220703125 seconds---
 ---0.000126123428345 seconds---

3. Information Diffusion

It is also known as graph activation process, e.g. <http://ncase.me/crowds/>

Further readings:

- <https://stackoverflow.com/questions/31815454/animate-graph-diffusion-with-networkx>
- <https://stackoverflow.com/questions/27475211/animating-a-network-graph-to-show-the-progress-of-an-algorithm/>

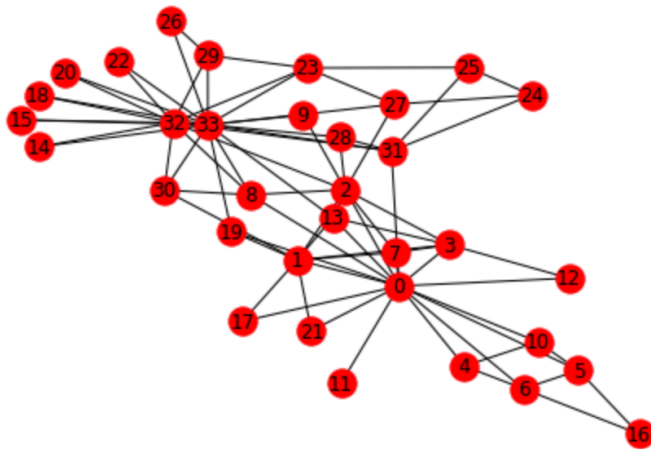

3.1. Diffusion process

Now we implement the diffusion process. Each active node will cause other nodes in the graph to become active over time. The diffusion rule is that a node gets active if at least a certain percentage of its neighbours become active. The process continues until convergence (i.e. has no new node activated).

OPTIONAL: Can you implement a data visualization to illustrate the diffusion process?

```
diffusion(G, {0,1})  
{0, 1, 2, 3, 7, 9, 11, 12, 13, 17, 19, 21}
```


3.2. Influence maximization

Now we find a minimal set of seeds that maximize the influence (i.e. the number of active nodes). The influence maximization problem is NP-hard in general. Here, we use a greedy algorithm that iteratively chooses a seed such that the gain of influence is maximal.

```
seeds = greedy(G,3)  
print(seeds)  
print(utility(G, seeds))  
  
set([0, 33, 4])  
34
```

4. Graph Modularity and Louvain Algorithm (OPTIONAL)

In this exercise, we compute the modularity measure of a graph. If you haven't installed networkx package, please install. First we create a small dataset and manually assign the community label to each node.

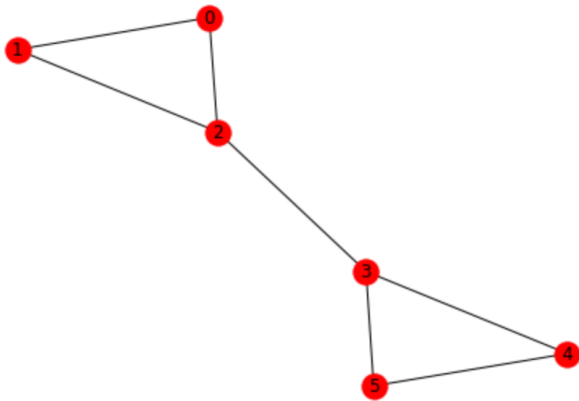

4.1. Compute Modularity

Now we compute the modularity of the graph given the current community assignment.

```
def compute_modularity(G):
    """
    TODO: compute the modularity of a networkx graph
    HINTS:
    + The community label of a node can be accessed by G[node_id]['community']
    + The degree of a node: G.degree[node_id]
    + The neighbors of a node: G.neighbors(node_id)
    + Number of edges between 2 nodes: G.number_of_edges(node_1, node_2)
    """
    m = len(G.edges)
    Q = 0
    ...
    return Q/(2*m)
```

```
compute_modularity(G)
```

```
0.3571428571428571
```

4.2. Naïve Louvain algorithm

Now we implement phase 1 of Louvain algorithm, in which we partition the nodes to maximize the modularity.

```
array([1, 1, 1, 5, 5, 5])
```

Now we implement the phase 2 of Louvain algorithm, in which we merge the nodes within the same community to a single node and create edges between communities.

```
(array([[0, 1],
        [1, 0]]), array([1, 1]))
```

Now we can implement the full Louvain algorithm:

```
Level 0 partition: [0 1 2 3 4 5]
```

```
Level 1 partition: [1 1 1 5 5 5]
```

```
Level 2 partition: [1 1]
```

4.3. Efficient Louvain algorithm

The naive Louvain algorithm is not efficient. It takes $O(n^3)$. There are some improvements in the literature

<http://www.ijcee.org/vol8/927-A023.pdf>

<https://www.cs.upc.edu/~CSN/slides/07communities.pdf>


https://en.wikipedia.org/wiki/Louvain_Modularity

<https://www.quora.com/Is-there-a-simple-explanation-of-the-Louvain-Method-of-community-detection>

<http://arxiv.org/abs/0803.0476>


<https://stackoverflow.com/questions/22070196/community-detection-in-networkx>

For simplicity, we will demo the existing implementations. You can try to improve the final visualization further.

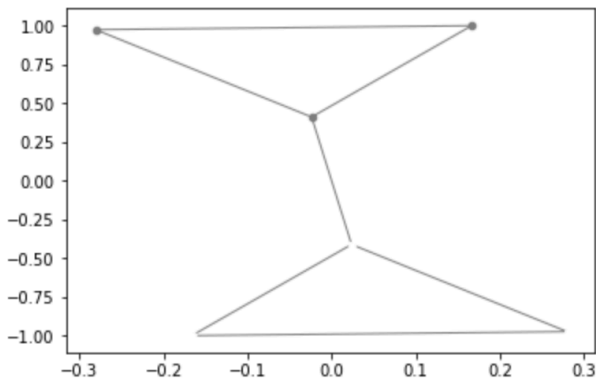


4.4. Efficiency comparison

We load a larger network and compare the running time of the two implementations.

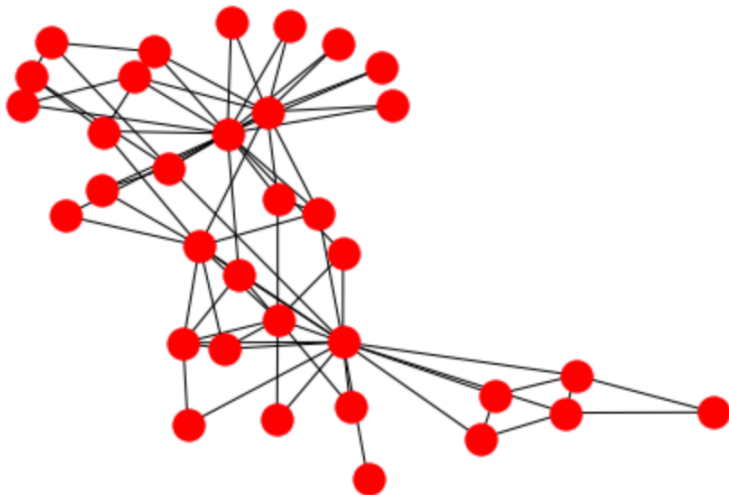

--- 0.00814485549927 seconds ---

{0: 0, 1: 0, 2: 0, 3: 0, 4: 1, 5: 1, 6: 1, 7: 0, 8: 2, 9: 0, 10: 1, 11: 0, 12: 0, 13: 0, 14: 2, 15: 2, 16: 1, 17: 0, 18: 2, 19: 0, 20: 2, 21: 0, 22: 2, 23: 3, 24: 3, 25: 3, 26: 2, 27: 3, 28: 3, 29: 2, 30: 2, 31: 3, 32: 2, 33: 2}

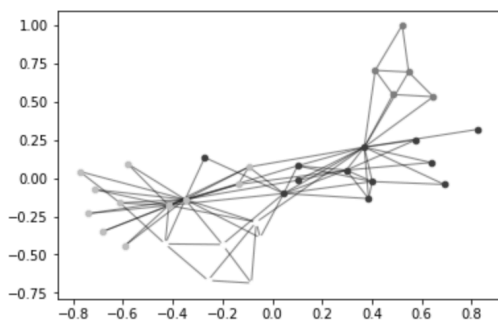

Now we load an even larger network: <https://snap.stanford.edu/data/email-Eu-core.html>

Name:
Type: Graph
Number of nodes: 1005
Number of edges: 16706
Average degree: 33.2458



--- 0.617053985596 seconds ---

