


My git was already configured.

## 1. Set Up a Git Repository

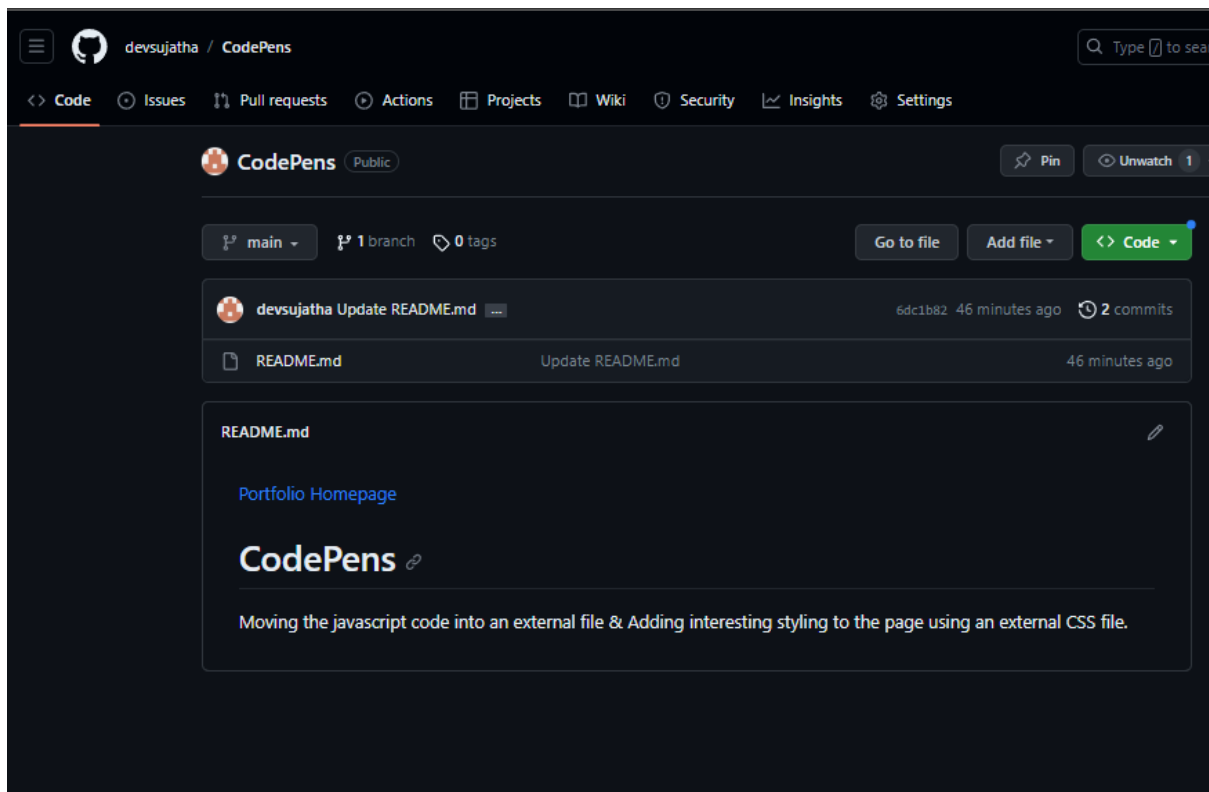

## 2. Clone the Repository

Clone the Git repository to your local machine using the following command:

```
PS C:\Users\BIG MAN\Desktop\codepens> git clone https://github.com/devsujatha/CodePens.git
Cloning into 'CodePens'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 1), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (6/6), done.
Resolving deltas: 100% (1/1), done.
PS C:\Users\BIG MAN\Desktop\codepens>
```

## 3. Add and Commit Your Changes

Made changes to my code in the local repository.

Used the following commands to stage and commit changes:

```
future_value.html X
future_value.html > ...
You, 51 minutes ago | 1 author (You)
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <title>Future Value Application</title>
6   <link rel="stylesheet" type="text/css" href="styles.css">
7   <script src="future_value.js"></script>
8 </head>
9 <body>
10   <main>
11     <script>
12       document.write("Investment amount = " + investment);
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS GITLENS

PS C:\Users\BIG MAN\Desktop\codepens> git status  
On branch master  
No commits yet  
Changes to be committed:  
(use "git rm --cached <file>..." to unstage)  
new file: future\_value.html  
new file: future\_value.js  
new file: index.html  
new file: indexstyles.css  
new file: mpg.html  
new file: mpg.js  
new file: scores.html  
new file: scores.js  
new file: scoresArray.html  
new file: scoresArray.js  
new file: styles.css

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS GITLENS

new file: styles.css

```
PS C:\Users\BIG MAN\Desktop\codepens> git commit -m"CodePens"
[master (root-commit) d23ec7d] CodePens
11 files changed, 252 insertions(+)
create mode 100644 future_value.html
create mode 100644 future_value.js
create mode 100644 index.html
create mode 100644 indexstyles.css
create mode 100644 mpg.html
create mode 100644 mpg.js
create mode 100644 scores.html
create mode 100644 scores.js
create mode 100644 scoresArray.html
create mode 100644 scoresArray.js
create mode 100644 styles.css
```

#### 4. Push Your Changes to Git

Used the following command to push committed changes to the remote repository:

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS GITLENS

```
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 1), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (6/6), done.
Resolving deltas: 100% (1/1), done.
PS C:\Users\BIG MAN\Desktop\codepens> git push origin
```

devsujatha / CodePens

CodeIssuesPull requestsActionsProjectsWikiSecurityInsightsSettings

CodePensPublic

PinUnwatch1ForkStar0

main1 branch0 tagsGo to fileAdd fileCode

devsujatha Add files via upload1e98344 minutes ago3 commits

README.md	Update README.md	1 hour ago
future_value.html	Add files via upload	4 minutes ago
future_value.js	Add files via upload	4 minutes ago
index.html	Add files via upload	4 minutes ago
indexstyles.css	Add files via upload	4 minutes ago
mpg.html	Add files via upload	4 minutes ago
mpg.js	Add files via upload	4 minutes ago
scores.html	Add files via upload	4 minutes ago
scores.js	Add files via upload	4 minutes ago
scoresArray.html	Add files via upload	4 minutes ago
scoresArray.js	Add files via upload	4 minutes ago
styles.css	Add files via upload	4 minutes ago

README.md

Portfolio Homepage

CodePens

Moving the javascript code into an external file & Adding interesting styling to the page using an external CSS file.

About

Moving the javascript code into an external file & Adding interesting styling to the page using an external CSS file.

ReadmeActivity0 stars1 watching0 forks

Releases

No releases published  
Create a new release

Packages

No packages published  
Publish your first package

Suggested Workflows

Based on your tech stack

Publish Node.js Package

Configure

Publishes a Node.js package to npm.

Grunt

Configure