NetRec

Network exposure and vulnerability report

Target	10.54.206.90/32
Profile	Fast
Ports	profile default
Time limit	5 min
Started	2026-10-11 17:20 UTC
Finished	2026-10-11 17:20 UTC
Run by	admin
Hosts up	1 of 1 scanned

Executive summary

Hosts up	Open ports	CVE findings	Critical	High	Known exploited
1	2	4	0	2	0

Findings by severity

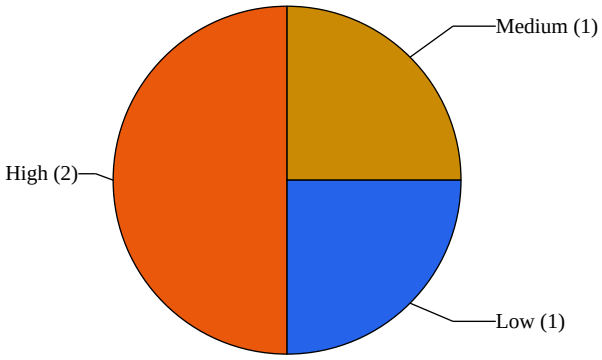

Most common open ports

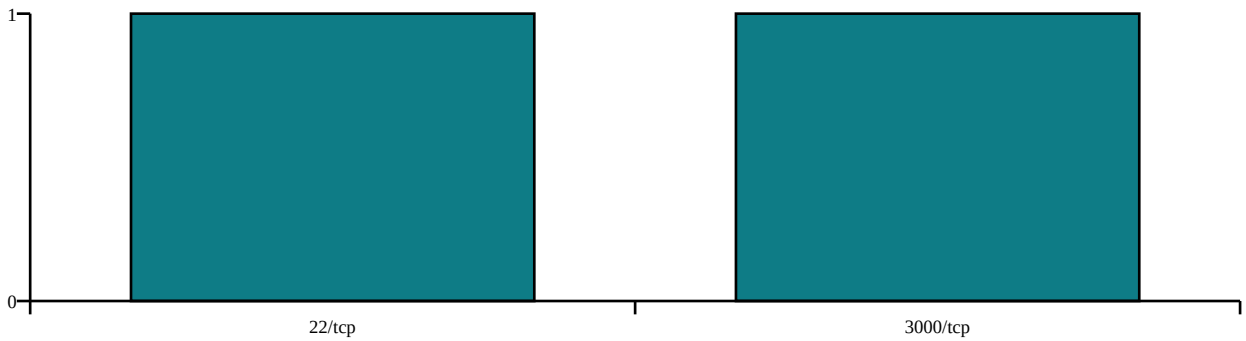

CVE findings are inferred from detected service versions (CPE matching against the NVD). They indicate **potential exposure**, not confirmed exploitability. Distribution packages often back-port fixes without changing version strings. Findings marked * are low-confidence keyword matches and are excluded from the counts above.

Host overview

IP	Hostname	OS (accuracy)	Open ports
10.54.206.90	-	-	2

Host 10.54.206.90

OS: - | MAC: - - | Closed/filtered ports: 98

Open ports

Port	Service	Product / version	CVEs
22/tcp	ssh	OpenSSH 10.5p1 Debian 1 protocol 2.0	4
3000/tcp	ppp	-	0

Potential vulnerabilities

CVE	CVSS	Severity	Port	Summary
CVE-2008-3844	9.3	HIGH	22/tcp	Certain Red Hat Enterprise Linux (RHEL) 4 and 5 packages for OpenSSH, as signed in August 2008 using a legitimate Red Hat GPG key, contain an external
CVE-2023-51767	7.0	HIGH	22/tcp	OpenSSH through 10.0, when common types of DRAM are used, might allow row hammer attacks (for authentication bypass) because the integer value of auth
CVE-2007-2768	4.3	MEDIUM	22/tcp	OpenSSH, when using OPIE (One-Time Passwords in Everything) for PAM, allows remote attackers to determine the existence of certain user accounts, whic
CVE-2026-106587	3.6	LOW	22/tcp	In sshd in OpenSSH before 10.6, the value "none" for a configuration option is sometimes interpreted as a filename but was intended to mean that a fea