

FactDev

0.1

Generated by Doxygen 1.8.6

Thu Feb 26 2015 11:04:10

Contents

1	FactDev documentation	1
2	README	3
3	QTestRunner	5
4	Namespace Index	7
4.1	Namespace List	7
5	Hierarchical Index	9
5.1	Class Hierarchy	9
6	Class Index	13
6.1	Class List	13
7	Namespace Documentation	17
7.1	Databases Namespace Reference	17
7.1.1	Detailed Description	17
7.2	Gui Namespace Reference	17
7.2.1	Detailed Description	18
7.3	Gui::Widgets Namespace Reference	18
7.3.1	Detailed Description	18
7.4	Models Namespace Reference	18
7.4.1	Detailed Description	19
8	Class Documentation	21
8.1	Gui::Dialogs::AddProjectDialog Class Reference	21
8.1.1	Detailed Description	21
8.1.2	Constructor & Destructor Documentation	22
8.1.2.1	AddProjectDialog	22
8.1.2.2	AddProjectDialog	22
8.2	Ui::AddProjectDialog Class Reference	22
8.3	Ui::AddQuoteDialog Class Reference	22
8.4	Gui::Dialogs::AddQuoteDialog Class Reference	23

8.4.1	Detailed Description	23
8.4.2	Constructor & Destructor Documentation	24
8.4.2.1	AddQuoteDialog	24
8.4.3	Member Function Documentation	25
8.4.3.1	getNumber	25
8.5	Models::Billing Class Reference	25
8.5.1	Detailed Description	26
8.5.2	Constructor & Destructor Documentation	26
8.5.2.1	Billing	26
8.5.3	Member Function Documentation	27
8.5.3.1	addContributory	27
8.5.3.2	getContributories	27
8.5.3.3	getDataMap	27
8.5.3.4	getDate	27
8.5.3.5	getDescription	27
8.5.3.6	getNumber	27
8.5.3.7	getTitle	28
8.5.3.8	hydrat	28
8.5.3.9	isBilling	28
8.5.3.10	operator!=	28
8.5.3.11	operator<	28
8.5.3.12	operator==	28
8.5.3.13	setDate	29
8.5.3.14	setDescription	29
8.5.3.15	setIsBilling	29
8.5.3.16	setNumber	29
8.5.3.17	setTitle	29
8.6	Databases::BillingDatabase Class Reference	30
8.6.1	Detailed Description	30
8.6.2	Member Function Documentation	31
8.6.2.1	addBilling	31
8.6.2.2	addBillingProject	31
8.6.2.3	getAllBillingsOfProject	31
8.6.2.4	getBilling	31
8.6.2.5	getBilling	31
8.6.2.6	getBillingsTable	32
8.6.2.7	getMaxBillingNumber	32
8.6.2.8	getMaxQuoteNumber	32
8.6.2.9	instance	32
8.6.2.10	removeBilling	32

8.6.2.11	removeBillingProject	33
8.7	BillingDatabaseTest Class Reference	33
8.8	BillingModelTest Class Reference	33
8.9	Gui::Widgets::WdgModels::BillingsTableModel Class Reference	34
8.9.1	Detailed Description	34
8.9.2	Constructor & Destructor Documentation	35
8.9.2.1	BillingsTableModel	35
8.9.3	Member Function Documentation	36
8.9.3.1	append	36
8.9.3.2	columnCount	36
8.9.3.3	count	36
8.9.3.4	data	36
8.9.3.5	flags	36
8.9.3.6	getBillings	37
8.9.3.7	headerData	37
8.9.3.8	remove	37
8.9.3.9	rowCount	37
8.9.3.10	setData	37
8.10	Gui::Widgets::CheckFields::CheckCity Class Reference	38
8.10.1	Detailed Description	38
8.10.2	Constructor & Destructor Documentation	38
8.10.2.1	CheckCity	38
8.11	Gui::Widgets::CheckFields::CheckCountry Class Reference	38
8.11.1	Detailed Description	39
8.11.2	Constructor & Destructor Documentation	39
8.11.2.1	CheckCountry	39
8.12	Gui::Widgets::CheckFields::CheckEmail Class Reference	39
8.12.1	Detailed Description	40
8.12.2	Constructor & Destructor Documentation	40
8.12.2.1	CheckEmail	40
8.12.3	Member Function Documentation	40
8.12.3.1	check	40
8.13	Gui::Widgets::CheckFields::CheckFieldsLetters Class Reference	41
8.13.1	Detailed Description	41
8.13.2	Constructor & Destructor Documentation	41
8.13.2.1	CheckFieldsLetters	41
8.13.3	Member Function Documentation	41
8.13.3.1	check	41
8.14	Gui::Widgets::CheckFields::CheckName Class Reference	42
8.14.1	Detailed Description	42

8.14.2	Constructor & Destructor Documentation	42
8.14.2.1	CheckName	42
8.15	Gui::Widgets::CheckFields::CheckPhone Class Reference	43
8.15.1	Detailed Description	43
8.15.2	Constructor & Destructor Documentation	43
8.15.2.1	CheckPhone	43
8.15.3	Member Function Documentation	43
8.15.3.1	check	43
8.15.3.2	getCountry	44
8.15.3.3	setCountry	44
8.16	Gui::Widgets::CheckFields::CheckPostalCode Class Reference	44
8.16.1	Detailed Description	45
8.16.2	Constructor & Destructor Documentation	45
8.16.2.1	CheckPostalCode	45
8.16.3	Member Function Documentation	45
8.16.3.1	check	45
8.16.3.2	getCountry	45
8.16.3.3	setCountry	45
8.17	Gui::Widgets::CheckFields::CheckQLineEdit Class Reference	46
8.17.1	Detailed Description	46
8.17.2	Constructor & Destructor Documentation	47
8.17.2.1	CheckQLineEdit	47
8.17.3	Member Function Documentation	48
8.17.3.1	getBtnValid	48
8.17.3.2	isValid	48
8.17.3.3	setBtnValid	48
8.18	Gui::Widgets::CheckFields::CheckSiretNumber Class Reference	48
8.18.1	Detailed Description	49
8.18.2	Constructor & Destructor Documentation	49
8.18.2.1	CheckSiretNumber	49
8.18.3	Member Function Documentation	49
8.18.3.1	check	49
8.19	Gui::Widgets::CheckFields::CheckUntilField Class Reference	49
8.19.1	Detailed Description	50
8.19.2	Constructor & Destructor Documentation	50
8.19.2.1	CheckUntilField	50
8.19.3	Member Function Documentation	50
8.19.3.1	check	50
8.20	Gui::Widgets::CheckFields::CheckValidField Class Reference	50
8.20.1	Detailed Description	51

8.20.2	Constructor & Destructor Documentation	51
8.20.2.1	CheckValidField	51
8.20.3	Member Function Documentation	51
8.20.3.1	check	51
8.21	Gui::Widgets::Delegates::ComboBoxDelegate Class Reference	52
8.22	Ui::ComboBoxModelWidget Class Reference	52
8.23	Gui::Widgets::ComboBoxModelWidget Class Reference	52
8.23.1	Detailed Description	53
8.24	Mustache::Context Class Reference	53
8.24.1	Detailed Description	53
8.24.2	Constructor & Destructor Documentation	54
8.24.2.1	Context	54
8.24.3	Member Function Documentation	54
8.24.3.1	canEval	54
8.24.3.2	eval	54
8.24.3.3	isFalse	54
8.24.3.4	listCount	54
8.24.3.5	partialResolver	54
8.24.3.6	partialValue	54
8.24.3.7	pop	54
8.24.3.8	push	55
8.24.3.9	stringValue	55
8.25	ContributoriesDatabaseTest Class Reference	55
8.26	Models::ContributoriesList Class Reference	55
8.27	Gui::Widgets::WdgModels::ContributoriesTableModel Class Reference	56
8.27.1	Detailed Description	57
8.27.2	Constructor & Destructor Documentation	57
8.27.2.1	ContributoriesTableModel	57
8.27.3	Member Function Documentation	57
8.27.3.1	append	57
8.27.3.2	columnCount	57
8.27.3.3	count	57
8.27.3.4	data	58
8.27.3.5	flags	59
8.27.3.6	getContributories	59
8.27.3.7	headerData	59
8.27.3.8	remove	59
8.27.3.9	rowCount	60
8.27.3.10	setData	60
8.28	Ui::ContributoriesWidget Class Reference	60

8.29	Gui::Widgets::ContributoriesWidget Class Reference	60
8.29.1	Member Function Documentation	61
8.29.1.1	add	61
8.29.1.2	getContributories	61
8.30	Models::Contributory Class Reference	62
8.30.1	Detailed Description	63
8.30.2	Constructor & Destructor Documentation	63
8.30.2.1	Contributory	63
8.30.3	Member Function Documentation	63
8.30.3.1	getDataMap	63
8.30.3.2	getDescription	63
8.30.3.3	getNbHours	63
8.30.3.4	getProject	63
8.30.3.5	hydrat	64
8.30.3.6	operator!=	65
8.30.3.7	operator==	65
8.30.3.8	setDescription	65
8.30.3.9	setNbHours	65
8.30.3.10	setProject	65
8.31	Databases::ContributoryDatabase Class Reference	66
8.31.1	Detailed Description	66
8.31.2	Member Function Documentation	66
8.31.2.1	addContributory	66
8.31.2.2	getContributory	67
8.31.2.3	getContributory	67
8.31.2.4	instance	67
8.31.2.5	removeContributory	67
8.32	CounterContext Class Reference	68
8.32.1	Member Function Documentation	68
8.32.1.1	canEval	68
8.32.1.2	canEval	68
8.32.1.3	eval	69
8.32.1.4	eval	69
8.32.1.5	stringValue	69
8.32.1.6	stringValue	69
8.33	Models::Customer Class Reference	69
8.33.1	Detailed Description	71
8.33.2	Constructor & Destructor Documentation	71
8.33.2.1	Customer	71
8.33.3	Member Function Documentation	71

8.33.3.1	getAddress	71
8.33.3.2	getCity	71
8.33.3.3	getCompany	72
8.33.3.4	getCountry	72
8.33.3.5	getDataMap	72
8.33.3.6	getEmail	72
8.33.3.7	getFax	72
8.33.3.8	getFirstnameReferent	72
8.33.3.9	getLastnameReferent	73
8.33.3.10	getMobilePhone	73
8.33.3.11	getNameFolder	73
8.33.3.12	getPath	73
8.33.3.13	getPhone	73
8.33.3.14	getPostalCode	73
8.33.3.15	hydrat	73
8.33.3.16	operator!=	74
8.33.3.17	operator==	74
8.33.3.18	setAddress	74
8.33.3.19	setCity	74
8.33.3.20	setCompany	74
8.33.3.21	setCountry	75
8.33.3.22	setEmail	75
8.33.3.23	setFax	75
8.33.3.24	setFirstnameReferent	75
8.33.3.25	setLastnameReferent	75
8.33.3.26	setMobilePhone	75
8.33.3.27	setPhone	76
8.33.3.28	setPostalCode	76
8.34	Gui::Widgets::CustomerContextualMenu Class Reference	76
8.34.1	Detailed Description	76
8.34.2	Constructor & Destructor Documentation	77
8.34.2.1	CustomerContextualMenu	77
8.35	Databases::CustomerDatabase Class Reference	77
8.35.1	Detailed Description	78
8.35.2	Member Function Documentation	78
8.35.2.1	addCustomer	78
8.35.2.2	getCustomer	78
8.35.2.3	getCustomer	78
8.35.2.4	getCustomersTable	79
8.35.2.5	getItemBillQuote	79

8.35.2.6	getItemCustomer	79
8.35.2.7	getItemProject	79
8.35.2.8	getItemRoot	80
8.35.2.9	getNbCustomers	80
8.35.2.10	getTree	80
8.35.2.11	instance	80
8.35.2.12	removeCustomer	80
8.35.2.13	updateCustomer	81
8.36	CustomerDatabaseTest Class Reference	81
8.37	Ui::CustomerDataWidget Class Reference	81
8.38	Gui::Widgets::CustomerDataWidget Class Reference	82
8.38.1	Detailed Description	82
8.38.2	Member Function Documentation	82
8.38.2.1	printInformations	82
8.39	CustomerModelTest Class Reference	82
8.40	Gui::Widgets::WdgModels::CustomersTableModel Class Reference	83
8.40.1	Detailed Description	83
8.40.2	Constructor & Destructor Documentation	84
8.40.2.1	CustomersTableModel	84
8.40.3	Member Function Documentation	84
8.40.3.1	append	84
8.40.3.2	columnCount	84
8.40.3.3	count	84
8.40.3.4	data	84
8.40.3.5	flags	84
8.40.3.6	getCustomers	85
8.40.3.7	headerData	85
8.40.3.8	remove	85
8.40.3.9	rowCount	85
8.40.3.10	setData	85
8.41	Databases::Database Class Reference	86
8.41.1	Detailed Description	87
8.41.2	Member Function Documentation	87
8.41.2.1	executeFile	87
8.41.2.2	instance	88
8.41.2.3	lastError	88
8.41.2.4	setDatabase	88
8.41.2.5	value	88
8.42	Exceptions::DbException Class Reference	88
8.42.1	Detailed Description	89

8.42.2	Constructor & Destructor Documentation	89
8.42.2.1	DbException	89
8.42.3	Member Function Documentation	89
8.42.3.1	popupMessage	89
8.43	Ui::DialogAddCustomer Class Reference	90
8.44	Gui::Dialogs::DialogAddCustomer Class Reference	90
8.44.1	Detailed Description	90
8.44.2	Constructor & Destructor Documentation	91
8.44.2.1	DialogAddCustomer	91
8.45	Gui::Widgets::Delegates::DoubleSpinBoxDelegate Class Reference	91
8.46	Exceptions::FileException Class Reference	91
8.46.1	Detailed Description	92
8.46.2	Constructor & Destructor Documentation	92
8.46.2.1	FileException	92
8.46.3	Member Function Documentation	92
8.46.3.1	popupMessage	92
8.47	Generation Class Reference	92
8.48	Generator Class Reference	93
8.49	Utils::HierarchicalSystem Class Reference	93
8.49.1	Detailed Description	93
8.49.2	Member Function Documentation	94
8.49.2.1	addBillingToProject	94
8.49.2.2	addProjectToCustomer	94
8.49.2.3	getCustomers	94
8.49.2.4	getProjects	94
8.50	Gui::Widgets::CheckFields::ICheckField Class Reference	94
8.50.1	Detailed Description	95
8.50.2	Member Function Documentation	95
8.50.2.1	check	95
8.51	Models::IModel Class Reference	95
8.51.1	Detailed Description	96
8.51.2	Member Function Documentation	96
8.51.2.1	getDataMap	96
8.51.2.2	getId	96
8.51.2.3	hydrat	96
8.51.2.4	isToRemoved	97
8.51.2.5	setId	97
8.51.2.6	setToRemoved	97
8.52	Utils::ItemType Class Reference	97
8.52.1	Detailed Description	98

8.52.2	Constructor & Destructor Documentation	98
8.52.2.1	ItemType	98
8.52.3	Member Function Documentation	98
8.52.3.1	getModel	98
8.52.3.2	getName	98
8.52.3.3	getType	98
8.52.3.4	setName	99
8.52.3.5	setType	99
8.53	Utils::Log Class Reference	99
8.53.1	Detailed Description	99
8.53.2	Member Function Documentation	100
8.53.2.1	instance	100
8.53.2.2	write	101
8.53.3	Friends And Related Function Documentation	101
8.53.3.1	operator<<	101
8.54	Gui::MainWindow Class Reference	101
8.54.1	Detailed Description	103
8.54.2	Constructor & Destructor Documentation	103
8.54.2.1	MainWindow	103
8.54.3	Member Function Documentation	103
8.54.3.1	addBill	103
8.54.3.2	addDoc	103
8.54.3.3	addQuote	103
8.54.3.4	editUser	104
8.54.3.5	getCurrentCustomerId	104
8.54.3.6	getCurrentCustomerName	104
8.54.3.7	getCurrentProjectId	104
8.54.3.8	getCurrentProjectName	104
8.54.3.9	getCurrentQuoteId	104
8.54.3.10	newProject	104
8.54.3.11	rootTree	105
8.54.3.12	search	105
8.54.3.13	treeLevel	105
8.55	Ui::MainWindow Class Reference	105
8.56	Ui::MessageBox Class Reference	105
8.57	Gui::Dialogs::MessageBox Class Reference	106
8.57.1	Detailed Description	106
8.57.2	Constructor & Destructor Documentation	107
8.57.2.1	MessageBox	107
8.57.3	Member Function Documentation	108

8.57.3.1	setImage	108
8.57.3.2	setText	108
8.58	Parameters Class Reference	108
8.58.1	Detailed Description	108
8.58.2	Member Data Documentation	109
8.58.2.1	DB_FILENAME	109
8.58.2.2	VERSION	109
8.59	Mustache::PartialFileLoader Class Reference	109
8.59.1	Detailed Description	109
8.59.2	Member Function Documentation	109
8.59.2.1	getPartial	109
8.60	Mustache::PartialMap Class Reference	110
8.60.1	Detailed Description	110
8.60.2	Member Function Documentation	110
8.60.2.1	getPartial	110
8.61	Mustache::PartialResolver Class Reference	110
8.61.1	Detailed Description	110
8.61.2	Member Function Documentation	111
8.61.2.1	getPartial	111
8.62	Gui::Widgets::Popup Class Reference	111
8.62.1	Detailed Description	111
8.63	Models::Project Class Reference	111
8.63.1	Detailed Description	112
8.63.2	Constructor & Destructor Documentation	113
8.63.2.1	Project	113
8.63.3	Member Function Documentation	113
8.63.3.1	getBeginDate	113
8.63.3.2	getCustomer	113
8.63.3.3	getDailyRate	113
8.63.3.4	getDataMap	113
8.63.3.5	getDescription	114
8.63.3.6	getEndDate	114
8.63.3.7	getName	114
8.63.3.8	hydrat	114
8.63.3.9	operator<	114
8.63.3.10	operator==	114
8.63.3.11	setBeginDate	115
8.63.3.12	setCustomer	115
8.63.3.13	setDailyRate	115
8.63.3.14	setDescription	115

8.63.3.15	setEndDate	115
8.63.3.16	setName	115
8.64	Gui::Widgets::Delegates::ProjectComboDelegate Class Reference	116
8.65	Gui::Widgets::WdgModels::ProjectContributoriesTableModel Class Reference	116
8.65.1	Constructor & Destructor Documentation	117
8.65.1.1	ProjectContributoriesTableModel	117
8.65.2	Member Function Documentation	117
8.65.2.1	columnCount	117
8.65.2.2	data	117
8.65.2.3	flags	118
8.65.2.4	headerData	118
8.65.2.5	rowCount	118
8.65.2.6	setData	118
8.66	Databases::ProjectDatabase Class Reference	119
8.66.1	Detailed Description	120
8.66.2	Member Function Documentation	120
8.66.2.1	addProject	120
8.66.2.2	getAllProjects	120
8.66.2.3	getNbProjects	120
8.66.2.4	getNbProjectsForACustomer	120
8.66.2.5	getProject	121
8.66.2.6	getProject	121
8.66.2.7	getProjectsOfCustomer	121
8.66.2.8	getProjectsTable	121
8.66.2.9	instance	122
8.66.2.10	removeProject	122
8.66.2.11	updateProject	122
8.67	Gui::Widgets::WdgModels::ProjectsTableModel Class Reference	122
8.67.1	Detailed Description	123
8.67.2	Constructor & Destructor Documentation	123
8.67.2.1	ProjectsTableModel	123
8.67.3	Member Function Documentation	123
8.67.3.1	append	123
8.67.3.2	columnCount	124
8.67.3.3	count	124
8.67.3.4	data	124
8.67.3.5	flags	124
8.67.3.6	getProjects	124
8.67.3.7	headerData	125
8.67.3.8	remove	126

8.67.3.9	rowCount	126
8.67.3.10	setData	126
8.68	Gui::Widgets::ProjectsWidget Class Reference	126
8.68.1	Detailed Description	127
8.68.2	Constructor & Destructor Documentation	127
8.68.2.1	ProjectsWidget	127
8.68.3	Member Function Documentation	128
8.68.3.1	updateBtn	128
8.69	Ui::ProjectsWidget Class Reference	129
8.70	qt_meta_stringdata_BillingDatabaseTest_t Struct Reference	129
8.71	qt_meta_stringdata_BillingModelTest_t Struct Reference	129
8.72	qt_meta_stringdata_ContributoriesDatabaseTest_t Struct Reference	130
8.73	qt_meta_stringdata_CustomerDatabaseTest_t Struct Reference	130
8.74	qt_meta_stringdata_CustomerModelTest_t Struct Reference	130
8.75	qt_meta_stringdata_Generation_t Struct Reference	130
8.76	qt_meta_stringdata_Gui__Dialogs__AddProjectDialog_t Struct Reference	130
8.77	qt_meta_stringdata_Gui__Dialogs__AddQuoteDialog_t Struct Reference	131
8.78	qt_meta_stringdata_Gui__Dialogs__DialogAddCustomer_t Struct Reference	131
8.79	qt_meta_stringdata_Gui__Dialogs__MessageBox_t Struct Reference	131
8.80	qt_meta_stringdata_Gui__Dialogs__UserDataDialog_t Struct Reference	131
8.81	qt_meta_stringdata_Gui__MainWindow_t Struct Reference	132
8.82	qt_meta_stringdata_Gui__Widgets__CheckFields__CheckQLineEdit_t Struct Reference	132
8.83	qt_meta_stringdata_Gui__Widgets__ComboBoxModelWidget_t Struct Reference	132
8.84	qt_meta_stringdata_Gui__Widgets__ContributoriesWidget_t Struct Reference	132
8.85	qt_meta_stringdata_Gui__Widgets__CustomerDataWidget_t Struct Reference	133
8.86	qt_meta_stringdata_Gui__Widgets__Delegates__ComboBoxDelegate_t Struct Reference	133
8.87	qt_meta_stringdata_Gui__Widgets__Delegates__DoubleSpinBoxDelegate_t Struct Reference	133
8.88	qt_meta_stringdata_Gui__Widgets__Delegates__ProjectComboDelegate_t Struct Reference	133
8.89	qt_meta_stringdata_Gui__Widgets__Delegates__UnitComboDelegate_t Struct Reference	134
8.90	qt_meta_stringdata_Gui__Widgets__ProjectsWidget_t Struct Reference	134
8.91	qt_meta_stringdata_Gui__Widgets__RateWidget_t Struct Reference	134
8.92	qt_meta_stringdata_Gui__Widgets__searchWidget_t Struct Reference	134
8.93	qt_meta_stringdata_RateModelTest_t Struct Reference	135
8.94	qt_meta_stringdata_searchTest_t Struct Reference	135
8.95	qt_meta_stringdata_TestMustache_t Struct Reference	135
8.96	Mustache::QtVariantContext Class Reference	135
8.96.1	Detailed Description	136
8.96.2	Member Typedef Documentation	136
8.96.2.1	fn_t	136
8.96.3	Member Function Documentation	136

8.96.3.1	canEval	136
8.96.3.2	eval	136
8.96.3.3	isFalse	136
8.96.3.4	listCount	137
8.96.3.5	pop	137
8.96.3.6	push	137
8.96.3.7	stringValue	137
8.97	Models::Rate Class Reference	137
8.98	Databases::RateDatabase Class Reference	138
8.98.1	Member Function Documentation	138
8.98.1.1	instance	138
8.99	RateModelTest Class Reference	138
8.100	Gui::Widgets::RateWidget Class Reference	139
8.100.1	Detailed Description	139
8.100.2	Constructor & Destructor Documentation	139
8.100.2.1	RateWidget	139
8.100.3	Member Function Documentation	140
8.100.3.1	getDailyRate	140
8.100.3.2	getHourlyRate	140
8.100.3.3	setDailyRate	140
8.100.3.4	setHourlyRate	140
8.100.3.5	setWidgetDailyRateValue	140
8.100.3.6	setWidgetHourlyRateValue	140
8.101	Ui::RateWidget Class Reference	141
8.102	Mustache::Renderer Class Reference	141
8.102.1	Detailed Description	141
8.102.2	Member Function Documentation	141
8.102.2.1	error	141
8.102.2.2	errorPartial	141
8.102.2.3	errorPos	142
8.102.2.4	render	142
8.102.2.5	setTagMarkers	142
8.103	Models::Search Class Reference	142
8.103.1	Detailed Description	143
8.103.2	Member Function Documentation	143
8.103.2.1	filterOnBillsOrQuotes	143
8.103.2.2	filterOnCompany	143
8.103.2.3	filterOnContributories	144
8.103.2.4	filterOnCustomersWithoutProject	144
8.103.2.5	filterOnNumberElements	144

8.103.2.6 filterOnProjects	144
8.103.2.7 filterOnReferentLastname	144
8.103.2.8 filterOnVarcharElements	145
8.103.2.9 getFilter	146
8.103.2.10getGroupFilter	146
8.103.2.11getSearchInBillsQuotes	146
8.103.2.12getSearchInCompanies	146
8.103.2.13getSearchInProjects	146
8.103.2.14getSearchInReferentLastname	146
8.103.2.15getText	147
8.103.2.16searchInContributories	147
8.103.2.17setGroupFilter	147
8.103.2.18setSearchInBillsQuotes	147
8.103.2.19setSearchInCompanies	147
8.103.2.20setSearchInContributories	147
8.103.2.21setSearchInProjects	147
8.103.2.22setSearchInReferentLastname	148
8.103.2.23setText	148
8.104searchTest Class Reference	148
8.105Gui::Widgets::searchWidget Class Reference	148
8.105.1 Detailed Description	149
8.105.2 Constructor & Destructor Documentation	149
8.105.2.1 searchWidget	149
8.105.3 Member Function Documentation	149
8.105.3.1 getCurrentCustomerId	149
8.105.3.2 isCustomerSelected	150
8.105.3.3 search	150
8.106Ui::searchWidget Class Reference	150
8.107Utils::String Class Reference	150
8.107.1 Detailed Description	151
8.107.2 Member Function Documentation	151
8.107.2.1 firstLetterToUpper	151
8.108Mustache::Tag Struct Reference	151
8.108.1 Detailed Description	151
8.108.2 Member Enumeration Documentation	152
8.108.2.1 Type	152
8.109testadder Class Reference	152
8.110TestAdder< T > Class Template Reference	152
8.111TestMustache Class Reference	152
8.112TestRunner Class Reference	153

8.113Ui_AddProjectDialog Class Reference	153
8.114Ui_AddQuoteDialog Class Reference	154
8.115Ui_ComboBoxModelWidget Class Reference	154
8.116Ui_ContributoriesWidget Class Reference	155
8.117Ui_CustomerDataWidget Class Reference	156
8.118Ui_DialogAddCustomer Class Reference	156
8.119Ui_MainWindow Class Reference	157
8.120Ui_MessageBox Class Reference	159
8.121Ui_ProjectsWidget Class Reference	160
8.122Ui_RateWidget Class Reference	160
8.123Ui_searchWidget Class Reference	161
8.124Ui_UserDataDialog Class Reference	161
8.125Gui::Widgets::Delegates::UnitComboDelegate Class Reference	163
8.126Models::User Class Reference	163
8.126.1 Detailed Description	165
8.126.2 Constructor & Destructor Documentation	165
8.126.2.1 User	165
8.126.3 Member Function Documentation	165
8.126.3.1 getAddress	165
8.126.3.2 getCity	165
8.126.3.3 getCompany	165
8.126.3.4 getDataMap	165
8.126.3.5 getEmail	166
8.126.3.6 getFirstname	166
8.126.3.7 getLastName	166
8.126.3.8 getMobilePhone	166
8.126.3.9 getNoSiret	166
8.126.3.10getPhone	166
8.126.3.11getPostalCode	166
8.126.3.12getTitle	167
8.126.3.13getWorkspaceName	167
8.126.3.14getWorkspacePath	167
8.126.3.15hydrat	167
8.126.3.16setAddress	167
8.126.3.17setCity	167
8.126.3.18setCompany	167
8.126.3.19setEmail	168
8.126.3.20setFirstname	168
8.126.3.21setLastName	168
8.126.3.22setMobilePhone	168

8.126.3.23	setNoSiret	168
8.126.3.24	setPhone	168
8.126.3.25	setPostalCode	169
8.126.3.26	setTitle	170
8.126.3.27	setWorkspaceName	170
8.126.3.28	setWorkspacePath	170
8.127	Databases::UserDatabase Class Reference	170
8.127.1	Detailed Description	171
8.127.2	Member Function Documentation	171
8.127.2.1	getUser	171
8.127.2.2	getUserTable	171
8.127.2.3	instance	171
8.128	Gui::Dialogs::UserDataDialog Class Reference	172
8.128.1	Detailed Description	172
8.128.2	Constructor & Destructor Documentation	172
8.128.2.1	UserDataDialog	172
8.129	Ui::UserDataDialog Class Reference	173
Index		174

Chapter 1

FactDev documentation

This website contains the documentation of FactDev, a billings and quotes software.

Team

FACT team is a team for University Project. Members of this team are :

- Florent Berbie ([KraTuX31](#))
- Antoine de Roquemaurel ([aroquemaurel](#))
- Cédric Rohaut ([Oxynos](#))
- Manantsoa Andriamihary Razanajatovo ([manantsoa](#))

For more informations, you can go to <http://fact-team.github.io>.

What is FactDev ?

FactDev is a software for quotes and billings developped by FACT team for university project in Toulouse III University – Paul Sabatier.

This software is developed with C++ and Qt framework, and there is differents features :

- Customers database
- Differents projects for customers
- Quotes
- Billings

Documentation

You can access to the documentation generated by Doxygen here :

- [HTML Documentation](#)
- [PDF Documentation](#)

Installation and using

- [User Manual](#)

Chapter 2

README

! [Build Status] (<https://travis-ci.org/robertknight/qt-mustache.svg?branch=master>)

Qt Mustache

qt-mustache is a simple library for rendering **Mustache templates**.

Example Usage

```
“cpp #include "mustache.h"
```

```
QVariantHash contact; contact["name"] = "John Smith"; contact["email"] = "john.smith@gmail.com";
```

```
QString contactTemplate = "<b>{{name}}</b> <a href='mailto:{{email}}'>{{email}}";
```

```
Mustache::Renderer renderer; Mustache::QtVariantContext context(contact);
```

```
QTextStream output(stdout); output << renderer.render(contactTemplate, &context); “
```

Outputs: John Smith john.smith@gmail.com

For further examples, see the tests in `test_mustache.cpp`

Building

- To build the tests, run `qmake` followed by `make`
- To use qt-mustache in your project, just add the `mustache.h` and `mustache.cpp` files to your project.

License

qt-mustache is licensed under the BSD license.

Dependencies

qt-mustache depends on the QtCore library. It is compatible with Qt 4 and Qt 5.

Usage

Syntax

qt-mustache uses the standard Mustache syntax. See the [Mustache manual](#) for details.

Data Sources

qt-mustache expands Mustache tags using values from a `Mustache::Context`. `Mustache::QtVariantContext` is a simple context implementation which wraps a `QVariantHash` or `QVariantMap`. If you want to render a template using a custom data source, you can either create a `QVariantHash` which mirrors the data source or you can re-implement `Mustache::Context`.

Partials

When a `{{>partial}}` Mustache tag is encountered, qt-mustache will attempt to load the partial using a `Mustache::PartialResolver` provided by the context. `Mustache::PartialMap` is a simple resolver which takes a `QHash<QString,QString>` map of partial names to values and looks up partials in that map. `Mustache::PartialFileLoader` is another simple resolver which fetches partials from `<partial name>.mustache` files in a specified directory.

You can re-implement the `Mustache::PartialResolver` interface if you want to load partials from a custom source (eg. a database).

Error Handling

If an error occurs when rendering a template, `Mustache::Renderer::errorPosition()` is set to non-negative value and template rendering stops. If the error occurs whilst rendering a partial template, `errorPartial()` contains the name of the partial.

Lambdas

The [Mustache manual](#) provides a mechanism to customize rendering of template sections by setting the value for a tag to a callable object (eg. a lambda in Ruby or Javascript), which takes the unrendered block of text for a template section and renders it itself. qt-mustache supports this via the `Context::canEval()` and `Context::eval()` methods.

Chapter 3

QTestRunner

A repo for Increase QTest productivity

Thanks to <https://marcoarena.wordpress.com/2012/06/23/increase-your-qtest-productivity/>!

The QTestLib framework is a tool for unit testing Qt based applications and libraries. I find it precious and simple to use, though it lacks some important features, supported, for example, by GTest. I'm not talking about mocking – for this you generally need an out-and-out framework (like GMock) – instead, I'm referring to simple things like fast deploying. Suppose you have written a test class like this:

This repo contains only the code in this article.

Chapter 4

Namespace Index

4.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

Databases		
	Class for Database , contains queries	??
Gui	??
Gui::Widgets		
	Contains Widgets classes	??
Models		
	Models classes	??

Chapter 5

Hierarchical Index

5.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Mustache::Context	??
Mustache::QtVariantContext	??
CounterContext	??
CounterContext	??
Databases::Database	??
Databases::BillingDatabase	??
Databases::ContributoryDatabase	??
Databases::CustomerDatabase	??
Databases::ProjectDatabase	??
Databases::RateDatabase	??
Databases::UserDatabase	??
exception	
Exceptions::DbException	??
Exceptions::FileException	??
Generator	??
Utils::HierarchicalSystem	??
Gui::Widgets::CheckFields::ICheckField	??
Gui::Widgets::CheckFields::CheckQLineEdit	??
Gui::Widgets::CheckFields::CheckEmail	??
Gui::Widgets::CheckFields::CheckSiretNumber	??
Gui::Widgets::CheckFields::CheckUntilField	??
Gui::Widgets::CheckFields::CheckFieldsLetters	??
Gui::Widgets::CheckFields::CheckCity	??
Gui::Widgets::CheckFields::CheckCountry	??
Gui::Widgets::CheckFields::CheckName	??
Gui::Widgets::CheckFields::CheckPhone	??
Gui::Widgets::CheckFields::CheckPostalCode	??
Gui::Widgets::CheckFields::CheckValidField	??
Models::IModel	??
Models::Billing	??
Models::Contributory	??
Models::Customer	??
Models::Project	??
Models::User	??
Utils::ItemType	??
Utils::Log	??

Parameters	??
Mustache::PartialResolver	??
Mustache::PartialFileLoader	??
Mustache::PartialMap	??
Gui::Widgets::Popup	??
QAbstractTableModel	
Gui::Widgets::WdgModels::BillingsTableModel	??
Gui::Widgets::WdgModels::ContributoriesTableModel	??
Gui::Widgets::WdgModels::CustomersTableModel	??
Gui::Widgets::WdgModels::ProjectContributoriesTableModel	??
Gui::Widgets::WdgModels::ProjectsTableModel	??
QDialog	
Gui::Dialogs::AddProjectDialog	??
Gui::Dialogs::AddQuoteDialog	??
Gui::Dialogs::DialogAddCustomer	??
Gui::Dialogs::MessageBox	??
Gui::Dialogs::UserDataDialog	??
QItemDelegate	
Gui::Widgets::Delegates::ComboBoxDelegate	??
Gui::Widgets::Delegates::ProjectComboDelegate	??
Gui::Widgets::Delegates::UnitComboDelegate	??
Gui::Widgets::Delegates::DoubleSpinBoxDelegate	??
QLineEdit	
Gui::Widgets::CheckFields::CheckQLineEdit	??
QMainWindow	
Gui::MainWindow	??
QMap	
Models::ContributoriesList	??
QMenu	
Gui::Widgets::CustomerContextualMenu	??
QObject	
BillingDatabaseTest	??
BillingModelTest	??
ContributoriesDatabaseTest	??
CustomerDatabaseTest	??
CustomerModelTest	??
Generation	??
RateModelTest	??
searchTest	??
TestMustache	??
TestMustache	??
qt_meta_stringdata_BillingDatabaseTest_t	??
qt_meta_stringdata_BillingModelTest_t	??
qt_meta_stringdata_ContributoriesDatabaseTest_t	??
qt_meta_stringdata_CustomerDatabaseTest_t	??
qt_meta_stringdata_CustomerModelTest_t	??
qt_meta_stringdata_Generation_t	??
qt_meta_stringdata_Gui_Dialogs_AddProjectDialog_t	??
qt_meta_stringdata_Gui_Dialogs_AddQuoteDialog_t	??
qt_meta_stringdata_Gui_Dialogs_DialogAddCustomer_t	??
qt_meta_stringdata_Gui_Dialogs_MessageBox_t	??
qt_meta_stringdata_Gui_Dialogs_UserDataDialog_t	??
qt_meta_stringdata_Gui_MainWindow_t	??
qt_meta_stringdata_Gui_Widgets_CheckFields_CheckQLineEdit_t	??
qt_meta_stringdata_Gui_Widgets_ComboBoxModelWidget_t	??
qt_meta_stringdata_Gui_Widgets_ContributoriesWidget_t	??
qt_meta_stringdata_Gui_Widgets_CustomerDataWidget_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_ComboBoxDelegate_t	??

qt_meta_stringdata_Gui_Widgets_Delegates_DoubleSpinBoxDelegate_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_ProjectComboDelegate_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_UnitComboDelegate_t	??
qt_meta_stringdata_Gui_Widgets_ProjectsWidget_t	??
qt_meta_stringdata_Gui_Widgets_RateWidget_t	??
qt_meta_stringdata_Gui_Widgets_searchWidget_t	??
qt_meta_stringdata_RateModelTest_t	??
qt_meta_stringdata_searchTest_t	??
qt_meta_stringdata_TestMustache_t	??
QWidget	
Gui::Widgets::ComboBoxModelWidget	??
Gui::Widgets::ContributoriesWidget	??
Gui::Widgets::CustomerDataWidget	??
Gui::Widgets::ProjectsWidget	??
Gui::Widgets::RateWidget	??
Gui::Widgets::searchWidget	??
Models::Rate	??
Mustache::Renderer	??
Models::Search	??
Utils::String	??
Mustache::Tag	??
testadder	??
TestAdder< T >	??
TestRunner	??
Ui_AddProjectDialog	??
Ui::AddProjectDialog	??
Ui_AddQuoteDialog	??
Ui::AddQuoteDialog	??
Ui_ComboBoxModelWidget	??
Ui::ComboBoxModelWidget	??
Ui_ContributoriesWidget	??
Ui::ContributoriesWidget	??
Ui_CustomerDataWidget	??
Ui::CustomerDataWidget	??
Ui_DialogAddCustomer	??
Ui::DialogAddCustomer	??
Ui_MainWindow	??
Ui::MainWindow	??
Ui_MessageBox	??
Ui::MessageBox	??
Ui_ProjectsWidget	??
Ui::ProjectsWidget	??
Ui_RateWidget	??
Ui::RateWidget	??
Ui_searchWidget	??
Ui::searchWidget	??
Ui_UserDataDialog	??
Ui::UserDataDialog	??

Chapter 6

Class Index

6.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Gui::Dialogs::AddProjectDialog	
Windows to add a new Project	??
Ui::AddProjectDialog	??
Ui::AddQuoteDialog	??
Gui::Dialogs::AddQuoteDialog	
Window to add or modify a Quote	??
Models::Billing	
: Billing or Quote of a Customer	??
Databases::BillingDatabase	
The BillingDatabase class Billing (or Quote) table database	??
BillingDatabaseTest	??
BillingModelTest	??
Gui::Widgets::WdgModels::BillingsTableModel	
For a Billing table	??
Gui::Widgets::CheckFields::CheckCity	
Line Edit of City with a check icon	??
Gui::Widgets::CheckFields::CheckCountry	
CheckCountry::CheckCountry Line Edit of country with a check icon	??
Gui::Widgets::CheckFields::CheckEmail	
Line Edit of email with a check icon	??
Gui::Widgets::CheckFields::CheckFieldsLetters	
Field with only letters (no numbers)	??
Gui::Widgets::CheckFields::CheckName	
Line edit of name with a check icon	??
Gui::Widgets::CheckFields::CheckPhone	
Line Edit of Phone number with a check icon	??
Gui::Widgets::CheckFields::CheckPostalCode	
Line Edit of postal code with a check icon	??
Gui::Widgets::CheckFields::CheckQLineEdit	
LineEdit custom with a check of text inputed	??
Gui::Widgets::CheckFields::CheckSiretNumber	
Line Edit with a check icon	??
Gui::Widgets::CheckFields::CheckUntilField	
The CheckUntilField class	??
Gui::Widgets::CheckFields::CheckValidField	
Check field not required	??
Gui::Widgets::Delegates::ComboBoxDelegate	??
Ui::ComboBoxModelWidget	??

Gui::Widgets::ComboBoxModelWidget	
The ComboBoxModelWidget class	??
Mustache::Context	??
ContributoriesDatabaseTest	??
Models::ContributoriesList	??
Gui::Widgets::WdgModels::ContributoriesTableModel	
For a custom table for contributories widget	??
Ui::ContributoriesWidget	??
Gui::Widgets::ContributoriesWidget	??
Models::Contributory	
The Contributory class	??
Databases::ContributoryDatabase	
The ContributoryDatabase class Contributor (or Quote) table database	??
CounterContext	??
Models::Customer	
Customer	??
Gui::Widgets::CustomerContextualMenu	
Display contextual menu on a customer	??
Databases::CustomerDatabase	
The CustomerDatabase class Customer table database	??
CustomerDatabaseTest	??
Ui::CustomerDataWidget	??
Gui::Widgets::CustomerDataWidget	
Class for display info of a customer	??
CustomerModelTest	??
Gui::Widgets::WdgModels::CustomersTableModel	
For a customer table	??
Databases::Database	
The Database class Master class for all database access	??
Exceptions::DbException	
For database exception : queries, db file, ...	??
Ui::DialogAddCustomer	??
Gui::Dialogs::DialogAddCustomer	
Window to add or modify a Customer	??
Gui::Widgets::Delegates::DoubleSpinBoxDelegate	??
Exceptions::FileException	
For file/access file exception	??
Generation	??
Generator	??
Utils::HierarchicalSystem	
Create class which contains hierarchical system of FactDev	??
Gui::Widgets::CheckFields::ICheckField	
Interface to check fields validity	??
Models::IModel	
The IModel class	??
Utils::ItemType	
Item type model	??
Utils::Log	
For Simple management of log	??
Gui::MainWindow	
Main Window of the software	??
Ui::MainWindow	??
Ui::MessageBox	??
Gui::Dialogs::MessageBox	
Information window with message	??
Parameters	
Class for simple user parameters	??
Mustache::PartialFileLoader	??

Mustache::PartialMap	??
Mustache::PartialResolver	??
Gui::Widgets::Popup	
Class for display popup quickly	??
Models::Project	
: Project linked to a Customer	??
Gui::Widgets::Delegates::ProjectComboDelegate	??
Gui::Widgets::WdgModels::ProjectContributoriesTableModel	??
Databases::ProjectDatabase	
Project table database	??
Gui::Widgets::WdgModels::ProjectsTableModel	
For a Project table	??
Gui::Widgets::ProjectsWidget	
Actions on Project	??
Ui::ProjectsWidget	??
qt_meta_stringdata_BillingDatabaseTest_t	??
qt_meta_stringdata_BillingModelTest_t	??
qt_meta_stringdata_ContributoriesDatabaseTest_t	??
qt_meta_stringdata_CustomerDatabaseTest_t	??
qt_meta_stringdata_CustomerModelTest_t	??
qt_meta_stringdata_Generation_t	??
qt_meta_stringdata_Gui_Dialogs_AddProjectDialog_t	??
qt_meta_stringdata_Gui_Dialogs_AddQuoteDialog_t	??
qt_meta_stringdata_Gui_Dialogs_DialogAddCustomer_t	??
qt_meta_stringdata_Gui_Dialogs_MessageBox_t	??
qt_meta_stringdata_Gui_Dialogs_UserDataDialog_t	??
qt_meta_stringdata_Gui_MainWindow_t	??
qt_meta_stringdata_Gui_Widgets_CheckFields_CheckQLineEdit_t	??
qt_meta_stringdata_Gui_Widgets_ComboBoxModelWidget_t	??
qt_meta_stringdata_Gui_Widgets_ContributoriesWidget_t	??
qt_meta_stringdata_Gui_Widgets_CustomerDataWidget_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_ComboBoxDelegate_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_DoubleSpinBoxDelegate_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_ProjectComboDelegate_t	??
qt_meta_stringdata_Gui_Widgets_Delegates_UnitComboDelegate_t	??
qt_meta_stringdata_Gui_Widgets_ProjectsWidget_t	??
qt_meta_stringdata_Gui_Widgets_RateWidget_t	??
qt_meta_stringdata_Gui_Widgets_searchWidget_t	??
qt_meta_stringdata_RateModelTest_t	??
qt_meta_stringdata_searchTest_t	??
qt_meta_stringdata_TestMustache_t	??
Mustache::QtVariantContext	??
Models::Rate	??
Databases::RateDatabase	??
RateModelTest	??
Gui::Widgets::RateWidget	
Class for display Rate	??
Ui::RateWidget	??
Mustache::Renderer	??
Models::Search	
The Search class	??
searchTest	??
Gui::Widgets::searchWidget	
Class for search in database	??
Ui::searchWidget	??
Utils::String	
The Utils class	??
Mustache::Tag	??

testadder	??
TestAdder< T >	??
TestMustache	??
TestRunner	??
Ui_AddProjectDialog	??
Ui_AddQuoteDialog	??
Ui_ComboBoxModelWidget	??
Ui_ContributoriesWidget	??
Ui_CustomerDataWidget	??
Ui_DialogAddCustomer	??
Ui_MainWindow	??
Ui_MessageBox	??
Ui_ProjectsWidget	??
Ui_RateWidget	??
Ui_searchWidget	??
Ui_UserDataDialog	??
Gui::Widgets::Delegates::UnitComboDelegate	??
Models::User	
User of it application	??
Databases::UserDatabase	
Access to User data in the the table User of the Database	??
Gui::Dialogs::UserDataDialog	
Window to fill user data	??
Ui::UserDataDialog	??

Chapter 7

Namespace Documentation

7.1 Databases Namespace Reference

Class for [Database](#), contains queries.

Classes

- class [BillingDatabase](#)
*The **BillingDatabase** class Billing (or Quote) table database.*
- class [ContributoryDatabase](#)
*The **ContributoryDatabase** class Contributory (or Quote) table database.*
- class [CustomerDatabase](#)
*The **CustomerDatabase** class Customer table database.*
- class [Database](#)
*The **Database** class Master class for all database access.*
- class [ProjectDatabase](#)
*The **ProjectDatabase** class Project table database.*
- class [RateDatabase](#)
- class [UserDatabase](#)
*The **UserDatabase** class Access to User data in the the table User of the **Database***

7.1.1 Detailed Description

Class for [Database](#), contains queries.

7.2 Gui Namespace Reference

Namespaces

- [Widgets](#)
*Contains **Widgets** classes.*

Classes

- class [MainWindow](#)
*The **MainWindow** class Main Window of the software.*

7.2.1 Detailed Description

Classes for Graphical User Interface

7.3 Gui::Widgets Namespace Reference

Contains [Widgets](#) classes.

Classes

- class [ComboBoxModelWidget](#)
The [ComboBoxModelWidget](#) class.
- class [ContributoriesWidget](#)
- class [CustomerContextualMenu](#)
Display contextual menu on a customer.
- class [CustomerDataWidget](#)
Class for display info of a customer.
- class [Popup](#)
Class for display popup quickly.
- class [ProjectsWidget](#)
The [ProjectsWidget](#) class Actions on Project.
- class [RateWidget](#)
Class for display Rate.
- class [searchWidget](#)
Class for search in database.

7.3.1 Detailed Description

Contains [Widgets](#) classes.

7.4 Models Namespace Reference

[Models](#) classes.

Classes

- class [Billing](#)
The [Billing](#) class : [Billing](#) or Quote of a [Customer](#).
- class [ContributoriesList](#)
- class [Contributory](#)
The [Contributory](#) class.
- class [Customer](#)
The [Customer](#) class [Customer](#).
- class [IModel](#)
The [IModel](#) class.
- class [Project](#)
The [Project](#) class : [Project](#) linked to a [Customer](#).
- class [Rate](#)

- class [Search](#)
The [Search](#) class.
- class [User](#)
The [User](#) class [User](#) of it application.

7.4.1 Detailed Description

[Models](#) classes.

Chapter 8


Class Documentation

8.1 Gui::Dialogs::AddProjectDialog Class Reference

The [AddProjectDialog](#) class Windows to add a new Project.

```
#include <addprojectdialog.h>
```

Inheritance diagram for Gui::Dialogs::AddProjectDialog:



Public Slots

- void [checkFields](#) ()
[AddProjectDialog::checkFields](#) Check if fields are valid.

Public Member Functions

- [AddProjectDialog](#) (int id=0, QWidget *parent=0)
[AddProjectDialog::AddProjectDialog](#) Construct a windows [AddProjectDialog](#).
- [AddProjectDialog](#) (int noRowCustomer, int idProject=0, QWidget *parent=0)
[AddProjectDialogAddProjectDialog](#) Construct a windows according an idCustomer and, optionnaly, an idProject
- void [accept](#) ()
[AddProjectDialog::accept](#) Valid data inputed by user and add these data in Database.
- void [reject](#) ()
[AddProjectDialog::reject](#) Cancel the operation and close the windows.
- void [fillFields](#) ()
[AddProjectDialog::fillFields](#) Fill the differents fields of the current windows according the Project data existing As a project requires to be linked to a Customer, the Customer selection part may be disable.

8.1.1 Detailed Description

The [AddProjectDialog](#) class Windows to add a new Project.

Author

Florent Berbie

See Also

Project

8.1.2 Constructor & Destructor Documentation**8.1.2.1** `Gui::Dialogs::AddProjectDialog::AddProjectDialog (int id = 0, QWidget * parent = 0)` `[explicit]`[AddProjectDialog::AddProjectDialog](#) Construct a windows [AddProjectDialog](#).**Parameters**


<i>id</i>	Project identity
<i>parent</i>	QWidget of the current windows

8.1.2.2 `Gui::Dialogs::AddProjectDialog::AddProjectDialog (int noRowCustomer, int idProject = 0, QWidget * parent = 0)` `[explicit]`[AddProjectDialogAddProjectDialog](#) Construct a windows according an *idCustomer* and, optionnaly, an *idProject***Parameters**

<i>noRowCustomer</i>	Row number of the Customer
<i>idProject</i>	Project identify
<i>parent</i>	QWidget of the current windows

The documentation for this class was generated from the following files:


- `/home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addprojectdialog.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addprojectdialog.cpp`

8.2 Ui::AddProjectDialog Class ReferenceInheritance diagram for `Ui::AddProjectDialog`:**Additional Inherited Members**

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/ui_addprojectdialog.h`

8.3 Ui::AddQuoteDialog Class ReferenceInheritance diagram for `Ui::AddQuoteDialog`:



Additional Inherited Members

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/ui_addquotedialog.h

8.4 Gui::Dialogs::AddQuoteDialog Class Reference

The [AddQuoteDialog](#) class Window to add or modify a Quote.

```
#include <addquotedialog.h>
```

Inheritance diagram for Gui::Dialogs::AddQuoteDialog:



Public Slots

- void **updateBtn** (void)

Public Member Functions

- [AddQuoteDialog](#) (bool isBilling, int idCustomer=0, int id=0, QWidget *parent=0)
[AddQuoteDialog::AddQuoteDialog](#) Construct a windows [AddQuoteDialog](#).
- void [fillFields](#) ()
[AddQuoteDialog::fillFields](#) Fill line edits with the data of the quote.
- int [getNumber](#) ()
[AddQuoteDialog::getNumber](#) return the number of bill or quote.
- void [accept](#) ()
[AddQuoteDialog::accept](#) Valid data inputed by user and add these data in Database.
- void [reject](#) ()
[AddQuoteDialog::reject](#) Cancel the operation and close the windows.

8.4.1 Detailed Description

The [AddQuoteDialog](#) class Window to add or modify a Quote.

Author

Cédric Rohaut

8.4.2 Constructor & Destructor Documentation

8.4.2.1 `Gui::Dialogs::AddQuoteDialog::AddQuoteDialog (bool isBilling, int idCustomer = 0, int id = 0, QWidget * parent = 0)`
[explicit]

[AddQuoteDialog::AddQuoteDialog](#) Construct a windows [AddQuoteDialog](#).

Parameters

<i>parent</i>	QWidget of the current windows
---------------	--------------------------------

8.4.3 Member Function Documentation

8.4.3.1 int Gui::Dialogs::AddQuoteDialog::getNumber ()

[AddQuoteDialog::getNumber](#) return the number of bill or quote.

Returns

int

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addquotedialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addquotedialog.cpp

8.5 Models::Billing Class Reference

The [Billing](#) class : [Billing](#) or Quote of a [Customer](#).

```
#include <billing.h>
```

Inheritance diagram for Models::Billing:



Public Member Functions

- [Billing](#) ()
Billing::Billing. Construct a [Billing](#).
- [Billing](#) (int id)
Billing::Billing. Construct a [Billing](#) or quote.
- [~Billing](#) ()
destruct a billing object
- void [commit](#) ()
Billing::commit. Insert a modification in [Billing](#) table on the database.
- void [hydrat](#) (int [getId](#))
Billing::hydrat. Update of the [Billing](#) which is specified by [getId](#)
- void [remove](#) ()
Billing::remove. Remove a [Billing](#).
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- void [generateTex](#) ()
generateTex Generate a .tex file for the billing
- [ContributoriesList](#) & [getContributories](#) ()
Billing::getContributories. Return a map of [Contributory](#) for each [Project](#) of the [Billing](#)

- void **addContributory** (**Contributory** &c)
addContributories Add a new contributory for project p
- double **getSumRate** ()
- double **getSumQuantity** ()
- QString **getTitle** () const
Billing::getTitle. return title of **Billing**
- void **setTitle** (const QString &getTitle)
Billing::setTitle. Modify the title of **Billing**
- QString **getDescription** () const
Billing::getDescription. return description of **Billing**
- void **setDescription** (const QString &getDescription)
Billing::setDescription. Modify the description of **Billing**
- int **getNumber** () const
Billing::getNumber. Return number of the **Billing**.
- void **setNumber** (int **getNumber**)
Billing::setNumber. Modify _number of **Billing**.
- bool **isBilling** () const
Billing::isBilling. Return if it's a billing or a quote.
- void **setIsBilling** (bool **isBilling**)
Billing::setIsBilling. Modify **isBilling** of **Billing**.
- QDate **getDate** () const
Billing::getDate. return date of the **Billing**
- void **setDate** (const QDate &getDate)
Billing::setDate. Modify date of the **Billing**
- bool **operator==** (const **Billing** &b)
Billing::operator == define the operator "==" to compare two billings and to see if they are the same.
- bool **operator!=** (const **Billing** &b)
Billing::operator != defines the operator "!=" to compare two **Billing** and to see if they are different.
- void **setContributories** (const **ContributoriesList** &contributories)
- bool **operator<** (const **Billing** &b) const
Billing::operator < defines the operator "<" to compare two **Billing** and to see if the first is anterior to the second.

Additional Inherited Members

8.5.1 Detailed Description

The **Billing** class : **Billing** or Quote of a **Customer**.

Author

Cédric Rohaut for the quote part

8.5.2 Constructor & Destructor Documentation

8.5.2.1 Models::Billing::Billing (int id)

Billing::Billing. Construct a **Billing** or quote.

Parameters

<i>int</i>	id
------------	----

8.5.3 Member Function Documentation

8.5.3.1 void Models::Billing::addContributory (Contributory & c)

addContributories Add a new contributory for project p

Parameters

<i>p</i>	The Project who contain Contributory
<i>c</i>	The new Contributory

8.5.3.2 ContributoriesList & Models::Billing::getContributories ()

[Billing::getContributories](#). Return a map of [Contributory](#) for each [Project](#) of the [Billing](#)

Returns

QMap<[Project](#), QList<Contributory>>

8.5.3.3 QVariantHash Models::Billing::getDataMap () [virtual]

getDataMap Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.5.3.4 QDate Models::Billing::getDate () const

[Billing::getDate](#). return date of the [Billing](#)

Returns

date of [Billing](#)

8.5.3.5 QString Models::Billing::getDescription () const

[Billing::getDescription](#). return description of [Billing](#)

Returns

description of [Billing](#)

8.5.3.6 int Models::Billing::getNumber () const

[Billing::getNumber](#). Return number of the [Billing](#).

Returns

_number of [Billing](#)

8.5.3.7 QString Models::Billing::getTitle () const

[Billing::getTitle](#). return title of [Billing](#)

Returns

title of [Billing](#)

8.5.3.8 void Models::Billing::hydrat (int *getId*) [virtual]

[Billing::hydrat](#). Update of the [Billing](#) which is specified by *getId*

Parameters

<i>getId</i>	
--------------	--

Implements [Models::IModel](#).

8.5.3.9 bool Models::Billing::isBilling () const

[Billing::isBilling](#). Return if it's a billing or a quote.

Returns

if it's billing or a quote

8.5.3.10 bool Models::Billing::operator!= (const Billing & b)

[Billing::operator !=](#) defines the operator "!=" to compare two [Billing](#) and to see if they are different.

Parameters

<i>b</i>	the Billing to compare with the current Billing
----------	---

Returns

true if the [Billing](#) are different else false

8.5.3.11 bool Models::Billing::operator< (const Billing & b) const

[Billing::operator <](#) defines the operator "<" to compare two [Billing](#) and to see if the first is anterior to the second.

Parameters

<i>b</i>	the Billing to compare with the current Billing
----------	---

Returns

true if the [Billing](#) are different else false

8.5.3.12 bool Models::Billing::operator== (const Billing & b)

[Billing::operator ==](#) define the operator "==" to compare two billings and to see if they are the same.

Parameters

<i>b</i>	the Billing to compare with the current Billing
----------	---

Returns

true if they are the same billings else false

8.5.3.13 void Models::Billing::setDate (const QDate & *getDate*)

[Billing::setDate](#). Modify *date* of the [Billing](#)

Parameters

<i>getDate</i>	the new date of the Billing
----------------	---

8.5.3.14 void Models::Billing::setDescription (const QString & *getDescription*)

[Billing::setDescription](#). Modify the description of [Billing](#)

Parameters

<i>getDescription</i>	Modify the description with <i>getDescription</i>
-----------------------	---

8.5.3.15 void Models::Billing::setIsBilling (bool *isBilling*)

[Billing::setIsBilling](#). Modify *isBilling* of [Billing](#).

Parameters

<i>isBilling</i>	
------------------	--

8.5.3.16 void Models::Billing::setNumber (int *getNumber*)

[Billing::setNumber](#). Modify *_number* of [Billing](#).

Parameters

<i>getNumber</i>	the new number of the Billing
------------------	---

8.5.3.17 void Models::Billing::setTitle (const QString & *getTitle*)

[Billing::setTitle](#). Modify the title of [Billing](#)

Parameters

<i>getTitle</i>	Modify the title with <i>getTitle</i>
-----------------	---------------------------------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/billing.h
- /home/travis/build/FACT-Team/FactDev/src/models/billing.cpp

8.6 Databases::BillingDatabase Class Reference

The **BillingDatabase** class Billing (or Quote) table database.

```
#include <billingdatabase.h>
```

Inheritance diagram for Databases::BillingDatabase:



Public Member Functions

- **Models::Billing * getBilling** (const int pld)
BillingDatabase::getCustomer get informations about the billing identified by pld
- **WdgModels::BillingsTableModel * getBillingsTable** (const int idProject) throw (DbException*)
BillingDatabase::getBillingsTable Return an item model of billings for QTableView.
- int **addBilling** (const **Models::Billing** &)
BillingDatabase::addBilling Add the billing pBilling to the database.
- void **updateBilling** (const **Models::Billing** &)
BillingDatabase::updateCustomer Update informations about the billing pCustomer
- void **removeBilling** (const int pld)
BillingDatabase::removeCustomer Remove the billing with the id pld
- void **addBillingProject** (const int idProject, const int idBilling, const int idContributory)
BillingDatabase::addBillingProject Link a project, a billing and a contributory in the table BillingProject.
- void **removeBillingProject** (const int idProject, const int idBilling, const int idContributory)
BillingDatabase::removeBillingProject remove a link between a project, a billing and a contributory in the table BillingProject.
- int **getMaxBillingNumber** ()
getMaxBillingNumber Get the last number of a billing
- int **getMaxQuoteNumber** ()
getMaxQuoteNumber Get the last number of a quote
- QSharedPointer< **Models::Billing** > **getBilling** (QStringQuery &q)
BillingDatabase::getBilling Add the element of the q request and return their.
- QMap< **Project** *, **Billing** * > **getAllBillingsOfProject** ()
BillingDatabase::getAllBillingsOfProject Return a map with the project id as key linked to the billing.

Static Public Member Functions

- static **BillingDatabase** * **instance** () throw (DbException*)
BillingDatabase::getInstance Return an instance of **BillingDatabase**

Additional Inherited Members

8.6.1 Detailed Description

The **BillingDatabase** class Billing (or Quote) table database.

Author

Cédric Rohaut

See Also

[Database](#)
Billing/Quote

8.6.2 Member Function Documentation

8.6.2.1 `int Databases::BillingDatabase::addBilling (const Models::Billing & pBilling)`

[BillingDatabase::addBilling](#) Add the billing *pBilling* to the database.

Returns

billing id

8.6.2.2 `void Databases::BillingDatabase::addBillingProject (const int idProject, const int idBilling, const int idContributory)`

[BillingDatabase::addBillingProject](#) Link a project, a billing and a contributory in the table BillingProject.

Parameters

<i>idProject</i>	Project id
<i>idBilling</i>	Billing id
<i>idContributory</i>	Contributory id

8.6.2.3 `QMap< Project *, Billing * > Databases::BillingDatabase::getAllBillingsOfProject ()`

[BillingDatabase::getAllBillingsOfProject](#) Return a map with the project id as key linked to the billing.

Returns

Map with projects and Billing

8.6.2.4 `Models::Billing * Databases::BillingDatabase::getBilling (const int pld)`

[BillingDatabase::getCustomer](#) get informations about the billing identified by *pld*

Parameters

<i>pld</i>	billing id
------------	------------

Returns

the Billing

8.6.2.5 `QSharedPointer< Billing > Databases::BillingDatabase::getBilling (QSqlQuery & q)`

[BillingDatabase::getBilling](#) Add the element of the *q* request and return their.

Parameters

<i>q</i>	SQL request
----------	-------------

Returns

a billing formed according to QSharedPointer

8.6.2.6 `WdgModels::BillingsTableModel * Databases::BillingDatabase::getBillingsTable (const int idProject) throw DbException *`

[BillingDatabase::getBillingsTable](#) Return an item model of billings for QTableView.

Parameters

<i>pld</i>	the project id of the billings returned
------------	---

Exceptions

<i>DbException</i>	
--------------------	--

Returns

QStandardItemModel an item model for QTableView

8.6.2.7 `int Databases::BillingDatabase::getMaxBillingNumber ()`

`getMaxBillingNumber` Get the last number of a billing

Returns

The max number

8.6.2.8 `int Databases::BillingDatabase::getMaxQuoteNumber ()`

`getMaxQuoteNumber` Get the last number of a quote

Returns

The last number

8.6.2.9 `BillingDatabase * Databases::BillingDatabase::instance () throw DbException *` `[static]`

`BillingDatabase::getInstance` Return an instance of [BillingDatabase](#)

See Also

`DbException`

Returns

Instance of [BillingDatabase](#)

8.6.2.10 `void Databases::BillingDatabase::removeBilling (const int pld)`

`BillingDatabase::removeCustomer` Remove the billing with the id *pld*

Parameters

<i>pId</i>	billing id
------------	------------

8.6.2.11 void Databases::BillingDatabase::removeBillingProject (const int *idProject*, const int *idBilling*, const int *idContributory*)

[BillingDatabase::removeBillingProject](#) remove a link between a project, a billing and a contributory in the table BillingProject.

Parameters


<i>idProject</i>	Project id
<i>idBilling</i>	Billing id
<i>idContributory</i>	Contributory id

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/billingdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/billingdatabase.cpp

8.7 BillingDatabaseTest Class Reference

Inheritance diagram for BillingDatabaseTest:




The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/billingdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/billingdatabasetest.cpp

8.8 BillingModelTest Class Reference

Inheritance diagram for BillingModelTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/models/billingmodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/billingmodeltest.cpp

8.9 Gui::Widgets::WdgModels::BillingsTableModel Class Reference

The [BillingsTableModel](#) class for a Billing table.

```
#include <billingstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::BillingsTableModel:



Public Member Functions

- [BillingsTableModel](#) ()
BillingsTableModel::BillingsTableModel Construct a *BillingsTableModel*.
- int [rowCount](#) (const QModelIndex &) const
BillingsTableModel::rowCount Number of billings row.
- int [columnCount](#) (const QModelIndex &) const
BillingsTableModel::columnCount Number of column of a Billing.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const
BillingsTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const
BillingsTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
BillingsTableModel::setData Change data of a cell.
- void [append](#) (const [Billing](#) &billing)
BillingsTableModel::append Add a new line in table.
- void [remove](#) (const int i)
BillingsTableModel::remove Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
BillingsTableModel::flags Differents table flags.
- int [count](#) ()
BillingsTableModel::count Number of billings in table.
- QList< [Billing](#) > [getBillings](#) () const
BillingsTableModel::getbillings Return the list of billings.

8.9.1 Detailed Description

The [BillingsTableModel](#) class for a Billing table.

Author

Florent Berbie

See Also

[Billing](#)

8.9.2 Constructor & Destructor Documentation

8.9.2.1 Gui::Widgets::WdgModels::BillingsTableModel::BillingsTableModel ()

[BillingsTableModel::BillingsTableModel](#) Construct a [BillingsTableModel](#).

Parameters

<i>parent</i>	Parent widget
---------------	---------------

8.9.3 Member Function Documentation

8.9.3.1 void Gui::Widgets::WdgModels::BillingsTableModel::append (const Billing & *billing*)

[BillingsTableModel::append](#) Add a new line in table.

Parameters

<i>Billing</i>	The new Billing
----------------	-----------------

8.9.3.2 int Gui::Widgets::WdgModels::BillingsTableModel::columnCount (const QModelIndex &) const

[BillingsTableModel::columnCount](#) Number of column of a Billing.

Returns

The number of column

8.9.3.3 int Gui::Widgets::WdgModels::BillingsTableModel::count ()

[BillingsTableModel::count](#) Number of billings in table.

Returns

The number of billings

8.9.3.4 QVariant Gui::Widgets::WdgModels::BillingsTableModel::data (const QModelIndex & *index*, int *role* = Qt::DisplayRole) const

[BillingsTableModel::data](#) Obtains data of a specify cell.

Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

Returns

The data of cell

8.9.3.5 Qt::ItemFlags Gui::Widgets::WdgModels::BillingsTableModel::flags (const QModelIndex & *index*) const

[BillingsTableModel::flags](#) Differents table flags.

Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

Returns

Flags

8.9.3.6 `QList< Billing > Gui::Widgets::WdgModels::BillingsTableModel::getBillings () const`

BillingsTableModel::getbillings Return the list of billings.

Returns

list of billings

8.9.3.7 `QVariant Gui::Widgets::WdgModels::BillingsTableModel::headerData (int section, Qt::Orientation orientation, int role = Qt::DisplayRole) const`

[BillingsTableModel::headerData](#) Obtains header title of table.

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.9.3.8 `void Gui::Widgets::WdgModels::BillingsTableModel::remove (const int i)`

[BillingsTableModel::remove](#) Remove a line.

Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.9.3.9 `int Gui::Widgets::WdgModels::BillingsTableModel::rowCount (const QModelIndex &) const`

[BillingsTableModel::rowCount](#) Number of billings row.

Returns

The number of billings

8.9.3.10 `bool Gui::Widgets::WdgModels::BillingsTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[BillingsTableModel::setData](#) Change data of a cell.

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/billingstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/billingstablemodel.cpp

8.10 Gui::Widgets::CheckFields::CheckCity Class Reference

The [CheckCity](#) class Line Edit of City with a check icon.

```
#include <checkcity.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckCity:

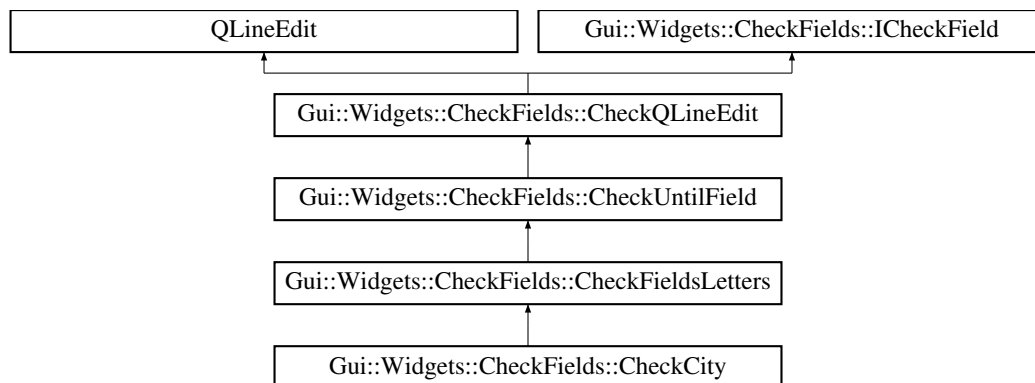

Public Member Functions

- [CheckCity](#) (QWidget *w=0, QPushButton *btn=0)
[CheckCity::CheckCity](#) Construct a [CheckCity](#).

Additional Inherited Members

8.10.1 Detailed Description

The [CheckCity](#) class Line Edit of City with a check icon.

8.10.2 Constructor & Destructor Documentation

8.10.2.1 Gui::Widgets::CheckFields::CheckCity::CheckCity (QWidget * w = 0, QPushButton * btn = 0)

[CheckCity::CheckCity](#) Construct a [CheckCity](#).

Parameters

<i>w</i>	QWidget linked to CheckCity
----------	---

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcity.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcity.cpp

8.11 Gui::Widgets::CheckFields::CheckCountry Class Reference

[CheckCountry::CheckCountry](#) Line Edit of country with a check icon.

```
#include <checkcountry.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckCountry:

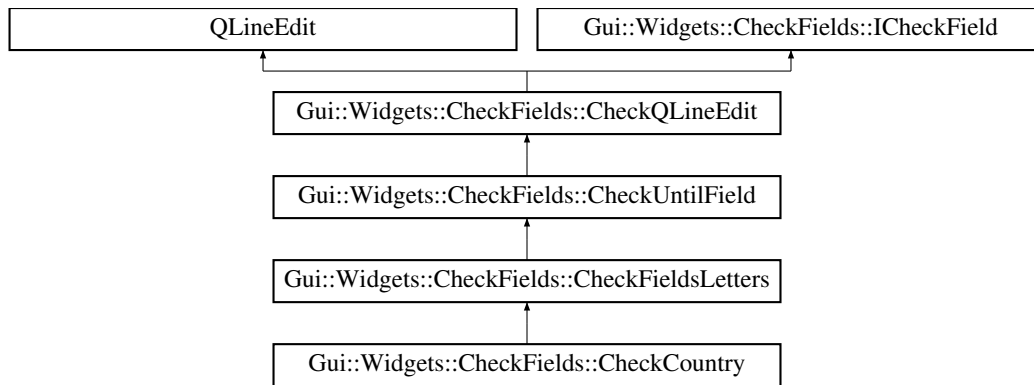

Public Member Functions

- [CheckCountry](#) (QWidget *w=0, QPushButton *btn=0)
CheckEmail::CheckCountry Construct a [CheckCountry](#).

Additional Inherited Members

8.11.1 Detailed Description

[CheckCountry::CheckCountry](#) Line Edit of country with a check icon.

8.11.2 Constructor & Destructor Documentation

8.11.2.1 [Gui::Widgets::CheckFields::CheckCountry::CheckCountry](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckEmail::CheckCountry](#) Construct a [CheckCountry](#).

Parameters

<i>w</i>	QWidget linked to CheckCountry
----------	--

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcountry.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcountry.cpp

8.12 Gui::Widgets::CheckFields::CheckEmail Class Reference

The [CheckEmail](#) class Line Edit of email with a check icon.

```
#include <checkemail.h>
```

Inheritance diagram for [Gui::Widgets::CheckFields::CheckEmail](#):

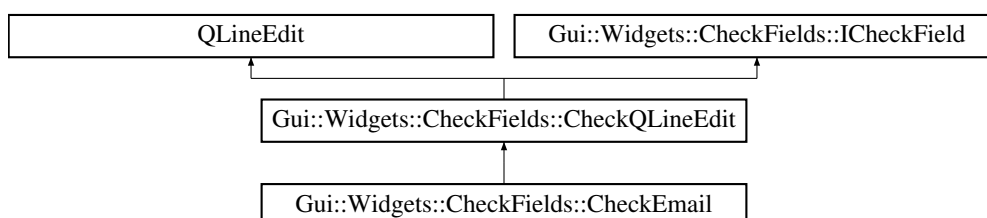

Public Member Functions

- [CheckEmail](#) (QWidget *w=0, QPushButton *btn=0)
[CheckEmail::CheckEmail](#) Construct a CheckMail.
- bool [check](#) (const QString text)
[CheckEmail::check](#) Check if the field email is valid. To be valid, an email address should be under this form: *me@me.xx* An email address need:

Additional Inherited Members

8.12.1 Detailed Description

The [CheckEmail](#) class Line Edit of email with a check icon.

8.12.2 Constructor & Destructor Documentation

8.12.2.1 [Gui::Widgets::CheckFields::CheckEmail::CheckEmail](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckEmail::CheckEmail](#) Construct a CheckMail.

Parameters

<i>w</i>	QWidget linked to CheckEmail
----------	--

8.12.3 Member Function Documentation

8.12.3.1 bool [Gui::Widgets::CheckFields::CheckEmail::check](#) (const [QString](#) *text*) `[virtual]`

[CheckEmail::check](#) Check if the field email is valid. To be valid, an email address should be under this form: *me@me.xx* An email address need:

- 1 character [A-Z] or [a-z] minimum before the character *</i>*
- the character '@'
- 1 character [A-Z] or [a-z] after the character *</i>* minimum and before the character .
- 1 character [A-Z] or [a-z] minimum after the character . Return TRUE if email address is valid, else FALSE

Parameters

<i>text</i>	
-------------	--

Returns

boolean

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkemail.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkemail.cpp

8.13 Gui::Widgets::CheckFields::CheckFieldsLetters Class Reference

The [CheckFieldsLetters](#) class Field with only letters (no numbers)

```
#include <checkfieldsletters.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckFieldsLetters:

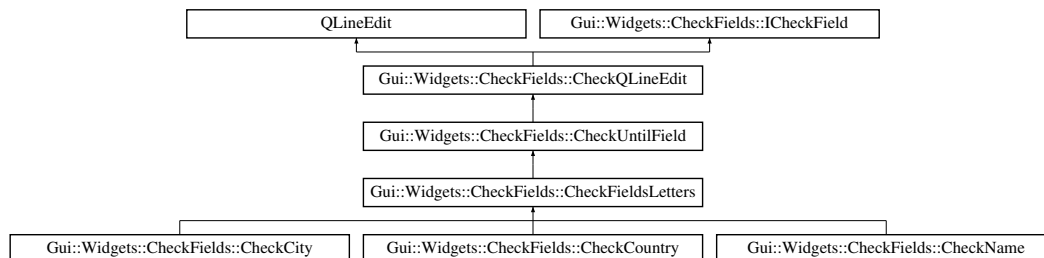

Public Member Functions

- [CheckFieldsLetters](#) (QWidget *w=0, QPushButton *btn=0)
[CheckFieldsLetters::CheckFieldsLetters](#) Construct a [CheckFieldsLetters](#).
- bool [check](#) (QString text)
[CheckName::check](#) Check if the field contains only letters.

Additional Inherited Members

8.13.1 Detailed Description

The [CheckFieldsLetters](#) class Field with only letters (no numbers)

8.13.2 Constructor & Destructor Documentation

8.13.2.1 Gui::Widgets::CheckFields::CheckFieldsLetters::CheckFieldsLetters (QWidget * w = 0, QPushButton * btn = 0)

[CheckFieldsLetters::CheckFieldsLetters](#) Construct a [CheckFieldsLetters](#).

Parameters

w	QWidget linked to CheckFieldsLetters
---	--

8.13.3 Member Function Documentation

8.13.3.1 bool Gui::Widgets::CheckFields::CheckFieldsLetters::check (QString text) [virtual]

[CheckName::check](#) Check if the field contains only letters.

Parameters

text	
------	--

Returns

boolean

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsletters.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsletters.cpp

8.14 Gui::Widgets::CheckFields::CheckName Class Reference

The [CheckName](#) class Line edit of name with a check icon.

```
#include <checkname.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckName:

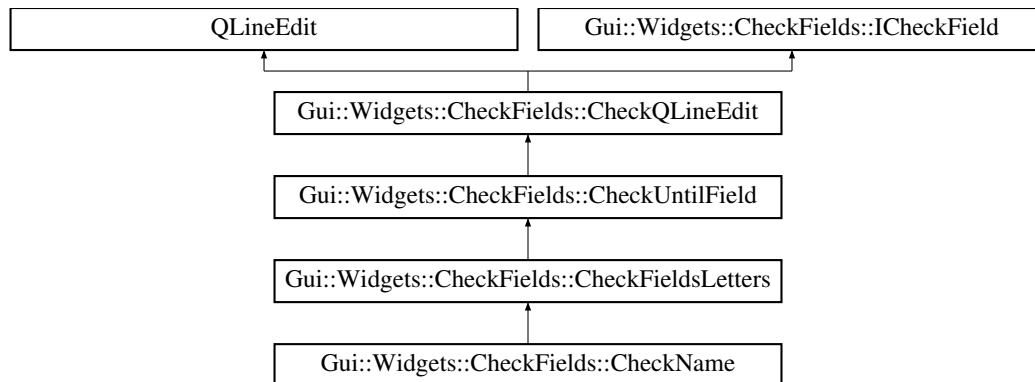

Public Member Functions

- [CheckName](#) (QWidget *w=0, QPushButton *btn=0)
[CheckName::CheckName](#) Construct a [CheckName](#).

Additional Inherited Members

8.14.1 Detailed Description

The [CheckName](#) class Line edit of name with a check icon.

8.14.2 Constructor & Destructor Documentation

8.14.2.1 [Gui::Widgets::CheckFields::CheckName::CheckName](#) (QWidget * w = 0, QPushButton * btn = 0)

[CheckName::CheckName](#) Construct a [CheckName](#).

Parameters

w	QWidget linked to CheckName
---	---

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkname.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkname.cpp

8.15 Gui::Widgets::CheckFields::CheckPhone Class Reference

The [CheckPhone](#) class Line Edit of Phone number with a check icon.

```
#include <checkphone.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPhone:

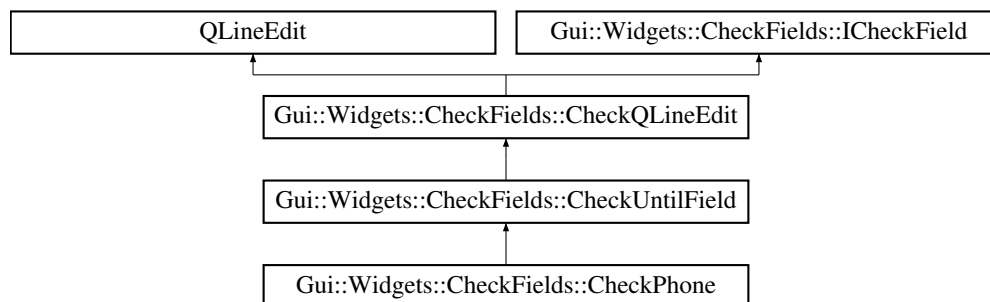

Public Member Functions

- [CheckPhone](#) (QWidget *w=0, QPushButton *btn=0)
CheckPhone::CheckPhone Construct a [CheckPhone](#).
- bool [check](#) (QString text)
CheckPhone::check Check if the field is valid. To be valid, a name should be composed of a character.
- QString [getCountry](#) () const
CheckPhone::getCountry Return the country linked to current field.
- void [setCountry](#) (const QString &country)
CheckPhone::setCountry Modify the country linked to field.

Additional Inherited Members

8.15.1 Detailed Description

The [CheckPhone](#) class Line Edit of Phone number with a check icon.

8.15.2 Constructor & Destructor Documentation

8.15.2.1 Gui::Widgets::CheckFields::CheckPhone::CheckPhone (QWidget * w = 0, QPushButton * btn = 0)

[CheckPhone::CheckPhone](#) Construct a [CheckPhone](#).

Parameters

<i>w</i>	QWidget linked to CheckPhone
----------	--

8.15.3 Member Function Documentation

8.15.3.1 `bool Gui::Widgets::CheckFields::CheckPhone::check (QString text) [virtual]`

[CheckPhone::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

<i>text</i>	
-------------	--

Returns

boolean

Implements [Gui::Widgets::CheckFields::!CheckField](#).

8.15.3.2 `QString Gui::Widgets::CheckFields::CheckPhone::getCountry () const`

[CheckPhone::getCountry](#) Return the country linked to current field.

Returns

8.15.3.3 `void Gui::Widgets::CheckFields::CheckPhone::setCountry (const QString & country)`

[CheckPhone::setCountry](#) Modify the *country* linked to field.

Parameters

<i>country</i>	New country
----------------	-------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkphone.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkphone.cpp

8.16 Gui::Widgets::CheckFields::CheckPostalCode Class Reference

The [CheckPostalCode](#) class Line Edit of postal code with a check icon.

```
#include <checkpostalcode.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPostalCode:

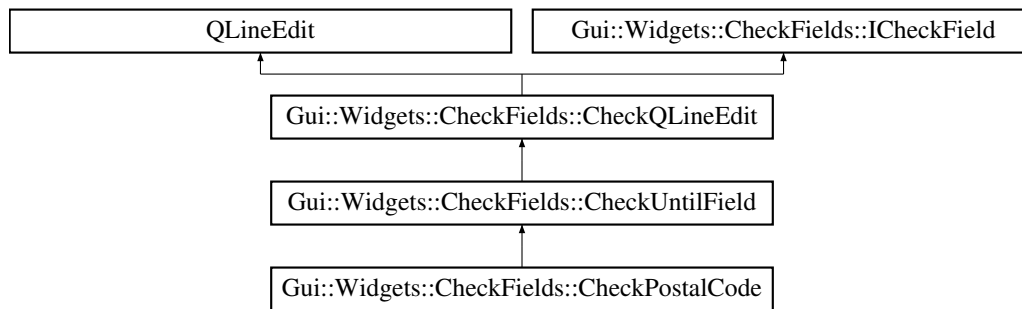

Public Member Functions

- [CheckPostalCode](#) (QWidget *w=0, QPushButton *btn=0)
[CheckPostalCode::CheckPostalCode](#) Construct a [CheckPostalCode](#).
- bool [check](#) (QString text)
[CheckPostalCode::check](#) Check if the field is valid. To be valid, a name should be composed of a character.
- QString [getCountry](#) () const
[CheckPostalCode::getCountry](#) Return the country linked to current field.
- void [setCountry](#) (const QString &country)
[CheckPostalCode::setCountry](#) Modify the country linked to field.

Additional Inherited Members

8.16.1 Detailed Description

The [CheckPostalCode](#) class Line Edit of postal code with a check icon.

8.16.2 Constructor & Destructor Documentation

8.16.2.1 [Gui::Widgets::CheckFields::CheckPostalCode::CheckPostalCode](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckPostalCode::CheckPostalCode](#) Construct a [CheckPostalCode](#).

Parameters

<i>w</i>	QWidget linked to CheckPostalCode
----------	---

8.16.3 Member Function Documentation

8.16.3.1 bool [Gui::Widgets::CheckFields::CheckPostalCode::check](#) ([QString](#) *text*) [virtual]

[CheckPostalCode::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

<i>text</i>	
-------------	--

Returns

boolean

Implements [Gui::Widgets::CheckFields::ICheckField](#).

8.16.3.2 QString Gui::Widgets::CheckFields::CheckPostalCode::getCountry () const

[CheckPostalCode::getCountry](#) Return the country linked to current field.

Returns

country

8.16.3.3 void Gui::Widgets::CheckFields::CheckPostalCode::setCountry (const QString & country)

[CheckPostalCode::setCountry](#) Modify the *country* linked to field.

Parameters

<i>country</i>	New country
----------------	-------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkpostalcode.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkpostalcode.cpp

8.17 Gui::Widgets::CheckFields::CheckQLineEdit Class Reference

The [CheckQLineEdit](#) class QLineEdit custom with a check of text inputed.

```
#include <checkqlineedit.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckQLineEdit:

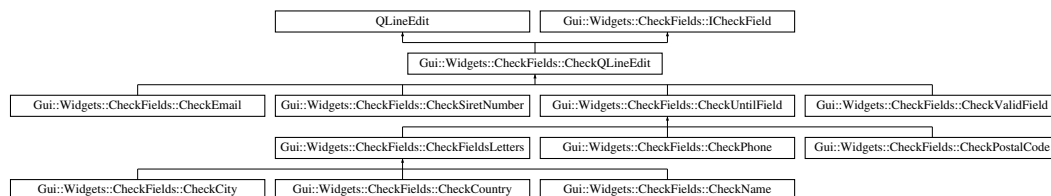

Public Slots

- void [fieldTextChanged](#) (const QString &text)
[CheckQLineEdit::fieldTextChanged](#) For each new characater inputed or removed, displays an icon to show if the field is valid or not.

Public Member Functions

- [CheckQLineEdit](#) (QWidget *parent=0, QPushButton *btn=0)
[CheckQLineEdit::CheckQLineEdit](#) Construct a [CheckQLineEdit](#).
- void [displayCheckValidFieldIcon](#) ()
[CheckQLineEdit::displayCheckValidFieldIcon](#) Display a valid icon into the field.
- void [displayCheckNoValidFieldIcon](#) ()
[CheckQLineEdit::displayCheckNoValidFieldIcon](#) Display a "no valid" icon into the field.
- QPushButton * [getBtnValid](#) () const
[CheckQLineEdit::getBtnValid](#).
- void [setBtnValid](#) (QPushButton *getBtnValid)

[CheckQLineEdit::setBtnValid.](#)

- bool [isValid](#) ()

isValid Return true if the current field if valid

8.17.1 Detailed Description

The [CheckQLineEdit](#) class QLineEdit custom with a check of text inputed.

8.17.2 Constructor & Destructor Documentation

8.17.2.1 `Gui::Widgets::CheckFields::CheckQLineEdit::CheckQLineEdit (QWidget * parent = 0, QPushButton * btn = 0)`
[explicit]

[CheckQLineEdit::CheckQLineEdit](#) Construct a [CheckQLineEdit](#).

Parameters

<i>parent</i>	
---------------	--

8.17.3 Member Function Documentation

8.17.3.1 `QPushButton * Gui::Widgets::CheckFields::CheckQLineEdit::getBtnValid ()` const

[CheckQLineEdit::getBtnValid.](#)

Returns

a

8.17.3.2 `bool Gui::Widgets::CheckFields::CheckQLineEdit::isValid ()`

isValid Return true if the current field if valid

Returns

boolean

8.17.3.3 `void Gui::Widgets::CheckFields::CheckQLineEdit::setBtnValid (QPushButton * getBtnValid)`

[CheckQLineEdit::setBtnValid.](#)

Parameters

<i>getBtnValid</i>	
--------------------	--

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkqlineedit.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkqlineedit.cpp

8.18 Gui::Widgets::CheckFields::CheckSiretNumber Class Reference

The [CheckSiretNumber](#) class Line Edit with a check icon.

```
#include <checksiretnumber.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckSiretNumber:

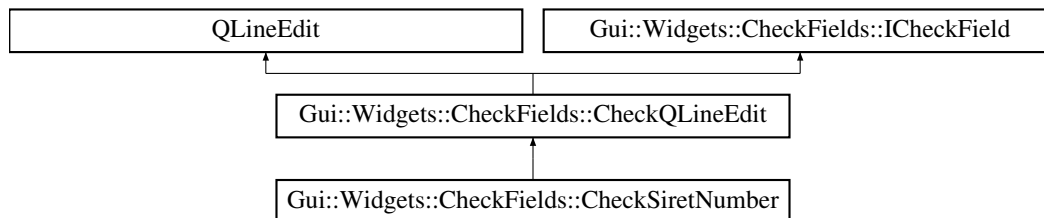

Public Member Functions

- [CheckSiretNumber](#) (QWidget *w=0, QPushButton *btn=0)
[CheckSiretNumber::CheckSiretNumber](#) Construct a [CheckSiretNumber](#).
- bool [check](#) (QString text)
[CheckSiretNumber::check](#) Check if the field noSiret is valid. To be valid, a SIRET number should be composed of numbers.

Additional Inherited Members

8.18.1 Detailed Description

The [CheckSiretNumber](#) class Line Edit with a check icon.

8.18.2 Constructor & Destructor Documentation

8.18.2.1 [Gui::Widgets::CheckFields::CheckSiretNumber::CheckSiretNumber](#) (QWidget * w = 0, QPushButton * btn = 0)

[CheckSiretNumber::CheckSiretNumber](#) Construct a [CheckSiretNumber](#).

Parameters

<i>w</i>	QWidget linked to CheckSiretNumber
----------	--

8.18.3 Member Function Documentation

8.18.3.1 bool [Gui::Widgets::CheckFields::CheckSiretNumber::check](#) (QString *text*) [virtual]

[CheckSiretNumber::check](#) Check if the field noSiret is valid. To be valid, a SIRET number should be composed of numbers.

Parameters

<i>text</i>	
-------------	--

Returns

boolean

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checksiretnumber.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checksiretnumber.cpp

8.19 Gui::Widgets::CheckFields::CheckUntilField Class Reference

The [CheckUntilField](#) class.

```
#include <checkuntilfield.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckUntilField:

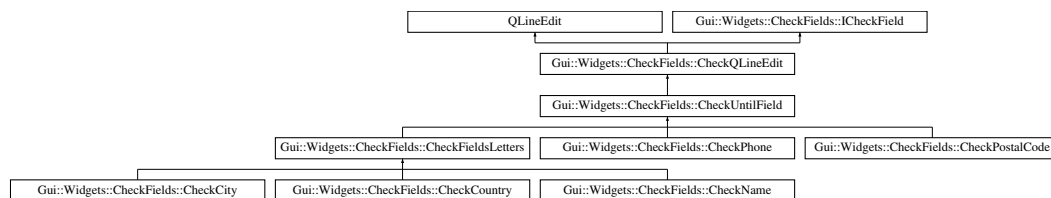**Public Member Functions**

- [CheckUntilField](#) (QWidget *w=0, QPushButton *btn=0)
[CheckUntilField::CheckUntilField](#) Construct a [CheckUntilField](#).
- bool [check](#) (QString text)
[CheckUntilField::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Additional Inherited Members

8.19.1 Detailed Description

The [CheckUntilField](#) class.

8.19.2 Constructor & Destructor Documentation

8.19.2.1 Gui::Widgets::CheckFields::CheckUntilField::CheckUntilField (QWidget * w = 0, QPushButton * btn = 0)

[CheckUntilField::CheckUntilField](#) Construct a [CheckUntilField](#).

Parameters

<i>w</i>	QWidget linked to CheckUntilField
----------	---

8.19.3 Member Function Documentation

8.19.3.1 bool Gui::Widgets::CheckFields::CheckUntilField::check (QString text) [virtual]

[CheckUntilField::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

<i>text</i>	
-------------	--

Returns

boolean

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkuntilfield.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkuntilfield.cpp

8.20 Gui::Widgets::CheckFields::CheckValidField Class Reference

The [CheckValidField](#) class Check field not required.

```
#include <checkvalidfield.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckValidField:

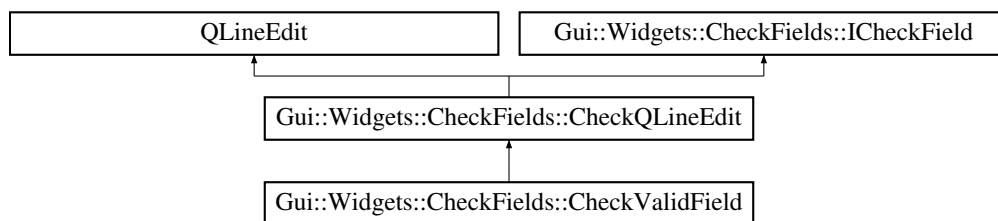

Public Member Functions

- [CheckValidField](#) (QWidget *w=0, QPushButton *btn=0)
[CheckValidField::CheckValidField](#).
- bool [check](#) (QString text)
[CheckValidField::check](#) Return TRUE : the field is not required.

Additional Inherited Members

8.20.1 Detailed Description

The [CheckValidField](#) class Check field not required.

8.20.2 Constructor & Destructor Documentation

8.20.2.1 [Gui::Widgets::CheckFields::CheckValidField::CheckValidField \(QWidget * w = 0, QPushButton * btn = 0 \)](#)

[CheckValidField::CheckValidField](#).

Parameters

<i>w</i>	QWidget linked to CheckValidField
----------	---

8.20.3 Member Function Documentation

8.20.3.1 bool Gui::Widgets::CheckFields::CheckValidField::check (QString *text*) [virtual]

[CheckValidField::check](#) Return TRUE : the field is not required.

Parameters

<i>text</i>	
-------------	--

Returns

boolean


Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkvalidfield.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkvalidfield.cpp

8.21 Gui::Widgets::Delegates::ComboBoxDelegate Class Reference

Inheritance diagram for Gui::Widgets::Delegates::ComboBoxDelegate:

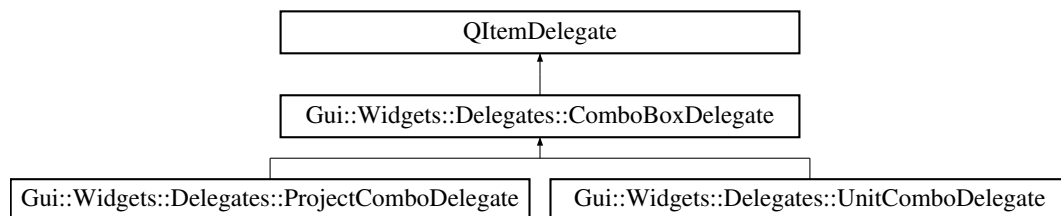

Public Member Functions


- **ComboBoxDelegate** (QObject *parent=0)
- virtual QWidget * **createEditor** (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const =0
- void **paint** (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const =0
- void **setEditorData** (QWidget *editor, const QModelIndex &index) const
- void **setModelData** (QWidget *editor, QAbstractItemModel *model, const QModelIndex &index) const
- void **updateEditorGeometry** (QWidget *editor, const QStyleOptionViewItem &option, const QModelIndex &index) const

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/comboboxdelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/comboboxdelegate.cpp

8.22 Ui::ComboBoxModelWidget Class Reference

Inheritance diagram for Ui::ComboBoxModelWidget:



Additional Inherited Members

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/ui_comboboxmodelwidget.h

8.23 Gui::Widgets::ComboBoxModelWidget Class Reference

The [ComboBoxModelWidget](#) class.

```
#include <comboboxmodelwidget.h>
```

Inheritance diagram for Gui::Widgets::ComboBoxModelWidget:



Public Member Functions

- **ComboBoxModelWidget** (QWidget *parent=0)

8.23.1 Detailed Description

The [ComboBoxModelWidget](#) class.


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/comboboxmodelwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/comboboxmodelwidget.cpp

8.24 Mustache::Context Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::Context:

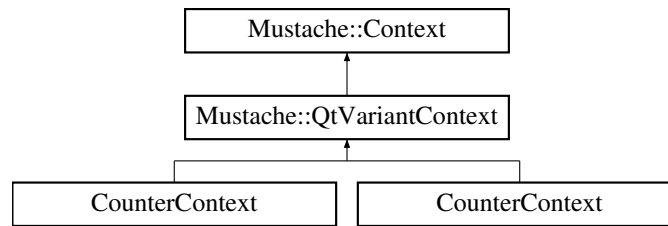

Public Member Functions

- [Context](#) ([PartialResolver](#) *resolver=0)
- virtual QString [stringValue](#) (const QString &key) const =0
- virtual bool [isFalse](#) (const QString &key) const =0
- virtual int [listCount](#) (const QString &key) const =0
- virtual void [push](#) (const QString &key, int index=-1)=0
- virtual void [pop](#) ()=0
- QString [partialValue](#) (const QString &key) const
- [PartialResolver](#) * [partialResolver](#) () const
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Renderer](#) *renderer)

8.24.1 Detailed Description

[Context](#) is an interface that [Mustache::Renderer::render\(\)](#) uses to fetch substitutions for template tags.

8.24.2 Constructor & Destructor Documentation

8.24.2.1 Context::Context ([PartialResolver](#) * *resolver* = 0) [explicit]

Create a context. *resolver* is used to fetch the expansions for any {{>partial}} tags which appear in a template.

8.24.3 Member Function Documentation

8.24.3.1 bool Context::canEval (const QString & *key*) const [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

8.24.3.2 QString Context::eval (const QString & *key*, const QString & *_template*, [Renderer](#) * *renderer*) [virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

8.24.3.3 `virtual bool Mustache::Context::isFalse (const QString & key) const` `[pure virtual]`

Returns true if the value for `key` is 'false' or an empty list. 'False' values typically include empty strings, the boolean value false etc.

When processing a section Mustache tag, the section is not rendered if the key is false, or for an inverted section tag, the section is only rendered if the key is false.

Implemented in [Mustache::QtVariantContext](#).

8.24.3.4 `virtual int Mustache::Context::listCount (const QString & key) const` `[pure virtual]`

Returns the number of items in the list value for `key` or 0 if the value for `key` is not a list.

Implemented in [Mustache::QtVariantContext](#).

8.24.3.5 `PartialResolver * Context::partialResolver () const`

Returns the partial resolver passed to the constructor.

8.24.3.6 `QString Context::partialValue (const QString & key) const`

Returns the partial template for a given `key`.

8.24.3.7 `virtual void Mustache::Context::pop ()` `[pure virtual]`

Exit the current context.

Implemented in [Mustache::QtVariantContext](#).

8.24.3.8 `virtual void Mustache::Context::push (const QString & key, int index = -1)` `[pure virtual]`

Set the current context to the value for `key`. If `index` is ≥ 0 , set the current context to the `index`'th value in the list value for `key`.

Implemented in [Mustache::QtVariantContext](#).

8.24.3.9 `virtual QString Mustache::Context::stringValue (const QString & key) const` `[pure virtual]`

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.


Implemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp`

8.25 ContributoriesDatabaseTest Class Reference

Inheritance diagram for ContributoriesDatabaseTest:




The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/contributoriesdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/contributoriesdatabasetest.cpp

8.26 Models::ContributoriesList Class Reference

Inheritance diagram for Models::ContributoriesList:



Public Member Functions

- virtual void **commit** ()
commit Update or insert data into the database
- void **addContributory** (Models::Contributory &contributory)
- void **addProject** (Project *p, Models::Rate rate)
- QList< Contributor > & **getContributories** (Project *p)
- int **getIldBilling** () const
- void **setIldBilling** (int getIldBilling)
- bool **getInsert** () const
- void **setInsert** (bool getInsert)
- int **getNbProjects** ()
- double **getSumRate** ()
- double **getSumQuantity** ()
- QSharedPointer< Customer > **getCustomer** ()
- QList< Project * > **getProjects** ()
- QList< Contributor > * **getAllContributories** ()
- Models::Rate **getRate** (Models::Project *project)
- QVariantList **getDataMap** ()

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/contributorieslist.h
- /home/travis/build/FACT-Team/FactDev/src/models/contributorieslist.cpp

8.27 Gui::Widgets::WdgModels::ContributoriesTableModel Class Reference

The [ContributoriesTableModel](#) class for a custom table for contributories widget.

```
#include <contributoriestablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ContributoriesTableModel:



Public Member Functions

- [ContributoriesTableModel](#) (QObject *parent=0)
ContributoriesTableModel Construct a ContributoriesTableModel.
- int [rowCount](#) (const QModelIndex &) const
rowCount Number of contributories row
- int [columnCount](#) (const QModelIndex &) const
columnCount Number of column of a contributory
- QVariant [data](#) (const QModelIndex &index, int role) const
data Obtains data of a specify cell
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role) const
headerData Obtains header title of table
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
setData Change data of a cell
- void [append](#) (const [Contributory](#) &contributory)
append Add a new line in table
- void [remove](#) (const int i)
remove Remove a line
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
flags Differents table flags
- QList< [Contributory](#) > [getContributories](#) ()
getContributories Get all contributories of table
- int [count](#) ()
count Number of contributories in table
- double [getSumQuantity](#) () const
- void [clear](#) ()

8.27.1 Detailed Description

The [ContributoriesTableModel](#) class for a custom table for contributories widget.

Author

Antoine de Roquemaurel

See Also

[Contributory](#)

8.27.2 Constructor & Destructor Documentation

8.27.2.1 Gui::Widgets::WdgModels::ContributoriesTableModel::ContributoriesTableModel (*QObject* * *parent* = 0)

[ContributoriesTableModel](#) Construct a [ContributoriesTableModel](#).

Parameters

<i>parent</i>	Parent widget
---------------	---------------

8.27.3 Member Function Documentation

8.27.3.1 void Gui::Widgets::WdgModels::ContributoriesTableModel::append (const Contributory & *contributory*)

append Add a new line in table

Parameters

<i>contributory</i>	The new contributory
---------------------	----------------------

8.27.3.2 int Gui::Widgets::WdgModels::ContributoriesTableModel::columnCount (const QModelIndex &) const

columnCount Number of column of a contributory

Returns

The number of column

8.27.3.3 int Gui::Widgets::WdgModels::ContributoriesTableModel::count ()

count Number of contributories in table

Returns

The number of contributories

8.27.3.4 QVariant Gui::Widgets::WdgModels::ContributoriesTableModel::data (const QModelIndex & *index*, int *role*) const

data Obtains data of a specify cell

Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

Returns

The data of cell

8.27.3.5 Qt::ItemFlags Gui::Widgets::WdgModels::ContributoriesTableModel::flags (const QModelIndex & *index*) const

flags Differents table flags

Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

Returns

Flags

8.27.3.6 QList< Contributory > Gui::Widgets::WdgModels::ContributoriesTableModel::getContributories ()

getContributories Get all contributories of table

Returns

The contributory list

8.27.3.7 QVariant Gui::Widgets::WdgModels::ContributoriesTableModel::headerData (int *section*, Qt::Orientation *orientation*, int *role*) const

headerData Obtains header title of table

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.27.3.8 void Gui::Widgets::WdgModels::ContributoriesTableModel::remove (const int *i*)

remove Remove a line

Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.27.3.9 int Gui::Widgets::WdgModels::ContributoriesTableModel::rowCount (const QModelIndex &) const

rowCount Number of contributories row

Returns

The number of contributories

8.27.3.10 bool Gui::Widgets::WdgModels::ContributoriesTableModel::setData (const QModelIndex & *index*, const QVariant & *value*, int *role* = Qt::EditRole)

setData Change data of a cell

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

Returns


True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/contributoriестablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/contributoriестablemodel.cpp

8.28 Ui::ContributoriesWidget Class Reference

Inheritance diagram for Ui::ContributoriesWidget:




Additional Inherited Members

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_contributorieswidget.h

8.29 Gui::Widgets::ContributoriesWidget Class Reference

Inheritance diagram for Gui::Widgets::ContributoriesWidget:



Public Slots

- void **add** (void)
add Add a new empty contributory
- void **remove** (void)
remove Remove the current contributory
- void **addProject** (QPair< **Project** *, **Rate** > *p=0)
- void **removeProject** (void)
- void **changeProject** (void)
- void **editing** (void)
- void **updateUi** (void)
- void **updatePrice** (void)

Signals

- void **contributoryChanged** ()

Public Member Functions

- **ContributoriesWidget** (QSharedPointer< **Customer** > c, QWidget *parent=0)
- **ContributoriesList** * **getContributories** () const
getContributories Get contributories List
- int **count** ()
- void **add** (**ContributoriesList** &list)
add Add the Contributory c in the model

8.29.1 Member Function Documentation

8.29.1.1 void Gui::Widgets::ContributoriesWidget::add (ContributoriesList & list)

add Add the Contributory *c* in the model

Parameters

<i>c</i>	the Contributory
----------	-------------------------

8.29.1.2 ContributoriesList * Gui::Widgets::ContributoriesWidget::getContributories () const

getContributories Get contributories List

Returns

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/contributorieswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/contributorieswidget.cpp
- /home/travis/build/FACT-Team/FactDev/src/moc_contributorieswidget.cpp

8.30 Models::Contributory Class Reference

The [Contributory](#) class.

```
#include <contributory.h>
```

Inheritance diagram for Models::Contributory:



Public Member Functions

- [Contributory](#) ()
Contributory::Contributory Construct a [Contributory](#).
- [Contributory](#) (int id)
Contributory::Contributory Construct a [Contributory](#) and get data in database.
- [~Contributory](#) ()
Destroy an contributory object.
- void [commit](#) ()
Contributory::commit Update or insert a contributory to the database.
- void [hydrat](#) (int id)
Contributory::hydrat Get data about the [Contributory](#) which is specified by the identify id
- void [remove](#) ()
Contributory::remove Remove the current [Contributory](#).
- QVariantHash [getDataMap](#) ()

- getDataMap* Get all data of model with a HashMap key/value
- [Project](#) * [getProject](#) () const
Contributory::getProject Return the project linked to this [Contributory](#).
- void [setProject](#) ([Project](#) *id)
Contributory::setProject Modify the identify id of the [Project](#) linked to this [Contributory](#).
- double [getNbHours](#) () const
getNbHours Number of work hour of a contributory
- void [setNbHours](#) (double value)
setNbHours Change nbHours
- QString [getDescription](#) () const
getDescription Description of a contributory
- void [setDescription](#) (const QString &[getDescription](#))
setDescription Change the contributory description
- bool [operator==](#) (const [Contributory](#) &c)
operator == define the operator "=" to compare two [Contributory](#)
- bool [operator!=](#) (const [Contributory](#) &c)
operator != define the operator "!=" to compare two [Contributory](#)

Additional Inherited Members

8.30.1 Detailed Description

The [Contributory](#) class.

Author

8.30.2 Constructor & Destructor Documentation

8.30.2.1 Models::Contributory::Contributory (int id)

[Contributory::Contributory](#) Construct a [Contributory](#) and get data in database.

Parameters

<i>id</i>	Contributory 's id
-----------	------------------------------------

8.30.3 Member Function Documentation

8.30.3.1 QVariantHash Models::Contributory::getDataMap () [virtual]

getDataMap Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.30.3.2 QString Models::Contributory::getDescription () const

getDescription Description of a contributory

Returns

The description

8.30.3.3 double Models::Contributory::getNbHours () const

getNbHours Number of work hour of a contributory

Returns

Then number of hours

8.30.3.4 Project * Models::Contributory::getProject () const

[Contributory::getProject](#) Return the project linked to this [Contributory](#).

Returns

[Project](#) linked to this [Contributory](#)

8.30.3.5 void Models::Contributory::hydrat (int *id*) [virtual]

[Contributory::hydrat](#) Get data about the [Contributory](#) which is specified by the identify *id*

Parameters

<i>id</i>	Contributory identify
-----------	---------------------------------------

Implements [Models::IModel](#).

8.30.3.6 bool Models::Contributory::operator!= (const Contributory & *c*)

operator != define the operator "!=" to compare two [Contributory](#)

Parameters

<i>c</i>	the Contributory to compare with the current Contributory
----------	---

Returns

true if the [Contributory](#) are different else false

8.30.3.7 bool Models::Contributory::operator== (const Contributory & *c*)

operator == define the operator "==" to compare two [Contributory](#)

Parameters

<i>c</i>	the Contributory to compare with the current Contributory
----------	---

Returns

true if the [Contributory](#) are equals else false

8.30.3.8 void Models::Contributory::setDescription (const QString & *getDescription*)

setDescription Change the contributory description

Parameters

<i>getDescription</i>	The new description
-----------------------	---------------------

8.30.3.9 void Models::Contributory::setNbHours (double *value*)

setNbHours Change nbHours

Parameters

<i>value</i>	The new value of nbHours
--------------	--------------------------

8.30.3.10 void Models::Contributory::setProject (Project * *id*)

[Contributory::setProject](#) Modify the identify *id* of the [Project](#) linked to this [Contributory](#).

Parameters

<i>id</i>	Project Identify
-----------	----------------------------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/contributory.h
- /home/travis/build/FACT-Team/FactDev/src/models/contributory.cpp

8.31 Databases::ContributoryDatabase Class Reference

The [ContributoryDatabase](#) class Contributory (or Quote) table database.

```
#include <contributorydatabase.h>
```

Inheritance diagram for Databases::ContributoryDatabase:



Public Member Functions

- [Models::Contributory](#) * [getContributory](#) (const int idContributory)
ContributoryDatabase::getCustomer get informations about the Contributory identified by pld

- [Models::ContributoriesList](#) **getContributoriesByBilling** (const int idBilling)
- int [addContributory](#) (const [Models::Contributory](#) &)
ContributoryDatabase::addContributory Add the Contributory *pContributory* to the database.
- void [updateContributory](#) (const [Models::Contributory](#) &)
ContributoryDatabase::updateCustomer Update informations about the Contributory *pCustomer*
- void [removeContributory](#) (const int pld)
ContributoryDatabase::removeCustomer Remove the Contributory with the id *pld*
- [Models::Contributory](#) * [getContributory](#) (QString &q)
getContributory Obtain a contributory without new query

Static Public Member Functions

- static [ContributoryDatabase](#) * [instance](#) () throw (DbException*)
ContributoryDatabase::getInstance Return an instance of [ContributoryDatabase](#)

Additional Inherited Members

8.31.1 Detailed Description

The [ContributoryDatabase](#) class Contributory (or Quote) table database.

Author

Cédric Rohaut

See Also

[Database](#)
[Contributory/Quote](#)

8.31.2 Member Function Documentation

8.31.2.1 int Databases::ContributoryDatabase::addContributory (const [Models::Contributory](#) & *pContributory*)

[ContributoryDatabase::addContributory](#) Add the Contributory *pContributory* to the database.

Returns

Contributory id

8.31.2.2 [Models::Contributory](#) * [Databases::ContributoryDatabase::getContributory](#) (const int *idContributory*)

[ContributoryDatabase::getCustomer](#) get informations about the Contributory identified by *pld*

Parameters

<i>idContributory</i>	Contributory id
-----------------------	-----------------

Returns

the Contributory

8.31.2.3 [Models::Contributory](#) * [Databases::ContributoryDatabase::getContributory](#) ([QString](#) & *q*)

[getContributory](#) Obtain a contributory without new query

Parameters

<i>q</i>	The query to use
----------	------------------

Returns

The contributory linked to *q*

8.31.2.4 ContributoryDatabase * Databases::ContributoryDatabase::instance () throw DbException *) [static]

ContributoryDatabase::getInstance Return an instance of [ContributoryDatabase](#)

See Also

DbException

Returns

Instance of [ContributoryDatabase](#)

8.31.2.5 void Databases::ContributoryDatabase::removeContributory (const int *pld*)

ContributoryDatabase::removeCustomer Remove the Contributory with the id *pld*

Parameters


<i>pld</i>	Contributory id
------------	-----------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/contributorydatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/contributorydatabase.cpp

8.32 CounterContext Class Reference

Inheritance diagram for CounterContext:

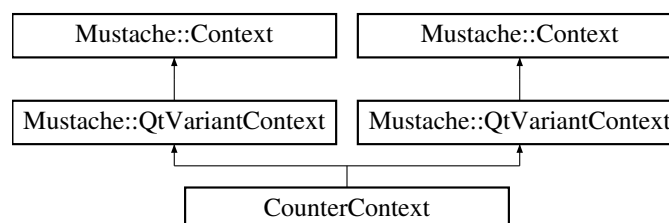

Public Member Functions

- **CounterContext** (const QVariantHash &map)
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer)
- virtual QString [stringValue](#) (const QString &key) const
- **CounterContext** (const QVariantHash &map)
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer)
- virtual QString [stringValue](#) (const QString &key) const

Public Attributes

- int **counter**

Additional Inherited Members

8.32.1 Member Function Documentation

8.32.1.1 virtual bool CounterContext::canEval (const QString & *key*) const [inline], [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::QtVariantContext](#).

8.32.1.2 virtual bool CounterContext::canEval (const QString & *key*) const [inline], [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::QtVariantContext](#).

8.32.1.3 virtual QString CounterContext::eval (const QString & *key*, const QString & *_template*, Mustache::Renderer * *renderer*) [inline], [virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::QtVariantContext](#).

8.32.1.4 virtual QString CounterContext::eval (const QString & *key*, const QString & *_template*, Mustache::Renderer * *renderer*) [inline], [virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::QtVariantContext](#).

8.32.1.5 virtual QString CounterContext::stringValue (const QString & *key*) const [inline], [virtual]

Returns a string representation of the value for *key* in the current context. This is used to replace a Mustache value tag.

Reimplemented from [Mustache::QtVariantContext](#).

8.32.1.6 virtual QString CounterContext::stringValue (const QString & key) const [inline], [virtual]

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Reimplemented from [Mustache::QtVariantContext](#).

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.cpp

8.33 Models::Customer Class Reference

The [Customer](#) class [Customer](#).

```
#include <customer.h>
```

Inheritance diagram for Models::Customer:



Public Member Functions

- [Customer](#) ()
Customer::Customer Construct a [Customer](#).
- [Customer](#) (int id)
Customer::Customer Construct a [Customer](#) who is specified by id
- void [commit](#) ()
Customer::commit Update customer data on the database.
- void [hydrat](#) (int id)
Customer::hydrat Insert into database informations related to the [Customer](#) who is specified by id
- void [remove](#) ()
Customer::remove Remove the current customer.
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- QString [getFirstnameReferent](#) () const
Customer::getFirstnameReferent Return the firstname of the referent [Customer](#).
- void [setFirstnameReferent](#) (const QString &firstnameReferent)
Customer::setFirstnameReferent Replace the referent firstname of the customer by `firstnameReferent`
- QString [getLastnameReferent](#) () const
Customer::getLastnameReferent Return the lastname of the referent [Customer](#).
- void [setLastnameReferent](#) (const QString &lastnameReferent)
Customer::setLastnameReferent Replace the referent lastname of the customer by `lastnameReferent`
- QString [getCompany](#) () const
Customer::getCompany Return the name of the company customer.
- void [setCompany](#) (const QString &company)
Customer::setCompany Replace the company name by `company`
- QString [getAddress](#) () const
Customer::getAddress Return the address (name and street number) of the customer company.

- void [setAddress](#) (const QString &address)
[Customer::setAddress](#) Replace the current company address by the new address
- QString [getPostalCode](#) () const
[Customer::getPostalCode](#) Return the postal code of the customer company.
- void [setPostalCode](#) (const QString &postalCode)
[Customer::setPostalCode](#) Replace the current postal code of the customer company by the new postalCode
- QString [getCity](#) () const
[Customer::getCity](#) Return the city of the customer company.
- void [setCity](#) (const QString &city)
[Customer::setCity](#) Replace the current city of the customer company by the new city
- QString [getCountry](#) () const
[Customer::getCountry](#) Return the country of the customer company.
- void [setCountry](#) (const QString &country)
[Customer::setCountry](#) Replace the country of the [Customer](#) company by country
- QString [getEmail](#) () const
[Customer::getEmail](#) Return the email of the customer company.
- void [setEmail](#) (const QString &email)
[Customer::setEmail](#) Replace the email of the [Customer](#) company by email
- QString [getMobilePhone](#) () const
[Customer::getMobilePhone](#) Return the number of the mobile phone of the customer company.
- void [setMobilePhone](#) (const QString &mobilePhone)
[Customer::setMobilePhone](#) Replace the current mobile phone of the customer company by mobilePhone
- QString [getPhone](#) () const
[Customer::getPhone](#) Return the number of desktop phone.
- void [setPhone](#) (const QString &phone)
[Customer::setPhone](#) Replace the current number of desktop phone by phone
- QString [getFax](#) () const
[Customer::getFax](#) Return the fax number.
- void [setFax](#) (const QString &fax)
[Customer::setFax](#) Replace the current fax number by fax
- QString [getPath](#) () const
[Customer::getPath](#) Return the path of the workspace for the current [Customer](#).
- QString [getNameFolder](#) () const
[Customer::getNameFolder](#) Return the name of the current [Customer](#)'s folder in the workspace.
- bool [operator==](#) (const [Customer](#) &c)
[Customer::operator ==](#) Re-define the operator "==" to compare if the current customer is the same to the other [Customer](#) c Return TRUE if both customers are the same, else FALSE.
- bool [operator!=](#) (const [Customer](#) &c)
[Customer::operator !=](#) Re-define the operator "!=" to compare if the current customer is different to the other [Customer](#) c Return TRUE if both customers are different, else FALSE.

Additional Inherited Members

8.33.1 Detailed Description

The [Customer](#) class [Customer](#).

Author

Antoine de Roquemaurel
 Florent Berbie

8.33.2 Constructor & Destructor Documentation

8.33.2.1 Models::Customer::Customer (int *id*)

[Customer::Customer](#) Construct a [Customer](#) who is specified by *id*

Parameters

<i>id</i>	Customer identify
-----------	-----------------------------------

8.33.3 Member Function Documentation

8.33.3.1 QString Models::Customer::getAddress () const

[Customer::getAddress](#) Return the address (name and street number) of the customer company.

Returns

company address

8.33.3.2 QString Models::Customer::getCity () const

[Customer::getCity](#) Return the city of the customer company.

Returns

city of the customer company

8.33.3.3 QString Models::Customer::getCompany () const

[Customer::getCompany](#) Return the name of the company customer.

Returns

name of the company customer

8.33.3.4 QString Models::Customer::getCountry () const

[Customer::getCountry](#) Return the country of the customer company.

Returns

country of the customer company

8.33.3.5 QVariantHash Models::Customer::getDataMap () [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.33.3.6 QString Models::Customer::getEmail () const

[Customer::getEmail](#) Return the email of the customer company.

Returns

email of the customer company

8.33.3.7 QString Models::Customer::getFax () const

[Customer::getFax](#) Return the fax number.

Returns

fax number

8.33.3.8 QString Models::Customer::getFirstnameReferent () const

[Customer::getFirstnameReferent](#) Return the firstname of the referent [Customer](#).

Returns

Referent firstname of the customer

8.33.3.9 QString Models::Customer::getLastnameReferent () const

[Customer::getLastnameReferent](#) Return the lastname of the referent [Customer](#).

Returns

Referent lastname of the customer

8.33.3.10 QString Models::Customer::getMobilePhone () const

[Customer::getMobilePhone](#) Return the number of the mobile phone of the customer company.

Returns

number of mobile phone

8.33.3.11 QString Models::Customer::getNameFolder () const

[Customer::getNameFolder](#) Return the name of the current [Customer](#)'s folder in the workspace.

Returns

name of the [Customer](#)'s folder

8.33.3.12 QString Models::Customer::getPath () const

[Customer::getPath](#) Return the path of the workspace for the current [Customer](#).

Returns

workspace path

8.33.3.13 QString Models::Customer::getPhone () const

[Customer::getPhone](#) Return the number of desktop phone.

Returns

number of desktop phone

8.33.3.14 QString Models::Customer::getPostalCode () const

[Customer::getPostalCode](#) Return the postal code of the customer company.

Returns

postal code of the customer company

8.33.3.15 void Models::Customer::hydrat (int *id*) [virtual]

[Customer::hydrat](#) Insert into database informations related to the [Customer](#) who is specified by *id*

Parameters

<i>id</i>	Customer identify
-----------	-----------------------------------

Implements [Models::IModel](#).

8.33.3.16 bool Models::Customer::operator!= (const Customer & *c*)

[Customer::operator ==](#) Re-define the operator "!=" to compare if the current customer is differnt to the other [Customer](#) *c* Return TRUE if both customers are different, else FALSE.

Parameters

<i>c</i>	Customer to compare
----------	-------------------------------------

Returns

boolean

8.33.3.17 bool Models::Customer::operator== (const Customer & *c*)

[Customer::operator ==](#) Re-define the operator "==" to compare if the current customer is the same to the other [Customer](#) *c* Return TRUE if both customers are the same, else FALSE.

Parameters

<i>c</i>	Customer to compare
----------	-------------------------------------

Returns

boolean

8.33.3.18 void Models::Customer::setAddress (const QString & *address*)

[Customer::setAddress](#) Replace the current company address by the new *address*

Parameters

<i>address</i>	New company address
----------------	---------------------

8.33.3.19 void Models::Customer::setCity (const QString & *city*)

[Customer::setCity](#) Replace the current city of the customer company by the new *city*

Parameters

<i>city</i>	New city of the customer company
-------------	----------------------------------

8.33.3.20 void Models::Customer::setCompany (const QString & *company*)

[Customer::setCompany](#) Replace the company name by *company*

Parameters

<i>company</i>	New company name
----------------	------------------

8.33.3.21 void Models::Customer::setCountry (const QString & *country*)

[Customer::setCountry](#) Replace the country of the [Customer](#) company by *country*

Parameters

<i>country</i>	New country of the customer company
----------------	-------------------------------------

8.33.3.22 void Models::Customer::setEmail (const QString & *email*)

[Customer::setEmail](#) Replace the email of the [Customer](#) company by *email*

Parameters

<i>email</i>	New email of the customer company
--------------	-----------------------------------

8.33.3.23 void Models::Customer::setFax (const QString & *fax*)

[Customer::setFax](#) Replace the current fax number by *fax*

Parameters

<i>fax</i>	new fax number
------------	----------------

8.33.3.24 void Models::Customer::setFirstnameReferent (const QString & *firstnameReferent*)

[Customer::setFirstnameReferent](#) Replace the referent firstname of the customer by *firstnameReferent*

Parameters

<i>firstname-Referent</i>	New referent firstname of the Customer
---------------------------	--

8.33.3.25 void Models::Customer::setLastnameReferent (const QString & *lastnameReferent*)

[Customer::setLastnameReferent](#) Replace the referent lastname of the customer by *lastnameReferent*

Parameters

<i>lastname-Referent</i>	New referent lastname of the Customer
--------------------------	---

8.33.3.26 void Models::Customer::setMobilePhone (const QString & *mobilePhone*)

[Customer::setMobilePhone](#) Replace the current mobile phone of the customer company by *mobilePhone*

Parameters

<i>mobilePhone</i>	New number of mobile phone
--------------------	----------------------------

8.33.3.27 void Models::Customer::setPhone (const QString & *phone*)

[Customer::setPhone](#) Replace the current number of desktop phone by *phone*

Parameters

<i>phone</i>	New number of desktop phone
--------------	-----------------------------

8.33.3.28 void Models::Customer::setPostalCode (const QString & *postalCode*)

[Customer::setPostalCode](#) Replace the current postal code of the customer company by the new *postalCode*

Parameters

<i>postalCode</i>	New postal code of the customer company
-------------------	---

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/customer.h
- /home/travis/build/FACT-Team/FactDev/src/models/customer.cpp

8.34 Gui::Widgets::CustomerContextMenu Class Reference

Display contextual menu on a customer.

```
#include <customercontextualmenu.h>
```

Inheritance diagram for Gui::Widgets::CustomerContextMenu:



Public Member Functions

- [CustomerContextMenu](#) (QWidget *w=0)
[CustomerContextMenu](#) Construct a new contextual menu.
- [~CustomerContextMenu](#) ()
Destruct the contextual menu.

8.34.1 Detailed Description

Display contextual menu on a customer.

Author

Antoine de Roquemaurel

8.34.2 Constructor & Destructor Documentation

8.34.2.1 Gui::Widgets::CustomerContextualMenu::CustomerContextualMenu (QWidget * w = 0)

[CustomerContextualMenu](#) Construct a new contextual menu.

Parameters

<i>w</i>	Parent
----------	--------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customercontextualmenu.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customercontextualmenu.cpp

8.35 Databases::CustomerDatabase Class Reference

The [CustomerDatabase](#) class Customer table database.

```
#include <customerdatabase.h>
```

Inheritance diagram for Databases::CustomerDatabase:



Public Member Functions

- [WdgModels::CustomersTableModel * getCustomersTable](#) (QString filter="") throw (DbException*)
[CustomerDatabase::getCustomersTable](#) Return an item model of customers for QTableView.
- QStandardItemModel * [getTree](#) (QString filter="") throw (DbException*)
[CustomerDatabase::getTree](#) Return an item model of customers for QTree.
- QSharedPointer< [Models::Customer](#) > [getCustomer](#) (const int pld)
[CustomerDatabase::getCustomer](#) get informations about the customer identified by pld
- int [addCustomer](#) (const [Models::Customer](#) &)
[CustomerDatabase::addCustomer](#) Add the customer pCustomer to the database.
- void [updateCustomer](#) (const [Models::Customer](#) &)
[CustomerDatabase::updateCustomer](#) Update informations about the customer pCustomer
- void [removeCustomer](#) (const int pld)
[CustomerDatabase::removeCustomer](#) Remove the customer with the id pld
- int [getNbCustomers](#) ()
[CustomerDatabase::getNbCustomers](#) Return the number of customers existing.
- QStandardItem * [getItemRoot](#) ()
[CustomerDatabase::getItemRoot](#) Return the first item for the QStandardItemModel.
- QStandardItem * [getItemCustomer](#) (QString q1)
[CustomerDatabase::getItemCustomer](#) Return the customer item for the QStandardItemModel.
- QStandardItem * [getItemProject](#) (QString q2)
[CustomerDatabase::getItemProject](#) Return the project item for the QStandardItemModel.
- QStandardItem * [getItemBillQuote](#) (QString q3)
[CustomerDatabase::getItemCustomer](#) Return the bill/quote item for the QStandardItemModel.
- QSharedPointer< [Models::Customer](#) > [getCustomer](#) (QString q1)

- [*CustomerDatabase::getCustomer*](#) Add the element of the *q* request and return their.
- void [*updateCustomer*](#) (QSqlQuery &q, [*Customer*](#) &pCustomer)
- [*CustomerDatabase::updateCustomer*](#) Update customer data according to the request *q*

Static Public Member Functions

- static [*CustomerDatabase * instance*](#) () throw (DbException*)
- [*CustomerDatabase::instance*](#) Return an instance of [*CustomerDatabase*](#)

Additional Inherited Members

8.35.1 Detailed Description

The [*CustomerDatabase*](#) class Customer table database.

Author

Antoine de Roquemaurel
Manantsoa Razanajatovo
Florent Berbie
Cédric Rohaut

See Also

[*Database*](#)
[*Customer*](#)

8.35.2 Member Function Documentation

8.35.2.1 int Databases::CustomerDatabase::addCustomer (const [*Models::Customer*](#) & *pCustomer*)

[*CustomerDatabase::addCustomer*](#) Add the customer *pCustomer* to the database.

Returns

customer id

8.35.2.2 QSharedPointer< [*Models::Customer*](#) > Databases::CustomerDatabase::getCustomer (const int *pld*)

[*CustomerDatabase::getCustomer*](#) get informations about the customer identified by *pld*

Parameters

<i>pld</i>	customer id
------------	-------------

Returns

the Customer

8.35.2.3 QSharedPointer< [*Models::Customer*](#) > Databases::CustomerDatabase::getCustomer (QSqlQuery & *q*)

[*CustomerDatabase::getCustomer*](#) Add the element of the *q* request and return their.

Parameters

<i>q</i>	SQL request
----------	-------------

Returns

a customer formed according to QSharedPointer

8.35.2.4 WdgModels::CustomersTableModel * Databases::CustomerDatabase::getCustomersTable (QString *filter* = " ") throw DbException *)

[CustomerDatabase::getCustomersTable](#) Return an item model of customers for QTableView.

Parameters

<i>filter</i>	Select only customers who are specified by <i>filter</i>
---------------	--

Exceptions

<i>DbException</i>	
--------------------	--

Returns

QStandardItemModel an item model for QTableView

8.35.2.5 QStandardItem * Databases::CustomerDatabase::getItemBillQuote (QSqlQuery *q3*)

[CustomerDatabase::getItemCustomer](#) Return the bill/quote item for the QStandardItemModel.

Parameters

<i>q3</i>	the first row of the sql query for bills/quotes
-----------	---

Returns

QStandardItem an item for QTree (level/depth 3)

8.35.2.6 QStandardItem * Databases::CustomerDatabase::getItemCustomer (QSqlQuery *q1*)

[CustomerDatabase::getItemCustomer](#) Return the customer item for the QStandardItemModel.

Parameters

<i>q1</i>	the row of the sql query for customers
-----------	--

Returns

QStandardItem an item for QTree (level/depth 1)

8.35.2.7 QStandardItem * Databases::CustomerDatabase::getItemProject (QSqlQuery *q2*)

[CustomerDatabase::getItemProject](#) Return the project item for the QStandardItemModel.

Parameters

<i>q2</i>	the row of the sql query for projects
-----------	---------------------------------------

Returns

QStandardItem an item for QTree (level/depth 2)

8.35.2.8 QStandardItem * Databases::CustomerDatabase::getItemRoot ()

[CustomerDatabase::getItemRoot](#) Return the first item for the QStandardItemModel.

Returns

QStandardItem an item for QTree (level/depth 0)

8.35.2.9 int Databases::CustomerDatabase::getNbCustomers ()

[CustomerDatabase::getNbCustomers](#) Return the number of customers existing.

Returns

number of customers

8.35.2.10 QStandardItemModel * Databases::CustomerDatabase::getTree (QString *filter* = " ") throw DbException *)

[CustomerDatabase::getTree](#) Return an item model of customers for QTree.

Parameters

<i>filter</i>	Select only customers who are specified by <i>filter</i>
---------------	--

Exceptions

<i>DbException</i>	
--------------------	--

Returns

QStandardItemModel an item model for QTreeView

8.35.2.11 CustomerDatabase * Databases::CustomerDatabase::instance () throw DbException *) [static]

[CustomerDatabase::instance](#) Return an instance of [CustomerDatabase](#)

See Also

DbException

Returns

Instance of [CustomerDatabase](#)

8.35.2.12 void Databases::CustomerDatabase::removeCustomer (const int *pld*)

[CustomerDatabase::removeCustomer](#) Remove the customer with the id *pld*

Parameters

<i>pId</i>	customer id
------------	-------------

8.35.2.13 void Databases::CustomerDatabase::updateCustomer (QSqlQuery & *q*, Customer & *pCustomer*)

[CustomerDatabase::updateCustomer](#) Update customer data according to the request *q*

Parameters


<i>q</i>	SQL request
----------	-------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/customerdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/customerdatabase.cpp

8.36 CustomerDatabaseTest Class Reference

Inheritance diagram for CustomerDatabaseTest:




The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/customerdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/customerdatabasetest.cpp

8.37 Ui::CustomerDataWidget Class Reference

Inheritance diagram for Ui::CustomerDataWidget:



Additional Inherited Members

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/ui_customerdatawidget.h

8.38 Gui::Widgets::CustomerDataWidget Class Reference

Class for display info of a customer.

```
#include <customerdatawidget.h>
```

Inheritance diagram for Gui::Widgets::CustomerDataWidget:



Public Member Functions

- **CustomerDataWidget** (QWidget *parent=0)
- void [printUserData](#) ()
printUserData Print Data of current user
- void [printInformations](#) (int id)
printInformations Print Data of customer id

8.38.1 Detailed Description

Class for display info of a customer.

Author

Cédric Rohaut

8.38.2 Member Function Documentation

8.38.2.1 void Gui::Widgets::CustomerDataWidget::printInformations (int id)

printInformations Print Data of customer id

Parameters


<i>id</i>	of customer to print
-----------	----------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customerdatawidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customerdatawidget.cpp

8.39 CustomerModelTest Class Reference

Inheritance diagram for CustomerModelTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/models/customermodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/customermodeltest.cpp

8.40 Gui::Widgets::WdgModels::CustomersTableModel Class Reference

The [CustomersTableModel](#) class for a customer table.

```
#include <customerstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::CustomersTableModel:



Public Member Functions

- [CustomersTableModel](#) (QObject *parent=0)
CustomersTableModel::CustomersTableModel Construct a [CustomersTableModel](#).
- int [rowCount](#) (const QModelIndex &) const
CustomersTableModel::rowCount Number of customers row.
- int [columnCount](#) (const QModelIndex &) const
CustomersTableModel::columnCount Number of column of a customer.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const
CustomersTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const
CustomersTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
CustomersTableModel::setData Change data of a cell.
- void [append](#) (const [Customer](#) &customer)
CustomersTableModel::append Add a new line in table.
- void [remove](#) (const int i)
CustomersTableModel::remove Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
CustomersTableModel::flags Differents table flags.
- int [count](#) ()
CustomersTableModel::count Number of customers in table.
- QList< [Customer](#) > [getCustomers](#) () const
CustomersTableModel::getCustomers Return the list of customers.

8.40.1 Detailed Description

The [CustomersTableModel](#) class for a customer table.

Author

Florent Berbie

See Also

Customer

8.40.2 Constructor & Destructor Documentation

8.40.2.1 `Gui::Widgets::WdgModels::CustomersTableModel::CustomersTableModel (QObject * parent = 0)`

[CustomersTableModel::CustomersTableModel](#) Construct a [CustomersTableModel](#).

Parameters

<i>parent</i>	Parent widget
---------------	---------------

8.40.3 Member Function Documentation

8.40.3.1 `void Gui::Widgets::WdgModels::CustomersTableModel::append (const Customer & customer)`

[CustomersTableModel::append](#) Add a new line in table.

Parameters

<i>Customer</i>	The new customer
-----------------	------------------

8.40.3.2 `int Gui::Widgets::WdgModels::CustomersTableModel::columnCount (const QModelIndex &) const`

[CustomersTableModel::columnCount](#) Number of column of a customer.

Returns

The number of column

8.40.3.3 `int Gui::Widgets::WdgModels::CustomersTableModel::count ()`

[CustomersTableModel::count](#) Number of customers in table.

Returns

The number of customers

8.40.3.4 `QVariant Gui::Widgets::WdgModels::CustomersTableModel::data (const QModelIndex & index, int role = Qt::DisplayRole) const`

[CustomersTableModel::data](#) Obtains data of a specify cell.

Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

Returns

The data of cell

8.40.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::CustomersTableModel::flags (const QModelIndex & index) const`

[CustomersTableModel::flags](#) Differents table flags.

Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

Returns

Flags

8.40.3.6 `QList< Customer > Gui::Widgets::WdgModels::CustomersTableModel::getCustomers () const`

[CustomersTableModel::getCustomers](#) Return the list of customers.

Returns

list of Customers

8.40.3.7 `QVariant Gui::Widgets::WdgModels::CustomersTableModel::headerData (int section, Qt::Orientation orientation, int role = Qt::DisplayRole) const`

[CustomersTableModel::headerData](#) Obtains header title of table.

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.40.3.8 `void Gui::Widgets::WdgModels::CustomersTableModel::remove (const int i)`

[CustomersTableModel::remove](#) Remove a line.

Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.40.3.9 `int Gui::Widgets::WdgModels::CustomersTableModel::rowCount (const QModelIndex &) const`

[CustomersTableModel::rowCount](#) Number of customers row.

Returns

The number of customers

8.40.3.10 `bool Gui::Widgets::WdgModels::CustomersTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[CustomersTableModel::setData](#) Change data of a cell.

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/customerstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/customerstablemodel.cpp

8.41 Databases::Database Class Reference

The **Database** class Master class for all database access.

```
#include <database.h>
```

Inheritance diagram for Databases::Database:



Public Member Functions

- QString **lastError** (const QSqlQuery &q) const
Database::lastError Return an error message on the last error occured during the SQL request q
- void **testCases** ()
Database::testCases Realise a test cases.
- void **cleanDatabase** ()
Database::viderDatabase Clear database.
- void **executeFile** (QString pName)
Database::executerFichier Exeute a specified file named pName
- void **openTransaction** ()
Database::openTransaction Open new transaction.
- void **closeTransaction** ()
Database::closeTransaction Close current transaction.
- void **close** ()
Database::close Close database access.
- void **open** ()
Database::open Open database.
- **~Database** ()
Database::~Database Suppression object, and close database access.
- void **setDatabase** (QSqlDatabase sql)
Database::setDatabase Set database.
- void **createDatabase** ()
Database::createDatabase Create a new database.
- void **updateBillingNumber** ()
Database::updateBillingNumber Update the billing number.

Static Public Member Functions

- static [Database](#) * [instance](#) () throw (DbException*)
Database::getInstance Return an instance of [Database](#).

Protected Member Functions

- [Database](#) () throw (DbException*)
Database::Database Database is a singleton.
- QVariant [value](#) (const QSqlQuery &q, const QString &champ) const
Database::valeur Value of database field.

Protected Attributes

- QSettings * [_settings](#)
settings
- QSqlDatabase [mDatabase](#)
contains Database
- QList< [Database](#) * > [_instances](#)
List of instances.

Static Protected Attributes

- static [Database](#) * [_instance](#) = 0
Instance.
- static bool [_dbInstance](#) = 0
an instance of db is open
- static bool [isOpen](#) = false
Database is open.

8.41.1 Detailed Description

The [Database](#) class Master class for all database access.

Author

Antoine de Roquemaurel

8.41.2 Member Function Documentation

8.41.2.1 void Databases::Database::executeFile (QString *pName*)

Database::executerFichier Exeute a specified file named *pName*

Parameters

<i>pNom</i>	File name
-------------	-----------

8.41.2.2 Database * Databases::Database::instance () throw DbException *) [static]

Database::getInstance Return an instance of [Database](#).

Returns

Instance of [Database](#)

8.41.2.3 QString Databases::Database::lastError (const QSqlQuery & q) const [inline]

[Database::lastError](#) Return an error message on the last error occurred during the SQL request *q*

Parameters

<i>q</i>	SQL request
----------	-------------

Returns

an error message

8.41.2.4 void Databases::Database::setDatabase (QSqlDatabase sql)

[Database::setDatabase](#) Set database.

Parameters

<i>sql</i>	The new database
------------	------------------

8.41.2.5 QVariant Databases::Database::value (const QSqlQuery & q, const QString & champ) const [protected]

Database::valeur Value of database field.

Parameters

<i>q</i>	Query
<i>champ</i>	Field

Returns

The value

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/database/database.h
- /home/travis/build/FACT-Team/FactDev/src/database/database.cpp

8.42 Exceptions::DbException Class Reference

The [DbException](#) class for database exception : queries, db file, ...

```
#include <dbexception.h>
```

Inheritance diagram for Exceptions::DbException:



Public Member Functions

- [DbException](#) (const QString fct, const QString fctName, const QString logError, float errorCode)
[DbException::DbException](#). Construct a [DbException](#).
- virtual [~DbException](#) () throw ()
[~DbException](#)
- void [popupMessage](#) (QWidget *parent)
[DbException::popupMessage](#). Display a popup message with the message error.

8.42.1 Detailed Description

The [DbException](#) class for database exception : queries, db file, ...

Author

Antoine de Roquemaurel

8.42.2 Constructor & Destructor Documentation

8.42.2.1 [Exceptions::DbException::DbException](#) (const QString *fct*, const QString *fctName*, const QString *logError*, float *errorCode*)

[DbException::DbException](#). Construct a [DbException](#).

Parameters

<i>userError</i>	ClassName of error
<i>fctName</i>	Function name
<i>logError</i>	Message error
<i>errorCode</i>	Code of error

8.42.3 Member Function Documentation

8.42.3.1 void [Exceptions::DbException::popupMessage](#) (QWidget * *parent*)

[DbException::popupMessage](#). Display a popup message with the message error.

Parameters


<i>parent</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/exceptions/dbexception.h
- /home/travis/build/FACT-Team/FactDev/src/exceptions/dbexception.cpp

8.43 Ui::DialogAddCustomer Class Reference

Inheritance diagram for Ui::DialogAddCustomer:



Additional Inherited Members

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/ui_dialogaddcustomer.h

8.44 Gui::Dialogs::DialogAddCustomer Class Reference

The [DialogAddCustomer](#) class Window to add or modify a Customer.

```
#include <dialogaddcustomer.h>
```

Inheritance diagram for Gui::Dialogs::DialogAddCustomer:



Public Slots

- void [checkFields](#) ()
setFieldsComponents

Public Member Functions

- [DialogAddCustomer](#) (int id=0, QWidget *parent=0)
DialogAddCustomer Construct a window to add/modify a Customer.
- void [fillFields](#) ()
fillFields If the Customer exists, fill line edits with the data of the current Customer
- void [accept](#) ()
accept Valid data inputed by user and add these data in Database
- void [reject](#) ()
reject Cancel the operation and close the windows

8.44.1 Detailed Description

The [DialogAddCustomer](#) class Window to add or modify a Customer.

Author

Cédric Rohaut

8.44.2 Constructor & Destructor Documentation

8.44.2.1 Gui::Dialogs::DialogAddCustomer::DialogAddCustomer (int *id* = 0, QWidget * *parent* = 0) [explicit]

[DialogAddCustomer](#) Construct a window to add/modify a Customer.

Parameters


<i>id</i>	Customer id
<i>parent</i>	QWidget parent

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/dialogaddcustomer.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/dialogaddcustomer.cpp

8.45 Gui::Widgets::Delegates::DoubleSpinBoxDelegate Class Reference

Inheritance diagram for Gui::Widgets::Delegates::DoubleSpinBoxDelegate:



Public Member Functions

- **DoubleSpinBoxDelegate** (QObject *parent=0)
- QWidget * **createEditor** (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
- void **setEditorData** (QWidget *editor, const QModelIndex &index) const
- void **setModelData** (QWidget *editor, QAbstractItemModel *model, const QModelIndex &index) const
- void **updateEditorGeometry** (QWidget *editor, const QStyleOptionViewItem &option, const QModelIndex &index) const

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/doublespinboxdelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/doublespinboxdelegate.cpp

8.46 Exceptions::FileException Class Reference

The [FileException](#) class for file/access file exception.

```
#include <fileexception.h>
```

Public Member Functions

- [FileException](#) (const QString userError, const QString fctName, const QString logError, float errorCode)
[FileException::FileException](#). Construct a [FileException](#).
- void [popupMessage](#) (QWidget *parent)
[FileException::popupMessage](#). Display a popup message with the message error.

8.46.1 Detailed Description

The [FileException](#) class for file/access file exception.

Author

Florent Berbie

8.46.2 Constructor & Destructor Documentation

8.46.2.1 Exceptions::FileException::FileException (const QString *userError*, const QString *fctName*, const QString *logError*, float *errorCode*)

[FileException::FileException](#). Construct a [FileException](#).

Parameters

<i>userError</i>	ClassName of error
<i>fctName</i>	Function name
<i>logError</i>	Message error
<i>errorCode</i>	Code of error

8.46.3 Member Function Documentation

8.46.3.1 void Exceptions::FileException::popupMessage (QWidget * *parent*)

[FileException::popupMessage](#). Display a popup message with the message error.

Parameters


<i>parent</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/exceptions/fileexception.h
- /home/travis/build/FACT-Team/FactDev/src/exceptions/fileexception.cpp

8.47 Generation Class Reference

Inheritance diagram for Generation:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/generation.h
- /home/travis/build/FACT-Team/FactDev/tests/generation.cpp

8.48 Generator Class Reference

Public Member Functions

- **Generator** (QString tpl)
- void **generate** (QVariantHash data, QString path)

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/generator.h
- /home/travis/build/FACT-Team/FactDev/src/generator.cpp

8.49 Utils::HierarchicalSystem Class Reference

The [HierarchicalSystem](#) class Create class which contains hierarchical system of FactDev.

```
#include <hierarchicalseystem.h>
```

Public Member Functions

- [HierarchicalSystem](#) ()
HierarchicalSystem::HierarchicalSystem Construct a [HierarchicalSystem](#).
- void [getAllProjects](#) ()
HierarchicalSystem::getAllProjects Get all projects and add each project to Customer linked.
- void [getAllBillings](#) ()
HierarchicalSystem::getAllBillings Get all billings and add each billing to Project linked.
- void [updateData](#) ()
HierarchicalSystem::updateData Update data on Customers, Projects, Billings.
- void [addProjectToCustomer](#) (Project *p, Customer c)
HierarchicalSystem::addProjectToCustomer Add the Project p to the Customer c
- void [addBillingToProject](#) (Billing *b, Project *p)
HierarchicalSystem::addBillingToProject Add the Billing b to the Project p
- QMap< [Project](#) *, [Customer](#) > [getCustomers](#) () const
HierarchicalSystem::getCustomers Return all customers and these projects linked.
- QMap< [Billing](#) *, [Project](#) * > [getProjects](#) () const
HierarchicalSystem::getProjects Return all projects and these billing linked.

8.49.1 Detailed Description

The [HierarchicalSystem](#) class Create class which contains hierarchical system of FactDev.

Author

Florent Berbie

See Also

Customer
Project
Billing

8.49.2 Member Function Documentation

8.49.2.1 void Utils::HierarchicalSystem::addBillingToProject (Billing * *b*, Project * *p*)

[HierarchicalSystem::addBillingToProject](#) Add the Billing *b* to the Project *p*

Parameters

<i>b</i>	Billing
<i>p</i>	Project

8.49.2.2 void Utils::HierarchicalSystem::addProjectToCustomer (Project * *p*, Customer *c*)

[HierarchicalSystem::addProjectToCustomer](#) Add the Project *p* to the Customer *c*

Parameters

<i>p</i>	Project
<i>c</i>	Customer

8.49.2.3 QMap< Project *, Customer > Utils::HierarchicalSystem::getCustomers () const

[HierarchicalSystem::getCustomers](#) Return all customers and these projects linked.

Returns

Projects linked to Customers

8.49.2.4 QMap< Billing *, Project * > Utils::HierarchicalSystem::getProjects (void) const

[HierarchicalSystem::getProjects](#) Return all projects and these billing linked.

Returns

Billing linked to Projects

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/utls/hierarchicalsistem.h
- /home/travis/build/FACT-Team/FactDev/src/utls/hierarchicalsistem.cpp

8.50 Gui::Widgets::CheckFields::ICheckField Class Reference

The [ICheckField](#) class Interface to check fields validity.

```
#include <icheckfield.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::ICheckField:

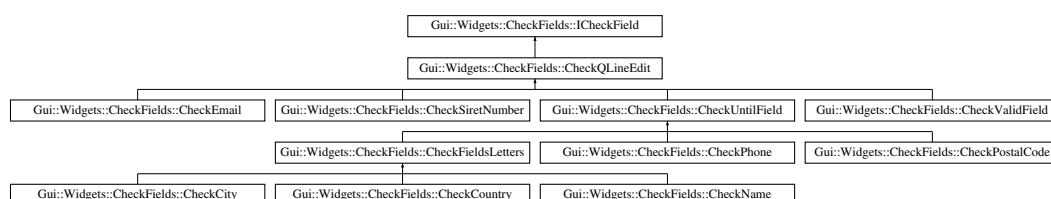

Public Member Functions

- virtual bool [check](#) (QString text)=0
check Check if the field (line edit) is valid Return TRUE if the field is valid, else FALSE

8.50.1 Detailed Description

The [ICheckField](#) class Interface to check fields validity.

8.50.2 Member Function Documentation

8.50.2.1 virtual bool Gui::Widgets::CheckFields::ICheckField::check (QString text) [pure virtual]

check Check if the field (line edit) is valid Return TRUE if the field is valid, else FALSE

Returns

boolean

Implemented in [Gui::Widgets::CheckFields::CheckEmail](#), [Gui::Widgets::CheckFields::CheckPhone](#), [Gui::Widgets::CheckFields::CheckPostalCode](#), [Gui::Widgets::CheckFields::CheckSiretNumber](#), [Gui::Widgets::CheckFields::CheckUntilField](#), [Gui::Widgets::CheckFields::CheckFieldsLetters](#), and [Gui::Widgets::CheckFields::CheckValidField](#).

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/ichckfield.h

8.51 Models::IModel Class Reference

The [IModel](#) class.

```
#include <imodel.h>
```

Inheritance diagram for Models::IModel:



Public Member Functions

- virtual [~IModel](#) ()
~IModel Remove an instance of IModel
- virtual void [commit](#) ()=0
IModel::commit Update or insert data into the database.
- virtual void [hydrat](#) (int id)=0
IModel::hydrat Get data of the element which is specified by the identify id from the database.
- virtual void [remove](#) ()=0
IModel::remove Remove the current element in the database.
- virtual QVariantHash [getDataMap](#) ()=0
getDataMap Get all data of model with a HashMap key/value
- int [getId](#) () const

- [`IModel::getId`](#) *Return the identify of the element of the database.*
- void [`setId`](#) (int id)
[`IModel::setId`](#) *Replace the current identify by id*
- bool [`isToRemoved`](#) () const
toRemoved return if object must be removed.
- void [`setToRemoved`](#) (bool toRemoved)
setToRemoved Change the flag for removed object

Protected Attributes

- int [`_id`](#)
Element identify.
- bool [`_toRemoved`](#)
Flag to know if the object must be removed.

8.51.1 Detailed Description

The [`IModel`](#) class.

Author

Antoine de Roquemaurel

8.51.2 Member Function Documentation

8.51.2.1 `virtual QVariantHash Models::IModel::getDataMap () [pure virtual]`

`getDataMap` Get all data of model with a HashMap key/value

Returns

Model's data

Implemented in [`Models::Billing`](#), [`Models::Project`](#), [`Models::Contributory`](#), [`Models::User`](#), and [`Models::Customer`](#).

8.51.2.2 `int Models::IModel::getId () const [inline]`

[`IModel::getId`](#) Return the identify of the element of the database.

Returns

identity

8.51.2.3 `virtual void Models::IModel::hydrat (int id) [pure virtual]`

[`IModel::hydrat`](#) Get data of the element which is specified by the identify *id* from the database.

Parameters

<i>id</i>	
-----------	--

Implemented in [Models::Project](#), [Models::Billing](#), [Models::Contributory](#), [Models::User](#), and [Models::Customer](#).

8.51.2.4 `bool Models::IModel::isToRemoved () const [inline]`

toRemoved return if object must be removed.

Returns

8.51.2.5 `void Models::IModel::setId (int id) [inline]`

[IModel::setId](#) Replace the current identify by *id*

Parameters

<i>id</i>	New identify
-----------	--------------

8.51.2.6 `void Models::IModel::setToRemoved (bool toRemoved) [inline]`

setToRemoved Change the flag for removed object

Parameters

<i>toRemoved</i>	The new flag
------------------	--------------

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/models/imodel.h

8.52 Utils::ItemType Class Reference

The [ItemType](#) class Item type model.

```
#include <itemtype.h>
```

Public Member Functions

- [ItemType](#) (int type, QString name)
ItemType::ItemType Construct an Item type.
- QString [getName](#) () const
ItemType::getName Get item name.
- [Models::IModel](#) * [getModel](#) (int id)
ItemType::getModel Get the databasemodel of the [ItemType](#) according to this identity id
- void [setName](#) (const QString &name)
ItemType::setName Modify the item name.
- int [getType](#) () const
ItemType::getType Get the type of the current item.
- void [setType](#) (int type)
ItemType::setType Modify the type of the current item.

Static Public Attributes

- static const int [CUSTOMER](#) = 0
constant value assigned to Customer
- static const int [PROJECT](#) = 1
constant value assigned to Project
- static const int [BILLING](#) = 2
constant value assigned to Billing
- static const int [QUOTE](#) = 3
constant value assigned to Quote

8.52.1 Detailed Description

The [ItemType](#) class Item type model.

8.52.2 Constructor & Destructor Documentation

8.52.2.1 Utils::ItemType::ItemType (int *type*, QString *name*)

[ItemType::ItemType](#) Construct an Item type.

Parameters

<i>type</i>	Type of the item
<i>name</i>	Name of the item

8.52.3 Member Function Documentation

8.52.3.1 Models::IModel * Utils::ItemType::getModel (int *id*)

[ItemType::getModel](#) Get the databasemodel of the [ItemType](#) according to this identity *id*

Parameters

<i>id</i>	Item type identity
-----------	--------------------

Returns

database model

8.52.3.2 QString Utils::ItemType::getName () const

[ItemType::getName](#) Get item name.

Returns

item name

8.52.3.3 int Utils::ItemType::getType () const

[ItemType::getType](#) Get the type of the current item.

Returns

type of the current item

8.52.3.4 void Utils::ItemType::setName (const QString & name)

[ItemType::setName](#) Modify the item name.

Parameters

<i>name</i>	New Item name
-------------	---------------

8.52.3.5 void Utils::ItemType::setType (int type)

[ItemType::setType](#) Modify the type of the current item.

Parameters

<i>type</i>	New item type
-------------	---------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utils/itemtype.h
- /home/travis/build/FACT-Team/FactDev/src/utils/itemtype.cpp

8.53 Utils::Log Class Reference

The [Log](#) class for Simple management of log.

```
#include <log.h>
```

Public Member Functions

- [~Log](#) ()
Log::~~Log.
- void [write](#) (const QString text)
Log::write. Write log message in file.
- [Log](#) ()
Log::Log. Log is a singleton.

Static Public Member Functions

- static [Log](#) & [instance](#) (TypeLog type=INFO)
Log::instance. Return the instance of logger.

Friends

- [Log](#) & [operator<<](#) ([Log](#) &logger, const QString &text)
operator<< for log writing

8.53.1 Detailed Description

The [Log](#) class for Simple management of log.

8.53.2 Member Function Documentation

8.53.2.1 Log & Utils::Log::instance (TypeLog *type* = INFO) [static]

[Log::instance](#). Return the instance of logger.

Parameters

<i>type</i>	Type of log : WARNING, INFO, ERROR
-------------	------------------------------------

Returns

Instance of logger.

8.53.2.2 void Utils::Log::write (const QString text)

[Log::write](#). Write log message in file.

Parameters

<i>text</i>	
-------------	--

8.53.3 Friends And Related Function Documentation

8.53.3.1 Log& operator<< (Log & logger, const QString & text) [friend]

operator << for log writing

Parameters

<i>logger</i>	Instance of Logger
<i>text</i>	Text to write

Returns

New logger.

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utils/log.h
- /home/travis/build/FACT-Team/FactDev/src/utils/log.cpp

8.54 Gui::MainWindow Class Reference

The [MainWindow](#) class Main Window of the software.

```
#include <mainwindow.h>
```

Inheritance diagram for Gui::MainWindow:



Public Slots

- void [addCustomer](#) ()
[MainWindow::addCustomer](#) open window to add a new customer.
- void [editCustomer](#) ()

- MainWindow::editCustomer* open window to modify a customer.
- void `removeCustomer` ()
 - MainWindow::removeCustomer* open a popup to confirm the deletion of a customer, if ok remove the customer.
- void `addQuote` ()
 - MainWindow::addQuote* open window to add a new quote.
- void `addBill` ()
 - MainWindow::addBill* open window to add a new bill.
- void `editUser` ()
 - MainWindow::editUser* modify the user.
- void `search` (QString s)
 - MainWindow::search* launch a new search.
- void `search` ()
 - MainWindow::search* call *search(QString)*
- void `newProject` ()
 - MainWindow::newProject* Create a new project for a customer.
- void `removeProject` (void)
 - MainWindow::removeProject* Remove a project for a customer.
- void `editProject` (void)
 - MainWindow::editProject* Modify the customer project.
- void `aboutQt` ()
 - MainWindow::aboutQt* show Qt's details.
- void `aboutFact` ()
 - MainWindow::aboutFact* show FACT's details (FACT team)
- void `aboutFactDev` ()
 - MainWindow::aboutFactDev()* show FactDev's details (FactDev Software)
- void `aboutIcons` ()
 - MainWindow::aboutIcons()* show icons's details.
- void `updateButtons` (void)
 - updateButton* Update all button to disable or enabled its
- void `editDoc` ()
 - MainWindow::editDoc* Edit the quote or bill of the project.
- void `removeDoc` ()
 - MainWindow::removeDoc* Remove the quote or bill of the project.

Public Member Functions

- `MainWindow` (QWidget *parent=0)
 - MainWindow*: Construct a window.
- int `getCurrentCustomerId` ()
 - MainWindow::getCurrentCustomerId* get the selected customer.
- int `getCurrentProjectId` ()
 - MainWindow::getCurrentProjectId* get the selected project id.
- int `getCurrentQuoteId` ()
 - MainWindow::getCurrentQuoteId* get the selected quote id.
- QString `getCurrentCustomerName` ()
 - MainWindow::getCurrentCustomerName* get the selected customer name in the customers' table.
- QString `getCurrentProjectName` ()
 - MainWindow::getCurrentProjectName* get the selected project name in the table of projects.
- int `treeLevel` ()
 - MainWindow::treeLevel* return the level of the node selected in the tree.

- QModelIndex [rootTree](#) ()
MainWindow::rootTree return the root of the tree "Tous les clients".
- void [addDoc](#) (bool isBilling)
MainWindow::addDoc open window to add a new document.
- void **demo** ()

8.54.1 Detailed Description

The [MainWindow](#) class Main Window of the software.

Author

Everybody

8.54.2 Constructor & Destructor Documentation

8.54.2.1 [Gui::MainWindow::MainWindow](#) ([QWidget](#) * *parent* = 0) [explicit]

[MainWindow](#): Construct a window.

Parameters

<i>parent</i>	
---------------	--

8.54.3 Member Function Documentation

8.54.3.1 void [Gui::MainWindow::addBill](#) () [slot]

[MainWindow::addBill](#) open window to add a new bill.

See Also

[AddQuoteDialog](#)

8.54.3.2 void [Gui::MainWindow::addDoc](#) (bool *isBilling*)

[MainWindow::addDoc](#) open window to add a new document.

Parameters

<i>bool</i>	quote or bill
-------------	---------------

See Also

[addBill](#) [addQuote](#)

8.54.3.3 void [Gui::MainWindow::addQuote](#) () [slot]

[MainWindow::addQuote](#) open window to add a new quote.

See Also

[AddQuoteDialog](#)

8.54.3.4 void Gui::MainWindow::editUser () [slot]

[MainWindow::editUser](#) modify the user.

See Also

UserDataDialog

8.54.3.5 int Gui::MainWindow::getCurrentCustomerId ()

[MainWindow::getCurrentCustomerId](#) get the selected customer.

Returns

id of the selected customer

8.54.3.6 QString Gui::MainWindow::getCurrentCustomerName ()

[MainWindow::getCurrentCustomerName](#) get the selected customer name in the customers' table.

Returns

name of the selected customer

8.54.3.7 int Gui::MainWindow::getCurrentProjectId ()

[MainWindow::getCurrentProjectId](#) get the selected project id.

Returns

id of the selected project

8.54.3.8 QString Gui::MainWindow::getCurrentProjectName ()

[MainWindow::getCurrentProjectName](#) get the selected project name in the table of projects.

Returns

name of the selected project

8.54.3.9 int Gui::MainWindow::getCurrentQuoteId ()

[MainWindow::getCurrentQuoteId](#) get the selected quote id.

Returns

id of the selected quote

8.54.3.10 void Gui::MainWindow::newProject () [slot]

[MainWindow::newProject](#) Create a new project for a customer.

See Also

AddProjectDialog

8.54.3.11 QModelIndex Gui::MainWindow::rootTree ()

[MainWindow::rootTree](#) return the root of the tree "Tous les clients".

Returns

QModelIndex

8.54.3.12 void Gui::MainWindow::search (QString s) [slot]

[MainWindow::search](#) launch a new search.

Parameters

s	text in field
---	---------------

8.54.3.13 int Gui::MainWindow::treeLevel ()

[MainWindow::treeLevel](#) return the level of the node selected in the tree.

Returns


integer, depth of the item in tree

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/mainwindow.h
- /home/travis/build/FACT-Team/FactDev/src/mainwindow.cpp

8.55 Ui::MainWindow Class Reference

Inheritance diagram for Ui::MainWindow:




Additional Inherited Members

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_mainwindow.h

8.56 Ui::MessageBox Class Reference

Inheritance diagram for Ui::MessageBox:



Additional Inherited Members

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/ui_messagebox.h

8.57 Gui::Dialogs::MessageBox Class Reference

The [MessageBox](#) class Information window with message.

```
#include <messagebox.h>
```

Inheritance diagram for Gui::Dialogs::MessageBox:



Public Member Functions

- [MessageBox](#) (QWidget *parent=0)
[MessageBox::MessageBox](#) Construt a [MessageBox](#)
- void [aboutFact](#) ()
[MessageBox::aboutFact](#) Defines FACT team information.
- void [aboutFactDev](#) ()
[MessageBox::aboutFactDev](#) Defines FactDev software information.
- void [aboutIcons](#) ()
[MessageBox::aboutIcons](#) Defines icons theme information.
- void [setImage](#) (QString img, int width=128, int height=128)
[MessageBox::setImage](#) Add the icon img to the current window.
- void [setText](#) (QString txt)
[MessageBox::setText](#) Add the text txt to the current window.

Static Public Member Functions

- static void [showAboutFact](#) ()
[MessageBox::showAboutFact](#) Shows window about FACT team.
- static void [showAboutFactDev](#) ()
[MessageBox::showAboutFactDev](#) Shows window about FactDev software.
- static void [showAboutIcons](#) ()
[MessageBox::showAboutIcons](#) Shows about icons theme of FactDev software.

8.57.1 Detailed Description

The [MessageBox](#) class Information window with message.

Author

Florent Berbie

8.57.2 Constructor & Destructor Documentation

8.57.2.1 Gui::Dialogs::MessageBox::MessageBox (QWidget * *parent* = 0) [explicit]

[MessageBox::MessageBox](#) Construt a [MessageBox](#)

Parameters

<i>parent</i>	
---------------	--

8.57.3 Member Function Documentation

8.57.3.1 void Gui::Dialogs::MessageBox::setImage (QString *img*, int *width* = 128, int *height* = 128)

[MessageBox::setImage](#) Add the icon *img* to the current window.

Parameters

<i>img</i>	Icon
<i>width</i>	Icon width (default: 128)
<i>height</i>	Icon height (default: 128)

8.57.3.2 void Gui::Dialogs::MessageBox::setText (QString *txt*)

[MessageBox::setText](#) Add the text *txt* to the current window.

Parameters

<i>txt</i>	Text inside the current window
------------	--------------------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/messagebox.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/messagebox.cpp

8.58 Parameters Class Reference

The [Parameters](#) class Class for simple user parameters.

```
#include <parameters.h>
```

Public Member Functions

- [Parameters](#) ()
Parameters Construct a new parameters.

Static Public Attributes

- static const QString [DB_FILENAME](#) = "database.db"
DB_FILENAME The database sqlite file name.
- static const double [VERSION](#) = 0.2
VERSION Version number of software.

8.58.1 Detailed Description

The [Parameters](#) class Class for simple user parameters.

Author

Antoine de Roquemaurel

8.58.2 Member Data Documentation

8.58.2.1 `const QString Parameters::DB_FILENAME = "database.db" [static]`

DB_FILENAME The database sqlite file name.

Database file name

8.58.2.2 `const double Parameters::VERSION = 0.2 [static]`

VERSION Version number of software.

Application version


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/parameters.h
- /home/travis/build/FACT-Team/FactDev/src/parameters.cpp

8.59 Mustache::PartialFileLoader Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialFileLoader:



Public Member Functions

- **PartialFileLoader** (const QString &basePath)
- virtual QString [getPartial](#) (const QString &name)

8.59.1 Detailed Description

A partial fetcher when loads templates from '<name>.mustache' files in a given directory.

Once a partial has been loaded, it is cached for future use.

8.59.2 Member Function Documentation

8.59.2.1 `QString PartialFileLoader::getPartial (const QString & name) [virtual]`

Returns the partial template with a given `name`.

Implements [Mustache::PartialResolver](#).


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

8.60 Mustache::PartialMap Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialMap:



Public Member Functions

- **PartialMap** (const QHash< QString, QString > &partials)
- virtual QString [getPartial](#) (const QString &name)

8.60.1 Detailed Description

A simple partial fetcher which returns templates from a map of (partial name -> template)

8.60.2 Member Function Documentation

8.60.2.1 `QString PartialMap::getPartial (const QString & name) [virtual]`

Returns the partial template with a given `name`.

Implements [Mustache::PartialResolver](#).


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

8.61 Mustache::PartialResolver Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialResolver:



Public Member Functions

- virtual QString [getPartial](#) (const QString &name)=0

8.61.1 Detailed Description

Interface for fetching template partials.

8.61.2 Member Function Documentation

8.61.2.1 virtual QString Mustache::PartialResolver::getPartial (const QString & *name*) [pure virtual]

Returns the partial template with a given *name*.

Implemented in [Mustache::PartialFileLoader](#), and [Mustache::PartialMap](#).

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h

8.62 Gui::Widgets::Popup Class Reference

Class for display popup quickly.

```
#include <popup.h>
```

Static Public Member Functions

- static void [toImplement](#) (QString, QWidget *)
[Popup::toImplement](#) Method to display a critical message : feature is not implemented now.

8.62.1 Detailed Description

Class for display popup quickly.

Author

Antoine de Roquemaurel

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/popup.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/popup.cpp

8.63 Models::Project Class Reference

The [Project](#) class : [Project](#) linked to a [Customer](#).

```
#include <project.h>
```

Inheritance diagram for Models::Project:



Public Member Functions

- [Project](#) ()
[Project::Project](#) Construct a [Project](#).

- [Project](#) (QString name)
Project::project Construct a project with a name.
- [Project](#) (int id)
Project::Project Construct a [Project](#) which is specified by an id
- virtual [~Project](#) ()
~Project Destruct project object
- void [commit](#) ()
Project::commit Update project data in the database.
- void [hydrat](#) (int id)
Project::hydrat Insert project data which is specified by id in the database.
- void [remove](#) ()
Project::remove Remove the current project.
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- QString [getName](#) () const
Project::getName Return the project name.
- void [setName](#) (const QString &name)
Project::setName Modify the project name
- QString [getDescription](#) () const
Project::getDescription Return a project description.
- void [setDescription](#) (const QString &description)
Project::setDescription Modify the project description
- QDate [getBeginDate](#) () const
Project::getBeginDate return the date of creation of the [Project](#)
- void [setBeginDate](#) (QDate beginDate)
Project::setBeginDate Modify beginDate of a [Project](#)
- QDate [getEndDate](#) () const
Project::getEndDate Return the endDate of the [Project](#)
- void [setEndDate](#) (QDate endDate)
Project::setEndDate Modify endDate of [Project](#)
- double [getDailyRate](#) () const
Project::getDailyRate Return the daily rate estimated for this project.
- void [setDailyRate](#) (double dailyRate)
Project::setDailyRate Modify the daily rate dailyRate of the current project.
- QSharedPointer< [Customer](#) > [getCustomer](#) () const
Project::getCustomer Return the reference to the customer linked to this project.
- void [setCustomer](#) (QSharedPointer< [Customer](#) > customer)
Project::setCustomer Modify the customer linked to this project.
- bool [operator==](#) (const [Project](#) &p)
Project::operator == Re-define the operator "==" to compare if the current project is the same to the other [Project](#) p
Return TRUE if both projects are the same, else FALSE.
- bool [operator<](#) (const [Project](#) &p) const
Project::operator < defines the operator "<" to compare two [Project](#) and to see if the first is anterior to the second.

Additional Inherited Members

8.63.1 Detailed Description

The [Project](#) class : [Project](#) linked to a [Customer](#).

Author

Florent Berbie

See Also

[IModel](#)

8.63.2 Constructor & Destructor Documentation

8.63.2.1 Models::Project::Project (int *id*)

[Project::Project](#) Construct a [Project](#) which is specified by an *id*

Parameters

<i>id</i>	
-----------	--

8.63.3 Member Function Documentation

8.63.3.1 QDate Models::Project::getBeginDate () const

[Project::getBeginDate](#) return the date of creation of the [Project](#)

Returns

the begin date of the [Project](#)

8.63.3.2 QSharedPointer< Customer > Models::Project::getCustomer () const

[Project::getCustomer](#) Return the reference to the customer linked to this project.

Returns

customer linked to this project

8.63.3.3 double Models::Project::getDailyRate () const

[Project::getDailyRate](#) Return the daily rate estimated for this project.

Returns

the daily rate linket to the current project

8.63.3.4 QVariantHash Models::Project::getDataMap () [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.63.3.5 QString Models::Project::getDescription () const

[Project::getDescription](#) Return a project description.

Returns

project description

8.63.3.6 QDate Models::Project::getEndDate () const

[Project::getEndDate](#) Return the *endDate* of the [Project](#)

Returns

the end date of the project

8.63.3.7 QString Models::Project::getName () const

[Project::getName](#) Return the project name.

Returns

project name

8.63.3.8 void Models::Project::hydrat (int *id*) [virtual]

[Project::hydrat](#) Insert project data which is specified by *id* in the database.

Parameters

<i>id</i>	Project identify
-----------	----------------------------------

Implements [Models::IModel](#).

8.63.3.9 bool Models::Project::operator< (const Project & *p*) const

[Project::operator <](#) defines the operator "<" to compare two [Project](#) and to see if the first is anterior to the second.

Parameters

<i>b</i>	the Project to compare with the current Project
----------	---

Returns

true if the [Project](#) are different else false

8.63.3.10 bool Models::Project::operator== (const Project & *p*)

[Project::operator ==](#) Re-define the operator "==" to compare if the current project is the same to the other [Project](#) *p*
Return TRUE if both projects are the same, else FALSE.

Parameters

<i>c</i>	Project to compare
----------	------------------------------------

Returns

boolean

8.63.3.11 void Models::Project::setBeginDate (QDate *beginDate*)

[Project::setBeginDate](#) Modify *beginDate* of a [Project](#)

Parameters

<i>beginDate</i>	the new date of creation of the project
------------------	---

8.63.3.12 void Models::Project::setCustomer (QSharedPointer< Customer > *customer*)

[Project::setCustomer](#) Modify the *customer* linked to this project.

Parameters

<i>customer</i>	New customer associated to this project
-----------------	---

8.63.3.13 void Models::Project::setDailyRate (double *dailyRate*)

[Project::setDailyRate](#) Modify the daily rate *dailyRate* of the current project.

Parameters

<i>dailyRate</i>	New daily rate associated to the current project
------------------	--

8.63.3.14 void Models::Project::setDescription (const QString & *description*)

[Project::setDescription](#) Modify the project *description*

Parameters

<i>description</i>	New project description
--------------------	-------------------------

8.63.3.15 void Models::Project::setEndDate (QDate *endDate*)

[Project::setEndDate](#) Modify *endDate* of [Project](#)

Parameters

<i>endDate</i>	the new end date of the project
----------------	---------------------------------

8.63.3.16 void Models::Project::setName (const QString & *name*)

[Project::setName](#) Modify the project *name*

Parameters


<i>name</i>	Project name
-------------	------------------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/project.h
- /home/travis/build/FACT-Team/FactDev/src/models/project.cpp

8.64 Gui::Widgets::Delegates::ProjectComboDelegate Class Reference

Inheritance diagram for Gui::Widgets::Delegates::ProjectComboDelegate:

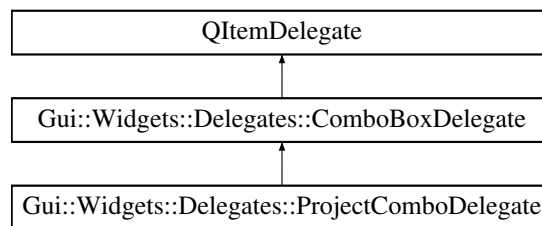

Public Member Functions


- **ProjectComboDelegate** (QSharedPointer< [Models::Customer](#) > c, QObject *parent=0)
- QWidget * **createEditor** (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
- void **paint** (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const
- void **removeInCombo** (QList< int > &)
- QMap< int, [Models::Project](#) > **getProjects** () const
- bool **getLocked** () const
- void **setLocked** (bool getLocked)

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/projectcombodelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/projectcombodelegate.cpp

8.65 Gui::Widgets::WdgModels::ProjectContributoriesTableModel Class Reference

Inheritance diagram for Gui::Widgets::WdgModels::ProjectContributoriesTableModel:



Public Member Functions

- [ProjectContributoriesTableModel](#) (QObject *parent=0)
ContributoriesTableModel Construct a *ContributoriesTableModel*.

- int [rowCount](#) (const QModelIndex &) const
rowCount Number of contributories row
- int [columnCount](#) (const QModelIndex &) const
columnCount Number of column of a contributory
- QVariant [data](#) (const QModelIndex &index, int role) const
data Obtains data of a specify cell
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role) const
headerData Obtains header title of table
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
setData Change data of a cell
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
flags Differents table flags
- void **append** (QPair< [Models::Project](#) *, [Models::Rate](#) > p)
- void **append** ()
- bool **allProjectsChose** ()
- QList< int > & **getSelectedProjects** ()
- void **remove** (int index)
- QPair< [Models::Project](#) *, [Models::Rate](#) > **getProject** (const int row)
- QList< QPair< [Models::Project](#) *, [Models::Rate](#) > > **getProjects** (void)

8.65.1 Constructor & Destructor Documentation

8.65.1.1 Gui::Widgets::WdgModels::ProjectContributoriesTableModel::ProjectContributoriesTableModel (QObject * *parent* = 0)

[ContributoriesTableModel](#) Construct a [ContributoriesTableModel](#).

Parameters

<i>parent</i>	Parent widget
---------------	---------------

8.65.2 Member Function Documentation

8.65.2.1 int Gui::Widgets::WdgModels::ProjectContributoriesTableModel::columnCount (const QModelIndex &) const

columnCount Number of column of a contributory

Returns

The number of column

8.65.2.2 QVariant Gui::Widgets::WdgModels::ProjectContributoriesTableModel::data (const QModelIndex & *index*, int *role*) const

data Obtains data of a specify cell

Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

Returns

The data of cell

8.65.2.3 `Qt::ItemFlags Gui::Widgets::WdgModels::ProjectContributoriesTableModel::flags (const QModelIndex & index) const`

flags Differents table flags

Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

Returns

Flags

8.65.2.4 `QVariant Gui::Widgets::WdgModels::ProjectContributoriesTableModel::headerData (int section, Qt::Orientation orientation, int role) const`

headerData Obtains header title of table

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.65.2.5 `int Gui::Widgets::WdgModels::ProjectContributoriesTableModel::rowCount (const QModelIndex &) const`

rowCount Number of contributories row

Returns

The number of contributories

8.65.2.6 `bool Gui::Widgets::WdgModels::ProjectContributoriesTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

setData Change data of a cell

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value

<i>role</i>	The role of cell
-------------	------------------

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectcontributoriestablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectcontributoriestablemodel.cpp

8.66 Databases::ProjectDatabase Class Reference

The [ProjectDatabase](#) class Project table database.

```
#include <projectdatabase.h>
```

Inheritance diagram for Databases::ProjectDatabase:



Public Member Functions

- [Models::Project](#) * [getProject](#) (const int pld)
ProjectDatabase::getProject Get informations about the project identified by 'pld'.
- [Models::Project](#) * [getProject](#) (QString &q)
ProjectDatabase::getProject.
- int [addProject](#) (const [Models::Project](#) &)
ProjectDatabase::addProject Add the project 'pProject' to the database.
- void [updateProject](#) (const [Models::Project](#) &)
ProjectDatabase::updateProject Update informations about the project.
- void [removeProject](#) (const int pld)
removeProject Remove the project with the id 'pld'
- int [getNbProjects](#) ()
ProjectDatabase::getNbProjects Return the number of projects existing.
- int [getNbProjectsForACustomer](#) (const int pld)
ProjectDatabase::getNbProjectsForACustomer Return the number of projects existing for an identify customer pld
- QMap< int, [Models::Project](#) > [getProjectsOfCustomer](#) (QSharedPointer< [Models::Customer](#) > c)
getProjectsOfCustomer Return all projects of a customer
- [WdgModels::ProjectsTableModel](#) * [getProjectsTable](#) (const int pld) throw (DbException*)
getProjectsTable Return all projects of a customer in QStandardItemModel
- QSharedPointer< [Project](#) > [updateProject](#) (QString &q)
getProject Obtain a project without new query
- QList< [Project](#) * > [getAllProjects](#) ()
Project::getAllProjects Return the list of projects.

Static Public Member Functions

- static [ProjectDatabase](#) * [instance](#) () throw (DbException*)
ProjectDatabase::getInstance Return an instance of [ProjectDatabase](#).

Additional Inherited Members

8.66.1 Detailed Description

The [ProjectDatabase](#) class Project table database.

Author

Florent Berbie

See Also

[Database](#)
[Project](#)

8.66.2 Member Function Documentation

8.66.2.1 int Databases::ProjectDatabase::addProject (const Models::Project & *pProject*)

[ProjectDatabase](#)::addProject Add the project 'pProject' to the database.

Returns

project id

8.66.2.2 QList< [Project](#) * > Databases::ProjectDatabase::getAllProjects ()

[Project](#)::getAllProjects Return the list of projects.

Returns

Projects list

8.66.2.3 int Databases::ProjectDatabase::getNbProjects ()

[ProjectDatabase](#)::getNbProjects Return the number of projects existing.

Returns

number of projects

8.66.2.4 int Databases::ProjectDatabase::getNbProjectsForACustomer (const int *pld*)

[ProjectDatabase](#)::getNbProjectsForACustomer Return the number of projects existing for an identify customer *pld*

Parameters

<i>pld</i>	Project id
------------	------------

Returns

number of projects

8.66.2.5 Models::Project * Databases::ProjectDatabase::getProject (const int *pld*)

[ProjectDatabase::getProject](#) Get informations about the project identified by 'pld'.

Parameters

<i>pld</i>	project
------------	---------

Returns

the project

8.66.2.6 Models::Project * Databases::ProjectDatabase::getProject (QSqlQuery & *q*)

[ProjectDatabase::getProject](#).

Parameters

<i>q</i>	
----------	--

Returns

8.66.2.7 QMap< int, Models::Project > Databases::ProjectDatabase::getProjectsOfCustomer (QSharedPointer< Models::Customer > *c*)

[getProjectsOfCustomer](#) Return all projects of a customer

Parameters

<i>c</i>	The customer
----------	--------------

Returns

All projects of *c* with id in key

8.66.2.8 WdgModels::ProjectsTableModel * Databases::ProjectDatabase::getProjectsTable (const int *pld*) throw DbException *)

[getProjectsTable](#) Return all projects of a customer in QStandardItemModel

Parameters

<i>filter</i>	Select only projects who are specified by <i>filter</i>
---------------	---

Returns

QStandardItemModel an item model for QTableView

8.66.2.9 ProjectDatabase * Databases::ProjectDatabase::instance () throw DbException *) [static]

ProjectDatabase::getInstance Return an instance of [ProjectDatabase](#).

Returns

Instance of [ProjectDatabase](#)

8.66.2.10 void Databases::ProjectDatabase::removeProject (const int *pld*)

removeProject Remove the project with the id 'pld'

Parameters

<i>pld</i>	project id
------------	------------

8.66.2.11 QSharedPointer< Models::Project > Databases::ProjectDatabase::updateProject (QSqlQuery & *q*)

getProject Obtain a project without new query

Parameters

<i>q</i>	The query to use
----------	------------------

Returns

The project linked to q

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/database/projectdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/projectdatabase.cpp

8.67 Gui::Widgets::WdgModels::ProjectsTableModel Class Reference

The [ProjectsTableModel](#) class for a Project table.

```
#include <projectstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ProjectsTableModel:



Public Member Functions

- [ProjectsTableModel](#) ()
ProjectsTableModel::ProjectsTableModel Construct a [ProjectsTableModel](#).
- int [rowCount](#) (const QModelIndex &) const
ProjectsTableModel::rowCount Number of projects row.
- int [columnCount](#) (const QModelIndex &) const
ProjectsTableModel::columnCount Number of column of a Project.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const
ProjectsTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const
ProjectsTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
ProjectsTableModel::setData Change data of a cell.
- void [append](#) (const [Project](#) &project)
ProjectsTableModel::append Add a new line in table.
- void [remove](#) (const int i)
ProjectsTableModel::remove Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
ProjectsTableModel::flags Differents table flags.
- int [count](#) ()
ProjectsTableModel::count Number of projects in table.
- QList< [Project](#) > [getProjects](#) () const
ProjectsTableModel::getProjects Return the list of projects.

8.67.1 Detailed Description

The [ProjectsTableModel](#) class for a Project table.

Author

Florent Berbie

See Also

[Project](#)

8.67.2 Constructor & Destructor Documentation

8.67.2.1 Gui::Widgets::WdgModels::ProjectsTableModel::ProjectsTableModel ()

[ProjectsTableModel::ProjectsTableModel](#) Construct a [ProjectsTableModel](#).

Parameters

<i>parent</i>	Parent widget
---------------	---------------

8.67.3 Member Function Documentation

8.67.3.1 void Gui::Widgets::WdgModels::ProjectsTableModel::append (const [Project](#) & *project*)

[ProjectsTableModel::append](#) Add a new line in table.

Parameters

<i>Project</i>	The new Project
----------------	-----------------

8.67.3.2 `int Gui::Widgets::WdgModels::ProjectsTableModel::columnCount (const QModelIndex &) const`

[ProjectsTableModel::columnCount](#) Number of column of a Project.

Returns

The number of column

8.67.3.3 `int Gui::Widgets::WdgModels::ProjectsTableModel::count ()`

[ProjectsTableModel::count](#) Number of projects in table.

Returns

The number of projects

8.67.3.4 `QVariant Gui::Widgets::WdgModels::ProjectsTableModel::data (const QModelIndex & index, int role = Qt::DisplayRole) const`

[ProjectsTableModel::data](#) Obtains data of a specify cell.

Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

Returns

The data of cell

8.67.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::ProjectsTableModel::flags (const QModelIndex & index) const`

[ProjectsTableModel::flags](#) Differents table flags.

Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

Returns

Flags

8.67.3.6 `QList< Project > Gui::Widgets::WdgModels::ProjectsTableModel::getProjects (void) const`

[ProjectsTableModel::getProjects](#) Return the list of projects.

Returns

list of projects

8.67.3.7 QVariant Gui::Widgets::WdgModels::ProjectsTableModel::headerData (int *section*, Qt::Orientation *orientation*, int *role* = Qt::DisplayRole) const

[ProjectsTableModel::headerData](#) Obtains header title of table.

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.67.3.8 `void Gui::Widgets::WdgModels::ProjectsTableModel::remove (const int i)`

[ProjectsTableModel::remove](#) Remove a line.

Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.67.3.9 `int Gui::Widgets::WdgModels::ProjectsTableModel::rowCount (const QModelIndex &) const`

[ProjectsTableModel::rowCount](#) Number of projects row.

Returns

The number of projects

8.67.3.10 `bool Gui::Widgets::WdgModels::ProjectsTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[ProjectsTableModel::setData](#) Change data of a cell.

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectstablemodel.cpp

8.68 Gui::Widgets::ProjectsWidget Class Reference

The [ProjectsWidget](#) class Actions on Project.

```
#include <projectswidget.h>
```

Inheritance diagram for Gui::Widgets::ProjectsWidget:



Public Slots

- void [newProject](#) ()
ProjectsWidget::newProject Event which sends a signal to add a new project.
- void [editSelectedProject](#) ()
ProjectsWidget::editSelectedProject Event which sends a signal to edit the project selected.
- void [removeSelectedProject](#) ()
ProjectsWidget::removeSelectedProject Event which sends a signal to remove the project selected.
- void [updateBtn](#) (bool b)
ProjectsWidget::updateBtn Update the toolbar in tblProjects.

Signals

- void [addProject](#) ()
ProjectsWidget::addProject Add a new project to the current Customer.
- void [editProject](#) ()
ProjectsWidget::editProject Edit the current Customer selected.
- void [removeProject](#) ()
ProjectsWidget::removeProject Remove the current Customer selected.

Public Member Functions

- [ProjectsWidget](#) (QWidget *parent=0)
ProjectsWidget::ProjectsWidget Construct a [ProjectsWidget](#).

8.68.1 Detailed Description

The [ProjectsWidget](#) class Actions on Project.

Author

Florent Berbie

8.68.2 Constructor & Destructor Documentation

8.68.2.1 [Gui::Widgets::ProjectsWidget::ProjectsWidget](#) ([QWidget](#) * *parent* = 0) [explicit]

[ProjectsWidget::ProjectsWidget](#) Construct a [ProjectsWidget](#).

Parameters

<i>parent</i>	
---------------	--

8.68.3 Member Function Documentation

8.68.3.1 void Gui::Widgets::ProjectsWidget::updateBtn (bool *b*) [slot]

[ProjectsWidget::updateBtn](#) Update the toolbar in tblProjects.

Parameters


<i>boolean</i>	if a row is selected
----------------	----------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/projectswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/projectswidget.cpp
- /home/travis/build/FACT-Team/FactDev/src/moc_projectswidget.cpp

8.69 Ui::ProjectsWidget Class Reference

Inheritance diagram for Ui::ProjectsWidget:



Additional Inherited Members

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_projectswidget.h

8.70 qt_meta_stringdata_BillingDatabaseTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [9]
- char **stringdata** [123]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_billingdatabasetest.cpp

8.71 qt_meta_stringdata_BillingModelTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [9]
- char **stringdata** [103]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_billingmodeltest.cpp

8.72 qt_meta_stringdata_ContributoriesDatabaseTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [8]
- char **stringdata** [128]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_contributoriesdatabasetest.cpp

8.73 qt_meta_stringdata_CustomerDatabaseTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [7]
- char **stringdata** [87]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_customerdatabasetest.cpp

8.74 qt_meta_stringdata_CustomerModelTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [11]
- char **stringdata** [108]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_customermodeltest.cpp

8.75 qt_meta_stringdata_Generation_t Struct Reference

Public Attributes

- QByteArrayData **data** [5]
- char **stringdata** [67]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_generation.cpp

8.76 qt_meta_stringdata_Gui__Dialogs__AddProjectDialog_t Struct Reference

Public Attributes

- QByteArrayData **data** [3]

- char **stringdata** [45]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_addprojectdialog.cpp

8.77 qt_meta_stringdata_Gui__Dialogs__AddQuoteDialog_t Struct Reference

Public Attributes

- QByteArrayData **data** [3]
- char **stringdata** [41]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_addquotedialog.cpp

8.78 qt_meta_stringdata_Gui__Dialogs__DialogAddCustomer_t Struct Reference

Public Attributes

- QByteArrayData **data** [3]
- char **stringdata** [46]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_dialogaddcustomer.cpp

8.79 qt_meta_stringdata_Gui__Dialogs__MessageBox_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [26]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_messagebox.cpp

8.80 qt_meta_stringdata_Gui__Dialogs__UserDataDialog_t Struct Reference

Public Attributes

- QByteArrayData **data** [4]
- char **stringdata** [63]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_userdatadialog.cpp

8.81 qt_meta_stringdata_Gui__MainWindow_t Struct Reference

Public Attributes

- QByteArrayData **data** [32]
- char **stringdata** [431]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_mainwindow.cpp

8.82 qt_meta_stringdata_Gui__Widgets__CheckFields__CheckQLineEdit_t Struct Reference

Public Attributes

- QByteArrayData **data** [4]
- char **stringdata** [66]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_checkqlineedit.cpp

8.83 qt_meta_stringdata_Gui__Widgets__ComboBoxModelWidget_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [35]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_comboboxmodelwidget.cpp

8.84 qt_meta_stringdata_Gui__Widgets__ContributoriesWidget_t Struct Reference

Public Attributes

- QByteArrayData **data** [13]
- char **stringdata** [160]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_contributorieswidget.cpp

8.85 qt_meta_stringdata_Gui__Widgets__CustomerDataWidget_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [34]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_customerdatawidget.cpp

8.86 qt_meta_stringdata_Gui__Widgets__Delegates__ComboBoxDelegate_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [43]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_comboboxdelegate.cpp

8.87 qt_meta_stringdata_Gui__Widgets__Delegates__DoubleSpinBoxDelegate_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [48]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_doubleSpinBoxdelegate.cpp

8.88 qt_meta_stringdata_Gui__Widgets__Delegates__ProjectComboDelegate_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [47]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_projectcombodelegate.cpp

8.89 qt_meta_stringdata_Gui__Widgets__Delegates__UnitComboDelegate_t Struct Reference

Public Attributes

- QByteArrayData **data** [1]
- char **stringdata** [44]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_unitcombodelegate.cpp

8.90 qt_meta_stringdata_Gui__Widgets__ProjectsWidget_t Struct Reference

Public Attributes

- QByteArrayData **data** [10]
- char **stringdata** [133]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_projectswidget.cpp

8.91 qt_meta_stringdata_Gui__Widgets__RateWidget_t Struct Reference

Public Attributes

- QByteArrayData **data** [4]
- char **stringdata** [54]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_ratewidget.cpp

8.92 qt_meta_stringdata_Gui__Widgets__searchWidget_t Struct Reference

Public Attributes

- QByteArrayData **data** [6]
- char **stringdata** [76]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/moc_searchwidget.cpp

8.93 qt_meta_stringdata_RateModelTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [8]
- char **stringdata** [89]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_ratemodeltest.cpp

8.94 qt_meta_stringdata_searchTest_t Struct Reference

Public Attributes

- QByteArrayData **data** [11]
- char **stringdata** [213]

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_searchtest.cpp

8.95 qt_meta_stringdata_TestMustache_t Struct Reference

Public Attributes

- QByteArrayData **data** [14]
- char **stringdata** [184]


The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/moc_test_mustache.cpp

8.96 Mustache::QtVariantContext Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::QtVariantContext:

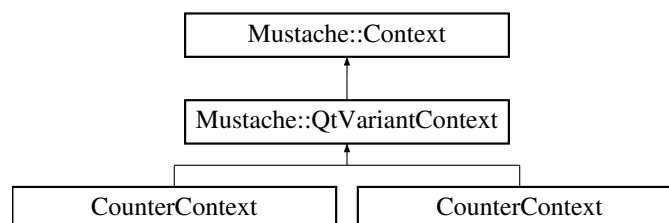

Public Types

- typedef QString(* **fn_t**)(const QString &, [Mustache::Renderer](#) *, [Mustache::Context](#) *)

Public Member Functions

- **QtVariantContext** (const QVariant &root, [PartialResolver](#) *resolver=0)
- virtual QString [stringValue](#) (const QString &key) const
- virtual bool [isFalse](#) (const QString &key) const
- virtual int [listCount](#) (const QString &key) const
- virtual void [push](#) (const QString &key, int index=-1)
- virtual void [pop](#) ()
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer)

8.96.1 Detailed Description

A context implementation which wraps a QVariantHash or QVariantMap.

8.96.2 Member Typedef Documentation

8.96.2.1 `typedef QString(* Mustache::QtVariantContext::fn_t)(const QString &, Mustache::Renderer *, Mustache::Context *)`

Construct a [QtVariantContext](#) which wraps a dictionary in a QVariantHash or a QVariantMap.

8.96.3 Member Function Documentation

8.96.3.1 `bool QtVariantContext::canEval (const QString & key) const` [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using `key`. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

8.96.3.2 `QString QtVariantContext::eval (const QString & key, const QString & _template, Mustache::Renderer * renderer)` [virtual]

Callback used to render a template section with the given `key`. `renderer` will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

8.96.3.3 `bool QtVariantContext::isFalse (const QString & key) const` [virtual]

Returns true if the value for `key` is 'false' or an empty list. 'False' values typically include empty strings, the boolean value false etc.

When processing a section Mustache tag, the section is not rendered if the key is false, or for an inverted section tag, the section is only rendered if the key is false.

Implements [Mustache::Context](#).

8.96.3.4 `int QtVariantContext::listCount (const QString & key) const` [virtual]

Returns the number of items in the list value for `key` or 0 if the value for `key` is not a list.

Implements [Mustache::Context](#).

8.96.3.5 `void QtVariantContext::pop ()` [virtual]

Exit the current context.

Implements [Mustache::Context](#).

8.96.3.6 `void QtVariantContext::push (const QString & key, int index = -1)` [virtual]

Set the current context to the value for `key`. If `index` is ≥ 0 , set the current context to the `index`'th value in the list value for `key`.

Implements [Mustache::Context](#).

8.96.3.7 `QString QtVariantContext::stringValue (const QString & key) const` [virtual]

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Implements [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp`

8.97 Models::Rate Class Reference

Public Member Functions


- **Rate** (double hourly)
- **Rate** (int idBilling, int idProject)
- void **setDailyRate** (const double &)
- void **setHourlyRate** (const double &)
- double **getDailyRate** () const
- double **getHourlyRate** () const
- int **getNbDailyHours** () const
- double **getLegalRate** () const

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/models/rate.h`
- `/home/travis/build/FACT-Team/FactDev/src/models/rate.cpp`

8.98 Databases::RateDatabase Class Reference

Inheritance diagram for Databases::RateDatabase:



Public Member Functions

- void **addRateProject** (int idProject, int idBilling, double hourlyRate)
- double **getRate** (const int idBilling, const int idProject) const
- void **updateRateProject** (int idProject, int idBilling, double hourlyRate)

Static Public Member Functions

- static [RateDatabase](#) * [instance](#) () throw (DbException*)
RateDatabase::getInstance Return an instance of [RateDatabase](#).

Additional Inherited Members

8.98.1 Member Function Documentation

8.98.1.1 [RateDatabase](#) * [Databases::RateDatabase::instance](#) () throw [DbException](#) * [static]

[RateDatabase::getInstance](#) Return an instance of [RateDatabase](#).

Returns


Instance of [RateDatabase](#)

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/ratedatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/ratedatabase.cpp

8.99 RateModelTest Class Reference

Inheritance diagram for RateModelTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/models/ratemodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/ratemodeltest.cpp

8.100 Gui::Widgets::RateWidget Class Reference

Class for display Rate.

```
#include <ratewidget.h>
```

Inheritance diagram for Gui::Widgets::RateWidget:



Public Slots

- void [setDailyRate](#) ()
setDailyRate Set a new value for the daily rate
- void [setHourlyRate](#) ()
setHourlyRate Set a new value for the hourly rate

Public Member Functions

- [RateWidget](#) (QWidget *parent=0)
RateWidget::RateWidget Construct a rate widget.
- void [initRate](#) ()
RateWidget::initRate Initialize the rate.
- void [setWidgetDailyRateValue](#) (double value)
RateWidget::setWidgetDailyRateValue Modify the value of the daily rate spin box component.
- double [getDailyRate](#) ()
RateWidget::getDailyRate Get the daily rate.
- double [getHourlyRate](#) ()
RateWidget::getHourlyRate Get the hourly rate.
- void [setWidgetHourlyRateValue](#) (double value)
RateWidget::setWidgetHourlyRateValue Modify the value of the hourly rate spin box component.
- void [updateConversionRate](#) ()
updateConversionRate Update daily rate or hourly rate

8.100.1 Detailed Description

Class for display Rate.

Author

Florent Berbie

8.100.2 Constructor & Destructor Documentation

8.100.2.1 [Gui::Widgets::RateWidget::RateWidget](#) (QWidget * *parent* = 0) [explicit]

[RateWidget::RateWidget](#) Construct a rate widget.

Parameters

<i>parent</i>	The QWidget parent
---------------	--------------------

8.100.3 Member Function Documentation

8.100.3.1 `double Gui::Widgets::RateWidget::getDailyRate ()`

[RateWidget::getDailyRate](#) Get the daily rate.

Returns

The daily rate

8.100.3.2 `double Gui::Widgets::RateWidget::getHourlyRate ()`

[RateWidget::getHourlyRate](#) Get the hourly rate.

Returns

The hourly rate

8.100.3.3 `void Gui::Widgets::RateWidget::setDailyRate () [slot]`

[setDailyRate](#) Set a new value for the daily rate

Parameters

<i>dailyRate</i>	The new daily rate
------------------	--------------------

8.100.3.4 `void Gui::Widgets::RateWidget::setHourlyRate () [slot]`

[setHourlyRate](#) Set a new value for the hourly rate

Parameters

<i>hourlyRate</i>	The new hourly rate
-------------------	---------------------

8.100.3.5 `void Gui::Widgets::RateWidget::setWidgetDailyRateValue (double value)`

[RateWidget::setWidgetDailyRateValue](#) Modify the *value* of the daily rate spin box component.

Parameters

<i>value</i>	New Value
--------------	-----------

8.100.3.6 `void Gui::Widgets::RateWidget::setWidgetHourlyRateValue (double value)`

[RateWidget::setWidgetHourlyRateValue](#) Modify the *value* of the hourly rate spin box component.

Parameters


<i>value</i>	New value
--------------	-----------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/ratewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/ratewidget.cpp

8.101 Ui::RateWidget Class Reference

Inheritance diagram for Ui::RateWidget:



Additional Inherited Members

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_ratewidget.h

8.102 Mustache::Renderer Class Reference

```
#include <mustache.h>
```

Public Member Functions

- QString [render](#) (const QString &_template, [Context](#) *context)
- QString [error](#) () const
- int [errorPos](#) () const
- QString [errorPartial](#) () const
- void [setTagMarkers](#) (const QString &startMarker, const QString &endMarker)

8.102.1 Detailed Description

Renders Mustache templates, replacing mustache tags with values from a provided context.

8.102.2 Member Function Documentation

8.102.2.1 QString Renderer::error () const

Returns a message describing the last error encountered by the previous [render\(\)](#) call.

8.102.2.2 QString Renderer::errorPartial () const

Returns the name of the partial where the error occurred, or an empty string if the error occurred in the main template.

8.102.2.3 `int Renderer::errorPos () const`

Returns the position in the template where the last error occurred when rendering the template or -1 if no error occurred.

If the error occurred in a partial template, the returned position is the offset in the partial template.

8.102.2.4 `QString Renderer::render (const QString & _template, Context * context)`

Render a Mustache template, using `context` to fetch the values used to replace Mustache tags.

8.102.2.5 `void Renderer::setTagMarkers (const QString & startMarker, const QString & endMarker)`

Sets the default tag start and end markers. This can be overridden within a template.

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp`

8.103 Models::Search Class Reference

The [Search](#) class.

```
#include <search.h>
```

Public Member Functions

- [Search](#) ()
Search::Search Construct a search.
- [~Search](#) ()
Search::Search Destruct a search.
- `QString` [getFilter](#) ()
Search::getFilter Return the search filter.
- `void` [filterOnVarcharElements](#) (`QString` &filter, `const QStringList` list, `QString` element)
Search::filterOnVarcharElements Search, for each word of the list from the filter, if it corresponds to the element in the database.
- `void` [filterOnNumberElements](#) (`QString` &filter, `const QStringList` list, `QString` element)
Search::filterOnNumberElements Search, for each number of the list from the filter, if it corresponds to the element in the database.
- `void` [filterOnCompany](#) (`QString` &filter, `const QStringList` list)
Search::filterOnCompany Search all companies contained in the list of the filter
- `void` [filterOnReferentLastname](#) (`QString` &filter, `const QStringList` list)
Search::filterOnReferentLastname Search all referents last name contained in the list of the filter
- `void` [filterOnProjects](#) (`QString` &filter, `const QStringList` list)
Search::filterOnProjects Search all projects contained in the list of the filter
- `void` [filterOnContributories](#) (`QString` &filter, `const QStringList` list)
Search::filterOnContributories Search all contributories contained in the list of the filter
- `void` [filterOnBillsOrQuotes](#) (`QString` &filter, `const QStringList` list)
Search::filterOnBillsOrQuotes Search all bills or quotes which are contained in the list of the filter
- `void` [filterOnCustomersWithoutProject](#) (`QString` &filter, `const QStringList` list)
Search::filterOnCustomersWithoutProject Search all customers which are contained in the list of the filter

- bool [getSearchInCompanies](#) () const
Search::getSearchInCompanies Return if we search a company.
- void [setSearchInCompanies](#) (bool searchInCompanies)
Search::setSearchInCompanies Modify the filter of companies search.
- bool [getSearchInReferentLastname](#) () const
Search::getSearchInReferentLastname Return if we search a Last name referent.
- void [setSearchInReferentLastname](#) (bool searchInReferentLastname)
Search::setSearchInReferentLastname Modify the filter of referents last name search.
- bool [getSearchInProjects](#) () const
Search::getSearchInProjects Return TRUE if it exists one or more projets in database.
- void [setSearchInProjects](#) (bool searchInProjects)
Search::setSearchInProjects Modify the filter of projects search.
- bool [searchInContributories](#) () const
Search::getSearchInContributories Return TRUE if it exists one or more projets in database.
- void [setSearchInContributories](#) (bool [searchInContributories](#))
Search::setSearchInContributories Modify the filter of contributories search.
- bool [getSearchInBillsQuotes](#) () const
Search::searchInBillsQuotes Return TRUE if it exists one or more bills or quotes in database.
- void [setSearchInBillsQuotes](#) (bool searchInBillsQuotes)
Search::setSearchInBillsQuotes Modify the filter of bills and quotes search.
- bool [getGroupFilter](#) () const
Search::getGroupFilter Return if the filter is activated.
- void [setGroupFilter](#) (bool [getGroupFilter](#))
Search::setGroupFilter Modify if we active search filter.
- QString [getText](#) () const
Search::getText Return sql portion of filter.
- void [setText](#) (const QString &[getText](#))
Search::setText Modify sql portion.

8.103.1 Detailed Description

The [Search](#) class.

Author

Antoine de Roquemaurel
Florent Berbie

8.103.2 Member Function Documentation

8.103.2.1 void Models::Search::filterOnBillsOrQuotes (QString & *filter*, const QStringList *list*)

[Search::filterOnBillsOrQuotes](#) [Search](#) all bills or quotes which are contained in the *list* of the *filter*

Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of bills or quotes

8.103.2.2 void Models::Search::filterOnCompany (QString & *filter*, const QStringList *list*)

[Search::filterOnCompany](#) [Search](#) all companies contained in the *list* of the *filter*

Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of companies

8.103.2.3 void Models::Search::filterOnContributories (QString & *filter*, const QStringList *list*)

[Search::filterOnContributories Search](#) all contributories contained in the *list* of the *filter*

Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of contributories

8.103.2.4 void Models::Search::filterOnCustomersWithoutProject (QString & *filter*, const QStringList *list*)

[Search::filterOnCustomersWithoutProject Search](#) all customers which are contained in the *list* of the *filter*

Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of bills or quotes

8.103.2.5 void Models::Search::filterOnNumberElements (QString & *filter*, const QStringList *list*, QString *element*)

[Search::filterOnNumberElements Search](#), for each number of the *list* from the *filter*, if it corresponds to the *element* in the database.

Parameters

<i>filter</i>	Text inputed in the searchbar
<i>list</i>	List of numbers from the <i>filter</i>
<i>element</i>	Attribute name into the database

8.103.2.6 void Models::Search::filterOnProjects (QString & *filter*, const QStringList *list*)

[Search::filterOnProjects Search](#) all projects contained in the *list* of the *filter*

Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of projects

8.103.2.7 void Models::Search::filterOnReferentLastname (QString & *filter*, const QStringList *list*)

[Search::filterOnReferentLastname Search](#) all referents last name contained in the *list* of the *filter*

Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of referent last name

8.103.2.8 void Models::Search::filterOnVarcharElements (QString & *filter*, const QStringList *list*, QString *element*)

[Search::filterOnVarcharElements](#) [Search](#), for each word of the *list* from the *filter*, if it corresponds to the *element* in the database.

Parameters

<i>filter</i>	Text inputed in the searchbar
<i>list</i>	List of words from the <i>filter</i>
<i>element</i>	Attribute name into the database

8.103.2.9 QString Models::Search::getFilter ()

[Search::getFilter](#) Return the search filter.

Returns

filter selected (sql portion)

8.103.2.10 bool Models::Search::getGroupFilter () const

[Search::getGroupFilter](#) Return if the filter is activated.

Returns

boolean if search filter is activated

8.103.2.11 bool Models::Search::getSearchInBillsQuotes () const

[Search::searchInBillsQuotes](#) Return TRUE if it exists one or more bills or quotes in database.

Returns

boolean if bills or quotes are existing

8.103.2.12 bool Models::Search::getSearchInCompanies () const

[Search::getSearchInCompanies](#) Return if we search a company.

Returns

boolean if we search a company

8.103.2.13 bool Models::Search::getSearchInProjects () const

[Search::getSearchInProjects](#) Return TRUE if it exists one or more projets in database.

Returns

boolean if project are existing

8.103.2.14 bool Models::Search::getSearchInReferentLastname () const

[Search::getSearchInReferentLastname](#) Return if we search a Last name referent.

Returns

boolean if search concerns the last name of referent

8.103.2.15 QString Models::Search::getText () const

[Search::getText](#) Return sql portion of filter.

Returns

QString the sql portion

8.103.2.16 bool Models::Search::searchInContributories () const

[Search::getSearchInContributories](#) Return TRUE if it exists one or more projets in database.

Returns

boolean if contributories are existing

8.103.2.17 void Models::Search::setGroupFilter (bool *getGroupFilter*)

[Search::setGroupFilter](#) Modify if we active search filter.

Parameters

<i>getGroupFilter</i>	Get if filter is actived
-----------------------	--------------------------

8.103.2.18 void Models::Search::setSearchInBillsQuotes (bool *searchInBillsQuotes*)

[Search::setSearchInBillsQuotes](#) Modify the filter of bills and quotes search.

Parameters

<i>searchInBills-Quotes</i>	Search in bills or quotes which are concerned
-----------------------------	---

8.103.2.19 void Models::Search::setSearchInCompanies (bool *searchInCompanies*)

[Search::setSearchInCompanies](#) Modify the filter of companies search.

Parameters

<i>getSearchIn-Companies</i>	Search in companies is concerned
------------------------------	--

8.103.2.20 void Models::Search::setSearchInContributories (bool *searchInContributories*)

[Search::setSearchInContributories](#) Modify the filter of contributories search.

Parameters

<i>searchIn-Contributories</i>	Search in contributories which are concerned
--------------------------------	--

8.103.2.21 void Models::Search::setSearchInProjects (bool *searchInProjects*)

[Search::setSearchInProjects](#) Modify the filter of projects search.

Parameters

<i>searchInProjects</i>	Search in projects which are concerned
-------------------------	--

8.103.2.22 void Models::Search::setSearchInReferentLastname (bool *searchInReferentLastname*)

[Search::setSearchInReferentLastname](#) Modify the filter of referents last name search.

Parameters

<i>searchIn-Referent-Lastname</i>	Search in referents last name which are concerned
-----------------------------------	---

8.103.2.23 void Models::Search::setText (const QString & *getText*)

[Search::setText](#) Modify sql portion.

Parameters


<i>getText</i>	Get sql portion
----------------	-----------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/search.h
- /home/travis/build/FACT-Team/FactDev/src/models/search.cpp

8.104 searchTest Class Reference

Inheritance diagram for searchTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/models/searchtest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/searchtest.cpp

8.105 Gui::Widgets::searchWidget Class Reference

Class for search in database.

```
#include <searchwidget.h>
```

Inheritance diagram for Gui::Widgets::searchWidget:



Public Slots

- void [search](#) (QString toSearch)
searchWidget::launch a search
- void [getCustomerData](#) ()
searchWidget::getCustomerData Return data on the customer selected in the QTableView and display this data (First-name, Lastname, Company)

Signals

- void **selectCustomer** ()

Public Member Functions

- [searchWidget](#) (QWidget *parent=0)
searchWidget::searchWidget Construct a search widget
- int [getCurrentCustomerId](#) ()
searchWidget::getCurrentCustomerId Return the id of the customer selected in the table
- bool [isCustomerSelected](#) () const
isCustomerSelected Return TRUE if a customer is selected, else FALSE
- void **selectCustomer** (int id)

8.105.1 Detailed Description

Class for search in database.

Author

Antoine de Roquemaurel

8.105.2 Constructor & Destructor Documentation

8.105.2.1 [Gui::Widgets::searchWidget::searchWidget](#) ([QWidget](#) * *parent* = 0) [explicit]

[searchWidget::searchWidget](#) Construct a search widget

Parameters

<i>parent</i>	The QWidget parent
---------------	--------------------

8.105.3 Member Function Documentation

8.105.3.1 int [Gui::Widgets::searchWidget::getCurrentCustomerId](#) ()

[searchWidget::getCurrentCustomerId](#) Return the id of the customer selected in the table

Returns

id of the current customer

8.105.3.2 bool Gui::Widgets::searchWidget::isCustomerSelected () const

isCustomerSelected Return TRUE if a customer is selected, else FALSE

Returns

boolean

8.105.3.3 void Gui::Widgets::searchWidget::search (QString toSearch) [slot]

searchWidget::launch a search

Parameters


<i>toSearch</i>	The value to search
-----------------	---------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/searchwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/searchwidget.cpp
- /home/travis/build/FACT-Team/FactDev/src/moc_searchwidget.cpp

8.106 Ui::searchWidget Class Reference

Inheritance diagram for Ui::searchWidget:

**Additional Inherited Members**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_searchwidget.h

8.107 Utils::String Class Reference

The Utils class.

```
#include <string.h>
```

Static Public Member Functions

- static QString [firstLetterToUpper](#) (QString s)
firstLetterToUpper Put the first letter of a string in capslock

8.107.1 Detailed Description

The Utils class.

Author

Antoine de Roquemaurel

8.107.2 Member Function Documentation

8.107.2.1 QString Utils::String::firstLetterToUpper (QString s) [static]

firstLetterToUpper Put the first letter of a string in capslock

Parameters

s	The string to display
---	-----------------------

Returns

The new string with caps

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/Utils/string.h
- /home/travis/build/FACT-Team/FactDev/src/Utils/string.cpp

8.108 Mustache::Tag Struct Reference

```
#include <mustache.h>
```

Public Types

- enum [Type](#) {
 Null, **Value**, [SectionStart](#), [InvertedSectionStart](#),
 [SectionEnd](#), [Partial](#), [Comment](#), [SetDelimiter](#) }
- enum **EscapeMode** { **Escape**, **Unescape**, **Raw** }

Public Attributes

- [Type](#) **type**
- QString **key**
- int **start**
- int **end**
- EscapeMode **escapeMode**

8.108.1 Detailed Description

Holds properties of a tag in a mustache template.

8.108.2 Member Enumeration Documentation

8.108.2.1 enum Mustache::Tag::Type

Enumerator

SectionStart A `{{key}}` or `{{{key}}}` tag.

InvertedSectionStart A `{{#section}}` tag.

SectionEnd An `{{^inverted-section}}` tag.

Partial A `{{/section}}` tag.

Comment A `{{^partial}}` tag.

SetDelimiter A `{{! comment }}` tag. A `{{=<% %>=}}` tag

The documentation for this struct was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`

8.109 testadder Class Reference

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/tests/QStringRunner/testadder.h`

8.110 TestAdder< T > Class Template Reference

Public Member Functions


- **TestAdder** (const QString &name)

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/tests/QStringRunner/testadder.cpp`

8.111 TestMustache Class Reference

Inheritance diagram for TestMustache:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.cpp`

8.112 TestRunner Class Reference

Public Member Functions

- template<typename T >
char **RegisterTest** (QString name)
- int **RunAll** (int argc, char *argv[])

Static Public Member Functions


- static [TestRunner](#) & **Instance** ()

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/QTestRunner/testrunner.h
- /home/travis/build/FACT-Team/FactDev/tests/QTestRunner/testrunner.cpp

8.113 Ui_AddProjectDialog Class Reference

Inheritance diagram for Ui_AddProjectDialog:



Public Member Functions

- void **setupUi** (QDialog *AddProjectDialog)
- void **retranslateUi** (QDialog *AddProjectDialog)

Public Attributes


- QGridLayout * **gridLayout**
- QLabel * **lbDescription**
- QLabel * **lbProjectName**
- QTextEdit * **leDescription**
- [Gui::Widgets::RateWidget](#) * **wdgRate**
- QHBoxLayout * **horizontalLayout_3**
- QSpacerItem * **horizontalSpacer**
- QPushButton * **btnValid**
- QPushButton * **btnCancel**
- [Gui::Widgets::searchWidget](#) * **wdgSearch**
- [Gui::Widgets::CheckFields::CheckUntilField](#) * **leNameProject**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_addprojectdialog.h

8.114 Ui_AddQuoteDialog Class Reference

Inheritance diagram for Ui_AddQuoteDialog:



Public Member Functions

- void **setupUi** (QDialog *AddQuoteDialog)
- void **retranslateUi** (QDialog *AddQuoteDialog)

Public Attributes


- QGridLayout * **_2**
- QHBoxLayout * **horizontalLayout_2**
- QSpacerItem * **horizontalSpacer**
- QPushButton * **btnSave**
- QPushButton * **btnCancel**
- QLabel * **label_3**
- QLabel * **label_2**
- QLabel * **label**
- QTextEdit * **leDescription**
- QDateEdit * **dateEditQuote**
- QWidget * **wdgContributories**
- QLabel * **label_4**
- [Gui::Widgets::CheckFields::CheckUntilField](#) * **leQuoteTitle**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_addquotedialog.h

8.115 Ui_ComboBoxModelWidget Class Reference

Inheritance diagram for Ui_ComboBoxModelWidget:



Public Member Functions

- void **setupUi** (QWidget *ComboBoxModelWidget)
- void **retranslateUi** (QWidget *ComboBoxModelWidget)

Public Attributes


- QGridLayout * **gridLayout**
- QComboBox * **cbModel**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_comboboxmodelwidget.h

8.116 Ui_ContributoriesWidget Class Reference

Inheritance diagram for Ui_ContributoriesWidget:



Public Member Functions

- void **setupUi** (QWidget *ContributoriesWidget)
- void **retranslateUi** (QWidget *ContributoriesWidget)

Public Attributes


- QGridLayout * **gridLayout_5**
- QSplitter * **splitter**
- QWidget * **gridLayoutWidget**
- QGridLayout * **gridLayout_4**
- QHBoxLayout * **horizontalLayout**
- QPushButton * **btnAddProject**
- QPushButton * **btnRemoveProject**
- QTableView * **tblProjects**
- QWidget * **gridLayoutWidget_2**
- QGridLayout * **gridLayout**
- QStackedWidget * **stack**
- QHBoxLayout * **horizontalLayout_2**
- QSpacerItem * **horizontalSpacer_2**
- QPushButton * **btnAddPrestation**
- QPushButton * **btnRmovePrestation**
- QHBoxLayout * **horizontalLayout_3**
- QSpacerItem * **horizontalSpacer_3**
- QLabel * **label_2**
- QDoubleSpinBox * **sbSubSum**
- QHBoxLayout * **horizontalLayout_4**
- QSpacerItem * **horizontalSpacer_4**
- QLabel * **label**
- QDoubleSpinBox * **sbAllSums**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_contributorieswidget.h

8.117 Ui_CustomerDataWidget Class Reference

Inheritance diagram for Ui_CustomerDataWidget:



Public Member Functions

- void **setupUi** (QWidget *CustomerDataWidget)
- void **retranslateUi** (QWidget *CustomerDataWidget)

Public Attributes


- QGridLayout * **gridLayout**
- QLabel * **lbPhone**
- QLabel * **lbFax**
- QLabel * **lbMobilePhone**
- QLabel * **lbTitlePhone**
- QLabel * **lbTitleMobile**
- QLabel * **lbTitleFax**
- QLabel * **lbName**
- QLabel * **lbCompany**
- QLabel * **lbEmail**
- QLabel * **lbAddress**
- QLabel * **lbPostalCodeCityCountry**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_customerdatawidget.h

8.118 Ui_DialogAddCustomer Class Reference

Inheritance diagram for Ui_DialogAddCustomer:



Public Member Functions

- void **setupUi** (QDialog *DialogAddCustomer)
- void **retranslateUi** (QDialog *DialogAddCustomer)

Public Attributes


- QGridLayout * **gridLayout**
- QGroupBox * **groupBox**
- QGridLayout * **gridLayout_2**
- [Gui::Widgets::CheckFields::CheckUntilField](#) * **leAddress**
- QLabel * **label_5**
- [Gui::Widgets::CheckFields::CheckCity](#) * **leCity**
- QLabel * **label_6**
- [Gui::Widgets::CheckFields::CheckPostalCode](#) * **lePostalCode**
- QLabel * **label_11**
- QLabel * **label_4**
- [Gui::Widgets::CheckFields::CheckCountry](#) * **leCountry**
- [Gui::Widgets::CheckFields::CheckValidField](#) * **leCompany**
- QLabel * **label_7**
- QLabel * **label_3**
- [Gui::Widgets::CheckFields::CheckEmail](#) * **leEmail**
- QLabel * **label_8**
- [Gui::Widgets::CheckFields::CheckPhone](#) * **leMobilePhone**
- QLabel * **label_10**
- [Gui::Widgets::CheckFields::CheckPhone](#) * **leFax**
- QLabel * **label**
- [Gui::Widgets::CheckFields::CheckName](#) * **leLastNameReferent**
- [Gui::Widgets::CheckFields::CheckName](#) * **leFirstNameReferent**
- QLabel * **label_2**
- QHBoxLayout * **horizontalLayout**
- QSpacerItem * **horizontalSpacer**
- QPushButton * **btnSave**
- QPushButton * **btnCancel**
- QLabel * **label_9**
- [Gui::Widgets::CheckFields::CheckPhone](#) * **lePhone**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_dialogaddcustomer.h

8.119 Ui_MainWindow Class Reference

Inheritance diagram for Ui_MainWindow:



Public Member Functions

- void **setupUi** (QMainWindow *MainWindow)
- void **retranslateUi** (QMainWindow *MainWindow)

Public Attributes

- QAction * **btnAddProject**
- QAction * **actSettings**
- QAction * **actClose**
- QAction * **actNew**
- QAction * **actResearch**
- QAction * **actionNewBill**
- QAction * **actionNewQuote**
- QAction * **actionPrint**
- QAction * **actQt**
- QAction * **actFact**
- QAction * **actFactDev**
- QAction * **actIcons**
- QWidget * **centralWidget**
- QGridLayout * **gridLayout_2**
- QStackedWidget * **stackedWidget**
- QWidget * **page**
- QGridLayout * **gridLayout_3**
- QGridLayout * **gridLayout_12**
- QPushButton * **btnDelCustomer**
- QSpacerItem * **horizontalSpacer**
- QPushButton * **btnAddCustomer**
- QPushButton * **btnEdit**
- QPushButton * **btnNewProject**
- QTableView * **tblCustomers**
- QWidget * **page_2**
- QGridLayout * **gridLayout_11**
- QPushButton * **btnBackToCustomers**
- QTableView * **tblProjects**
- QHBoxLayout * **horizontalLayout**
- QSpacerItem * **horizontalSpacer_4**
- [Gui::Widgets::ProjectsWidget](#) * **wdgTblProjectsToolBar**
- QLabel * **lblProjects**
- QSpacerItem * **horizontalSpacer_2**
- QWidget * **page_3**
- QGridLayout * **gridLayout_10**
- QGridLayout * **gridLayout_8**
- QTableView * **tblQuotes**
- QGridLayout * **gridLayout_9**
- QPushButton * **btnBackCustomersProject**
- QLabel * **lblQuotes**
- QPushButton * **btnBackToProjects**
- QSpacerItem * **horizontalSpacer_3**
- QHBoxLayout * **horizontalLayout_2**
- QSpacerItem * **horizontalSpacer_5**
- QPushButton * **btnEditDoc**
- QPushButton * **btnRemoveDoc**
- QPushButton * **btnLatex**
- QMenuBar * **menuBar**
- QMenu * **menuFichier**
- QMenu * **menuClient**
- QMenu * **menuA_propos**
- QToolBar * **mainToolBar**
- QStatusBar * **statusBar**


- QDockWidget * **dockWidget**
- QWidget * **dockWidgetContents**
- QGridLayout * **gridLayout**
- QLineEdit * **leSearch**
- QGroupBox * **gpbxSearchFilter**
- QGridLayout * **gridLayout_6**
- QCheckBox * **chkSearchCompany**
- QCheckBox * **chkReferentName**
- QCheckBox * **chkProjectName**
- QCheckBox * **chkContributory**
- QCheckBox * **chkBillQuote**
- QDockWidget * **dockWidget_2**
- QWidget * **dockWidgetContents_2**
- QGridLayout * **gridLayout_5**
- [Gui::Widgets::CustomerDataWidget](#) * **wdgCustomerData**
- QSpacerItem * **verticalSpacer**
- QDockWidget * **dockWidget_3**
- QWidget * **dockWidgetContents_3**
- QGridLayout * **gridLayout_4**
- QTreeView * **trCustomers**
- QDockWidget * **dockWidget_4**
- QWidget * **dockWidgetContents_4**
- QGridLayout * **gridLayout_7**
- [Gui::Widgets::CustomerDataWidget](#) * **wdgUserData**
- QSpacerItem * **verticalSpacer_2**

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/ui_mainwindow.h`

8.120 Ui_MessageBox Class Reference

Inheritance diagram for Ui_MessageBox:



Public Member Functions

- void **setupUi** (QDialog *MessageBox)
- void **retranslateUi** (QDialog *MessageBox)

Public Attributes

- QGridLayout * **gridLayout**
- QLabel * **lbText**
- QLabel * **lbIcon**
- QHBoxLayout * **horizontalLayout**
- QSpacerItem * **horizontalSpacer**


- QPushButton * **btnValid**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_messagebox.h

8.121 Ui_ProjectsWidget Class Reference

Inheritance diagram for Ui_ProjectsWidget:



Public Member Functions

- void **setupUi** (QWidget *ProjectsWidget)
- void **retranslateUi** (QWidget *ProjectsWidget)

Public Attributes


- QGridLayout * **gridLayout**
- QPushButton * **btnEditProject**
- QPushButton * **btnCreateProject**
- QPushButton * **btnDeleteProject**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_projectswidget.h

8.122 Ui_RateWidget Class Reference

Inheritance diagram for Ui_RateWidget:



Public Member Functions

- void **setupUi** (QWidget *RateWidget)
- void **retranslateUi** (QWidget *RateWidget)

Public Attributes


- QGridLayout * **gridLayout**
- QDoubleSpinBox * **sbHourlyRate**
- QLabel * **label_2**
- QLabel * **label**
- QDoubleSpinBox * **sbDailyRate**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_ratewidget.h

8.123 Ui_searchWidget Class Reference

Inheritance diagram for Ui_searchWidget:



Public Member Functions

- void **setupUi** (QWidget *searchWidget)
- void **retranslateUi** (QWidget *searchWidget)

Public Attributes


- QGridLayout * **gridLayout**
- QLabel * **lbCustomer**
- QLineEdit * **leSearch**
- QLabel * **lbSearch**
- QTableView * **tblSearch**
- [Gui::Widgets::CheckFields::CheckName](#) * **leCustomer**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_searchwidget.h

8.124 Ui_UserDataDialog Class Reference

Inheritance diagram for Ui_UserDataDialog:



Public Member Functions

- void **setupUi** (QDialog *UserDataDialog)
- void **retranslateUi** (QDialog *UserDataDialog)

Public Attributes


- QGridLayout * **gridLayout_3**
- QPushButton * **btnValid**
- QSpacerItem * **horizontalSpacer**
- QHBoxLayout * **horizontalLayout**
- QPushButton * **btnCancel**
- QTabWidget * **tabUserData**
- QWidget * **tab1PersonalData**
- QGridLayout * **gridLayout**
- QLabel * **lbLastname**
- QLabel * **lbMobilePhone**
- QLabel * **lbNoSiret**
- [Gui::Widgets::CheckFields::CheckSiretNumber](#) * **leNoSiret**
- [Gui::Widgets::CheckFields::CheckPhone](#) * **leMobilePhone**
- QGroupBox * **groupBox**
- QGridLayout * **gridLayout_2**
- [Gui::Widgets::CheckFields::CheckCity](#) * **leCity**
- QLabel * **lbAddress**
- QLabel * **lbCity**
- [Gui::Widgets::CheckFields::CheckPostalCode](#) * **lePostalCode**
- [Gui::Widgets::CheckFields::CheckUntilField](#) * **leAddress**
- QLabel * **lbPostalCode**
- QLabel * **lbEmail**
- [Gui::Widgets::CheckFields::CheckEmail](#) * **leEmail**
- QLabel * **lbPhone**
- [Gui::Widgets::CheckFields::CheckPhone](#) * **lePhone**
- [Gui::Widgets::CheckFields::CheckValidField](#) * **leTitle**
- QLabel * **lbCompany**
- [Gui::Widgets::CheckFields::CheckValidField](#) * **leCompany**
- QLabel * **lbTitle**
- QLabel * **lbFirstname**
- [Gui::Widgets::CheckFields::CheckName](#) * **leFirstname**
- [Gui::Widgets::CheckFields::CheckName](#) * **leLastname**
- QWidget * **tab2Workspace**
- QGridLayout * **gridLayout_4**
- QGroupBox * **groupBox_2**
- QGridLayout * **gridLayout_5**
- QLabel * **lbWorkspaceName**
- QPushButton * **btnBrowseWorkspace**
- QLabel * **lbWorkspacePath**
- QLineEdit * **leWorkspacePath**
- QLineEdit * **leWorkspaceName**
- QSpacerItem * **verticalSpacer**

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_userdatadialog.h

8.125 Gui::Widgets::Delegates::UnitComboDelegate Class Reference

Inheritance diagram for Gui::Widgets::Delegates::UnitComboDelegate:

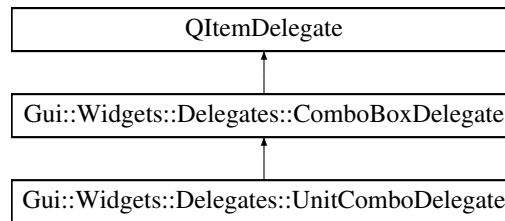

Public Member Functions

- **UnitComboDelegate** (QObject *parent=0)
- QWidget * **createEditor** (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
- void **paint** (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/unitcombodelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/unitcombodelegate.cpp

8.126 Models::User Class Reference

The [User](#) class [User](#) of it application.

```
#include <user.h>
```

Inheritance diagram for Models::User:



Public Member Functions

- [User](#) ()
User::User. Construct an [User](#).
- [User](#) (int id)
User::User. Construct a [User](#) with the identify id
- void [commit](#) ()
User::commit Update user data in [User](#) table on the database.
- void [hydrat](#) (int id=1)
User::hydrat Get data of the user who is specified by id from the database.
- void [remove](#) ()
remove Remove the current [User](#)
- QVariantHash [getDataMap](#) ()

- getDataMap* Get all data of model with a HashMap key/value
- QString [getFirstname](#) () const
User::getFirstname Return the user firstname.
- void [setFirstname](#) (const QString &firstname)
User::setFirstname Modify the user firstname
- QString [getLastname](#) () const
User::getLastname Return the user lastname.
- void [setLastname](#) (const QString &lastname)
User::setLastname Modify the user lastname
- QString [getCompany](#) () const
User::getCompany Return the user company.
- void [setCompany](#) (const QString &company)
User::setCompany Modify the user company name.
- QString [getTitle](#) () const
User::getTitle Return a short description of [User](#) (company) activity.
- void [setTitle](#) (const QString &title)
User::setTitle Modify the user/company activities description
- QString [getAddress](#) () const
User::getAddress Return the company address (Number and name of street)
- void [setAddress](#) (const QString &address)
User::setAddress Modify the user company address
- QString [getPostalCode](#) () const
User::getPostalCode Return the postal code.
- void [setPostalCode](#) (const QString &postalCode)
User::setPostalCode Modify the postal code postalCode
- QString [getCity](#) () const
User::getCity Return the city.
- void [setCity](#) (const QString &city)
User::setCity Modify the city
- QString [getEmail](#) () const
User::getEmail Return the user professional email
- void [setEmail](#) (const QString &email)
User::setEmail Modify the user professional email
- QString [getMobilePhone](#) () const
User::getMobilePhone Return the number of the professional mobile phone.
- void [setMobilePhone](#) (const QString &mobilePhone)
User::setMobilePhone Modify the number of the professional user mobile phone mobilePhone
- QString [getPhone](#) () const
User::getPhone Return the number of the desktop phone.
- void [setPhone](#) (const QString &phone)
User::setPhone Modify the number of the desktop phone
- QString [getNoSiret](#) () const
User::getNoSiret Return the SIRET number (company registration number)
- void [setNoSiret](#) (const QString &noSiret)
User::setNoSiret Modify the SIRET number (company registration number) noSiret
- QString [getWorkspaceName](#) () const
User::getWorkspaceName Return the name of the workspace user.
- void [setWorkspaceName](#) (const QString &workspaceName)
User::setWorkspaceName Change the current workspace name by the new workspaceName
- QString [getWorkspacePath](#) () const
User::getWorkspacePath Return the path of the workspace user.
- void [setWorkspacePath](#) (const QString &workspacePath)
User::setWorkspacePath Change the current workspace path by the new workspacePath

Additional Inherited Members

8.126.1 Detailed Description

The [User](#) class [User](#) of it application.

Author

Florent Berbie

8.126.2 Constructor & Destructor Documentation

8.126.2.1 Models::User::User (int *id*)

[User::User](#). Construct a [User](#) with the identify *id*

Parameters

<i>id</i>	User <i>id</i>
-----------	--------------------------------

8.126.3 Member Function Documentation

8.126.3.1 QString Models::User::getAddress () const

[User::getAddress](#) Return the company address (Number and name of street)

Returns

Address company

8.126.3.2 QString Models::User::getCity () const

[User::getCity](#) Return the city.

Returns

city

8.126.3.3 QString Models::User::getCompany () const

[User::getCompany](#) Return the user company.

Returns

New company name

8.126.3.4 QVariantHash Models::User::getDataMap () [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.126.3.5 QString Models::User::getEmail () const

[User::getEmail](#) Return the user professional *email*

Returns

professional email

8.126.3.6 QString Models::User::getFirstname () const

[User::getFirstname](#) Return the user firstname.

Returns

[User](#) firstname

8.126.3.7 QString Models::User::getLastname () const

[User::getLastname](#) Return the user lastname.

Returns

[User](#) lastname

8.126.3.8 QString Models::User::getMobilePhone () const

[User::getMobilePhone](#) Return the number of the professional mobile phone.

Returns

number of mobile phone

8.126.3.9 QString Models::User::getNoSiret () const

[User::getNoSiret](#) Return the SIRET number (company registration number)

Returns

SIRET number

8.126.3.10 QString Models::User::getPhone () const

[User::getPhone](#) Return the number of the desktop phone.

Returns

number of the desktop phone

8.126.3.11 QString Models::User::getPostalCode () const

[User::getPostalCode](#) Return the postal code.

Returns

postal code

8.126.3.12 QString Models::User::getTitle () const

[User::getTitle](#) Return a short description of [User](#) (company) activity.

Returns

a short description of user (company) activity

8.126.3.13 QString Models::User::getWorkspaceName () const

[User::getWorkspaceName](#) Return the name of the workspace user.

Returns

workspace name

8.126.3.14 QString Models::User::getWorkspacePath () const

[User::getWorkspacePath](#) Return the path of the workspace user.

Returns

workspace path

8.126.3.15 void Models::User::hydrat (int *id* = 1) [virtual]

[User::hydrat](#) Get data of the user who is specified by *id* from the database.

Parameters

<i>id</i>	User identify
-----------	-------------------------------

Implements [Models::IModel](#).

8.126.3.16 void Models::User::setAddress (const QString & *address*)

[User::setAddress](#) Modify the user company *address*

Parameters

<i>address</i>	Company address (name and number of street)
----------------	---

8.126.3.17 void Models::User::setCity (const QString & *city*)

[User::setCity](#) Modify the *city*

Parameters

<i>city</i>	Company city address
-------------	----------------------

8.126.3.18 void Models::User::setCompany (const QString & *company*)

[User::setCompany](#) Modify the user *company* name.

Parameters

<i>company</i>	New user company name
----------------	-----------------------

8.126.3.19 void Models::User::setEmail (const QString & *email*)

[User::setEmail](#) Modify the user professional *email*

Parameters

<i>email</i>	The user professional email
--------------	-----------------------------

8.126.3.20 void Models::User::setFirstname (const QString & *firstname*)

[User::setFirstname](#) Modify the user *firstname*

Parameters

<i>firstname</i>	New user firstname
------------------	--------------------

8.126.3.21 void Models::User::setLastname (const QString & *lastname*)

[User::setLastname](#) Modify the user *lastname*

Parameters

<i>lastname</i>	New user lastname
-----------------	-------------------

8.126.3.22 void Models::User::setMobilePhone (const QString & *mobilePhone*)

[User::setMobilePhone](#) Modify the number of the professional user mobile phone *mobilePhone*

Parameters

<i>mobilePhone</i>	Number of the professional mobile phone
--------------------	---

8.126.3.23 void Models::User::setNoSiret (const QString & *noSiret*)

[User::setNoSiret](#) Modify the SIRET number (company registration number) *noSiret*

Parameters

<i>noSiret</i>	SIRET number
----------------	--------------

8.126.3.24 void Models::User::setPhone (const QString & *phone*)

[User::setPhone](#) Modify the number of the desktop *phone*

Parameters

<i>phone</i>	Number of the desktop phone
--------------	-----------------------------

8.126.3.25 void Models::User::setPostalCode (const QString & *postalCode*)

[User::setPostalCode](#) Modify the postal code *postalCode*

Parameters

<i>postalCode</i>	New postal code
-------------------	-----------------

8.126.3.26 void Models::User::setTitle (const QString & *title*)

[User::setTitle](#) Modify the user/company activities *description*

Parameters

<i>title</i>	Short description on activity(ies) of customer company
--------------	--

8.126.3.27 void Models::User::setWorkspaceName (const QString & *workspaceName*)

[User::setWorkspaceName](#) Change the current workspace name by the new *workspaceName*

Parameters

<i>workspaceName</i>	
----------------------	--

8.126.3.28 void Models::User::setWorkspacePath (const QString & *workspacePath*)

[User::setWorkspacePath](#) Change the current workspace path by the new *workspacePath*

Parameters

<i>workspacePath</i>	
----------------------	--

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/user.h
- /home/travis/build/FACT-Team/FactDev/src/models/user.cpp

8.127 Databases::UserDatabase Class Reference

The [UserDatabase](#) class Access to User data in the the table User of the [Database](#)

```
#include <userdatabase.h>
```

Inheritance diagram for Databases::UserDatabase:



Public Member Functions

- QStandardItemModel * [getUserTable](#) () throw (DbException*)
getUserTable Return an item model of User for QTableView
- [Models::User](#) * [getUser](#) (const int pld=1)
getUser Get informations about the user (identified by 'pld')
- void [updateUser](#) (const [Models::User](#) &)
updateUser Update informations about the user

Static Public Member Functions

- static [UserDatabase](#) * [instance](#) () throw (DbException*)
UserDatabase::getInstance Return an instance of [UserDatabase](#).

Additional Inherited Members

8.127.1 Detailed Description

The [UserDatabase](#) class Access to User data in the the table User of the [Database](#)

Author

Florent Berbie

See Also

[Database](#)
[User](#)

8.127.2 Member Function Documentation

8.127.2.1 [Models::User](#) * [Databases::UserDatabase::getUser](#) (const int *pId* = 1)

[getUser](#) Get informations about the user (identified by 'pId')

Parameters

<i>pId</i>	user id (1 default) *
------------	-----------------------

Returns

the user

8.127.2.2 [QStandardItemModel](#)* [Databases::UserDatabase::getUserTable](#) () throw [DbException](#) *)

[getUserTable](#) Return an item model of User for QTableView

Returns

[QStandardItemModel](#) an item model

8.127.2.3 [UserDatabase](#) * [Databases::UserDatabase::instance](#) () throw [DbException](#) *) [static]

[UserDatabase::getInstance](#) Return an instance of [UserDatabase](#).

Returns

Instance of [UserDatabase](#)

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/userdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/userdatabase.cpp

8.128 Gui::Dialogs::UserDataDialog Class Reference

The [UserDataDialog](#) class Window to fill user data.

```
#include <userdatadialog.h>
```

Inheritance diagram for Gui::Dialogs::UserDataDialog:



Public Slots

- void [checkFields](#) ()
[UserDataDialog::checkFields](#) Check all fields of dialog components.
- void [browseWorkspacePath](#) ()
[UserDataDialog::browseWorkspacePath](#) Open a new window to define the workspace path of the user.

Public Member Functions

- [UserDataDialog](#) (QWidget *parent=0)
[UserDataDialog](#): Construct a window with user data.
- void [fillFields](#) ()
[UserDataDialog::fillFields](#) Fill line edits with the data of the user.
- void [accept](#) ()
[accept](#) Valid data inputed by user and add these data in Database
- void [reject](#) ()
[reject](#) Cancel the operation and close the windows

8.128.1 Detailed Description

The [UserDataDialog](#) class Window to fill user data.

Author

Florent Berbie

See Also

[Project](#)

8.128.2 Constructor & Destructor Documentation

8.128.2.1 Gui::Dialogs::UserDataDialog::UserDataDialog (QWidget * parent = 0) [explicit]

[UserDataDialog](#): Construct a window with user data.

Parameters


<i>parent</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/userdatadialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/userdatadialog.cpp

8.129 Ui::UserDataDialog Class Reference

Inheritance diagram for Ui::UserDataDialog:



Additional Inherited Members

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/ui_userdatadialog.h

Index

- add
 - Gui::Widgets::ContributoriesWidget, [61](#)
- addBill
 - Gui::MainWindow, [103](#)
- addBilling
 - Databases::BillingDatabase, [31](#)
- addBillingProject
 - Databases::BillingDatabase, [31](#)
- addBillingToProject
 - Utils::HierarchicalSystem, [94](#)
- addContributory
 - Databases::ContributoryDatabase, [66](#)
 - Models::Billing, [27](#)
- addCustomer
 - Databases::CustomerDatabase, [78](#)
- addDoc
 - Gui::MainWindow, [103](#)
- addProject
 - Databases::ProjectDatabase, [120](#)
- AddProjectDialog
 - Gui::Dialogs::AddProjectDialog, [22](#)
- addProjectToCustomer
 - Utils::HierarchicalSystem, [94](#)
- addQuote
 - Gui::MainWindow, [103](#)
- AddQuoteDialog
 - Gui::Dialogs::AddQuoteDialog, [24](#)
- append
 - Gui::Widgets::WdgModels::BillingsTableModel, [36](#)
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [57](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [84](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [123](#)
- Billing
 - Models::Billing, [26](#)
- BillingDatabaseTest, [33](#)
- BillingModelTest, [33](#)
- BillingsTableModel
 - Gui::Widgets::WdgModels::BillingsTableModel, [35](#)
- canEval
 - CounterContext, [68](#)
 - Mustache::Context, [54](#)
 - Mustache::QtVariantContext, [136](#)
- check
 - Gui::Widgets::CheckFields::CheckEmail, [40](#)
 - Gui::Widgets::CheckFields::CheckFieldsLetters, [41](#)
 - Gui::Widgets::CheckFields::CheckPhone, [43](#)
 - Gui::Widgets::CheckFields::CheckPostalCode, [45](#)
 - Gui::Widgets::CheckFields::CheckSiretNumber, [49](#)
 - Gui::Widgets::CheckFields::CheckUntilField, [50](#)
 - Gui::Widgets::CheckFields::CheckValidField, [51](#)
 - Gui::Widgets::CheckFields::ICheckField, [95](#)
- CheckCity
 - Gui::Widgets::CheckFields::CheckCity, [38](#)
- CheckCountry
 - Gui::Widgets::CheckFields::CheckCountry, [39](#)
- CheckEmail
 - Gui::Widgets::CheckFields::CheckEmail, [40](#)
- CheckFieldsLetters
 - Gui::Widgets::CheckFields::CheckFieldsLetters, [41](#)
- CheckName
 - Gui::Widgets::CheckFields::CheckName, [42](#)
- CheckPhone
 - Gui::Widgets::CheckFields::CheckPhone, [43](#)
- CheckPostalCode
 - Gui::Widgets::CheckFields::CheckPostalCode, [45](#)
- CheckQLineEdit
 - Gui::Widgets::CheckFields::CheckQLineEdit, [47](#)
- CheckSiretNumber
 - Gui::Widgets::CheckFields::CheckSiretNumber, [49](#)
- CheckUntilField
 - Gui::Widgets::CheckFields::CheckUntilField, [50](#)
- CheckValidField
 - Gui::Widgets::CheckFields::CheckValidField, [51](#)
- columnCount
 - Gui::Widgets::WdgModels::BillingsTableModel, [36](#)
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [57](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [84](#)
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [117](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [124](#)
- Comment
 - Mustache::Tag, [152](#)
- Context
 - Mustache::Context, [54](#)
- ContributoriesDatabaseTest, [55](#)
- ContributoriesTableModel
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [57](#)
- Contributory
 - Models::Contributory, [63](#)
- count

- Gui::Widgets::WdgModels::BillingsTableModel, 36
- Gui::Widgets::WdgModels::ContributoriesTableModel, 57
- Gui::Widgets::WdgModels::CustomersTableModel, 84
- Gui::Widgets::WdgModels::ProjectsTableModel, 124
- CounterContext, 68
 - canEval, 68
 - eval, 68, 69
 - stringValue, 69
- Customer
 - Models::Customer, 71
- CustomerContextualMenu
 - Gui::Widgets::CustomerContextualMenu, 77
- CustomerDatabaseTest, 81
- CustomerModelTest, 82
- CustomersTableModel
 - Gui::Widgets::WdgModels::CustomersTableModel, 84
- DB_FILENAME
 - Parameters, 109
- data
 - Gui::Widgets::WdgModels::BillingsTableModel, 36
 - Gui::Widgets::WdgModels::ContributoriesTableModel, 57
 - Gui::Widgets::WdgModels::CustomersTableModel, 84
 - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 117
 - Gui::Widgets::WdgModels::ProjectsTableModel, 124
- Databases, 17
- Databases::BillingDatabase, 30
 - addBilling, 31
 - addBillingProject, 31
 - getAllBillingsOfProject, 31
 - getBilling, 31
 - getBillingsTable, 32
 - getMaxBillingNumber, 32
 - getMaxQuoteNumber, 32
 - instance, 32
 - removeBilling, 32
 - removeBillingProject, 33
- Databases::ContributoryDatabase, 66
 - addContributory, 66
 - getContributory, 67
 - instance, 67
 - removeContributory, 67
- Databases::CustomerDatabase, 77
 - addCustomer, 78
 - getCustomer, 78
 - getCustomersTable, 79
 - getItemBillQuote, 79
 - getItemCustomer, 79
 - getItemProject, 79
 - getItemRoot, 80
 - getNbCustomers, 80
 - getTree, 80
 - instance, 80
 - removeCustomer, 80
 - updateCustomer, 81
- Databases::Database, 86
 - executeFile, 87
 - instance, 87
 - lastError, 88
 - setDatabase, 88
 - value, 88
- Databases::ProjectDatabase, 119
 - addProject, 120
 - getAllProjects, 120
 - getNbProjects, 120
 - getNbProjectsForACustomer, 120
 - getProject, 121
 - getProjectsOfCustomer, 121
 - getProjectsTable, 121
 - instance, 122
 - removeProject, 122
 - updateProject, 122
- Databases::RateDatabase, 138
 - instance, 138
- Databases::UserDatabase, 170
 - getUser, 171
 - getUserTable, 171
 - instance, 171
- DbException
 - Exceptions::DbException, 89
- DialogAddCustomer
 - Gui::Dialogs::DialogAddCustomer, 91
- editUser
 - Gui::MainWindow, 103
- error
 - Mustache::Renderer, 141
- errorPartial
 - Mustache::Renderer, 141
- errorPos
 - Mustache::Renderer, 141
- eval
 - CounterContext, 68, 69
 - Mustache::Context, 54
 - Mustache::QtVariantContext, 136
- Exceptions::DbException, 88
 - DbException, 89
 - popupMessage, 89
- Exceptions::FileException, 91
 - FileException, 92
 - popupMessage, 92
- executeFile
 - Databases::Database, 87
- FileException
 - Exceptions::FileException, 92
- filterOnBillsOrQuotes
 - Models::Search, 143
- filterOnCompany
 - Models::Search, 143

- filterOnContributories
 - Models::Search, 144
- filterOnCustomersWithoutProject
 - Models::Search, 144
- filterOnNumberElements
 - Models::Search, 144
- filterOnProjects
 - Models::Search, 144
- filterOnReferentLastname
 - Models::Search, 144
- filterOnVarcharElements
 - Models::Search, 144
- firstLetterToUpper
 - Utils::String, 151
- flags
 - Gui::Widgets::WdgModels::BillingsTableModel, 36
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, 59
 - Gui::Widgets::WdgModels::CustomersTableModel, 84
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 118
 - Gui::Widgets::WdgModels::ProjectsTableModel, 124
- fn_t
 - Mustache::QtVariantContext, 136
- Generation, 92
- Generator, 93
- getAddress
 - Models::Customer, 71
 - Models::User, 165
- getAllBillingsOfProject
 - Databases::BillingDatabase, 31
- getAllProjects
 - Databases::ProjectDatabase, 120
- getBeginDate
 - Models::Project, 113
- getBilling
 - Databases::BillingDatabase, 31
- getBillings
 - Gui::Widgets::WdgModels::BillingsTableModel, 36
- getBillingsTable
 - Databases::BillingDatabase, 32
- getBtnValid
 - Gui::Widgets::CheckFields::CheckQLineEdit, 48
- getCity
 - Models::Customer, 71
 - Models::User, 165
- getCompany
 - Models::Customer, 71
 - Models::User, 165
- getContributories
 - Gui::Widgets::ContributoriesWidget, 61
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, 59
 - Models::Billing, 27
- getContributory
 - Databases::ContributoryDatabase, 67
- getCountry
 - Gui::Widgets::CheckFields::CheckPhone, 44
 - Gui::Widgets::CheckFields::CheckPostalCode, 45
 - Models::Customer, 72
- getCurrentCustomerId
 - Gui::MainWindow, 104
 - Gui::Widgets::searchWidget, 149
- getCurrentCustomerName
 - Gui::MainWindow, 104
- getCurrentProjectId
 - Gui::MainWindow, 104
- getCurrentProjectName
 - Gui::MainWindow, 104
- getCurrentQuotedId
 - Gui::MainWindow, 104
- getCustomer
 - Databases::CustomerDatabase, 78
 - Models::Project, 113
- getCustomers
 - Gui::Widgets::WdgModels::CustomersTableModel, 85
 - Utils::HierarchicalSystem, 94
- getCustomersTable
 - Databases::CustomerDatabase, 79
- getDailyRate
 - Gui::Widgets::RateWidget, 140
 - Models::Project, 113
- getDataMap
 - Models::Billing, 27
 - Models::Contributory, 63
 - Models::Customer, 72
 - Models::IModel, 96
 - Models::Project, 113
 - Models::User, 165
- getDate
 - Models::Billing, 27
- getDescription
 - Models::Billing, 27
 - Models::Contributory, 63
 - Models::Project, 113
- getEmail
 - Models::Customer, 72
 - Models::User, 165
- getEndDate
 - Models::Project, 114
- getFax
 - Models::Customer, 72
- getFilter
 - Models::Search, 146
- getFirstname
 - Models::User, 166
- getFirstnameReferent
 - Models::Customer, 72
- getGroupFilter
 - Models::Search, 146
- getHourlyRate
 - Gui::Widgets::RateWidget, 140
- getId

- Models::IModel, 96
- getItemBillQuote
 - Databases::CustomerDatabase, 79
- getItemCustomer
 - Databases::CustomerDatabase, 79
- getItemProject
 - Databases::CustomerDatabase, 79
- getItemRoot
 - Databases::CustomerDatabase, 80
- getLastName
 - Models::User, 166
- getLastNameReferent
 - Models::Customer, 72
- getMaxBillingNumber
 - Databases::BillingDatabase, 32
- getMaxQuoteNumber
 - Databases::BillingDatabase, 32
- getMobilePhone
 - Models::Customer, 73
 - Models::User, 166
- getModel
 - Utils::ItemType, 98
- getName
 - Models::Project, 114
 - Utils::ItemType, 98
- getNameFolder
 - Models::Customer, 73
- getNbCustomers
 - Databases::CustomerDatabase, 80
- getNbHours
 - Models::Contributory, 63
- getNbProjects
 - Databases::ProjectDatabase, 120
- getNbProjectsForACustomer
 - Databases::ProjectDatabase, 120
- getNoSiret
 - Models::User, 166
- getNumber
 - Gui::Dialogs::AddQuoteDialog, 25
 - Models::Billing, 27
- getPartial
 - Mustache::PartialFileLoader, 109
 - Mustache::PartialMap, 110
 - Mustache::PartialResolver, 111
- getPath
 - Models::Customer, 73
- getPhone
 - Models::Customer, 73
 - Models::User, 166
- getPostalCode
 - Models::Customer, 73
 - Models::User, 166
- getProject
 - Databases::ProjectDatabase, 121
 - Models::Contributory, 63
- getProjects
 - Gui::Widgets::WdgModels::ProjectsTableModel, 124
- Utils::HierarchicalSystem, 94
- getProjectsOfCustomer
 - Databases::ProjectDatabase, 121
- getProjectsTable
 - Databases::ProjectDatabase, 121
- getSearchInBillsQuotes
 - Models::Search, 146
- getSearchInCompanies
 - Models::Search, 146
- getSearchInProjects
 - Models::Search, 146
- getSearchInReferentLastname
 - Models::Search, 146
- getText
 - Models::Search, 146
- getTitle
 - Models::Billing, 27
 - Models::User, 166
- getTree
 - Databases::CustomerDatabase, 80
- getType
 - Utils::ItemType, 98
- getUser
 - Databases::UserDatabase, 171
- getUserTable
 - Databases::UserDatabase, 171
- getWorkspaceName
 - Models::User, 167
- getWorkspacePath
 - Models::User, 167
- Gui, 17
- Gui::Dialogs::AddProjectDialog, 21
 - AddProjectDialog, 22
- Gui::Dialogs::AddQuoteDialog, 23
 - AddQuoteDialog, 24
 - getNumber, 25
- Gui::Dialogs::DialogAddCustomer, 90
 - DialogAddCustomer, 91
- Gui::Dialogs::MessageBox, 106
 - MessageBox, 107
 - setImage, 108
 - setText, 108
- Gui::Dialogs::UserDataDialog, 172
 - UserDataDialog, 172
- Gui::MainWindow, 101
 - addBill, 103
 - addDoc, 103
 - addQuote, 103
 - editUser, 103
 - getCurrentCustomerId, 104
 - getCurrentCustomerName, 104
 - getCurrentProjectId, 104
 - getCurrentProjectName, 104
 - getCurrentQuoteId, 104
 - MainWindow, 103
 - newProject, 104
 - rootTree, 104
 - search, 105

- treeLevel, 105
- Gui::Widgets, 18
- Gui::Widgets::CheckFields::CheckCity, 38
 - CheckCity, 38
- Gui::Widgets::CheckFields::CheckCountry, 38
 - CheckCountry, 39
- Gui::Widgets::CheckFields::CheckEmail, 39
 - check, 40
 - CheckEmail, 40
- Gui::Widgets::CheckFields::CheckFieldsLetters, 41
 - check, 41
 - CheckFieldsLetters, 41
- Gui::Widgets::CheckFields::CheckName, 42
 - CheckName, 42
- Gui::Widgets::CheckFields::CheckPhone, 43
 - check, 43
 - CheckPhone, 43
 - getCountry, 44
 - setCountry, 44
- Gui::Widgets::CheckFields::CheckPostalCode, 44
 - check, 45
 - CheckPostalCode, 45
 - getCountry, 45
 - setCountry, 45
- Gui::Widgets::CheckFields::CheckQLineEdit, 46
 - CheckQLineEdit, 47
 - getBtnValid, 48
 - isValid, 48
 - setBtnValid, 48
- Gui::Widgets::CheckFields::CheckSiretNumber, 48
 - check, 49
 - CheckSiretNumber, 49
- Gui::Widgets::CheckFields::CheckUntilField, 49
 - check, 50
 - CheckUntilField, 50
- Gui::Widgets::CheckFields::CheckValidField, 50
 - check, 51
 - CheckValidField, 51
- Gui::Widgets::CheckFields::ICheckField, 94
 - check, 95
- Gui::Widgets::ComboBoxModelWidget, 52
- Gui::Widgets::ContributoriesWidget, 60
 - add, 61
 - getContributories, 61
- Gui::Widgets::CustomerContextualMenu, 76
 - CustomerContextualMenu, 77
- Gui::Widgets::CustomerDataWidget, 82
 - printInformations, 82
- Gui::Widgets::Delegates::ComboBoxDelegate, 52
- Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 91
- Gui::Widgets::Delegates::ProjectComboDelegate, 116
- Gui::Widgets::Delegates::UnitComboDelegate, 163
- Gui::Widgets::Popup, 111
- Gui::Widgets::ProjectsWidget, 126
 - ProjectsWidget, 127
 - updateBtn, 128
- Gui::Widgets::RateWidget, 139
 - getDailyRate, 140
 - getHourlyRate, 140
 - RateWidget, 139
 - setDailyRate, 140
 - setHourlyRate, 140
 - setWidgetDailyRateValue, 140
 - setWidgetHourlyRateValue, 140
- Gui::Widgets::WdgModels::BillingsTableModel, 34
 - append, 36
 - BillingsTableModel, 35
 - columnCount, 36
 - count, 36
 - data, 36
 - flags, 36
 - getBillings, 36
 - headerData, 37
 - remove, 37
 - rowCount, 37
 - setData, 37
- Gui::Widgets::WdgModels::ContributoriesTableModel, 56
 - append, 57
 - columnCount, 57
 - ContributoriesTableModel, 57
 - count, 57
 - data, 57
 - flags, 59
 - getContributories, 59
 - headerData, 59
 - remove, 59
 - rowCount, 59
 - setData, 60
- Gui::Widgets::WdgModels::CustomersTableModel, 83
 - append, 84
 - columnCount, 84
 - count, 84
 - CustomersTableModel, 84
 - data, 84
 - flags, 84
 - getCustomers, 85
 - headerData, 85
 - remove, 85
 - rowCount, 85
 - setData, 85
- Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 116
 - columnCount, 117
 - data, 117
 - flags, 118
 - headerData, 118
 - ProjectContributoriesTableModel, 117
 - rowCount, 118
 - setData, 118
- Gui::Widgets::WdgModels::ProjectsTableModel, 122
 - append, 123
 - columnCount, 124
 - count, 124
 - data, 124
 - flags, 124

- getProjects, 124
- headerData, 124
- ProjectsTableModel, 123
- remove, 126
- rowCount, 126
- setData, 126
- Gui::Widgets::searchWidget, 148
 - getCurrentCustomerId, 149
 - isCustomerSelected, 150
 - search, 150
 - searchWidget, 149
- headerData
 - Gui::Widgets::WdgModels::BillingsTableModel, 37
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, 59
 - Gui::Widgets::WdgModels::CustomersTableModel, 85
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 118
 - Gui::Widgets::WdgModels::ProjectsTableModel, 124
- hydrat
 - Models::Billing, 28
 - Models::Contributory, 63
 - Models::Customer, 73
 - Models::IModel, 96
 - Models::Project, 114
 - Models::User, 167
- instance
 - Databases::BillingDatabase, 32
 - Databases::ContributoryDatabase, 67
 - Databases::CustomerDatabase, 80
 - Databases::Database, 87
 - Databases::ProjectDatabase, 122
 - Databases::RateDatabase, 138
 - Databases::UserDatabase, 171
 - Utils::Log, 100
- InvertedSectionStart
 - Mustache::Tag, 152
- isBilling
 - Models::Billing, 28
- isCustomerSelected
 - Gui::Widgets::searchWidget, 150
- isFalse
 - Mustache::Context, 54
 - Mustache::QtVariantContext, 136
- isToRemoved
 - Models::IModel, 96
- isValid
 - Gui::Widgets::CheckFields::CheckQLineEdit, 48
- ItemType
 - Utils::ItemType, 98
- lastError
 - Databases::Database, 88
- listCount
 - Mustache::Context, 54
- Mustache::QtVariantContext, 136
- MainWindow
 - Gui::MainWindow, 103
- MessageBox
 - Gui::Dialogs::MessageBox, 107
- Models, 18
- Models::Billing, 25
 - addContributory, 27
 - Billing, 26
 - getContributories, 27
 - getDataMap, 27
 - getDate, 27
 - getDescription, 27
 - getNumber, 27
 - getTitle, 27
 - hydrat, 28
 - isBilling, 28
 - operator<, 28
 - operator==, 28
 - setDate, 29
 - setDescription, 29
 - setIsBilling, 29
 - setNumber, 29
 - setTitle, 29
- Models::ContributoriesList, 55
- Models::Contributory, 62
 - Contributory, 63
 - getDataMap, 63
 - getDescription, 63
 - getNbHours, 63
 - getProject, 63
 - hydrat, 63
 - operator==, 65
 - setDescription, 65
 - setNbHours, 65
 - setProject, 65
- Models::Customer, 69
 - Customer, 71
 - getAddress, 71
 - getCity, 71
 - getCompany, 71
 - getCountry, 72
 - getDataMap, 72
 - getEmail, 72
 - getFax, 72
 - getFirstnameReferent, 72
 - getLastnameReferent, 72
 - getMobilePhone, 73
 - getNameFolder, 73
 - getPath, 73
 - getPhone, 73
 - getPostalCode, 73
 - hydrat, 73
 - operator==, 74
 - setAddress, 74
 - setCity, 74
 - setCompany, 74
 - setCountry, 75

- setEmail, 75
- setFax, 75
- setFirstnameReferent, 75
- setLastnameReferent, 75
- setMobilePhone, 75
- setPhone, 76
- setPostalCode, 76
- Models::IModel, 95
 - getDataMap, 96
 - getId, 96
 - hydrat, 96
 - isToRemoved, 96
 - setId, 97
 - setToRemoved, 97
- Models::Project, 111
 - getBeginDate, 113
 - getCustomer, 113
 - getDailyRate, 113
 - getDataMap, 113
 - getDescription, 113
 - getEndDate, 114
 - getName, 114
 - hydrat, 114
 - operator<, 114
 - operator==, 114
 - Project, 113
 - setBeginDate, 115
 - setCustomer, 115
 - setDailyRate, 115
 - setDescription, 115
 - setEndDate, 115
 - setName, 115
- Models::Rate, 137
- Models::Search, 142
 - filterOnBillsOrQuotes, 143
 - filterOnCompany, 143
 - filterOnContributories, 144
 - filterOnCustomersWithoutProject, 144
 - filterOnNumberElements, 144
 - filterOnProjects, 144
 - filterOnReferentLastname, 144
 - filterOnVarcharElements, 144
 - getFilter, 146
 - getGroupFilter, 146
 - getSearchInBillsQuotes, 146
 - getSearchInCompanies, 146
 - getSearchInProjects, 146
 - getSearchInReferentLastname, 146
 - getText, 146
 - searchInContributories, 147
 - setGroupFilter, 147
 - setSearchInBillsQuotes, 147
 - setSearchInCompanies, 147
 - setSearchInContributories, 147
 - setSearchInProjects, 147
 - setSearchInReferentLastname, 148
 - setText, 148
- Models::User, 163
 - getAddress, 165
 - getCity, 165
 - getCompany, 165
 - getDataMap, 165
 - getEmail, 165
 - getFirstname, 166
 - getLastname, 166
 - getMobilePhone, 166
 - getNoSiret, 166
 - getPhone, 166
 - getPostalCode, 166
 - getTitle, 166
 - getWorkspaceName, 167
 - getWorkspacePath, 167
 - hydrat, 167
 - setAddress, 167
 - setCity, 167
 - setCompany, 167
 - setEmail, 168
 - setFirstname, 168
 - setLastname, 168
 - setMobilePhone, 168
 - setNoSiret, 168
 - setPhone, 168
 - setPostalCode, 168
 - setTitle, 170
 - setWorkspaceName, 170
 - setWorkspacePath, 170
 - User, 165
- Mustache::Tag
 - Comment, 152
 - InvertedSectionStart, 152
 - Partial, 152
 - SectionEnd, 152
 - SectionStart, 152
 - SetDelimiter, 152
- Mustache::Context, 53
 - canEval, 54
 - Context, 54
 - eval, 54
 - isFalse, 54
 - listCount, 54
 - partialResolver, 54
 - partialValue, 54
 - pop, 54
 - push, 54
 - stringValue, 55
- Mustache::PartialFileLoader, 109
 - getPartial, 109
- Mustache::PartialMap, 110
 - getPartial, 110
- Mustache::PartialResolver, 110
 - getPartial, 111
- Mustache::QtVariantContext, 135
 - canEval, 136
 - eval, 136
 - fn_t, 136
 - isFalse, 136

- listCount, 136
- pop, 137
- push, 137
- stringValue, 137
- Mustache::Renderer, 141
 - error, 141
 - errorPartial, 141
 - errorPos, 141
 - render, 142
 - setTagMarkers, 142
- Mustache::Tag, 151
 - Type, 152
- newProject
 - Gui::MainWindow, 104
- operator<
 - Models::Billing, 28
 - Models::Project, 114
- operator<<
 - Utils::Log, 101
- operator==
 - Models::Billing, 28
 - Models::Contributory, 65
 - Models::Customer, 74
 - Models::Project, 114
- Parameters, 108
 - DB_FILENAME, 109
 - VERSION, 109
- Partial
 - Mustache::Tag, 152
- partialResolver
 - Mustache::Context, 54
- partialValue
 - Mustache::Context, 54
- pop
 - Mustache::Context, 54
 - Mustache::QtVariantContext, 137
- popupMessage
 - Exceptions::DbException, 89
 - Exceptions::FileException, 92
- printInformations
 - Gui::Widgets::CustomerDataWidget, 82
- Project
 - Models::Project, 113
- ProjectContributoriesTableModel
 - Gui::Widgets::WdgModels::ProjectContributories-
TableModel, 117
- ProjectsTableModel
 - Gui::Widgets::WdgModels::ProjectsTableModel, 123
- ProjectsWidget
 - Gui::Widgets::ProjectsWidget, 127
- push
 - Mustache::Context, 54
 - Mustache::QtVariantContext, 137
- qt_meta_stringdata_BillingDatabaseTest_t, 129
- qt_meta_stringdata_ContributoriesDatabaseTest_t, 130
- qt_meta_stringdata_CustomerDatabaseTest_t, 130
- qt_meta_stringdata_CustomerModelTest_t, 130
- qt_meta_stringdata_Generation_t, 130
- qt_meta_stringdata_Gui_Dialogs_MessageBox_t, 131
- qt_meta_stringdata_Gui_MainWindow_t, 132
- qt_meta_stringdata_Gui_Widgets_Contributories-
Widget_t, 132
- qt_meta_stringdata_Gui_Widgets_ProjectsWidget_t, 134
- qt_meta_stringdata_Gui_Widgets_RateWidget_t, 134
- qt_meta_stringdata_Gui_Widgets_searchWidget_t, 134
- qt_meta_stringdata_RateModelTest_t, 135
- qt_meta_stringdata_TestMustache_t, 135
- qt_meta_stringdata_searchTest_t, 135
- RateModelTest, 138
- RateWidget
 - Gui::Widgets::RateWidget, 139
- remove
 - Gui::Widgets::WdgModels::BillingsTableModel, 37
 - Gui::Widgets::WdgModels::ContributoriesTable-
Model, 59
 - Gui::Widgets::WdgModels::CustomersTableModel, 85
 - Gui::Widgets::WdgModels::ProjectsTableModel, 126
- removeBilling
 - Databases::BillingDatabase, 32
- removeBillingProject
 - Databases::BillingDatabase, 33
- removeContributory
 - Databases::ContributoryDatabase, 67
- removeCustomer
 - Databases::CustomerDatabase, 80
- removeProject
 - Databases::ProjectDatabase, 122
- render
 - Mustache::Renderer, 142
- rootTree
 - Gui::MainWindow, 104
- rowCount
 - Gui::Widgets::WdgModels::BillingsTableModel, 37
 - Gui::Widgets::WdgModels::ContributoriesTable-
Model, 59
 - Gui::Widgets::WdgModels::CustomersTableModel, 85
 - Gui::Widgets::WdgModels::ProjectContributories-
TableModel, 118
 - Gui::Widgets::WdgModels::ProjectsTableModel, 126
- search
 - Gui::MainWindow, 105
 - Gui::Widgets::searchWidget, 150

searchInContributories
 Models::Search, 147
 searchTest, 148
 searchWidget
 Gui::Widgets::searchWidget, 149
 SectionEnd
 Mustache::Tag, 152
 SectionStart
 Mustache::Tag, 152
 SetDelimiter
 Mustache::Tag, 152
 setAddress
 Models::Customer, 74
 Models::User, 167
 setBeginDate
 Models::Project, 115
 setBtnValid
 Gui::Widgets::CheckFields::CheckQLineEdit, 48
 setCity
 Models::Customer, 74
 Models::User, 167
 setCompany
 Models::Customer, 74
 Models::User, 167
 setCountry
 Gui::Widgets::CheckFields::CheckPhone, 44
 Gui::Widgets::CheckFields::CheckPostalCode, 45
 Models::Customer, 75
 setCustomer
 Models::Project, 115
 setDailyRate
 Gui::Widgets::RateWidget, 140
 Models::Project, 115
 setData
 Gui::Widgets::WdgModels::BillingsTableModel, 37
 Gui::Widgets::WdgModels::ContributoriesTable-
 Model, 60
 Gui::Widgets::WdgModels::CustomersTableModel,
 85
 Gui::Widgets::WdgModels::ProjectContributories-
 TableModel, 118
 Gui::Widgets::WdgModels::ProjectsTableModel,
 126
 setDatabase
 Databases::Database, 88
 setDate
 Models::Billing, 29
 setDescription
 Models::Billing, 29
 Models::Contributory, 65
 Models::Project, 115
 setEmail
 Models::Customer, 75
 Models::User, 168
 setEndDate
 Models::Project, 115
 setFax
 Models::Customer, 75
 setFirstname
 Models::User, 168
 setFirstnameReferent
 Models::Customer, 75
 setGroupFilter
 Models::Search, 147
 setHourlyRate
 Gui::Widgets::RateWidget, 140
 setId
 Models::IModel, 97
 setImage
 Gui::Dialogs::MessageBox, 108
 setIsBilling
 Models::Billing, 29
 setLastname
 Models::User, 168
 setLastnameReferent
 Models::Customer, 75
 setMobilePhone
 Models::Customer, 75
 Models::User, 168
 setName
 Models::Project, 115
 Utils::ItemType, 98
 setNbHours
 Models::Contributory, 65
 setNoSiret
 Models::User, 168
 setNumber
 Models::Billing, 29
 setPhone
 Models::Customer, 76
 Models::User, 168
 setPostalCode
 Models::Customer, 76
 Models::User, 168
 setProject
 Models::Contributory, 65
 setSearchInBillsQuotes
 Models::Search, 147
 setSearchInCompanies
 Models::Search, 147
 setSearchInContributories
 Models::Search, 147
 setSearchInProjects
 Models::Search, 147
 setSearchInReferentLastname
 Models::Search, 148
 setTagMarkers
 Mustache::Renderer, 142
 setText
 Gui::Dialogs::MessageBox, 108
 Models::Search, 148
 setTitle
 Models::Billing, 29
 Models::User, 170
 setToRemoved
 Models::IModel, 97

- setType
 - Utils::ItemType, 99
- setWidgetDailyRateValue
 - Gui::Widgets::RateWidget, 140
- setWidgetHourlyRateValue
 - Gui::Widgets::RateWidget, 140
- setWorkspaceName
 - Models::User, 170
- setWorkspacePath
 - Models::User, 170
- stringValue
 - CounterContext, 69
 - Mustache::Context, 55
 - Mustache::QtVariantContext, 137
- TestAdder< T >, 152
- TestMustache, 152
- TestRunner, 153
- testadder, 152
- treeLevel
 - Gui::MainWindow, 105
- Type
 - Mustache::Tag, 152
- Ui::AddProjectDialog, 22
- Ui::AddQuoteDialog, 22
- Ui::ComboBoxModelWidget, 52
- Ui::ContributoriesWidget, 60
- Ui::CustomerDataWidget, 81
- Ui::DialogAddCustomer, 90
- Ui::MainWindow, 105
- Ui::MessageBox, 105
- Ui::ProjectsWidget, 129
- Ui::RateWidget, 141
- Ui::UserDataDialog, 173
- Ui::searchWidget, 150
- Ui_AddProjectDialog, 153
- Ui_AddQuoteDialog, 154
- Ui_ComboBoxModelWidget, 154
- Ui_ContributoriesWidget, 155
- Ui_CustomerDataWidget, 156
- Ui_DialogAddCustomer, 156
- Ui_MainWindow, 157
- Ui_MessageBox, 159
- Ui_ProjectsWidget, 160
- Ui_RateWidget, 160
- Ui_UserDataDialog, 161
- Ui_searchWidget, 161
- updateBtn
 - Gui::Widgets::ProjectsWidget, 128
- updateCustomer
 - Databases::CustomerDatabase, 81
- updateProject
 - Databases::ProjectDatabase, 122
- User
 - Models::User, 165
- UserDataDialog
 - Gui::Dialogs::UserDataDialog, 172
- Utils::HierarchicalSystem, 93
 - addBillingToProject, 94
 - addProjectToCustomer, 94
 - getCustomers, 94
 - getProjects, 94
 - Utils::ItemType, 97
 - getModel, 98
 - getName, 98
 - getType, 98
 - ItemType, 98
 - setName, 98
 - setType, 99
 - Utils::Log, 99
 - instance, 100
 - operator<<, 101
 - write, 101
 - Utils::String, 150
 - firstLetterToUpper, 151
- VERSION
 - Parameters, 109
- value
 - Databases::Database, 88
- write
 - Utils::Log, 101