

FactDev

0.1

Generated by Doxygen 1.8.6

Tue Apr 28 2015 22:09:53



# Contents

<b>1</b>	<b>FactDev documentation</b>	<b>1</b>
<b>2</b>	<b>README</b>	<b>3</b>
<b>3</b>	<b>QTestRunner</b>	<b>5</b>
<b>4</b>	<b>Namespace Index</b>	<b>7</b>
4.1	Namespace List . . . . .	7
<b>5</b>	<b>Hierarchical Index</b>	<b>9</b>
5.1	Class Hierarchy . . . . .	9
<b>6</b>	<b>Class Index</b>	<b>13</b>
6.1	Class List . . . . .	13
<b>7</b>	<b>Namespace Documentation</b>	<b>17</b>
7.1	Databases Namespace Reference . . . . .	17
7.1.1	Detailed Description . . . . .	17
7.2	Gui Namespace Reference . . . . .	17
7.2.1	Detailed Description . . . . .	18
7.3	Gui::Widgets Namespace Reference . . . . .	18
7.3.1	Detailed Description . . . . .	18
7.4	Models Namespace Reference . . . . .	19
7.4.1	Detailed Description . . . . .	19
<b>8</b>	<b>Class Documentation</b>	<b>21</b>
8.1	Databases::AccessDatabase Class Reference . . . . .	21
8.2	Gui::Dialogs::AddProjectDialog Class Reference . . . . .	21
8.2.1	Detailed Description . . . . .	22
8.2.2	Constructor & Destructor Documentation . . . . .	22
8.2.2.1	AddProjectDialog . . . . .	22
8.3	Gui::Dialogs::AddQuoteDialog Class Reference . . . . .	22
8.3.1	Detailed Description . . . . .	23
8.3.2	Constructor & Destructor Documentation . . . . .	23

8.3.2.1	AddQuoteDialog	23
8.3.3	Member Function Documentation	24
8.3.3.1	fillQuoteBilling	24
8.3.3.2	getCopy	24
8.3.3.3	getIdCustomer	24
8.3.3.4	getNumber	24
8.3.3.5	setCopy	24
8.3.3.6	setQuoteIdNumber	25
8.4	Models::Billing Class Reference	25
8.4.1	Detailed Description	27
8.4.2	Constructor & Destructor Documentation	27
8.4.2.1	Billing	27
8.4.3	Member Function Documentation	27
8.4.3.1	addContributory	27
8.4.3.2	getContributories	27
8.4.3.3	getDataMap	27
8.4.3.4	getDate	27
8.4.3.5	getDescription	28
8.4.3.6	getFilename	28
8.4.3.7	getFolder	28
8.4.3.8	getItem	28
8.4.3.9	getNumber	28
8.4.3.10	getPath	28
8.4.3.11	getPrice	29
8.4.3.12	getSumQuantity	29
8.4.3.13	getTitle	29
8.4.3.14	hydrat	29
8.4.3.15	isBilling	29
8.4.3.16	isPaid	29
8.4.3.17	operator!=	29
8.4.3.18	operator<	30
8.4.3.19	operator==	30
8.4.3.20	setDate	30
8.4.3.21	setDescription	30
8.4.3.22	setIsBilling	30
8.4.3.23	setIsPaid	31
8.4.3.24	setNumber	31
8.4.3.25	setTitle	31
8.5	Databases::BillingDatabase Class Reference	31
8.5.1	Detailed Description	33

8.5.2	Member Function Documentation	33
8.5.2.1	addBilling	33
8.5.2.2	addBillingProject	33
8.5.2.3	getAllBillingsOfProject	33
8.5.2.4	getBilling	33
8.5.2.5	getBilling	34
8.5.2.6	getBillingsTable	35
8.5.2.7	getBills	35
8.5.2.8	getBillsBetweenDates	35
8.5.2.9	getBillsPaid	35
8.5.2.10	getMaxBillingNumber	36
8.5.2.11	getMaxBillingNumberOfCustomer	36
8.5.2.12	getMaxQuoteNumber	36
8.5.2.13	getMaxQuoteNumberOfCustomer	36
8.5.2.14	getNbBills	36
8.5.2.15	getNbBillsPaid	37
8.5.2.16	getNbDocs	37
8.5.2.17	getNbQuotes	37
8.5.2.18	instance	37
8.5.2.19	isBillingPaid	38
8.5.2.20	removeBilling	39
8.5.2.21	removeBillingProject	39
8.6	BillingDatabaseTest Class Reference	39
8.7	BillingModelTest Class Reference	39
8.8	Gui::Widgets::WdgModels::BillingsTableModel Class Reference	40
8.8.1	Detailed Description	41
8.8.2	Constructor & Destructor Documentation	41
8.8.2.1	BillingsTableModel	41
8.8.3	Member Function Documentation	41
8.8.3.1	append	41
8.8.3.2	columnCount	41
8.8.3.3	count	41
8.8.3.4	data	41
8.8.3.5	flags	42
8.8.3.6	getBillings	42
8.8.3.7	headerData	42
8.8.3.8	remove	42
8.8.3.9	rowCount	43
8.8.3.10	setData	43
8.9	Gui::Widgets::BrowseImageWidget Class Reference	43

8.9.1	Detailed Description	44
8.9.2	Constructor & Destructor Documentation	44
8.9.2.1	BrowseImageWidget	44
8.9.3	Member Function Documentation	44
8.9.3.1	getExtension	44
8.9.3.2	getImage	44
8.9.3.3	setImage	44
8.9.3.4	setImageScaled	44
8.10	Models::Calculable Class Reference	45
8.10.1	Detailed Description	45
8.10.2	Member Function Documentation	45
8.10.2.1	getPrice	45
8.10.2.2	getSumQuantity	45
8.11	Gui::Widgets::CheckFields::CheckCity Class Reference	46
8.11.1	Detailed Description	46
8.11.2	Constructor & Destructor Documentation	46
8.11.2.1	CheckCity	46
8.12	Gui::Widgets::CheckFields::CheckCountry Class Reference	47
8.12.1	Detailed Description	47
8.12.2	Constructor & Destructor Documentation	47
8.12.2.1	CheckCountry	47
8.13	Gui::Widgets::CheckFields::CheckEmail Class Reference	47
8.13.1	Detailed Description	48
8.13.2	Constructor & Destructor Documentation	48
8.13.2.1	CheckEmail	48
8.13.3	Member Function Documentation	48
8.13.3.1	check	48
8.14	Gui::Widgets::CheckFields::CheckFieldsLetters Class Reference	49
8.14.1	Detailed Description	49
8.14.2	Constructor & Destructor Documentation	49
8.14.2.1	CheckFieldsLetters	49
8.14.3	Member Function Documentation	50
8.14.3.1	check	50
8.15	Gui::Widgets::CheckFields::CheckFieldsNumbers Class Reference	51
8.15.1	Detailed Description	51
8.15.2	Constructor & Destructor Documentation	52
8.15.2.1	CheckFieldsNumbers	52
8.15.3	Member Function Documentation	53
8.15.3.1	check	53
8.16	Gui::Widgets::CheckFields::CheckIpAddress Class Reference	53

8.16.1 Detailed Description . . . . .	53
8.16.2 Constructor & Destructor Documentation . . . . .	54
8.16.2.1 CheckIpAddress . . . . .	54
8.16.3 Member Function Documentation . . . . .	54
8.16.3.1 check . . . . .	54
8.17 Gui::Widgets::CheckFields::CheckLogin Class Reference . . . . .	54
8.17.1 Detailed Description . . . . .	55
8.17.2 Constructor & Destructor Documentation . . . . .	55
8.17.2.1 CheckLogin . . . . .	55
8.17.3 Member Function Documentation . . . . .	55
8.17.3.1 check . . . . .	55
8.18 Gui::Widgets::CheckFields::CheckName Class Reference . . . . .	56
8.18.1 Detailed Description . . . . .	56
8.18.2 Constructor & Destructor Documentation . . . . .	56
8.18.2.1 CheckName . . . . .	56
8.19 Gui::Widgets::CheckFields::CheckPhone Class Reference . . . . .	56
8.19.1 Detailed Description . . . . .	57
8.19.2 Constructor & Destructor Documentation . . . . .	57
8.19.2.1 CheckPhone . . . . .	57
8.19.3 Member Function Documentation . . . . .	57
8.19.3.1 check . . . . .	57
8.19.3.2 getCountry . . . . .	58
8.19.3.3 setCountry . . . . .	58
8.20 Gui::Widgets::CheckFields::CheckPortNumber Class Reference . . . . .	58
8.20.1 Detailed Description . . . . .	58
8.20.2 Constructor & Destructor Documentation . . . . .	59
8.20.2.1 CheckPortNumber . . . . .	59
8.20.3 Member Function Documentation . . . . .	59
8.20.3.1 check . . . . .	59
8.21 Gui::Widgets::CheckFields::CheckPostalCode Class Reference . . . . .	59
8.21.1 Detailed Description . . . . .	60
8.21.2 Constructor & Destructor Documentation . . . . .	60
8.21.2.1 CheckPostalCode . . . . .	60
8.21.3 Member Function Documentation . . . . .	60
8.21.3.1 check . . . . .	60
8.21.3.2 getCountry . . . . .	60
8.21.3.3 setCountry . . . . .	60
8.22 Gui::Widgets::CheckFields::CheckQLineEdit Class Reference . . . . .	61
8.22.1 Detailed Description . . . . .	61
8.22.2 Constructor & Destructor Documentation . . . . .	61

8.22.2.1	<a href="#">CheckQLineEdit</a>	61
8.22.3	<a href="#">Member Function Documentation</a>	62
8.22.3.1	<a href="#">getBtnValid</a>	62
8.22.3.2	<a href="#">isValid</a>	62
8.22.3.3	<a href="#">setBtnValid</a>	62
8.23	<a href="#">Gui::Widgets::CheckFields::CheckSiretNumber Class Reference</a>	62
8.23.1	<a href="#">Detailed Description</a>	63
8.23.2	<a href="#">Constructor &amp; Destructor Documentation</a>	63
8.23.2.1	<a href="#">CheckSiretNumber</a>	63
8.23.3	<a href="#">Member Function Documentation</a>	63
8.23.3.1	<a href="#">check</a>	63
8.24	<a href="#">Gui::Widgets::CheckFields::CheckUntilField Class Reference</a>	63
8.24.1	<a href="#">Detailed Description</a>	64
8.24.2	<a href="#">Constructor &amp; Destructor Documentation</a>	64
8.24.2.1	<a href="#">CheckUntilField</a>	64
8.24.3	<a href="#">Member Function Documentation</a>	64
8.24.3.1	<a href="#">check</a>	64
8.25	<a href="#">Gui::Widgets::CheckFields::CheckValidField Class Reference</a>	64
8.25.1	<a href="#">Detailed Description</a>	65
8.25.2	<a href="#">Constructor &amp; Destructor Documentation</a>	65
8.25.2.1	<a href="#">CheckValidField</a>	65
8.25.3	<a href="#">Member Function Documentation</a>	65
8.25.3.1	<a href="#">check</a>	65
8.26	<a href="#">Gui::Widgets::CheckFields::CheckWebsite Class Reference</a>	66
8.26.1	<a href="#">Detailed Description</a>	66
8.26.2	<a href="#">Constructor &amp; Destructor Documentation</a>	66
8.26.2.1	<a href="#">CheckWebsite</a>	66
8.26.3	<a href="#">Member Function Documentation</a>	66
8.26.3.1	<a href="#">check</a>	66
8.27	<a href="#">Gui::Widgets::Path::ChoseDirectoryWidget Class Reference</a>	67
8.27.1	<a href="#">Detailed Description</a>	67
8.27.2	<a href="#">Constructor &amp; Destructor Documentation</a>	67
8.27.2.1	<a href="#">ChoseDirectoryWidget</a>	67
8.28	<a href="#">Gui::Widgets::Path::ChoseFileWidget Class Reference</a>	68
8.28.1	<a href="#">Detailed Description</a>	68
8.28.2	<a href="#">Constructor &amp; Destructor Documentation</a>	68
8.28.2.1	<a href="#">ChoseFileWidget</a>	68
8.28.3	<a href="#">Member Function Documentation</a>	69
8.28.3.1	<a href="#">getTypeFiles</a>	69
8.28.3.2	<a href="#">setTypeFiles</a>	69



8.29	<a href="#">Gui::Widgets::Path::ChosePathWidget Class Reference</a>	69
8.29.1	<a href="#">Detailed Description</a>	70
8.29.2	<a href="#">Constructor &amp; Destructor Documentation</a>	70
8.29.2.1	<a href="#">ChosePathWidget</a>	70
8.29.3	<a href="#">Member Function Documentation</a>	70
8.29.3.1	<a href="#">getDefaultLocation</a>	70
8.29.3.2	<a href="#">getField</a>	70
8.29.3.3	<a href="#">setField</a>	70
8.30	<a href="#">Gui::Widgets::CoffeeEasterEggWidget Class Reference</a>	71
8.30.1	<a href="#">Detailed Description</a>	72
8.30.2	<a href="#">Constructor &amp; Destructor Documentation</a>	72
8.30.2.1	<a href="#">CoffeeEasterEggWidget</a>	72
8.30.3	<a href="#">Member Function Documentation</a>	72
8.30.3.1	<a href="#">isDrunked</a>	72
8.31	<a href="#">Gui::Widgets::Delegates::ComboBoxDelegate Class Reference</a>	72
8.31.1	<a href="#">Detailed Description</a>	73
8.31.2	<a href="#">Constructor &amp; Destructor Documentation</a>	73
8.31.2.1	<a href="#">ComboBoxDelegate</a>	73
8.31.3	<a href="#">Member Function Documentation</a>	73
8.31.3.1	<a href="#">createEditor</a>	73
8.31.3.2	<a href="#">paint</a>	74
8.31.3.3	<a href="#">setEditorData</a>	75
8.31.3.4	<a href="#">setModelData</a>	75
8.31.3.5	<a href="#">updateEditorGeometry</a>	75
8.32	<a href="#">Gui::Widgets::ComboBoxModelWidget Class Reference</a>	75
8.32.1	<a href="#">Detailed Description</a>	76
8.32.2	<a href="#">Constructor &amp; Destructor Documentation</a>	76
8.32.2.1	<a href="#">ComboBoxModelWidget</a>	76
8.33	<a href="#">Gui::Dialogs::ComputeTurnoverDialog Class Reference</a>	76
8.33.1	<a href="#">Detailed Description</a>	77
8.33.2	<a href="#">Member Function Documentation</a>	77
8.33.2.1	<a href="#">beginDateControl</a>	77
8.33.2.2	<a href="#">endDateControl</a>	77
8.33.2.3	<a href="#">fillLabels</a>	77
8.34	<a href="#">Mustache::Context Class Reference</a>	77
8.34.1	<a href="#">Detailed Description</a>	78
8.34.2	<a href="#">Constructor &amp; Destructor Documentation</a>	78
8.34.2.1	<a href="#">Context</a>	78
8.34.3	<a href="#">Member Function Documentation</a>	78
8.34.3.1	<a href="#">canEval</a>	78

8.34.3.2	<a href="#">eval</a>	78
8.34.3.3	<a href="#">isFalse</a>	79
8.34.3.4	<a href="#">listCount</a>	79
8.34.3.5	<a href="#">partialResolver</a>	79
8.34.3.6	<a href="#">partialValue</a>	79
8.34.3.7	<a href="#">pop</a>	79
8.34.3.8	<a href="#">push</a>	79
8.34.3.9	<a href="#">stringValue</a>	79
8.35	<a href="#">ContributoriesDatabaseTest Class Reference</a>	79
8.36	<a href="#">Models::ContributoriesList Class Reference</a>	80
8.36.1	<a href="#">Detailed Description</a>	81
8.36.2	<a href="#">Member Function Documentation</a>	81
8.36.2.1	<a href="#">addContributory</a>	81
8.36.2.2	<a href="#">addProject</a>	81
8.36.2.3	<a href="#">getAllContributories</a>	81
8.36.2.4	<a href="#">getContributories</a>	81
8.36.2.5	<a href="#">getCustomer</a>	82
8.36.2.6	<a href="#">getDataMap</a>	82
8.36.2.7	<a href="#">getIdBilling</a>	82
8.36.2.8	<a href="#">getNbProjects</a>	82
8.36.2.9	<a href="#">getPrice</a>	82
8.36.2.10	<a href="#">getPrice</a>	82
8.36.2.11	<a href="#">getProjects</a>	83
8.36.2.12	<a href="#">getRate</a>	83
8.36.2.13	<a href="#">getSumQuantity</a>	83
8.36.2.14	<a href="#">getSumQuantity</a>	83
8.36.2.15	<a href="#">isInsert</a>	83
8.36.2.16	<a href="#">setAllIdContributories</a>	84
8.36.2.17	<a href="#">setIdBilling</a>	85
8.36.2.18	<a href="#">setInsert</a>	85
8.37	<a href="#">Gui::Widgets::WdgModels::ContributoriesTableModel Class Reference</a>	85
8.37.1	<a href="#">Detailed Description</a>	86
8.37.2	<a href="#">Constructor &amp; Destructor Documentation</a>	86
8.37.2.1	<a href="#">ContributoriesTableModel</a>	86
8.37.3	<a href="#">Member Function Documentation</a>	86
8.37.3.1	<a href="#">append</a>	86
8.37.3.2	<a href="#">columnCount</a>	86
8.37.3.3	<a href="#">count</a>	87
8.37.3.4	<a href="#">data</a>	87
8.37.3.5	<a href="#">flags</a>	87

8.37.3.6	<a href="#">getContributories</a>	87
8.37.3.7	<a href="#">getSumQuantity</a>	87
8.37.3.8	<a href="#">headerData</a>	87
8.37.3.9	<a href="#">remove</a>	88
8.37.3.10	<a href="#">rowCount</a>	88
8.37.3.11	<a href="#">setData</a>	88
8.38	<a href="#">Gui::Widgets::ContributoriesWidget Class Reference</a>	88
8.38.1	<a href="#">Detailed Description</a>	89
8.38.2	<a href="#">Constructor &amp; Destructor Documentation</a>	90
8.38.2.1	<a href="#">ContributoriesWidget</a>	90
8.38.3	<a href="#">Member Function Documentation</a>	91
8.38.3.1	<a href="#">add</a>	91
8.38.3.2	<a href="#">addProject</a>	91
8.38.3.3	<a href="#">count</a>	91
8.38.3.4	<a href="#">getContributories</a>	91
8.38.3.5	<a href="#">responsiveContributoriesTable</a>	91
8.39	<a href="#">Models::Contributory Class Reference</a>	92
8.39.1	<a href="#">Detailed Description</a>	93
8.39.2	<a href="#">Constructor &amp; Destructor Documentation</a>	93
8.39.2.1	<a href="#">Contributory</a>	93
8.39.3	<a href="#">Member Function Documentation</a>	93
8.39.3.1	<a href="#">getDataMap</a>	93
8.39.3.2	<a href="#">getDescription</a>	93
8.39.3.3	<a href="#">getHourlyRate</a>	94
8.39.3.4	<a href="#">getLongDescription</a>	94
8.39.3.5	<a href="#">getPrice</a>	94
8.39.3.6	<a href="#">getProject</a>	94
8.39.3.7	<a href="#">getQuantity</a>	94
8.39.3.8	<a href="#">getSumQuantity</a>	94
8.39.3.9	<a href="#">getUnit</a>	95
8.39.3.10	<a href="#">hydrat</a>	95
8.39.3.11	<a href="#">operator!=</a>	95
8.39.3.12	<a href="#">operator==</a>	95
8.39.3.13	<a href="#">setDescription</a>	95
8.39.3.14	<a href="#">setHourlyRate</a>	95
8.39.3.15	<a href="#">setLongDescription</a>	96
8.39.3.16	<a href="#">setProject</a>	96
8.39.3.17	<a href="#">setQuantity</a>	96
8.39.3.18	<a href="#">setUnit</a>	96
8.40	<a href="#">Databases::ContributoryDatabase Class Reference</a>	96

8.40.1	Detailed Description	97
8.40.2	Member Function Documentation	97
8.40.2.1	addContributory	97
8.40.2.2	getContributoriesByBilling	97
8.40.2.3	getContributoriesByBillingAndProject	98
8.40.2.4	getContributory	98
8.40.2.5	getContributory	98
8.40.2.6	instance	98
8.40.2.7	removeContributory	99
8.41	ContributoryListTest Class Reference	100
8.42	ContributoryModelTest Class Reference	100
8.43	CounterContext Class Reference	100
8.43.1	Member Function Documentation	101
8.43.1.1	canEval	101
8.43.1.2	canEval	101
8.43.1.3	eval	101
8.43.1.4	eval	101
8.43.1.5	stringValue	102
8.43.1.6	stringValue	102
8.44	Models::Customer Class Reference	102
8.44.1	Detailed Description	103
8.44.2	Constructor & Destructor Documentation	103
8.44.2.1	Customer	103
8.44.3	Member Function Documentation	103
8.44.3.1	commit	103
8.44.3.2	getDataMap	103
8.44.3.3	getImage	104
8.44.3.4	getNameFolder	104
8.44.3.5	getPath	104
8.44.3.6	getTurnover	104
8.44.3.7	hydrat	104
8.44.3.8	isArchived	104
8.44.3.9	setImage	104
8.44.3.10	setIsArchived	105
8.45	Gui::Widgets::CustomerContextualMenu Class Reference	105
8.45.1	Detailed Description	105
8.45.2	Constructor & Destructor Documentation	105
8.45.2.1	CustomerContextualMenu	105
8.46	Databases::CustomerDatabase Class Reference	106
8.46.1	Detailed Description	107

8.46.2	Member Function Documentation	107
8.46.2.1	addCustomer	107
8.46.2.2	getCustomer	107
8.46.2.3	getCustomer	107
8.46.2.4	getCustomerImage	108
8.46.2.5	getCustomers	109
8.46.2.6	getCustomersTable	109
8.46.2.7	getItemCustomer	109
8.46.2.8	getItemProject	109
8.46.2.9	getItemRoot	110
8.46.2.10	getNbCustomers	110
8.46.2.11	getTree	110
8.46.2.12	instance	110
8.46.2.13	removeCustomer	110
8.46.2.14	setCustomerImage	110
8.46.2.15	updateCustomer	111
8.47	CustomerDatabaseTest Class Reference	111
8.48	Gui::Widgets::CustomerDataWidget Class Reference	111
8.48.1	Detailed Description	112
8.48.2	Constructor & Destructor Documentation	112
8.48.2.1	CustomerDataWidget	112
8.48.3	Member Function Documentation	112
8.48.3.1	printInformations	112
8.49	CustomerModelTest Class Reference	112
8.50	Gui::Widgets::WdgModels::CustomersTableModel Class Reference	113
8.50.1	Detailed Description	113
8.50.2	Constructor & Destructor Documentation	114
8.50.2.1	CustomersTableModel	114
8.50.3	Member Function Documentation	115
8.50.3.1	append	115
8.50.3.2	columnCount	115
8.50.3.3	count	115
8.50.3.4	data	115
8.50.3.5	flags	115
8.50.3.6	getCustomers	116
8.50.3.7	headerData	116
8.50.3.8	remove	116
8.50.3.9	rowCount	116
8.50.3.10	setData	116
8.51	Databases::Database Class Reference	117

8.51.1	Detailed Description	118
8.51.2	Member Function Documentation	118
8.51.2.1	changeDatabase	118
8.51.2.2	executeFile	118
8.51.2.3	instance	118
8.51.2.4	lastError	119
8.51.2.5	setDatabase	120
8.51.2.6	value	120
8.52	Gui::Widgets::DatabaseSettingsWidget Class Reference	120
8.52.1	Detailed Description	121
8.52.2	Constructor & Destructor Documentation	121
8.52.2.1	DatabaseSettingsWidget	121
8.52.3	Member Function Documentation	121
8.52.3.1	getDatabaseName	121
8.52.3.2	getDomainNameOrIP	122
8.52.3.3	getLogin	122
8.52.3.4	getPassword	122
8.52.3.5	getPort	122
8.52.3.6	isValid	122
8.53	Exceptions::DbException Class Reference	122
8.53.1	Detailed Description	123
8.53.2	Constructor & Destructor Documentation	123
8.53.2.1	DbException	123
8.53.3	Member Function Documentation	123
8.53.3.1	popupMessage	123
8.54	Gui::Dialogs::DialogAddCustomer Class Reference	124
8.54.1	Detailed Description	124
8.54.2	Constructor & Destructor Documentation	124
8.54.2.1	DialogAddCustomer	124
8.55	Utils::Directories Class Reference	125
8.55.1	Member Function Documentation	125
8.55.1.1	makeDirectory	125
8.56	DirectoriesTest Class Reference	125
8.57	DirectoriesTests Class Reference	125
8.58	Utils::Double Class Reference	126
8.58.1	Detailed Description	126
8.58.2	Member Function Documentation	126
8.58.2.1	round	126
8.59	Gui::Widgets::Delegates::DoubleSpinBoxDelegate Class Reference	126
8.59.1	Detailed Description	127

8.59.2	Constructor & Destructor Documentation	127
8.59.2.1	DoubleSpinBoxDelegate	127
8.59.3	Member Function Documentation	127
8.59.3.1	createEditor	127
8.59.3.2	setEditorData	128
8.59.3.3	setModelData	129
8.59.3.4	updateEditorGeometry	129
8.60	FileChoseWidget Class Reference	129
8.61	Exceptions::FileException Class Reference	130
8.61.1	Detailed Description	130
8.61.2	Constructor & Destructor Documentation	130
8.61.2.1	FileException	130
8.61.3	Member Function Documentation	130
8.61.3.1	popupMessage	130
8.62	Generation Class Reference	130
8.63	Utils::HierarchicalSystem Class Reference	131
8.63.1	Detailed Description	131
8.63.2	Member Function Documentation	132
8.63.2.1	addBillingToProject	132
8.63.2.2	addProjectToCustomer	133
8.63.2.3	getCustomers	133
8.63.2.4	getProjects	133
8.64	HierarchicalSystemTest Class Reference	133
8.65	Gui::Widgets::CheckFields::ICheckField Class Reference	134
8.65.1	Detailed Description	134
8.65.2	Member Function Documentation	134
8.65.2.1	check	134
8.66	Gui::Utils::Image Class Reference	134
8.66.1	Detailed Description	135
8.66.2	Member Function Documentation	135
8.66.2.1	bytesToPixmap	135
8.66.2.2	getImage	135
8.66.2.3	imageToBytes	135
8.66.2.4	pixmapToBytes	136
8.66.2.5	pixmapToImage	136
8.67	Models::IModel Class Reference	136
8.67.1	Detailed Description	137
8.67.2	Member Function Documentation	137
8.67.2.1	getDataMap	137
8.67.2.2	getId	137

8.67.2.3	hydrat	138
8.67.2.4	isToRemoved	138
8.67.2.5	setId	138
8.67.2.6	setToRemoved	138
8.68	Utils::ItemType Class Reference	138
8.68.1	Detailed Description	139
8.68.2	Constructor & Destructor Documentation	139
8.68.2.1	ItemType	139
8.68.3	Member Function Documentation	139
8.68.3.1	getModel	139
8.68.3.2	getName	139
8.68.3.3	getType	140
8.68.3.4	setName	140
8.68.3.5	setType	140
8.69	ItemTypeTest Class Reference	140
8.70	Utils::Log Class Reference	140
8.70.1	Detailed Description	141
8.70.2	Member Function Documentation	141
8.70.2.1	instance	141
8.70.2.2	write	141
8.70.3	Friends And Related Function Documentation	141
8.70.3.1	operator<<	141
8.71	Gui::MainWindow Class Reference	142
8.71.1	Detailed Description	144
8.71.2	Constructor & Destructor Documentation	144
8.71.2.1	MainWindow	144
8.71.3	Member Function Documentation	144
8.71.3.1	addBill	144
8.71.3.2	addDoc	144
8.71.3.3	addProject	145
8.71.3.4	addQuote	145
8.71.3.5	editUser	145
8.71.3.6	getCurrentCustomerId	145
8.71.3.7	getCurrentCustomerName	145
8.71.3.8	getCurrentProjectId	145
8.71.3.9	getCurrentProjectName	145
8.71.3.10	getCurrentQuoteId	146
8.71.3.11	isEasterEgg	146
8.71.3.12	resizeEvent	146
8.71.3.13	rootTree	146



8.71.3.14 search	146
8.71.3.15 treeLevel	146
8.72 Gui::Dialogs::MessageBox Class Reference	147
8.72.1 Detailed Description	147
8.72.2 Constructor & Destructor Documentation	147
8.72.2.1 MessageBox	147
8.72.3 Member Function Documentation	148
8.72.3.1 setImage	148
8.72.3.2 setText	148
8.73 Parameters Class Reference	148
8.73.1 Detailed Description	148
8.73.2 Member Data Documentation	148
8.73.2.1 DB_FILENAME	148
8.73.2.2 VERSION	149
8.74 Mustache::PartialFileLoader Class Reference	149
8.74.1 Detailed Description	149
8.74.2 Member Function Documentation	149
8.74.2.1 getPartial	149
8.75 Mustache::PartialMap Class Reference	149
8.75.1 Detailed Description	150
8.75.2 Member Function Documentation	150
8.75.2.1 getPartial	150
8.76 Mustache::PartialResolver Class Reference	150
8.76.1 Detailed Description	150
8.76.2 Member Function Documentation	151
8.76.2.1 getPartial	151
8.77 Generator::PdfGenerator Class Reference	151
8.77.1 Detailed Description	151
8.77.2 Constructor & Destructor Documentation	151
8.77.2.1 PdfGenerator	151
8.77.3 Member Function Documentation	151
8.77.3.1 generate	151
8.78 Models::People Class Reference	152
8.78.1 Detailed Description	153
8.78.2 Member Function Documentation	154
8.78.2.1 getAddress	154
8.78.2.2 getAddressComplement	154
8.78.2.3 getCity	154
8.78.2.4 getCompany	154
8.78.2.5 getCountry	154

8.78.2.6	<a href="#">getEmail</a>	154
8.78.2.7	<a href="#">getExtensionImage</a>	155
8.78.2.8	<a href="#">getFax</a>	155
8.78.2.9	<a href="#">getFirstname</a>	155
8.78.2.10	<a href="#">getImage</a>	155
8.78.2.11	<a href="#">getLastName</a>	155
8.78.2.12	<a href="#">getMobilePhone</a>	155
8.78.2.13	<a href="#">getPhone</a>	155
8.78.2.14	<a href="#">getPostalCode</a>	156
8.78.2.15	<a href="#">getWebsite</a>	156
8.78.2.16	<a href="#">operator!=</a>	156
8.78.2.17	<a href="#">operator==</a>	156
8.78.2.18	<a href="#">setAddress</a>	156
8.78.2.19	<a href="#">setAddressComplement</a>	156
8.78.2.20	<a href="#">setCity</a>	157
8.78.2.21	<a href="#">setCompany</a>	157
8.78.2.22	<a href="#">setCountry</a>	157
8.78.2.23	<a href="#">setEmail</a>	157
8.78.2.24	<a href="#">setExtensionImage</a>	157
8.78.2.25	<a href="#">setFax</a>	157
8.78.2.26	<a href="#">setFirstname</a>	158
8.78.2.27	<a href="#">setImage</a>	158
8.78.2.28	<a href="#">setLastName</a>	158
8.78.2.29	<a href="#">setMobilePhone</a>	158
8.78.2.30	<a href="#">setPhone</a>	158
8.78.2.31	<a href="#">setPostalCode</a>	158
8.78.2.32	<a href="#">setWebsite</a>	159
8.79	<a href="#">Utils::pointers Class Reference</a>	160
8.79.1	<a href="#">Detailed Description</a>	160
8.79.2	<a href="#">Member Function Documentation</a>	160
8.79.2.1	<a href="#">deleteIfNotNull</a>	160
8.80	<a href="#">PointersTest Class Reference</a>	160
8.81	<a href="#">Gui::Widgets::Popup Class Reference</a>	161
8.81.1	<a href="#">Detailed Description</a>	161
8.82	<a href="#">Models::Project Class Reference</a>	161
8.82.1	<a href="#">Detailed Description</a>	163
8.82.2	<a href="#">Constructor &amp; Destructor Documentation</a>	163
8.82.2.1	<a href="#">Project</a>	163
8.82.3	<a href="#">Member Function Documentation</a>	163
8.82.3.1	<a href="#">getBeginDate</a>	163

8.82.3.2	<a href="#">getCost</a>	163
8.82.3.3	<a href="#">getCustomer</a>	163
8.82.3.4	<a href="#">getDailyRate</a>	163
8.82.3.5	<a href="#">getDataMap</a>	164
8.82.3.6	<a href="#">getDescription</a>	164
8.82.3.7	<a href="#">getEndDate</a>	164
8.82.3.8	<a href="#">getName</a>	164
8.82.3.9	<a href="#">hydrat</a>	164
8.82.3.10	<a href="#">operator!=</a>	164
8.82.3.11	<a href="#">operator&lt;</a>	165
8.82.3.12	<a href="#">operator==</a>	166
8.82.3.13	<a href="#">setBeginDate</a>	166
8.82.3.14	<a href="#">setCustomer</a>	166
8.82.3.15	<a href="#">setDailyRate</a>	166
8.82.3.16	<a href="#">setDescription</a>	166
8.82.3.17	<a href="#">setEndDate</a>	166
8.82.3.18	<a href="#">setName</a>	167
8.83	<a href="#">Gui::Widgets::Delegates::ProjectComboDelegate Class Reference</a>	167
8.83.1	<a href="#">Detailed Description</a>	168
8.83.2	<a href="#">Constructor &amp; Destructor Documentation</a>	168
8.83.2.1	<a href="#">ProjectComboDelegate</a>	168
8.83.3	<a href="#">Member Function Documentation</a>	168
8.83.3.1	<a href="#">createEditor</a>	168
8.83.3.2	<a href="#">getProjects</a>	168
8.83.3.3	<a href="#">isLocked</a>	168
8.83.3.4	<a href="#">paint</a>	168
8.83.3.5	<a href="#">setLocked</a>	169
8.84	<a href="#">Gui::Widgets::WdgModels::ProjectContributoriesTableModel Class Reference</a>	169
8.84.1	<a href="#">Detailed Description</a>	170
8.84.2	<a href="#">Constructor &amp; Destructor Documentation</a>	170
8.84.2.1	<a href="#">ProjectContributoriesTableModel</a>	170
8.84.3	<a href="#">Member Function Documentation</a>	170
8.84.3.1	<a href="#">allProjectsChosen</a>	170
8.84.3.2	<a href="#">append</a>	170
8.84.3.3	<a href="#">columnCount</a>	171
8.84.3.4	<a href="#">data</a>	171
8.84.3.5	<a href="#">flags</a>	171
8.84.3.6	<a href="#">getProject</a>	171
8.84.3.7	<a href="#">getProjects</a>	171
8.84.3.8	<a href="#">getSelectedProjects</a>	172

8.84.3.9	headerData	172
8.84.3.10	remove	172
8.84.3.11	rowCount	172
8.84.3.12	setData	172
8.85	Databases::ProjectDatabase Class Reference	173
8.85.1	Detailed Description	174
8.85.2	Member Function Documentation	174
8.85.2.1	addProject	174
8.85.2.2	getAllProjects	174
8.85.2.3	getCostProjects	174
8.85.2.4	getNbProjects	174
8.85.2.5	getNbProjects	174
8.85.2.6	getProject	175
8.85.2.7	getProject	175
8.85.2.8	getProjects	175
8.85.2.9	getProjectsOfCustomer	175
8.85.2.10	getProjectsTable	176
8.85.2.11	instance	177
8.85.2.12	removeProject	177
8.85.2.13	updateProject	177
8.86	ProjectDatabaseTest Class Reference	177
8.87	ProjectModelTest Class Reference	178
8.88	Gui::Widgets::WdgModels::ProjectsTableModel Class Reference	178
8.88.1	Detailed Description	179
8.88.2	Constructor & Destructor Documentation	179
8.88.2.1	ProjectsTableModel	179
8.88.3	Member Function Documentation	179
8.88.3.1	append	179
8.88.3.2	columnCount	179
8.88.3.3	count	179
8.88.3.4	data	179
8.88.3.5	flags	180
8.88.3.6	getProjects	180
8.88.3.7	headerData	180
8.88.3.8	remove	180
8.88.3.9	rowCount	181
8.88.3.10	setData	181
8.89	Gui::Widgets::ProjectsWidget Class Reference	181
8.89.1	Detailed Description	182
8.89.2	Constructor & Destructor Documentation	182

8.89.2.1	ProjectsWidget	182
8.89.3	Member Function Documentation	182
8.89.3.1	updateBtn	182
8.90	Mustache::QtVariantContext Class Reference	182
8.90.1	Detailed Description	183
8.90.2	Member Typedef Documentation	183
8.90.2.1	fn_t	183
8.90.3	Member Function Documentation	183
8.90.3.1	canEval	183
8.90.3.2	eval	183
8.90.3.3	isFalse	184
8.90.3.4	listCount	184
8.90.3.5	pop	184
8.90.3.6	push	184
8.90.3.7	stringValue	184
8.91	Models::Rate Class Reference	184
8.91.1	Detailed Description	185
8.91.2	Constructor & Destructor Documentation	185
8.91.2.1	Rate	185
8.91.2.2	Rate	185
8.91.3	Member Function Documentation	185
8.91.3.1	getDailyRate	185
8.91.3.2	getHourlyRate	186
8.91.3.3	getLegalRate	186
8.91.3.4	getNbDailyHours	186
8.92	Databases::RateDatabase Class Reference	186
8.92.1	Member Function Documentation	187
8.92.1.1	addRateProject	187
8.92.1.2	getRate	187
8.92.1.3	instance	187
8.92.1.4	updateRateProject	187
8.93	RateModelTest Class Reference	188
8.94	Gui::Widgets::RateWidget Class Reference	188
8.94.1	Detailed Description	189
8.94.2	Constructor & Destructor Documentation	189
8.94.2.1	RateWidget	189
8.94.3	Member Function Documentation	189
8.94.3.1	getDailyRate	189
8.94.3.2	getHourlyRate	189
8.94.3.3	setDailyRate	189

8.94.3.4	setHourlyRate	189
8.94.3.5	setWidgetDailyRateValue	189
8.94.3.6	setWidgetHourlyRateValue	190
8.95	Mustache::Renderer Class Reference	190
8.95.1	Detailed Description	190
8.95.2	Member Function Documentation	190
8.95.2.1	error	190
8.95.2.2	errorPartial	190
8.95.2.3	errorPos	190
8.95.2.4	render	191
8.95.2.5	setTagMarkers	191
8.96	Models::Search Class Reference	191
8.96.1	Detailed Description	192
8.96.2	Member Function Documentation	192
8.96.2.1	filterOnBillsOrQuotes	192
8.96.2.2	filterOnCompany	192
8.96.2.3	filterOnContributories	192
8.96.2.4	filterOnCustomersWithoutProject	193
8.96.2.5	filterOnNumberElements	193
8.96.2.6	filterOnProjects	193
8.96.2.7	filterOnReferentLastname	193
8.96.2.8	filterOnVarcharElements	193
8.96.2.9	getFilter	194
8.96.2.10	getGroupFilter	194
8.96.2.11	getSearchInBillsQuotes	194
8.96.2.12	getSearchInCompanies	194
8.96.2.13	getSearchInProjects	194
8.96.2.14	getSearchInReferentLastname	194
8.96.2.15	getText	194
8.96.2.16	searchInContributories	195
8.96.2.17	setGroupFilter	195
8.96.2.18	setSearchInBillsQuotes	195
8.96.2.19	setSearchInCompanies	195
8.96.2.20	setSearchInContributories	195
8.96.2.21	setSearchInProjects	195
8.96.2.22	setSearchInReferentLastname	195
8.96.2.23	setText	196
8.97	Gui::Docks::SearchDock Class Reference	196
8.97.1	Detailed Description	196
8.97.2	Constructor & Destructor Documentation	197

8.97.2.1	SearchDock	197
8.97.3	Member Function Documentation	197
8.97.3.1	getText	197
8.97.3.2	search	197
8.97.3.3	textChanged	197
8.98	searchTest Class Reference	197
8.99	Gui::Widgets::searchWidget Class Reference	198
8.99.1	Detailed Description	198
8.99.2	Constructor & Destructor Documentation	199
8.99.2.1	searchWidget	199
8.99.3	Member Function Documentation	200
8.99.3.1	getCurrentCustomerId	200
8.99.3.2	getIdCustomer	200
8.99.3.3	isCustomerSelected	200
8.99.3.4	search	200
8.99.3.5	selectCustomer	200
8.99.3.6	setIdCustomer	200
8.100	Gui::Dialogs::StartedWindowsDialog Class Reference	201
8.100.1	Detailed Description	202
8.100.2	Constructor & Destructor Documentation	202
8.100.2.1	StartedWindowsDialog	202
8.100.3	Member Function Documentation	202
8.100.3.1	databaseTypeChanged	202
8.100.3.2	getImage	202
8.100.3.3	isDatabaseCentralized	203
8.100.3.4	isDatabaseTypeValid	203
8.101	StatisticModelTest Class Reference	203
8.102	Models::Statistics Class Reference	203
8.102.1	Member Function Documentation	203
8.102.1.1	getGlobalTurnover	203
8.102.1.2	getTurnoverBetweenDates	204
8.103	Gui::Dialogs::StatisticsDialog Class Reference	204
8.103.1	Detailed Description	204
8.103.2	Constructor & Destructor Documentation	205
8.103.2.1	StatisticsDialog	205
8.103.3	Member Function Documentation	206
8.103.3.1	singularPlural	206
8.103.3.2	updateUi	206
8.104	Utils::String Class Reference	206
8.104.1	Detailed Description	206

8.104.2 Member Function Documentation	207
8.104.2.1 firstLetterToUpper	207
8.104.2.2 getExtensionFile	208
8.105StringTest Class Reference	208
8.106Mustache::Tag Struct Reference	208
8.106.1 Detailed Description	209
8.106.2 Member Enumeration Documentation	209
8.106.2.1 Type	209
8.107testadder Class Reference	209
8.108TestAdder< T > Class Template Reference	209
8.109TestMustache Class Reference	210
8.110TestRunner Class Reference	210
8.111Generator::TexGenerator Class Reference	210
8.111.1 Detailed Description	210
8.111.2 Constructor & Destructor Documentation	211
8.111.2.1 TexGenerator	211
8.111.3 Member Function Documentation	212
8.111.3.1 generate	212
8.112Gui::Widgets::Delegates::TextareaDelegate Class Reference	212
8.112.1 Detailed Description	212
8.112.2 Constructor & Destructor Documentation	213
8.112.2.1 TextareaDelegate	213
8.112.3 Member Function Documentation	213
8.112.3.1 createEditor	213
8.112.3.2 setEditorData	213
8.112.3.3 setModelData	213
8.112.3.4 updateEditorGeometry	214
8.113Models::Unit Class Reference	215
8.113.1 Detailed Description	215
8.113.2 Constructor & Destructor Documentation	215
8.113.2.1 Unit	215
8.113.3 Member Function Documentation	215
8.113.3.1 gettype	215
8.113.3.2 operator!=	216
8.113.3.3 operator==	216
8.113.3.4 setType	216
8.113.3.5 toString	216
8.114Gui::Widgets::Delegates::UnitComboDelegate Class Reference	216
8.114.1 Detailed Description	217
8.114.2 Constructor & Destructor Documentation	217



8.114.2.1 UnitComboDelegate . . . . .	217
8.114.3 Member Function Documentation . . . . .	217
8.114.3.1 createEditor . . . . .	217
8.114.3.2 paint . . . . .	218
8.115Models::User Class Reference . . . . .	218
8.115.1 Detailed Description . . . . .	219
8.115.2 Constructor & Destructor Documentation . . . . .	220
8.115.2.1 User . . . . .	220
8.115.3 Member Function Documentation . . . . .	220
8.115.3.1 getDataMap . . . . .	220
8.115.3.2 getImage . . . . .	220
8.115.3.3 getNbDaysPerMonth . . . . .	220
8.115.3.4 getNbDaysPerWeek . . . . .	220
8.115.3.5 getNbHoursPerDay . . . . .	220
8.115.3.6 getNbHoursPerMonth . . . . .	221
8.115.3.7 getNbHoursPerWeek . . . . .	221
8.115.3.8 getNoSiret . . . . .	221
8.115.3.9 getPdflatexPath . . . . .	221
8.115.3.10getTitle . . . . .	221
8.115.3.11getWorkspaceName . . . . .	221
8.115.3.12getWorkspacePath . . . . .	221
8.115.3.13hydrat . . . . .	222
8.115.3.14operator!= . . . . .	223
8.115.3.15operator== . . . . .	223
8.115.3.16setImage . . . . .	223
8.115.3.17setNbDaysPerMonth . . . . .	223
8.115.3.18setNbDaysPerWeek . . . . .	223
8.115.3.19setNbHoursPerDay . . . . .	224
8.115.3.20setNoSiret . . . . .	224
8.115.3.21setPdflatexPath . . . . .	224
8.115.3.22setTitle . . . . .	224
8.115.3.23setWorkspaceName . . . . .	224
8.115.3.24setWorkspacePath . . . . .	224
8.115.3.25updateFolders . . . . .	225
8.116Gui::Widgets::UserDailyHoursWidget Class Reference . . . . .	225
8.116.1 Detailed Description . . . . .	226
8.116.2 Constructor & Destructor Documentation . . . . .	226
8.116.2.1 UserDailyHoursWidget . . . . .	226
8.116.3 Member Function Documentation . . . . .	226
8.116.3.1 dailyHoursValueHasChanged . . . . .	226

8.116.3.2 getNbDaysPerMonth . . . . .	226
8.116.3.3 getNbDaysPerWeek . . . . .	226
8.116.3.4 getNbHoursPerDay . . . . .	226
8.116.3.5 monthlyDaysValueHasChanged . . . . .	227
8.116.3.6 setNbDaysPerMonth . . . . .	228
8.116.3.7 setNbDaysPerWeek . . . . .	228
8.116.3.8 setNbHoursPerDay . . . . .	228
8.116.3.9 weeklyDaysValueHasChanged . . . . .	228
8.117Databases::UserDatabase Class Reference . . . . .	228
8.117.1 Detailed Description . . . . .	229
8.117.2 Member Function Documentation . . . . .	229
8.117.2.1 getUser . . . . .	229
8.117.2.2 getUserImage . . . . .	229
8.117.2.3 instance . . . . .	230
8.117.2.4 setUserImage . . . . .	230
8.118UserDatabaseTest Class Reference . . . . .	230
8.119Gui::Dialogs::UserDataDialog Class Reference . . . . .	230
8.119.1 Detailed Description . . . . .	231
8.119.2 Constructor & Destructor Documentation . . . . .	231
8.119.2.1 UserDataDialog . . . . .	231
8.120UserModelTest Class Reference . . . . .	231
8.121Gui::Utils::WindowSettings Class Reference . . . . .	232
8.121.1 Detailed Description . . . . .	232
8.121.2 Member Function Documentation . . . . .	232
8.121.2.1 setMaximumSize . . . . .	232
8.121.2.2 setPositionToCenter . . . . .	232
<b>Index</b>	<b>233</b>

# Chapter 1

## FactDev documentation

This website contains the documentation of FactDev, a billings and quotes software.

### Team

FACT team is a team for University Project. Members of this team are :

- Florent Berbie ([KraTuX31](#))
- Antoine de Roquemaurel ([aroquemaurel](#))
- Cédric Rohaut ([Oxynos](#))
- Manantsoa Andriamihary Razanajatovo ([manantsoa](#))

For more informations, you can go to <http://fact-team.github.io>.

### What is FactDev ?

FactDev is a software for quotes and billings developped by FACT team for university project in Toulouse III University – Paul Sabatier.

This software is developed with C++ and Qt framework, and there is differents features :

- Customers database
- Differents projects for customers
- Quotes
- Billings

### Documentation

You can access to the documentation generated by Doxygen here :

- [HTML Documentation](#)
- [PDF Documentation](#)

## Installation and using

- [User Manual](#)

## Chapter 2

# README

! [Build Status] (<https://travis-ci.org/robertknight/qt-mustache.svg?branch=master>)

### Qt Mustache

qt-mustache is a simple library for rendering **Mustache templates**.

#### Example Usage

```
“cpp #include "mustache.h"
```

```
QVariantHash contact; contact["name"] = "John Smith"; contact["email"] = "john.smith@gmail.com";
```

```
QString contactTemplate = "<b>{{name}}</b> <a href='mailto:{{email}}'>{{email}}";
```

```
Mustache::Renderer renderer; Mustache::QtVariantContext context(contact);
```

```
QTextStream output(stdout); output << renderer.render(contactTemplate, &context); “
```

Outputs:        <b>John Smith</b> <a href="mailto:john.smith@gmail.com">john.smith@gmail.com</a>

For further examples, see the tests in `test_mustache.cpp`

#### Building

- To build the tests, run `qmake` followed by `make`
- To use qt-mustache in your project, just add the `mustache.h` and `mustache.cpp` files to your project.

#### License

qt-mustache is licensed under the BSD license.

#### Dependencies

qt-mustache depends on the QtCore library. It is compatible with Qt 4 and Qt 5.

#### Usage

## Syntax

qt-mustache uses the standard Mustache syntax. See the [Mustache manual](#) for details.

## Data Sources

qt-mustache expands Mustache tags using values from a [Mustache::Context](#). [Mustache::QtVariantContext](#) is a simple context implementation which wraps a `QVariantHash` or `QVariantMap`. If you want to render a template using a custom data source, you can either create a `QVariantHash` which mirrors the data source or you can re-implement [Mustache::Context](#).

## Partials

When a `{{>partial}}` Mustache tag is encountered, qt-mustache will attempt to load the partial using a [Mustache::PartialResolver](#) provided by the context. [Mustache::PartialMap](#) is a simple resolver which takes a `QHash<QString,QString>` map of partial names to values and looks up partials in that map. [Mustache::PartialFileLoader](#) is another simple resolver which fetches partials from `<partial name>.mustache` files in a specified directory.

You can re-implement the [Mustache::PartialResolver](#) interface if you want to load partials from a custom source (eg. a database).

## Error Handling

If an error occurs when rendering a template, `Mustache::Renderer::errorPosition()` is set to non-negative value and template rendering stops. If the error occurs whilst rendering a partial template, `errorPartial()` contains the name of the partial.

## Lambdas

The [Mustache manual](#) provides a mechanism to customize rendering of template sections by setting the value for a tag to a callable object (eg. a lambda in Ruby or Javascript), which takes the unrendered block of text for a template section and renders it itself. qt-mustache supports this via the `Context::canEval()` and `Context::eval()` methods.

## Chapter 3

# QTestRunner

A repo for Increase QTest productivity

Thanks to <https://marcoarena.wordpress.com/2012/06/23/increase-your-qtest-productivity/>!

The QTestLib framework is a tool for unit testing Qt based applications and libraries. I find it precious and simple to use, though it lacks some important features, supported, for example, by GTest. I'm not talking about mocking – for this you generally need an out-and-out framework (like GMock) – instead, I'm referring to simple things like fast deploying. Suppose you have written a test class like this:

This repo contains only the code in this article.





## Chapter 4

# Namespace Index

### 4.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

<a href="#">Databases</a>		
	Class for <a href="#">Database</a> , contains queries . . . . .	??
<a href="#">Gui</a>	. . . . .	??
<a href="#">Gui::Widgets</a>		
	Contains <a href="#">Widgets</a> classes . . . . .	??
<a href="#">Models</a>		
	<a href="#">Models</a> classes . . . . .	??



## Chapter 5

# Hierarchical Index

### 5.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Databases::AccessDatabase . . . . .	??
Models::Calculable . . . . .	??
Models::Billing . . . . .	??
Models::ContributoriesList . . . . .	??
Models::Contributory . . . . .	??
Mustache::Context . . . . .	??
Mustache::QtVariantContext . . . . .	??
CounterContext . . . . .	??
CounterContext . . . . .	??
Databases::Database . . . . .	??
Databases::BillingDatabase . . . . .	??
Databases::ContributoryDatabase . . . . .	??
Databases::CustomerDatabase . . . . .	??
Databases::ProjectDatabase . . . . .	??
Databases::RateDatabase . . . . .	??
Databases::UserDatabase . . . . .	??
Utils::Directories . . . . .	??
Utils::Double . . . . .	??
exception	
Exceptions::DbException . . . . .	??
Exceptions::FileException . . . . .	??
Utils::HierarchicalSystem . . . . .	??
Gui::Widgets::CheckFields::ICheckField . . . . .	??
Gui::Widgets::CheckFields::CheckQLineEdit . . . . .	??
Gui::Widgets::CheckFields::CheckEmail . . . . .	??
Gui::Widgets::CheckFields::CheckPortNumber . . . . .	??
Gui::Widgets::CheckFields::CheckSiretNumber . . . . .	??
Gui::Widgets::CheckFields::CheckUntilField . . . . .	??
Gui::Widgets::CheckFields::CheckFieldsLetters . . . . .	??
Gui::Widgets::CheckFields::CheckCity . . . . .	??
Gui::Widgets::CheckFields::CheckCountry . . . . .	??
Gui::Widgets::CheckFields::CheckName . . . . .	??
Gui::Widgets::CheckFields::CheckFieldsNumbers . . . . .	??
Gui::Widgets::CheckFields::CheckIpAddress . . . . .	??
Gui::Widgets::CheckFields::CheckLogin . . . . .	??
Gui::Widgets::CheckFields::CheckPhone . . . . .	??
Gui::Widgets::CheckFields::CheckPostalCode . . . . .	??

Gui::Widgets::CheckFields::CheckValidField . . . . .	??
Gui::Widgets::CheckFields::CheckWebsite . . . . .	??
Gui::Utils::Image . . . . .	??
Models::IModel . . . . .	??
Models::Billing . . . . .	??
Models::Contributory . . . . .	??
Models::People . . . . .	??
Models::Customer . . . . .	??
Models::User . . . . .	??
Models::Project . . . . .	??
Utils::ItemType . . . . .	??
Utils::Log . . . . .	??
Parameters . . . . .	??
Mustache::PartialResolver . . . . .	??
Mustache::PartialFileLoader . . . . .	??
Mustache::PartialMap . . . . .	??
Generator::PdfGenerator . . . . .	??
Utils::pointers . . . . .	??
Gui::Widgets::Popup . . . . .	??
QAbstractTableModel	
Gui::Widgets::WdgModels::BillingsTableModel . . . . .	??
Gui::Widgets::WdgModels::ContributoriesTableModel . . . . .	??
Gui::Widgets::WdgModels::CustomersTableModel . . . . .	??
Gui::Widgets::WdgModels::ProjectContributoriesTableModel . . . . .	??
Gui::Widgets::WdgModels::ProjectsTableModel . . . . .	??
QDialog	
Gui::Dialogs::AddProjectDialog . . . . .	??
Gui::Dialogs::AddQuoteDialog . . . . .	??
Gui::Dialogs::ComputeTurnoverDialog . . . . .	??
Gui::Dialogs::DialogAddCustomer . . . . .	??
Gui::Dialogs::MessageBox . . . . .	??
Gui::Dialogs::StartedWindowsDialog . . . . .	??
Gui::Dialogs::StatisticsDialog . . . . .	??
Gui::Dialogs::UserDataDialog . . . . .	??
QDockWidget	
Gui::Docks::SearchDock . . . . .	??
QItemDelegate	
Gui::Widgets::Delegates::ComboBoxDelegate . . . . .	??
Gui::Widgets::Delegates::ProjectComboDelegate . . . . .	??
Gui::Widgets::Delegates::UnitComboDelegate . . . . .	??
Gui::Widgets::Delegates::DoubleSpinBoxDelegate . . . . .	??
Gui::Widgets::Delegates::TextareaDelegate . . . . .	??
QLineEdit	
Gui::Widgets::CheckFields::CheckQLineEdit . . . . .	??
QMainWindow	
Gui::MainWindow . . . . .	??
QMap	
Models::ContributoriesList . . . . .	??
QMenu	
Gui::Widgets::CustomerContextualMenu . . . . .	??
QObject	
BillingDatabaseTest . . . . .	??
BillingModelTest . . . . .	??
ContributoriesDatabaseTest . . . . .	??
ContributoryListTest . . . . .	??
ContributoryModelTest . . . . .	??
CustomerDatabaseTest . . . . .	??

CustomerModelTest . . . . .	??
DirectoriesTest . . . . .	??
DirectoriesTests . . . . .	??
Generation . . . . .	??
HierarchicalSystemTest . . . . .	??
ItemTypeTest . . . . .	??
PointersTest . . . . .	??
ProjectDatabaseTest . . . . .	??
ProjectModelTest . . . . .	??
RateModelTest . . . . .	??
searchTest . . . . .	??
StatisticModelTest . . . . .	??
StringTest . . . . .	??
TestMustache . . . . .	??
TestMustache . . . . .	??
UserDatabaseTest . . . . .	??
UserModelTest . . . . .	??
QWidget	
FileChoseWidget . . . . .	??
Gui::Widgets::BrowseImageWidget . . . . .	??
Gui::Widgets::CoffeeEasterEggWidget . . . . .	??
Gui::Widgets::ComboBoxModelWidget . . . . .	??
Gui::Widgets::ContributoriesWidget . . . . .	??
Gui::Widgets::CustomerDataWidget . . . . .	??
Gui::Widgets::DatabaseSettingsWidget . . . . .	??
Gui::Widgets::Path::ChosePathWidget . . . . .	??
Gui::Widgets::Path::ChoseDirectoryWidget . . . . .	??
Gui::Widgets::Path::ChoseFileWidget . . . . .	??
Gui::Widgets::ProjectsWidget . . . . .	??
Gui::Widgets::RateWidget . . . . .	??
Gui::Widgets::searchWidget . . . . .	??
Gui::Widgets::UserDailyHoursWidget . . . . .	??
Models::Rate . . . . .	??
Mustache::Renderer . . . . .	??
Models::Search . . . . .	??
Models::Statistics . . . . .	??
Utils::String . . . . .	??
Mustache::Tag . . . . .	??
testadder . . . . .	??
TestAdder< T > . . . . .	??
TestRunner . . . . .	??
Generator::TexGenerator . . . . .	??
Models::Unit . . . . .	??
Gui::Utils::WindowSettings . . . . .	??



## Chapter 6

# Class Index

### 6.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Databases::AccessDatabase</a>	??
<a href="#">Gui::Dialogs::AddProjectDialog</a>	
Windows to add a new Project	??
<a href="#">Gui::Dialogs::AddQuoteDialog</a>	
Window to add or modify a Quote	??
<a href="#">Models::Billing</a>	
: <a href="#">Billing</a> or Quote of a <a href="#">Customer</a>	??
<a href="#">Databases::BillingDatabase</a>	
The <a href="#">BillingDatabase</a> class Billing (or Quote) table database	??
<a href="#">BillingDatabaseTest</a>	??
<a href="#">BillingModelTest</a>	??
<a href="#">Gui::Widgets::WdgModels::BillingsTableModel</a>	
For a Billing table	??
<a href="#">Gui::Widgets::BrowseImageWidget</a>	
Widget to add a new <a href="#">BrowseImageWidget</a>	??
<a href="#">Models::Calculable</a>	
The <a href="#">Calculable</a> interface <a href="#">Models</a> who are calculable	??
<a href="#">Gui::Widgets::CheckFields::CheckCity</a>	
Line Edit of City with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckCountry</a>	
<a href="#">CheckCountry::CheckCountry</a> Line Edit of country with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckEmail</a>	
Line Edit of email with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckFieldsLetters</a>	
Field with only letters (no numbers)	??
<a href="#">Gui::Widgets::CheckFields::CheckFieldsNumbers</a>	
Line Edit of number with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckIpAddress</a>	
Line Edit of IP address with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckLogin</a>	
Line Edit of login with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckName</a>	
Line edit of name with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckPhone</a>	
Line Edit of Phone number with a check icon	??
<a href="#">Gui::Widgets::CheckFields::CheckPortNumber</a>	
The <a href="#">CheckFieldsNumbers</a> class Line Edit of number with a check icon	??

<a href="#">Gui::Widgets::CheckFields::CheckPostalCode</a>	
Line Edit of postal code with a check icon . . . . .	??
<a href="#">Gui::Widgets::CheckFields::CheckQLineEdit</a>	
LineEdit custom with a check of text inputed . . . . .	??
<a href="#">Gui::Widgets::CheckFields::CheckSiretNumber</a>	
Line Edit with a check icon . . . . .	??
<a href="#">Gui::Widgets::CheckFields::CheckUntilField</a>	
The <a href="#">CheckUntilField</a> class . . . . .	??
<a href="#">Gui::Widgets::CheckFields::CheckValidField</a>	
Check field not required . . . . .	??
<a href="#">Gui::Widgets::CheckFields::CheckWebsite</a>	
Line Edit of website with a check icon . . . . .	??
<a href="#">Gui::Widgets::Path::ChoseDirectoryWidget</a>	
Open a QFileDialog.and display path in textfield . . . . .	??
<a href="#">Gui::Widgets::Path::ChoseFileWidget</a>	
Chose a File in computer . . . . .	??
<a href="#">Gui::Widgets::Path::ChosePathWidget</a>	
The <a href="#">ChoseDirectoryWidget</a> class Open a QFileDialog.and display path in textfield . . . . .	??
<a href="#">Gui::Widgets::CoffeeEasterEggWidget</a>	
Easter egg class because we need coffee . . . . .	??
<a href="#">Gui::Widgets::Delegates::ComboBoxDelegate</a>	
The <a href="#">ComboBoxDelegate</a> class . . . . .	??
<a href="#">Gui::Widgets::ComboBoxModelWidget</a>	
Model of ComboBox . . . . .	??
<a href="#">Gui::Dialogs::ComputeTurnoverDialog</a>	
Window to compute a turnover with a period . . . . .	??
<a href="#">Mustache::Context</a> . . . . .	??
<a href="#">ContributoriesDatabaseTest</a> . . . . .	??
<a href="#">Models::ContributoriesList</a>	
List of contributories . . . . .	??
<a href="#">Gui::Widgets::WdgModels::ContributoriesTableModel</a>	
For a custom table for contributories widget . . . . .	??
<a href="#">Gui::Widgets::ContributoriesWidget</a>	
Widget of Contributories . . . . .	??
<a href="#">Models::Contributory</a>	
The <a href="#">Unit</a> enum Unity of work : hour or day . . . . .	??
<a href="#">Databases::ContributoryDatabase</a>	
The <a href="#">ContributoryDatabase</a> class Contributory (or Quote) table database . . . . .	??
<a href="#">ContributoryListTest</a> . . . . .	??
<a href="#">ContributoryModelTest</a> . . . . .	??
<a href="#">CounterContext</a> . . . . .	??
<a href="#">Models::Customer</a>	
Customer . . . . .	??
<a href="#">Gui::Widgets::CustomerContextualMenu</a>	
Display contextual menu on a customer . . . . .	??
<a href="#">Databases::CustomerDatabase</a>	
The <a href="#">CustomerDatabase</a> class Customer table database . . . . .	??
<a href="#">CustomerDatabaseTest</a> . . . . .	??
<a href="#">Gui::Widgets::CustomerDataWidget</a>	
Class for display info of a customer . . . . .	??
<a href="#">CustomerModelTest</a> . . . . .	??
<a href="#">Gui::Widgets::WdgModels::CustomersTableModel</a>	
For a customer table . . . . .	??
<a href="#">Databases::Database</a>	
The <a href="#">Database</a> class Master class for all database access . . . . .	??
<a href="#">Gui::Widgets::DatabaseSettingsWidget</a>	
Windows of database settings . . . . .	??



<a href="#">Exceptions::DbException</a>	
For database exception : queries, db file, ...	??
<a href="#">Gui::Dialogs::DialogAddCustomer</a>	
Window to add or modify a Customer	??
<a href="#">Utils::Directories</a>	??
<a href="#">DirectoriesTest</a>	??
<a href="#">DirectoriesTests</a>	??
<a href="#">Utils::Double</a>	
Utils functions for <a href="#">Double</a> calculs	??
<a href="#">Gui::Widgets::Delegates::DoubleSpinBoxDelegate</a>	
The <a href="#">DoubleSpinBoxDelegate</a> class	??
<a href="#">FileChoseWidget</a>	??
<a href="#">Exceptions::FileException</a>	
For file/access file exception	??
<a href="#">Generation</a>	??
<a href="#">Utils::HierarchicalSystem</a>	
Create class which contains hierarchical system of FactDev	??
<a href="#">HierarchicalSystemTest</a>	??
<a href="#">Gui::Widgets::CheckFields::ICheckField</a>	
Interface to check fields validity	??
<a href="#">Gui::Utils::Image</a>	
Contains generic methods on image formats	??
<a href="#">Models::IModel</a>	
The <a href="#">IModel</a> class	??
<a href="#">Utils::ItemType</a>	
Item type model	??
<a href="#">ItemTypeTest</a>	??
<a href="#">Utils::Log</a>	
For Simple management of log	??
<a href="#">Gui::MainWindow</a>	
Main Window of the software	??
<a href="#">Gui::Dialogs::MessageBox</a>	
Information window with message	??
<a href="#">Parameters</a>	
Class for simple user parameters	??
<a href="#">Mustache::PartialFileLoader</a>	??
<a href="#">Mustache::PartialMap</a>	??
<a href="#">Mustache::PartialResolver</a>	??
<a href="#">Generator::PdfGenerator</a>	
Generator of PDF files	??
<a href="#">Models::People</a>	
<a href="#">People</a>	??
<a href="#">Utils::pointers</a>	
The pointers class	??
<a href="#">PointersTest</a>	??
<a href="#">Gui::Widgets::Popup</a>	
Class for display popup quickly	??
<a href="#">Models::Project</a>	
: <a href="#">Project</a> linked to a <a href="#">Customer</a>	??
<a href="#">Gui::Widgets::Delegates::ProjectComboDelegate</a>	
The <a href="#">ProjectComboDelegate</a> class	??
<a href="#">Gui::Widgets::WdgModels::ProjectContributoriesTableModel</a>	
Table model of contributories linked to projets	??
<a href="#">Databases::ProjectDatabase</a>	
Project table database	??
<a href="#">ProjectDatabaseTest</a>	??
<a href="#">ProjectModelTest</a>	??

<a href="#">Gui::Widgets::WdgModels::ProjectsTableModel</a>	
For a Project table	??
<a href="#">Gui::Widgets::ProjectsWidget</a>	
Actions on Project	??
<a href="#">Mustache::QtVariantContext</a>	??
<a href="#">Models::Rate</a>	
Rate of a prestation	??
<a href="#">Databases::RateDatabase</a>	??
<a href="#">RateModelTest</a>	??
<a href="#">Gui::Widgets::RateWidget</a>	
Class for display Rate	??
<a href="#">Mustache::Renderer</a>	??
<a href="#">Models::Search</a>	
The <a href="#">Search</a> class	??
<a href="#">Gui::Docks::SearchDock</a>	
Dock which contains search bar	??
<a href="#">searchTest</a>	??
<a href="#">Gui::Widgets::searchWidget</a>	
Class for search in database	??
<a href="#">Gui::Dialogs::StartedWindowsDialog</a>	
Construct a Windows for the first begin	??
<a href="#">StatisticModelTest</a>	??
<a href="#">Models::Statistics</a>	??
<a href="#">Gui::Dialogs::StatisticsDialog</a>	
Window to have global informations or about a customer	??
<a href="#">Utils::String</a>	
The Utils class	??
<a href="#">StringTest</a>	??
<a href="#">Mustache::Tag</a>	??
<a href="#">testadder</a>	??
<a href="#">TestAdder&lt; T &gt;</a>	??
<a href="#">TestMustache</a>	??
<a href="#">TestRunner</a>	??
<a href="#">Generator::TexGenerator</a>	
Generate a LaTeX file	??
<a href="#">Gui::Widgets::Delegates::TextareaDelegate</a>	
The <a href="#">TextareaDelegate</a> class	??
<a href="#">Models::Unit</a>	
An unity for billing calculs	??
<a href="#">Gui::Widgets::Delegates::UnitComboDelegate</a>	
The <a href="#">UnitComboDelegate</a> class	??
<a href="#">Models::User</a>	
<b>User</b> of it application	??
<a href="#">Gui::Widgets::UserDailyHoursWidget</a>	
Define user quantity of work	??
<a href="#">Databases::UserDatabase</a>	
Access to User data in the the table User of the <a href="#">Database</a>	??
<a href="#">UserDatabaseTest</a>	??
<a href="#">Gui::Dialogs::UserDataDialog</a>	
Window to fill user data	??
<a href="#">UserModelTest</a>	??
<a href="#">Gui::Utils::WindowSettings</a>	
Utils function on windows	??

## Chapter 7

# Namespace Documentation

### 7.1 Databases Namespace Reference

Class for [Database](#), contains queries.

#### Classes

- class [AccessDatabase](#)
- class [BillingDatabase](#)  
*The **BillingDatabase** class Billing (or Quote) table database.*
- class [ContributoryDatabase](#)  
*The **ContributoryDatabase** class Contributory (or Quote) table database.*
- class [CustomerDatabase](#)  
*The **CustomerDatabase** class Customer table database.*
- class [Database](#)  
*The **Database** class Master class for all database access.*
- class [ProjectDatabase](#)  
*The **ProjectDatabase** class Project table database.*
- class [RateDatabase](#)
- class [UserDatabase](#)  
*The **UserDatabase** class Access to User data in the the table User of the **Database***

#### Enumerations

- enum **DbType** { [SQLITE](#), [MYSQL](#) }

#### 7.1.1 Detailed Description

Class for [Database](#), contains queries.

### 7.2 Gui Namespace Reference

#### Namespaces

- [Widgets](#)  
*Contains [Widgets](#) classes.*

## Classes

- class [MainWindow](#)  
*The [MainWindow](#) class Main Window of the software.*

### 7.2.1 Detailed Description

Classes for Graphical User Interface

## 7.3 Gui::Widgets Namespace Reference

Contains [Widgets](#) classes.

## Classes

- class [BrowseImageWidget](#)  
*The [BrowseImageWidget](#) class Widget to add a new [BrowseImageWidget](#).*
- class [CoffeeEasterEggWidget](#)  
*The [CoffeeEasterEggWidget](#) class Easter egg class because we need coffee.*
- class [ComboBoxModelWidget](#)  
*The [ComboBoxModelWidget](#) class Model of ComboBox.*
- class [ContributoriesWidget](#)  
*The [ContributoriesWidget](#) class Widget of Contributories.*
- class [CustomerContextualMenu](#)  
*Display contextual menu on a customer.*
- class [CustomerDataWidget](#)  
*Class for display info of a customer.*
- class [DatabaseSettingsWidget](#)  
*The [DatabaseSettingsWidget](#) class Windows of database settings.*
- class [Popup](#)  
*Class for display popup quickly.*
- class [ProjectsWidget](#)  
*The [ProjectsWidget](#) class Actions on Project.*
- class [RateWidget](#)  
*Class for display Rate.*
- class [searchWidget](#)  
*Class for search in database.*
- class [UserDailyHoursWidget](#)  
*The [UserDailyHoursWidget](#) class Define user quantity of work.*

## Enumerations

- enum [CoffeeState](#) {  
    **INIT, FIRST\_STEP, SECOND\_STEP, THIRD\_STEP,**  
    **FOURTH\_STEP, READY** }  
*The [CoffeeState](#) enum.*

### 7.3.1 Detailed Description

Contains [Widgets](#) classes.

## 7.4 Models Namespace Reference

Models classes.

### Classes

- class [Billing](#)  
*The [Billing](#) class : [Billing](#) or Quote of a [Customer](#).*
- class [Calculable](#)  
*The [Calculable](#) interface [Models](#) who are calculable.*
- class [ContributoriesList](#)  
*The [ContributoriesList](#) class List of contributories.*
- class [Contributory](#)  
*The [Unit](#) enum Unity of work : hour or day.*
- class [Customer](#)  
*The [Customer](#) class [Customer](#).*
- class [IModel](#)  
*The [IModel](#) class.*
- class [People](#)  
*The [People](#) class [People](#).*
- class [Project](#)  
*The [Project](#) class : [Project](#) linked to a [Customer](#).*
- class [Rate](#)  
*The [Rate](#) class [Rate](#) of a prestation.*
- class [Search](#)  
*The [Search](#) class.*
- class [Statistics](#)
- class [Unit](#)  
*The [Unit](#) class An unity for billing calculs.*
- class [User](#)  
*The [User](#) class [User](#) of it application.*

### Enumerations

- enum [TypeUnit](#) { **HOURLY**, **DAILY**, **MONTHLY** }  
*The [TypeUnit](#) enum Type Unit : hour or days.*

#### 7.4.1 Detailed Description

Models classes.



## Chapter 8

# Class Documentation

### 8.1 Databases::AccessDatabase Class Reference

#### Static Public Member Functions

- static void **init** ()
- static void **commit** ()

#### Static Public Attributes

- static QString **\_address**
- static int **\_port**
- static QString **\_userDb**
- static QString **\_password**
- static QString **\_dbName**
- static Databases::DbType **\_dbType**
- static bool **\_exists**

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/accessdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/accessdatabase.cpp

### 8.2 Gui::Dialogs::AddProjectDialog Class Reference

The [AddProjectDialog](#) class Windows to add a new Project.

```
#include <addprojectdialog.h>
```

Inheritance diagram for Gui::Dialogs::AddProjectDialog:



## Public Slots

- void [checkFields](#) ()  
*AddProjectDialog::checkFields* Check if fields are valid.

## Public Member Functions

- [AddProjectDialog](#) (int idProject=0, int noRowCustomer=0, QWidget \*parent=0)  
*AddProjectDialogAddProjectDialog* Construct a windows according an idCustomer and, optionnaly, an idProject
- void [accept](#) ()  
*AddProjectDialog::accept* Valid data inputed by user and add these data in Database.
- void [reject](#) ()  
*AddProjectDialog::reject* Cancel the operation and close the windows.
- void [fillFields](#) ()  
*AddProjectDialog::fillFields* Fill the differents fields of the current windows according the Project data existing As a project requires to be linked to a Customer, the Customer selection part may be disable.

### 8.2.1 Detailed Description

The [AddProjectDialog](#) class Windows to add a new Project.

#### Author

Florent Berbie

#### See Also

[Project](#)

### 8.2.2 Constructor & Destructor Documentation

#### 8.2.2.1 [Gui::Dialogs::AddProjectDialog::AddProjectDialog](#) ( int *idProject* = 0, int *noRowCustomer* = 0, QWidget \* *parent* = 0 ) [explicit]

[AddProjectDialogAddProjectDialog](#) Construct a windows according an *idCustomer* and, optionnaly, an *idProject*

#### Parameters

<i>noRowCustomer</i>	Row number of the Customer
<i>idProject</i>	Project identify
<i>parent</i>	QWidget of the current windows

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addprojectdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addprojectdialog.cpp

## 8.3 [Gui::Dialogs::AddQuoteDialog](#) Class Reference

The [AddQuoteDialog](#) class Window to add or modify a Quote.

```
#include <addquotedialog.h>
```

Inheritance diagram for [Gui::Dialogs::AddQuoteDialog](#):





## Public Slots

- void **updateBtn** (void)
- void **changeDocType** ()

## Public Member Functions

- [AddQuoteDialog](#) (bool isBilling, int idCustomer=0, int id=0, bool copy=false, QWidget \*parent=0)  
*[AddQuoteDialog::AddQuoteDialog](#) Construct a windows [AddQuoteDialog](#).*
- void [fillFields](#) ()  
*[AddQuoteDialog::fillFields](#) Fill line edits with the data of the quote.*
- int [getNumber](#) ()  
*[AddQuoteDialog::getNumber](#) return the number of bill or quote.*
- void [accept](#) ()  
*[AddQuoteDialog::accept](#) Valid data inputed by user and add these data in Database.*
- bool [getCopy](#) () const  
*[AddQuoteDialog::getCopy](#) return if [AddQuoteDialog](#) is an add by copy of Billing/quote or if it's edition or add of Billing/quote.*
- void [setCopy](#) (bool copy)  
*[AddQuoteDialog::setCopy](#) Change the \_copy value to define if it's a copy of a Billing/quote or if it's a new Billing or a Billing edition.*
- int [getIdCustomer](#) () const  
*[AddQuoteDialog::getIdCustomer](#) get the id of the customer changing his quote/billing.*
- void [fillQuoteBilling](#) (bool isBilling)  
*[AddQuoteDialog::fillQuoteBilling](#) fill fields for a Billing or a quote.*
- void [fillQuoteBillingCopy](#) (bool isBilling)  
*[AddQuoteDialog::fillQuoteBilling](#) fill fields if it's a Billing or a quote for a copy.*
- void [setQuoteIdNumber](#) (int id, int idCustomer, bool isBilling)  
*[AddQuoteDialog::setQuoteIdNumber](#) set id and number of the \_quote*

### 8.3.1 Detailed Description

The [AddQuoteDialog](#) class Window to add or modify a Quote.

Author

### 8.3.2 Constructor & Destructor Documentation

- 8.3.2.1 [Gui::Dialogs::AddQuoteDialog::AddQuoteDialog](#) ( bool *isBilling*, int *idCustomer* = 0, int *id* = 0, bool *copy* = false, QWidget \* *parent* = 0 ) [explicit]

[AddQuoteDialog::AddQuoteDialog](#) Construct a windows [AddQuoteDialog](#).

## Parameters

<i>isBilling</i>	displaying of a quote or a Billing
<i>idCustomer</i>	the id of the Customer
<i>id</i>	the id of the quote or the billing of the Customer's Project
<i>edit</i>	if it's an edition or a copy of a quote/Billing
<i>parent</i>	QWidget of the current windows

## 8.3.3 Member Function Documentation

8.3.3.1 void Gui::Dialogs::AddQuoteDialog::fillQuoteBilling ( bool *isBilling* )

[AddQuoteDialog::fillQuoteBilling](#) fill fields for a Billing or a quote.

## Parameters

<i>isBilling</i>	if it's a quote or a Billing
------------------	------------------------------

## 8.3.3.2 bool Gui::Dialogs::AddQuoteDialog::getCopy ( ) const

[AddQuoteDialog::getCopy](#) return if [AddQuoteDialog](#) is an add by copy of Billing/quote or if it's edition or add of Billing/quote.

## Returns

if it's a copy or not

## 8.3.3.3 int Gui::Dialogs::AddQuoteDialog::getIdCustomer ( ) const

[AddQuoteDialog::getIdCustomer](#) get the id of the customer changing his quote/billing.

## Returns

the id of the customer

## 8.3.3.4 int Gui::Dialogs::AddQuoteDialog::getNumber ( )

[AddQuoteDialog::getNumber](#) return the number of bill or quote.

## Returns

int

8.3.3.5 void Gui::Dialogs::AddQuoteDialog::setCopy ( bool *copy* )

[AddQuoteDialog::setCopy](#) Change the `_copy` value to define if it's a copy of a Billing/quote or if it's a new Billing or a Billing edition.

## Parameters

<i>copy</i>	
-------------	--

8.3.3.6 void Gui::Dialogs::AddQuoteDialog::setQuotedIdNumber ( int *id*, int *idCustomer*, bool *isBilling* )

AddQuoteDialog::setQuotedIdNumber set id and number of the *\_quote*

Parameters

<i>id</i>	the id of the Billing
<i>idCustomer</i>	the id of the customer to set the <i>number</i>
<i>isBilling</i>	if it's a quote or a Billing

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addquotedialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addquotedialog.cpp

## 8.4 Models::Billing Class Reference

The **Billing** class : **Billing** or Quote of a **Customer**.

```
#include <billing.h>
```

Inheritance diagram for Models::Billing:



### Public Member Functions

- **Billing** ()  
*Billing::Billing*. Construct a **Billing**.
- **Billing** (int *id*)  
*Billing::Billing*. Construct a **Billing** or quote.
- **~Billing** ()  
*destruct a billing object*
- void **commit** ()  
*Billing::commit*. Insert a modification in **Billing** table on the database.
- void **hydrat** (int *getId*)  
*Billing::hydrat*. Update of the **Billing** which is specified by *getId*
- void **remove** ()  
*Billing::remove*. Remove a **Billing**.
- QVariantHash **getDataMap** ()  
*Billing::getDataMap* Get all data of model with a HashMap key/value.
- double **getPrice** (bool *paied=false*)  
*getPrice* Return the price of a calculable object
- double **getSumQuantity** ()  
*ContributoriesList::getSumQuantity* Return the sum of quantity (number of days) of the Contributories.
- void **generateTex** ()

- Billing::generateTex* Generate a .tex file for the billing.
- void **generatePdf** ()
  - Billing::generatePdf* Generate a .pdf file for the billing.
- QString **getPath** ()
  - Billing::getPath* Return the path of billing filename (without extension)
- QString **getFolder** ()
  - Billing::getFolder* Return the directory of billing.
- QString **getFilename** ()
  - Billing::getFilename* Return the filename of billing (without extension)
- **ContributoriesList** & **getContributories** ()
  - Billing::getContributories.* Return a map of **Contributory** for each **Project** of the **Billing**
- void **addContributory** (**Contributory** &c)
  - Billing::addContributories* Add a new contributory for project p.
- QString **getTitle** () const
  - Billing::getTitle.* return title of **Billing**
- void **setTitle** (const QString &**getTitle**)
  - Billing::setTitle.* Modify the title of **Billing**
- QString **getDescription** () const
  - Billing::getDescription.* return description of **Billing**
- void **setDescription** (const QString &**getDescription**)
  - Billing::setDescription.* Modify the description of **Billing**
- int **getNumber** () const
  - Billing::getNumber.* Return number of the **Billing**.
- void **setNumber** (int **getNumber**)
  - Billing::setNumber.* Modify \_number of **Billing**.
- bool **isBilling** () const
  - Billing::isBilling.* Return if it's a billing or a quote.
- void **setIsBilling** (bool **isBilling**)
  - Billing::setIsBilling.* Modify isBilling of **Billing**.
- QDate **getDate** () const
  - Billing::getDate.* return date of the **Billing**
- void **setDate** (const QDate &**getDate**)
  - Billing::setDate.* Modify date of the **Billing**
- bool **isPaid** () const
  - Billing::isPaid* Return TRUE if thee current billing is paid else return FALSE.
- void **setIsPaid** (bool **isPaid**)
  - Billing::setIsPaid* Define the current billing according the argument isPaid
- bool **operator==** (const **Billing** &b)
  - Billing::operator ==* define the operator "==" to compare two billings and to see if they are the same.
- bool **operator!=** (const **Billing** &b)
  - Billing::operator !=* defines the operator "!=" to compare two **Billing** and to see if they are different.
- void **setContributories** (const **ContributoriesList** &contributories)
- bool **operator<** (const **Billing** &b) const
  - Billing::operator <* defines the operator "<" to compare two **Billing** and to see if the first is anterior to the second.
- QStandardItem \* **getItem** ()
  - Billing::getItem* Return the bill/quote item.

## Additional Inherited Members

### 8.4.1 Detailed Description

The [Billing](#) class : [Billing](#) or Quote of a [Customer](#).

#### Author

Antoine de Roquemaurel  
Florent Berbie

### 8.4.2 Constructor & Destructor Documentation

#### 8.4.2.1 Models::Billing::Billing ( int *id* )

[Billing::Billing](#). Construct a [Billing](#) or quote.

#### Parameters

<i>int</i>	id
------------	----

### 8.4.3 Member Function Documentation

#### 8.4.3.1 void Models::Billing::addContributory ( Contributory & *c* )

[Billing::addContributories](#) Add a new contributory for project p.

#### Parameters

<i>p</i>	The <a href="#">Project</a> who contain <a href="#">Contributory</a>
<i>c</i>	The new <a href="#">Contributory</a>

#### 8.4.3.2 ContributoriesList & Models::Billing::getContributories ( )

[Billing::getContributories](#). Return a map of [Contributory](#) for each [Project](#) of the [Billing](#)

#### Returns

QMap<[Project](#), QList<Contributory>>

#### 8.4.3.3 QVariantHash Models::Billing::getDataMap ( ) [virtual]

[Billing::getDataMap](#) Get all data of model with a HashMap key/value.

#### Returns

Model's data

Implements [Models::IModel](#).

#### 8.4.3.4 QDate Models::Billing::getDate ( ) const

[Billing::getDate](#). return date of the [Billing](#)

#### Returns

date of [Billing](#)

#### 8.4.3.5 QString Models::Billing::getDescription ( ) const

[Billing::getDescription](#). return description of [Billing](#)

##### Returns

description of [Billing](#)

#### 8.4.3.6 QString Models::Billing::getFilename ( )

[Billing::getFilename](#) Return the filename of billing (without extension)

##### Returns

Filename of Billing

#### 8.4.3.7 QString Models::Billing::getFolder ( )

[Billing::getFolder](#) Return the directory of billing.

##### Returns

[Billing](#) directory

#### 8.4.3.8 QList<QStandardItem> \* Models::Billing::getItem ( )

[Billing::getItem](#) Return the bill/quote item.

##### Returns

QStandardItem an item for QTree (level/depth 3)

#### 8.4.3.9 int Models::Billing::getNumber ( ) const

[Billing::getNumber](#). Return number of the [Billing](#).

##### Returns

\_number of [Billing](#)

#### 8.4.3.10 QString Models::Billing::getPath ( )

[Billing::getPath](#) Return the path of billing filename (without extension)

##### Returns

billing path

8.4.3.11 `double Models::Billing::getPrice ( bool paied = false ) [virtual]`

`getPrice` Return the price of a calculable object

Returns

The price

Implements [Models::Calculable](#).

8.4.3.12 `double Models::Billing::getSumQuantity ( ) [virtual]`

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of days) of the Contributories.

Returns

sum of quantity in days

Implements [Models::Calculable](#).

8.4.3.13 `QString Models::Billing::getTitle ( ) const`

[Billing::getTitle](#). return title of [Billing](#)

Returns

title of [Billing](#)

8.4.3.14 `void Models::Billing::hydrat ( int getId ) [virtual]`

[Billing::hydrat](#). Update of the [Billing](#) which is specified by *getId*

Parameters

<i>getId</i>	
--------------	--

Implements [Models::IModel](#).

8.4.3.15 `bool Models::Billing::isBilling ( ) const`

[Billing::isBilling](#). Return if it's a billing or a quote.

Returns

if it's billing or a quote

8.4.3.16 `bool Models::Billing::isPaid ( ) const`

[Billing::isPaid](#) Return TRUE if thee current billing is paid else return FALSE.

Returns

Boolean

8.4.3.17 `bool Models::Billing::operator!= ( const Billing & b )`

[Billing::operator !=](#) defines the operator "!=" to compare two [Billing](#) and to see if they are different.

## Parameters

<i>b</i>	the <b>Billing</b> to compare with the current <b>Billing</b>
----------	---------------------------------------------------------------

## Returns

true if the **Billing** are different else false

8.4.3.18 bool Models::Billing::operator< ( const **Billing** & *b* ) const

**Billing::operator <** defines the operator "<" to compare two **Billing** and to see if the first is anterior to the second.

## Parameters

<i>b</i>	the <b>Billing</b> to compare with the current <b>Billing</b>
----------	---------------------------------------------------------------

## Returns

true if the **Billing** are different else false

8.4.3.19 bool Models::Billing::operator== ( const **Billing** & *b* )

**Billing::operator ==** define the operator "==" to compare two billings and to see if they are the same.

## Parameters

<i>b</i>	the <b>Billing</b> to compare with the current <b>Billing</b>
----------	---------------------------------------------------------------

## Returns

true if they are the same billings else false

8.4.3.20 void Models::Billing::setDate ( const **QDate** & *getDate* )

**Billing::setDate**. Modify *date* of the **Billing**

## Parameters

<i>getDate</i>	the new date of the <b>Billing</b>
----------------	------------------------------------

8.4.3.21 void Models::Billing::setDescription ( const **QString** & *getDescription* )

**Billing::setDescription**. Modify the description of **Billing**

## Parameters

<i>getDescription</i>	Modify the description with <i>getDescription</i>
-----------------------	---------------------------------------------------

8.4.3.22 void Models::Billing::setIsBilling ( bool *isBilling* )

**Billing::setIsBilling**. Modify *isBilling* of **Billing**.



## Parameters

<i>isBilling</i>	
------------------	--

8.4.3.23 void Models::Billing::setIsPaid ( bool *isPaid* )

[Billing::setIsPaid](#) Define the current billing according the argument *isPaid*

## Parameters

<i>isPaid</i>	Boolean
---------------	---------

8.4.3.24 void Models::Billing::setNumber ( int *getNumber* )

[Billing::setNumber](#). Modify *\_number* of [Billing](#).

## Parameters

<i>getNumber</i>	the new number of the <a href="#">Billing</a>
------------------	-----------------------------------------------

8.4.3.25 void Models::Billing::setTitle ( const QString & *getTitle* )

[Billing::setTitle](#). Modify the title of [Billing](#)

## Parameters

<i>getTitle</i>	Modify the title with <i>getTitle</i>
-----------------	---------------------------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/billing.h
- /home/travis/build/FACT-Team/FactDev/src/models/billing.cpp

## 8.5 Databases::BillingDatabase Class Reference

The [BillingDatabase](#) class Billing (or Quote) table database.

```
#include <billingdatabase.h>
```

Inheritance diagram for Databases::BillingDatabase:



### Public Member Functions

- [Models::Billing \\* getBilling](#) (const int pld)  
[BillingDatabase::getBilling](#) get informations about the billing identified by pld
- [WdgModels::BillingsTableModel \\* getBillingsTable](#) (const int idProject) throw (DbException\*)  
[BillingDatabase::getBillingsTable](#) Return an item model of billings for QTableView.
- int [addBilling](#) (const [Models::Billing](#) &)

- BillingDatabase::addBilling* Add the billing pBilling to the database.
- void **updateBilling** (const **Models::Billing** &)

*BillingDatabase::updateCustomer* Update informations about the billing pCustomer
- void **removeBilling** (const int pld)

*BillingDatabase::removeCustomer* Remove the billing with the id pld
- void **addBillingProject** (const int idProject, const int idBilling, const int idContributory)

*BillingDatabase::addBillingProject* Link a project, a billing and a contributory in the table BillingProject.
- bool **isBillingPaid** (const int pld)

*BillingDatabase::isBillingPaid* Return TRUE if the id pld correspond to a Billing and not quote (isBilling = 1) and if this billing is paid (isPaid = 1) else return FALSE.
- void **removeBillingProject** (const int idProject, const int idBilling, const int idContributory)

*BillingDatabase::removeBillingProject* remove a link between a project, a billing and a contributory in the table Billing-Project.
- int **getMaxBillingNumber** ()

*getMaxBillingNumber* Get the last number of a billing
- int **getMaxQuoteNumber** ()

*getMaxQuoteNumber* Get the last number of a quote
- int **getMaxBillingNumberOfCustomer** (const int idCustomer)

*BillingDatabase::getMaxBillingNumberOfCustomer* Get the last number of a **Customer's** Billing.
- int **getMaxQuoteNumberOfCustomer** (const int idCustomer)

*BillingDatabase::getMaxQuoteNumberOfCustomer* Get the last number of a **Customer's** quote.
- QSharedPointer< **Models::Billing** > **getBilling** (QStringQuery &q)

*BillingDatabase::getBilling* Add the element of the q request and return their.
- QMap< **Project** \*, **Billing** \* > **getAllBillingsOfProject** ()

*BillingDatabase::getAllBillingsOfProject* Return a map with the project id as key linked to the billing.
- QList< **Billing** > **getBillsBetweenDates** (QDate begin, QDate end)

*Get the bills between begin and end dates.*
- QList< **Billing** > **getBills** (const int projectId=0)

*Get the bills.*
- QList< **Billing** > **getBillsPaid** (const int projectId=0)

*Get the bills paid.*
- int **getNbBills** (const int customerId=0)

*Get the number of bills.*
- int **getNbBillsPaid** (const int customerId=0)

*Get the number of bills paid.*
- int **getNbQuotes** (const int customerId=0)

*Get the number of quotes.*
- int **getNbDocs** (const int customerId=0)

*Get the number of documents.*

## Static Public Member Functions

- static **BillingDatabase** \* **instance** () throw (DbException\*)

*BillingDatabase::getInstance* Return an instance of **BillingDatabase**

## Additional Inherited Members

### 8.5.1 Detailed Description

The [BillingDatabase](#) class Billing (or Quote) table database.

Author

See Also

[Database](#)  
Billing/Quote

### 8.5.2 Member Function Documentation

8.5.2.1 `int Databases::BillingDatabase::addBilling ( const Models::Billing & pBilling )`

[BillingDatabase::addBilling](#) Add the billing *pBilling* to the database.

Returns

billing id

8.5.2.2 `void Databases::BillingDatabase::addBillingProject ( const int idProject, const int idBilling, const int idContributory )`

[BillingDatabase::addBillingProject](#) Link a project, a billing and a contributory in the table BillingProject.

Parameters

<i>idProject</i>	Project id
<i>idBilling</i>	Billing id
<i>idContributory</i>	Contributory id

8.5.2.3 `QMap< Project *, Billing * > Databases::BillingDatabase::getAllBillingsOfProject ( )`

[BillingDatabase::getAllBillingsOfProject](#) Return a map with the project id as key linked to the billing.

Returns

Map with projects and Billing

8.5.2.4 `Models::Billing * Databases::BillingDatabase::getBilling ( const int pld )`

[BillingDatabase::getBilling](#) get informations about the billing identified by *pld*

Parameters

<i>pld</i>	billing id
------------	------------

Returns

the Billing

8.5.2.5 QSharedPointer< Billing > Databases::BillingDatabase::getBilling ( QSqlQuery & *q* )

[BillingDatabase::getBilling](#) Add the element of the *q* request and return their.

## Parameters

<i>q</i>	SQL request
----------	-------------

## Returns

a billing formed according to QSharedPointer

**8.5.2.6** `WdgModels::BillingsTableModel * Databases::BillingDatabase::getBillingsTable ( const int idProject ) throw DbException *`

[BillingDatabase::getBillingsTable](#) Return an item model of billings for QTableView.

## Parameters

<i>pld</i>	the project id of the billings returned
------------	-----------------------------------------

## Exceptions

<i>DbException</i>	
--------------------	--

## Returns

QStandardItemModel an item model for QTableView

**8.5.2.7** `QList< Billing > Databases::BillingDatabase::getBills ( const int projectId = 0 )`

Get the bills.

## Parameters

<i>projectId</i>	Get the specified project bills
------------------	---------------------------------

## Returns

The list of bills

**8.5.2.8** `QList< Billing > Databases::BillingDatabase::getBillsBetweenDates ( QDate begin, QDate end )`

Get the bills between *begin* and *end* dates.

## Parameters

<i>begin</i>	
<i>end</i>	

## Returns

the list of **Bills**

**8.5.2.9** `QList< Billing > Databases::BillingDatabase::getBillsPaid ( const int projectId = 0 )`

Get the bills paid.

## Parameters

<i>projectId</i>	Get the specified project bills paid
------------------	--------------------------------------

## Returns

The list of bills paid

**8.5.2.10** `int Databases::BillingDatabase::getMaxBillingNumber ( )`

`getMaxBillingNumber` Get the last number of a billing

## Returns

The max number

**8.5.2.11** `int Databases::BillingDatabase::getMaxBillingNumberOfCustomer ( const int idCustomer )`

[BillingDatabase::getMaxBillingNumberOfCustomer](#) Get the last number of a **Customer's** Billing.

## Parameters

<i>idCustomer</i>	Customer id
-------------------	-------------

## Returns

the last number of the **Customer's** Billing

**8.5.2.12** `int Databases::BillingDatabase::getMaxQuoteNumber ( )`

`getMaxQuoteNumber` Get the last number of a quote

## Returns

The last number

**8.5.2.13** `int Databases::BillingDatabase::getMaxQuoteNumberOfCustomer ( const int idCustomer )`

[BillingDatabase::getMaxQuoteNumberOfCustomer](#) Get the last number of a **Customer's** quote.

## Parameters

<i>idCustomer</i>	Customer id
-------------------	-------------

## Returns

the last number of the **Customer's** quote

**8.5.2.14** `int Databases::BillingDatabase::getNbBills ( const int customerId = 0 )`

Get the number of bills.

## Parameters

<i>customerId</i>	If customerId isn't specified or if it's not valid, get all bills else get the specified customer bills
-------------------	---------------------------------------------------------------------------------------------------------

## Returns

Number of bills in the database for all or for a customer

8.5.2.15 int Databases::BillingDatabase::getNbBillsPaid ( const int *customerId* = 0 )

Get the number of bills paid.

## Parameters

<i>customerId</i>	If customerId isn't specified if it's not valid, get all bills paid else get the specified customer bills paid
-------------------	----------------------------------------------------------------------------------------------------------------

## Returns

Number of bills paid in the database for all or for a customer

8.5.2.16 int Databases::BillingDatabase::getNbDocs ( const int *customerId* = 0 )

Get the number of documents.

## Parameters

<i>customerId</i>	If customerId isn't specified or if it's not valid, get all documents else get the specified customer documents
-------------------	-----------------------------------------------------------------------------------------------------------------

## Returns

Number of quotes in the database for all or for a customer

8.5.2.17 int Databases::BillingDatabase::getNbQuotes ( const int *customerId* = 0 )

Get the number of quotes.

## Parameters

<i>customerId</i>	If customerId isn't specified or if it's not valid, get all quotes else get the specified customer quotes
-------------------	-----------------------------------------------------------------------------------------------------------

## Returns

Number of quotes in the database for all or for a customer

## 8.5.2.18 BillingDatabase \* Databases::BillingDatabase::instance ( ) throw DbException \* [static]

BillingDatabase::getInstance Return an instance of [BillingDatabase](#)

## See Also

DbException

## Returns

Instance of [BillingDatabase](#)

8.5.2.19 `bool Databases::BillingDatabase::isBillingPaid ( const int pId )`

[BillingDatabase::isBillingPaid](#) Return TRUE if the id *pId* correspond to a Billing and not quote (isBilling = 1) and if this billing is paid (isPaid = 1) else return FALSE.



## Parameters

<i>pld</i>	Billing id
------------	------------

## Returns

TRUE if billing is paid

8.5.2.20 void Databases::BillingDatabase::removeBilling ( const int *pld* )

BillingDatabase::removeCustomer Remove the billing with the id *pld*

## Parameters

<i>pld</i>	billing id
------------	------------

8.5.2.21 void Databases::BillingDatabase::removeBillingProject ( const int *idProject*, const int *idBilling*, const int *idContributory* )

[BillingDatabase::removeBillingProject](#) remove a link between a project, a billing and a contributory in the table BillingProject.

## Parameters

<i>idProject</i>	Project id
<i>idBilling</i>	Billing id
<i>idContributory</i>	Contributory id

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/billingdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/billingdatabase.cpp

## 8.6 BillingDatabaseTest Class Reference

Inheritance diagram for BillingDatabaseTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/billingdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/billingdatabasetest.cpp

## 8.7 BillingModelTest Class Reference

Inheritance diagram for BillingModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/billingmodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/billingmodeltest.cpp

## 8.8 Gui::Widgets::WdgModels::BillingsTableModel Class Reference

The [BillingsTableModel](#) class for a Billing table.

```
#include <billingstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::BillingsTableModel:



### Public Member Functions

- [BillingsTableModel](#) ()  
*BillingsTableModel::BillingsTableModel* Construct a *BillingsTableModel*.
- int [rowCount](#) (const QModelIndex &) const  
*BillingsTableModel::rowCount* Number of billings row.
- int [columnCount](#) (const QModelIndex &) const  
*BillingsTableModel::columnCount* Number of column of a Billing.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const  
*BillingsTableModel::data* Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const  
*BillingsTableModel::headerData* Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)  
*BillingsTableModel::setData* Change data of a cell.
- void [append](#) (const [Billing](#) &billing)  
*BillingsTableModel::append* Add a new line in table.
- void [remove](#) (const int i)  
*BillingsTableModel::remove* Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const  
*BillingsTableModel::flags* Differents table flags.
- int [count](#) ()  
*BillingsTableModel::count* Number of billings in table.
- QList< [Billing](#) > [getBillings](#) () const  
*BillingsTableModel::getbillings* Return the list of billings.

### 8.8.1 Detailed Description

The [BillingsTableModel](#) class for a Billing table.

#### Author

Florent Berbie

#### See Also

[Billing](#)

### 8.8.2 Constructor & Destructor Documentation

#### 8.8.2.1 Gui::Widgets::WdgModels::BillingsTableModel::BillingsTableModel ( )

[BillingsTableModel::BillingsTableModel](#) Construct a [BillingsTableModel](#).

##### Parameters

<i>parent</i>	Parent widget
---------------	---------------

### 8.8.3 Member Function Documentation

#### 8.8.3.1 void Gui::Widgets::WdgModels::BillingsTableModel::append ( const Billing & *billing* )

[BillingsTableModel::append](#) Add a new line in table.

##### Parameters

<i>Billing</i>	The new Billing
----------------	-----------------

#### 8.8.3.2 int Gui::Widgets::WdgModels::BillingsTableModel::columnCount ( const QModelIndex & ) const

[BillingsTableModel::columnCount](#) Number of column of a Billing.

##### Returns

The number of column

#### 8.8.3.3 int Gui::Widgets::WdgModels::BillingsTableModel::count ( )

[BillingsTableModel::count](#) Number of billings in table.

##### Returns

The number of billings

#### 8.8.3.4 QVariant Gui::Widgets::WdgModels::BillingsTableModel::data ( const QModelIndex & *index*, int *role* = Qt::DisplayRole ) const

[BillingsTableModel::data](#) Obtains data of a specify cell.

## Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

## Returns

The data of cell

8.8.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::BillingsTableModel::flags ( const QModelIndex & index ) const`

[BillingsTableModel::flags](#) Differents table flags.

## Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

## Returns

Flags

8.8.3.6 `QList< Billing > Gui::Widgets::WdgModels::BillingsTableModel::getBillings ( ) const`

[BillingsTableModel::getbillings](#) Return the list of billings.

## Returns

list of billings

8.8.3.7 `QVariant Gui::Widgets::WdgModels::BillingsTableModel::headerData ( int section, Qt::Orientation orientation, int role = Qt::DisplayRole ) const`

[BillingsTableModel::headerData](#) Obtains header title of table.

## Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

## Returns

The Title header of column

8.8.3.8 `void Gui::Widgets::WdgModels::BillingsTableModel::remove ( const int i )`

[BillingsTableModel::remove](#) Remove a line.

## Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.8.3.9 `int Gui::Widgets::WdgModels::BillingsTableModel::rowCount ( const QModelIndex & ) const`

[BillingsTableModel::rowCount](#) Number of billings row.

#### Returns

The number of billings

8.8.3.10 `bool Gui::Widgets::WdgModels::BillingsTableModel::setData ( const QModelIndex & index, const QVariant & value, int role = Qt::EditRole )`

[BillingsTableModel::setData](#) Change data of a cell.

#### Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

#### Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/billingstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/billingstablemodel.cpp

## 8.9 Gui::Widgets::BrowseImageWidget Class Reference

The [BrowseImageWidget](#) class Widget to add a new [BrowseImageWidget](#).

```
#include <browseimagewidget.h>
```

Inheritance diagram for Gui::Widgets::BrowseImageWidget:



#### Public Slots

- void [browseImagePath](#) ()  
[BrowseImageWidget::browseImagePath\(\)](#) Open a new window to define the workspace path of the user.

#### Public Member Functions

- [BrowseImageWidget](#) (QWidget \*parent=0)  
[BrowseImageWidget::BrowseImageWidget](#) Construct a [BrowseImageWidget](#).
- void [setImageScaled](#) (QString path, int width=128, int height=128)  
[BrowseImageWidget::getImageScaled](#) Modify the current image to a scaled image from the icon specified by it path.  
The image has a resolution of width\*height (default 128\*128)

- QPixmap \* [getImage](#) ()  
*BrowseImageWidget::getIcon* Return the icon selected.
- void [setImage](#) (QPixmap \*img)  
*BrowseImageWidget::setImage* Change the current image by the new *img*
- QString [getExtension](#) () const  
*BrowseImageWidgetextension::getExtension* Return extension of the image file.

### 8.9.1 Detailed Description

The [BrowseImageWidget](#) class Widget to add a new [BrowseImageWidget](#).

Author

Florent Berbie

### 8.9.2 Constructor & Destructor Documentation

8.9.2.1 [Gui::Widgets::BrowseImageWidget::BrowseImageWidget \( QWidget \\* parent = 0 \)](#) [explicit]

[BrowseImageWidget::BrowseImageWidget](#) Cosntruct a [BrowseImageWidget](#).

Parameters

<i>parent</i>	QWidget parent
---------------	----------------

### 8.9.3 Member Function Documentation

8.9.3.1 [QString Gui::Widgets::BrowseImageWidget::getExtension \( \)](#) const

*BrowseImageWidgetextension::getExtension* Return extension of the image file.

Returns

Extension of image file

8.9.3.2 [QPixmap \\* Gui::Widgets::BrowseImageWidget::getImage \( \)](#)

*BrowseImageWidget::getIcon* Return the icon selected.

Returns

image

8.9.3.3 [void Gui::Widgets::BrowseImageWidget::setImage \( QPixmap \\* img \)](#)

*BrowseImageWidget::setImage* Change the current image by the new *img*

Parameters

<i>img</i>	New image
------------	-----------

8.9.3.4 [void Gui::Widgets::BrowseImageWidget::setImageScaled \( QString path, int width = 128, int height = 128 \)](#)

*BrowseImageWidget::getImageScaled* Modify the current image to a scaled image from the icon specified by it *path*. The image has a resolution of *width\*height* (default 128\*128)

## Parameters

<i>path</i>	Icon path
<i>width</i>	Icon width
<i>height</i>	Icon height

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/browseimagewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/browseimagewidget.cpp

## 8.10 Models::Calculable Class Reference

The [Calculable](#) interface [Models](#) who are calculable.

```
#include <calculable.h>
```

Inheritance diagram for Models::Calculable:



### Public Member Functions

- virtual double [getPrice](#) (bool *paied*=false)=0  
*getPrice* Return the price of a calculable object
- virtual double [getSumQuantity](#) ()=0  
[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of days) of the Contributories.

#### 8.10.1 Detailed Description

The [Calculable](#) interface [Models](#) who are calculable.

#### 8.10.2 Member Function Documentation

8.10.2.1 virtual double Models::Calculable::getPrice ( bool *paied* = false ) [pure virtual]

*getPrice* Return the price of a calculable object

##### Returns

The price

Implemented in [Models::Billing](#), [Models::Contributory](#), and [Models::ContributoriesList](#).

8.10.2.2 virtual double Models::Calculable::getSumQuantity ( ) [pure virtual]

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of days) of the Contributories.

**Returns**

sum of quantity in days

Implemented in [Models::Billing](#), [Models::Contributory](#), and [Models::ContributoriesList](#).

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/models/calculable.h`

## 8.11 Gui::Widgets::CheckFields::CheckCity Class Reference

The [CheckCity](#) class Line Edit of City with a check icon.

```
#include <checkcity.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckCity:

**Public Member Functions**

- [CheckCity](#) (QWidget \*w=0, QPushButton \*btn=0)  
*[CheckCity::CheckCity](#) Construct a [CheckCity](#).*

**Additional Inherited Members**

### 8.11.1 Detailed Description

The [CheckCity](#) class Line Edit of City with a check icon.

### 8.11.2 Constructor & Destructor Documentation

#### 8.11.2.1 Gui::Widgets::CheckFields::CheckCity::CheckCity ( QWidget \* w = 0, QPushButton \* btn = 0 )

[CheckCity::CheckCity](#) Construct a [CheckCity](#).

**Parameters**

<i>w</i>	QWidget linked to <a href="#">CheckCity</a>
----------	---------------------------------------------

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcity.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcity.cpp`



## 8.12 Gui::Widgets::CheckFields::CheckCountry Class Reference

[CheckCountry::CheckCountry](#) Line Edit of country with a check icon.

```
#include <checkcountry.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckCountry:



### Public Member Functions

- [CheckCountry](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckCountry::CheckCountry](#) Construct a [CheckCountry](#).

### Additional Inherited Members

#### 8.12.1 Detailed Description

[CheckCountry::CheckCountry](#) Line Edit of country with a check icon.

#### 8.12.2 Constructor & Destructor Documentation

8.12.2.1 [Gui::Widgets::CheckFields::CheckCountry::CheckCountry](#) ( [QWidget](#) \* *w* = 0, [QPushButton](#) \* *btn* = 0 )

[CheckCountry::CheckCountry](#) Construct a [CheckCountry](#).

Parameters

<i>w</i>	<a href="#">QWidget</a> linked to <a href="#">CheckCountry</a>
----------	----------------------------------------------------------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcountry.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcountry.cpp

## 8.13 Gui::Widgets::CheckFields::CheckEmail Class Reference

The [CheckEmail](#) class Line Edit of email with a check icon.

```
#include <checkemail.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckEmail:

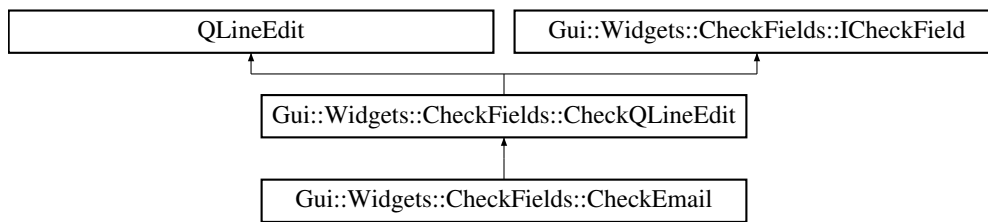

## Public Member Functions

- [CheckEmail](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckEmail::CheckEmail](#) Construct a CheckMail.
- bool [check](#) (const QString text)  
[CheckEmail::check](#) Check if the field email is valid. To be valid, an email address should be under this form: *me@me.* –  
*xx* An email address need:

## Additional Inherited Members

### 8.13.1 Detailed Description

The [CheckEmail](#) class Line Edit of email with a check icon.

### 8.13.2 Constructor & Destructor Documentation

8.13.2.1 [Gui::Widgets::CheckFields::CheckEmail::CheckEmail](#) ( [QWidget](#) \* *w* = 0, [QPushButton](#) \* *btn* = 0 )

[CheckEmail::CheckEmail](#) Construct a CheckMail.

Parameters

<i>w</i>	<a href="#">QWidget</a> linked to <a href="#">CheckEmail</a>
----------	--------------------------------------------------------------

### 8.13.3 Member Function Documentation

8.13.3.1 bool [Gui::Widgets::CheckFields::CheckEmail::check](#) ( const [QString](#) *text* ) [virtual]

[CheckEmail::check](#) Check if the field email is valid. To be valid, an email address should be under this form: *me@me.* *xx* An email address need:

- 1 character [A-Z] or [a-z] minimum before the character *</i>*
- the character '@'
- 1 character [A-Z] or [a-z] after the character *</i>* minimum and before the character .
- 1 character [A-Z] or [a-z] minimum after the character . Return TRUE if email address is valid, else FALSE

Parameters

<i>text</i>	<i>Text to check</i>
-------------	----------------------

**Returns**

*boolean* Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkemail.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkemail.cpp

## 8.14 Gui::Widgets::CheckFields::CheckFieldsLetters Class Reference

The [CheckFieldsLetters](#) class Field with only letters (no numbers)

```
#include <checkfieldsletters.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckFieldsLetters:



### Public Member Functions

- [CheckFieldsLetters](#) (QWidget \*w=0, QPushButton \*btn=0)  
*CheckFieldsLetters::CheckFieldsLetters* Construct a [CheckFieldsLetters](#).
- bool [check](#) (QString text)  
*CheckFieldsLetters::check* Check if the field contains only letters.

### Additional Inherited Members

#### 8.14.1 Detailed Description

The [CheckFieldsLetters](#) class Field with only letters (no numbers)

#### 8.14.2 Constructor & Destructor Documentation

##### 8.14.2.1 Gui::Widgets::CheckFields::CheckFieldsLetters::CheckFieldsLetters ( QWidget \* w = 0, QPushButton \* btn = 0 )

[CheckFieldsLetters::CheckFieldsLetters](#) Construct a [CheckFieldsLetters](#).

Parameters

<i>w</i>	QWidget linked to <a href="#">CheckFieldsLetters</a>
----------	------------------------------------------------------

### 8.14.3 Member Function Documentation

8.14.3.1 `bool Gui::Widgets::CheckFields::CheckFieldsLetters::check ( QString text )` `[virtual]`

[CheckFieldsLetters::check](#) Check if the field contains only letters.

## Parameters

<i>text</i>	Text to check
-------------	---------------

## Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsletters.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsletters.cpp

## 8.15 Gui::Widgets::CheckFields::CheckFieldsNumbers Class Reference

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

```
#include <checkfieldsnumbers.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckFieldsNumbers:



### Public Member Functions

- [CheckFieldsNumbers](#) (QWidget \*w=0, QPushButton \*btn=0)  
*CheckFieldsNumbers::CheckFieldsNumbers* Construct a [CheckFieldsNumbers](#).
- bool [check](#) (QString text)  
*CheckFieldsNumbers::check* Check if the field contains only numbers.

### Additional Inherited Members

#### 8.15.1 Detailed Description

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

#### Author

Florent BERBIE

#### See Also

[CheckQLineEdit](#)  
[CheckUntilField](#)

## 8.15.2 Constructor & Destructor Documentation

8.15.2.1 `Gui::Widgets::CheckFields::CheckFieldsNumbers::CheckFieldsNumbers ( QWidget * w = 0, QPushButton * btn = 0 )`

[CheckFieldsNumbers::CheckFieldsNumbers](#) Construct a [CheckFieldsNumbers](#).

## Parameters

<i>w</i>	QWidget linked to <a href="#">CheckFieldsNumbers</a>
----------	------------------------------------------------------

## 8.15.3 Member Function Documentation

8.15.3.1 bool Gui::Widgets::CheckFields::CheckFieldsNumbers::check ( QString *text* ) [virtual]

[CheckFieldsNumbers::check](#) Check if the field contains only numbers.

## Parameters

<i>text</i>	Text to check
-------------	---------------

## Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsnumbers.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsnumbers.cpp

## 8.16 Gui::Widgets::CheckFields::CheckIpAddress Class Reference

The [CheckIpAddress](#) class Line Edit of IP address with a check icon.

```
#include <checkipaddress.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckIpAddress:



## Public Member Functions

- [CheckIpAddress](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckIpAddress::CheckIpAddress](#) Construct a [CheckIpAddress](#).
- bool [check](#) (QString *text*)  
[CheckIpAddress::check](#) Check if the field contains an IP address or domain name valid.

## Additional Inherited Members

## 8.16.1 Detailed Description

The [CheckIpAddress](#) class Line Edit of IP address with a check icon.

## Author

Florent BERBIE

## See Also

[CheckQLineEdit](#)  
[CheckUntilField](#)

## 8.16.2 Constructor &amp; Destructor Documentation

8.16.2.1 `Gui::Widgets::CheckFields::CheckIpAddress::CheckIpAddress ( QWidget * w = 0, QPushButton * btn = 0 )`[CheckIpAddress::CheckIpAddress](#) Construct a [CheckIpAddress](#).

## Parameters

<i>w</i>	QWidget linked to <a href="#">CheckIpAddress</a>
----------	--------------------------------------------------

## 8.16.3 Member Function Documentation

8.16.3.1 `bool Gui::Widgets::CheckFields::CheckIpAddress::check ( QString text ) [virtual]`[CheckIpAddress::check](#) Check if the field contains an IP address or domain name valid.

## Parameters

<i>text</i>	Text to check
-------------	---------------

## Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkipaddress.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkipaddress.cpp

## 8.17 Gui::Widgets::CheckFields::CheckLogin Class Reference

The [CheckLogin](#) class Line Edit of login with a check icon.

#include &lt;checklogin.h&gt;

Inheritance diagram for Gui::Widgets::CheckFields::CheckLogin:





## Public Slots

- void [passwordPreviousInputed](#) (const QString &text)  
[CheckLogin::fieldTextChanged](#) For each new characater inputed or removed, displays an icon to show if the field is valid or not.

## Public Member Functions

- [CheckLogin](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckLogin::CheckLogin](#) Construct a [CheckLogin](#).
- bool [check](#) (QString text)  
[CheckLogin::check](#) Check if the field contains only numbers.

### 8.17.1 Detailed Description

The [CheckLogin](#) class Line Edit of login with a check icon.

#### Author

Florent BERBIE

#### See Also

[CheckQLineEdit](#)  
[CheckUntilField](#)

### 8.17.2 Constructor & Destructor Documentation

#### 8.17.2.1 Gui::Widgets::CheckFields::CheckLogin::CheckLogin ( QWidget \* w = 0, QPushButton \* btn = 0 )

[CheckLogin::CheckLogin](#) Construct a [CheckLogin](#).

#### Parameters

<i>w</i>	QWidget linked to <a href="#">CheckIpAddress</a>
----------	--------------------------------------------------

### 8.17.3 Member Function Documentation

#### 8.17.3.1 bool Gui::Widgets::CheckFields::CheckLogin::check ( QString text ) [virtual]

[CheckLogin::check](#) Check if the field contains only numbers.

#### Parameters

<i>text</i>	Text to check
-------------	---------------

#### Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checklogin.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checklogin.cpp

## 8.18 Gui::Widgets::CheckFields::CheckName Class Reference

The [CheckName](#) class Line edit of name with a check icon.

```
#include <checkname.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckName:



### Public Member Functions

- [CheckName](#) (QWidget \*w=0, QPushButton \*btn=0)  
*CheckName::CheckName* Construct a [CheckName](#).

### Additional Inherited Members

#### 8.18.1 Detailed Description

The [CheckName](#) class Line edit of name with a check icon.

#### 8.18.2 Constructor & Destructor Documentation

##### 8.18.2.1 Gui::Widgets::CheckFields::CheckName::CheckName ( QWidget \* w = 0, QPushButton \* btn = 0 )

[CheckName::CheckName](#) Construct a [CheckName](#).

Parameters

<i>w</i>	QWidget linked to <a href="#">CheckName</a>
----------	---------------------------------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkname.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkname.cpp

## 8.19 Gui::Widgets::CheckFields::CheckPhone Class Reference

The [CheckPhone](#) class Line Edit of Phone number with a check icon.

```
#include <checkphone.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPhone:



## Public Member Functions

- [CheckPhone](#) (QWidget \*w=0, QPushButton \*btn=0)  
*CheckPhone::CheckPhone* Construct a [CheckPhone](#).
- bool [check](#) (QString text)  
*CheckPhone::check* Check if the field is valid. To be valid, a name should be composed of a character.
- QString [getCountry](#) () const  
*CheckPhone::getCountry* Return the country linked to current field.
- void [setCountry](#) (const QString &country)  
*CheckPhone::setCountry* Modify the country linked to field.

## Additional Inherited Members

### 8.19.1 Detailed Description

The [CheckPhone](#) class Line Edit of Phone number with a check icon.

### 8.19.2 Constructor & Destructor Documentation

8.19.2.1 [Gui::Widgets::CheckFields::CheckPhone::CheckPhone](#) ( [QWidget](#) \* *w* = 0, [QPushButton](#) \* *btn* = 0 )

[CheckPhone::CheckPhone](#) Construct a [CheckPhone](#).

Parameters

<i>w</i>	QWidget linked to <a href="#">CheckPhone</a>
----------	----------------------------------------------

### 8.19.3 Member Function Documentation

8.19.3.1 bool [Gui::Widgets::CheckFields::CheckPhone::check](#) ( [QString](#) *text* ) [virtual]

[CheckPhone::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

<i>text</i>	Text to check
-------------	---------------

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

### 8.19.3.2 QString Gui::Widgets::CheckFields::CheckPhone::getCountry ( ) const

[CheckPhone::getCountry](#) Return the country linked to current field.

Returns

### 8.19.3.3 void Gui::Widgets::CheckFields::CheckPhone::setCountry ( const QString & country )

[CheckPhone::setCountry](#) Modify the *country* linked to field.

Parameters

<i>country</i>	New country
----------------	-------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkphone.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkphone.cpp

## 8.20 Gui::Widgets::CheckFields::CheckPortNumber Class Reference

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

```
#include <checkportnumber.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPortNumber:



### Public Member Functions

- [CheckPortNumber](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckPortNumber](#).
- bool [check](#) (QString text)  
[CheckPortNumber::check](#) Check if the field contains only numbers or an empty text.

### Additional Inherited Members

#### 8.20.1 Detailed Description

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

Author

Florent BERBIE

See Also

[CheckQLineEdit](#)

[CheckUntilField](#)

## 8.20.2 Constructor & Destructor Documentation

8.20.2.1 `Gui::Widgets::CheckFields::CheckPortNumber::CheckPortNumber ( QWidget * w = 0, QPushButton * btn = 0 )`

[CheckPortNumber.](#)

Parameters

<i>w</i>	Widget parent
<i>btn</i>	Button parretn

## 8.20.3 Member Function Documentation

8.20.3.1 `bool Gui::Widgets::CheckFields::CheckPortNumber::check ( QString text )` `[virtual]`

[CheckPortNumber::check](#) Check if the field contains only numbers or an empty text.

Parameters

<i>text</i>	Text to check
-------------	---------------

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkportnumber.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkportnumber.cpp

## 8.21 Gui::Widgets::CheckFields::CheckPostalCode Class Reference

The [CheckPostalCode](#) class Line Edit of postal code with a check icon.

```
#include <checkpostalcode.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPostalCode:

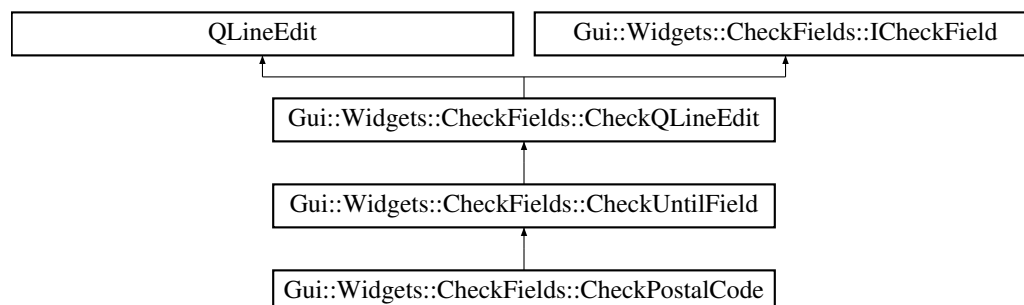

## Public Member Functions

- [CheckPostalCode](#) (QWidget \*w=0, QPushButton \*btn=0)  
*[CheckPostalCode::CheckPostalCode](#) Construct a [CheckPostalCode](#).*
- bool [check](#) (QString text)  
*[CheckPostalCode::check](#) Check if the field is valid. To be valid, a name should be composed of a character.*
- QString [getCountry](#) () const  
*[CheckPostalCode::getCountry](#) Return the country linked to current field.*
- void [setCountry](#) (const QString &country)  
*[CheckPostalCode::setCountry](#) Modify the country linked to field.*

## Additional Inherited Members

### 8.21.1 Detailed Description

The [CheckPostalCode](#) class Line Edit of postal code with a check icon.

### 8.21.2 Constructor & Destructor Documentation

8.21.2.1 `Gui::Widgets::CheckFields::CheckPostalCode::CheckPostalCode ( QWidget * w = 0, QPushButton * btn = 0 )`

[CheckPostalCode::CheckPostalCode](#) Construct a [CheckPostalCode](#).

Parameters

<i>w</i>	QWidget linked to <a href="#">CheckPostalCode</a>
----------	---------------------------------------------------

### 8.21.3 Member Function Documentation

8.21.3.1 `bool Gui::Widgets::CheckFields::CheckPostalCode::check ( QString text ) [virtual]`

[CheckPostalCode::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

<i>text</i>	Text to check
-------------	---------------

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

8.21.3.2 `QString Gui::Widgets::CheckFields::CheckPostalCode::getCountry ( ) const`

[CheckPostalCode::getCountry](#) Return the country linked to current field.

Returns

country Country of the field

8.21.3.3 `void Gui::Widgets::CheckFields::CheckPostalCode::setCountry ( const QString & country )`

[CheckPostalCode::setCountry](#) Modify the *country* linked to field.

### Parameters

<i>country</i>	New country
----------------	-------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkpostalcode.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkpostalcode.cpp

## 8.22 Gui::Widgets::CheckFields::CheckQLineEdit Class Reference

The `CheckQLineEdit` class `LineEdit` custom with a check of text inputed.

```
#include <checkqlineedit.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckQLineEdit:



## Public Slots

- void `fieldTextChanged` (const QString &text)  
*CheckLineEdit::fieldTextChanged* For each new character inputted or removed, displays an icon to show if the field is valid or not.

## Public Member Functions

- [CheckQLineEdit](#) (QWidget \*parent=0, QPushButton \*btn=0)  
*CheckQLineEdit::CheckQLineEdit* Construct a [CheckQLineEdit](#).
- void [displayCheckValidFieldIcon](#) ()  
*CheckQLineEdit::displayCheckValidFieldIcon* Display a valid icon into the field.
- void [displayCheckNoValidFieldIcon](#) ()  
*CheckQLineEdit::displayCheckNoValidFieldIcon* Display a "no valid" icon into the field.
- QPushButton \* [getBtnValid](#) () const  
*CheckQLineEdit::getBtnValid*.
- void [setBtnValid](#) (QPushButton \*[getBtnValid](#))  
*CheckQLineEdit::setBtnValid*.
- bool [isValid](#) ()  
*isValid* Return true if the current field if valid

### 8.22.1 Detailed Description

The `CheckQLineEdit` class `LineEdit` custom with a check of text inputed.

### 8.22.2 Constructor & Destructor Documentation

### 8.22.2.1 Gui::Widgets::CheckFields::CheckQLineEdit::CheckQLineEdit ( QWidget \* *parent* = 0, QPushButton \* *btn* = 0 )

[CheckQLineEdit::CheckQLineEdit](#) Construct a [CheckQLineEdit](#).

## Parameters

<i>parent</i>	
---------------	--

### 8.22.3 Member Function Documentation

8.22.3.1 `QPushButton * Gui::Widgets::CheckFields::CheckQLineEdit::getBtnValid ( ) const`

[CheckQLineEdit::getBtnValid.](#)

## Returns

a

8.22.3.2 `bool Gui::Widgets::CheckFields::CheckQLineEdit::isValid ( )`

isValid Return true if the current field if valid

## Returns

boolean

8.22.3.3 `void Gui::Widgets::CheckFields::CheckQLineEdit::setBtnValid ( QPushButton * getBtnValid )`

[CheckQLineEdit::setBtnValid.](#)

## Parameters

<i>getBtnValid</i>	
--------------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkqlineEdit.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkqlineEdit.cpp

## 8.23 Gui::Widgets::CheckFields::CheckSiretNumber Class Reference

The [CheckSiretNumber](#) class Line Edit with a check icon.

```
#include <checksiretnumber.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckSiretNumber:



### Public Member Functions

- [CheckSiretNumber](#) (QWidget \*w=0, QPushButton \*btn=0)



[CheckSiretNumber::CheckSiretNumber](#) Construct a [CheckSiretNumber](#).

- bool [check](#) (QString text)

[CheckSiretNumber::check](#) Check if the field noSiret is valid. To be valid, a SIRET number should be composed of numbers.

## Additional Inherited Members

### 8.23.1 Detailed Description

The [CheckSiretNumber](#) class Line Edit with a check icon.

### 8.23.2 Constructor & Destructor Documentation

8.23.2.1 [Gui::Widgets::CheckFields::CheckSiretNumber::CheckSiretNumber \( QWidget \\* \*w\* = 0, QPushButton \\* \*btn\* = 0 \)](#)

[CheckSiretNumber::CheckSiretNumber](#) Construct a [CheckSiretNumber](#).

Parameters

<i>w</i>	QWidget linked to <a href="#">CheckSiretNumber</a>
----------	----------------------------------------------------

### 8.23.3 Member Function Documentation

8.23.3.1 [bool Gui::Widgets::CheckFields::CheckSiretNumber::check \( QString \*text\* \)](#) [virtual]

[CheckSiretNumber::check](#) Check if the field noSiret is valid. To be valid, a SIRET number should be composed of numbers.

Parameters

<i>text</i>	Text to check
-------------	---------------

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checksiretnumber.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checksiretnumber.cpp

## 8.24 Gui::Widgets::CheckFields::CheckUntilField Class Reference

The [CheckUntilField](#) class.

```
#include <checkuntilfield.h>
```

Inheritance diagram for [Gui::Widgets::CheckFields::CheckUntilField](#):



## Public Member Functions

- [CheckUntilField](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckUntilField::CheckUntilField](#) Construct a [CheckUntilField](#).
- bool [check](#) (QString text)  
[CheckUntilField::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

## Additional Inherited Members

### 8.24.1 Detailed Description

The [CheckUntilField](#) class.

### 8.24.2 Constructor & Destructor Documentation

8.24.2.1 [Gui::Widgets::CheckFields::CheckUntilField::CheckUntilField](#) ( [QWidget](#) \* *w* = 0, [QPushButton](#) \* *btn* = 0 )

[CheckUntilField::CheckUntilField](#) Construct a [CheckUntilField](#).

Parameters

<i>w</i>	<a href="#">QWidget</a> linked to <a href="#">CheckUntilField</a>
----------	-------------------------------------------------------------------

### 8.24.3 Member Function Documentation

8.24.3.1 bool [Gui::Widgets::CheckFields::CheckUntilField::check](#) ( [QString](#) *text* ) [virtual]

[CheckUntilField::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

<i>text</i>	Text to check
-------------	---------------

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkuntilfield.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkuntilfield.cpp

## 8.25 Gui::Widgets::CheckFields::CheckValidField Class Reference

The [CheckValidField](#) class Check field not required.

```
#include <checkvalidfield.h>
```

Inheritance diagram for [Gui::Widgets::CheckFields::CheckValidField](#):



## Public Member Functions

- [CheckValidField](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckValidField::CheckValidField](#).
- bool [check](#) (QString text)  
[CheckValidField::check](#) Return TRUE : the field is not required.

## Additional Inherited Members

### 8.25.1 Detailed Description

The [CheckValidField](#) class Check field not required.

### 8.25.2 Constructor & Destructor Documentation

8.25.2.1 [Gui::Widgets::CheckFields::CheckValidField::CheckValidField](#) ( QWidget \* w = 0, QPushButton \* btn = 0 )

[CheckValidField::CheckValidField](#).

Parameters

<i>w</i>	QWidget linked to <a href="#">CheckValidField</a>
----------	---------------------------------------------------

### 8.25.3 Member Function Documentation

8.25.3.1 bool [Gui::Widgets::CheckFields::CheckValidField::check](#) ( QString text ) [virtual]

[CheckValidField::check](#) Return TRUE : the field is not required.

Parameters

<i>text</i>	Text to check
-------------	---------------

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

Reimplemented in [Gui::Widgets::CheckFields::CheckWebsite](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkvalidfield.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkvalidfield.cpp

## 8.26 Gui::Widgets::CheckFields::CheckWebsite Class Reference

The [CheckWebsite](#) class Line Edit of website with a check icon.

```
#include <checkwebsite.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckWebsite:



### Public Member Functions

- [CheckWebsite](#) (QWidget \*w=0, QPushButton \*btn=0)  
[CheckWebsite::CheckWebsite](#) Construct a [CheckWebsite](#).
- bool [check](#) (QString text)  
[CheckWebsite::check](#) Check if the field contains an website address.

### Additional Inherited Members

#### 8.26.1 Detailed Description

The [CheckWebsite](#) class Line Edit of website with a check icon.

#### See Also

[CheckQLineEdit](#)  
[CheckUntilField](#)  
[CheckIpAddress](#)

### 8.26.2 Constructor & Destructor Documentation

8.26.2.1 [Gui::Widgets::CheckFields::CheckWebsite::CheckWebsite](#) ( [QWidget](#) \* *w* = 0, [QPushButton](#) \* *btn* = 0 )

[CheckWebsite::CheckWebsite](#) Construct a [CheckWebsite](#).

#### Parameters

<i>w</i>	QWidget linked to <a href="#">CheckWebsite</a>
----------	------------------------------------------------

### 8.26.3 Member Function Documentation

8.26.3.1 bool [Gui::Widgets::CheckFields::CheckWebsite::check](#) ( [QString](#) *text* ) [virtual]

[CheckWebsite::check](#) Check if the field contains an website address.

## Parameters

<i>text</i>	Text to check
-------------	---------------

## Returns

boolean Validity of the text

Reimplemented from [Gui::Widgets::CheckFields::CheckValidField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkwebsite.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkwebsite.cpp

## 8.27 Gui::Widgets::Path::ChoseDirectoryWidget Class Reference

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

```
#include <chosedirectorywidget.h>
```

Inheritance diagram for Gui::Widgets::Path::ChoseDirectoryWidget:



## Public Slots

- void [fillField](#) ()  
*fillField Fill the textfield with path information*

## Public Member Functions

- [ChoseDirectoryWidget](#) (QWidget \*parent=0)  
*ChoseDirectoryWidget Construct Widget.*

## Additional Inherited Members

### 8.27.1 Detailed Description

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

### 8.27.2 Constructor & Destructor Documentation

8.27.2.1 [Gui::Widgets::Path::ChoseDirectoryWidget::ChoseDirectoryWidget](#) ( QWidget \* *parent* = 0 ) [explicit]

[ChoseDirectoryWidget](#) Construct Widget.

## Parameters

<i>parent</i>	The parent widget
---------------	-------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosedirectorywidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosedirectorywidget.cpp

## 8.28 Gui::Widgets::Path::ChoseFileWidget Class Reference

The [ChoseFileWidget](#) class Chose a File in computer.

```
#include <chosefilewidget.h>
```

Inheritance diagram for Gui::Widgets::Path::ChoseFileWidget:



### Public Slots

- void [fillField](#) ()  
*fillField Fill the textfield with path information*

### Public Member Functions

- [ChoseFileWidget](#) (QWidget \*parent=0)  
*ChoseFileWidget Construct a choseFileWidget.*
- QString [gettypeFiles](#) () const  
*gettypeFiles Return the types of files, by default it's \**
- void [setTypeFiles](#) (const QString &[gettypeFiles](#))  
*setTypeFiles Change the files types. By default it's \**

### Additional Inherited Members

#### 8.28.1 Detailed Description

The [ChoseFileWidget](#) class Chose a File in computer.

#### 8.28.2 Constructor & Destructor Documentation

8.28.2.1 [Gui::Widgets::Path::ChoseFileWidget::ChoseFileWidget \( QWidget \\* parent = 0 \)](#) [explicit]

[ChoseFileWidget](#) Construct a choseFileWidget.

## Parameters

<i>parent</i>	The parent widget
---------------	-------------------

## 8.28.3 Member Function Documentation

## 8.28.3.1 QString Gui::Widgets::Path::ChoseFileWidget::getTypeFiles ( ) const

getTypeFiles Return the types of files, by default it's \*

## Returns

The type of files

8.28.3.2 void Gui::Widgets::Path::ChoseFileWidget::setTypeFiles ( const QString & *getTypeFiles* )

setTypeFiles Change the files types. By default it's \*

## Parameters

<i>getTypeFiles</i>	The new files types.
---------------------	----------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosefilewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosefilewidget.cpp

## 8.29 Gui::Widgets::Path::ChosePathWidget Class Reference

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

```
#include <chosepathwidget.h>
```

Inheritance diagram for Gui::Widgets::Path::ChosePathWidget:



## Public Slots

- virtual void [fillField](#) ()  
*fillField* Fill the textfield with path information

## Signals

- void [textChanged](#) ()  
*textChanged* Signal is send when path changed.

## Public Member Functions

- [ChosePathWidget](#) (QWidget \*parent=0)  
[ChoseFileWidget](#) Construct a choseFileWidget.
- void [setField](#) (QString text)  
*setField* Change the path in textfield
- QString [getField](#) ()  
*getField* The text in field
- virtual QString [getDefaultLocation](#) ()  
*getDefaultLocation* The default location when we open popup. In default case, it's ~/Documents

## Protected Attributes

- Ui::ChosePathWidget \* **ui**

### 8.29.1 Detailed Description

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

### 8.29.2 Constructor & Destructor Documentation

8.29.2.1 Gui::Widgets::Path::ChosePathWidget::ChosePathWidget ( QWidget \* *parent* = 0 ) [explicit]

[ChoseFileWidget](#) Construct a choseFileWidget.

Parameters

<i>parent</i>	The parent widget
---------------	-------------------

### 8.29.3 Member Function Documentation

8.29.3.1 QString Gui::Widgets::Path::ChosePathWidget::getDefaultLocation ( ) [virtual]

*getDefaultLocation* The default location when we open popup. In default case, it's ~/Documents

Returns

The default location

8.29.3.2 QString Gui::Widgets::Path::ChosePathWidget::getField ( void )

*getField* The text in field

Returns

The path text

8.29.3.3 void Gui::Widgets::Path::ChosePathWidget::setField ( QString *text* )

*setField* Change the path in textfield



## Parameters

<i>text</i>	The new text
-------------	--------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosepathwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosepathwidget.cpp

## 8.30 Gui::Widgets::CoffeeEasterEggWidget Class Reference

The [CoffeeEasterEggWidget](#) class Easter egg class because we need coffee.

```
#include <coffeeeastereggwidget.h>
```

Inheritance diagram for Gui::Widgets::CoffeeEasterEggWidget:



### Public Slots

- void [makeCoffeeInProgress](#) ()  
*CoffeeEasterEggWidget::makeCoffeeInProgress* Make Coffee.
- void [nextState](#) ()  
*CoffeeEasterEggWidget::nextState* Go to the next state to make coffee.

### Public Member Functions

- [CoffeeEasterEggWidget](#) (QWidget \*parent=0)  
*CoffeeEasterEggWidget::CoffeeEasterEggWidget* Construct a [CoffeeEasterEggWidget](#).
- void [setupUI](#) ()  
*CoffeeEasterEggWidget::setupUI* Init user interface.
- void [makeCoffeeFirstStep](#) ()  
*CoffeeEasterEggWidget::makeCoffeeFirstStep* First step to make coffee.
- void [makeCoffeeSecondStep](#) ()  
*CoffeeEasterEggWidget::makeCoffeeSecondStep* Second step to make coffee.
- void [makeCoffeeThirdStep](#) ()  
*CoffeeEasterEggWidget::makeCoffeeThirdStep* Third step to make coffee.
- void [makeCoffeeFourthStep](#) ()  
*CoffeeEasterEggWidget::makeCoffeeFourthStep* Fourth step to make coffee.
- void [makeCoffeeReadyStep](#) ()  
*CoffeeEasterEggWidget::makeCoffeeReadyStep* Last step to make coffee.
- bool [isDrinked](#) ()  
*CoffeeEasterEggWidget::isDrinked* Return TRUE if coffee has been dranked, else FALSE.

### 8.30.1 Detailed Description

The [CoffeeEasterEggWidget](#) class Easter egg class because we need coffee.

Author

Florent Berbie

### 8.30.2 Constructor & Destructor Documentation

8.30.2.1 `Gui::Widgets::CoffeeEasterEggWidget::CoffeeEasterEggWidget ( QWidget * parent = 0 ) [explicit]`

[CoffeeEasterEggWidget::CoffeeEasterEggWidget](#) Construct a [CoffeeEasterEggWidget](#).

Parameters

<i>parent</i>	QWidget parent
---------------	----------------

### 8.30.3 Member Function Documentation

8.30.3.1 `bool Gui::Widgets::CoffeeEasterEggWidget::isDrunked ( )`

[CoffeeEasterEggWidget::isDrunked](#) Return TRUE if coffee has been drunked, else FALSE.

Returns

boolean

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/coffeeeastereggwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/coffeeeastereggwidget.cpp

## 8.31 Gui::Widgets::Delegates::ComboBoxDelegate Class Reference

The [ComboBoxDelegate](#) class.

```
#include <comboboxdelegate.h>
```

Inheritance diagram for `Gui::Widgets::Delegates::ComboBoxDelegate`:



### Public Member Functions

- [ComboBoxDelegate](#) (QObject \*parent=0)  
[ComboBoxDelegate::ComboBoxDelegate](#) Construct a [ComboBoxDelegate](#).
- virtual QWidget \* [createEditor](#) (QWidget \*parent, const QStyleOptionViewItem &option, const QModelIndex &index) const =0

[\*ComboBoxDelegate::createEditor\*](#) Return a *ComboBox* specified by *index* item defined by the parent widget and style option which are used to control how the editor widgets appears.

- void [\*paint\*](#) (QPainter \*painter, const QStyleOptionViewItem &option, const QModelIndex &index) const =0

[\*ComboBoxDelegate::paint\*](#) Renders the delegate using the given painter and style option for the item specified by *index*

- void [\*setEditorData\*](#) (QWidget \*editor, const QModelIndex &index) const

[\*ComboBoxDelegate::setEditorData\*](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index

- void [\*setModelData\*](#) (QWidget \*editor, QAbstractItemModel \*model, const QModelIndex &index) const

[\*ComboBoxDelegate::setModelData\*](#) Gets data from the editor widget and stores it in the specified model at the item index

- void [\*updateEditorGeometry\*](#) (QWidget \*editor, const QStyleOptionViewItem &option, const QModelIndex &index) const

[\*ComboBoxDelegate::updateEditorGeometry\*](#) Update the editor for the item specified by index according to the style option given.

### 8.31.1 Detailed Description

The [\*ComboBoxDelegate\*](#) class.

#### Author

Antoine de Roquemaurel

### 8.31.2 Constructor & Destructor Documentation

#### 8.31.2.1 Gui::Widgets::Delegates::ComboBoxDelegate::ComboBoxDelegate ( QObject \* *parent* = 0 )

[\*ComboBoxDelegate::ComboBoxDelegate\*](#) Construct a [\*ComboBoxDelegate\*](#).

#### Parameters

<i>parent</i>	Object parent
---------------	---------------

### 8.31.3 Member Function Documentation

#### 8.31.3.1 virtual QWidget\* Gui::Widgets::Delegates::ComboBoxDelegate::createEditor ( QWidget \* *parent*, const QStyleOptionViewItem & *option*, const QModelIndex & *index* ) const [pure virtual]

[\*ComboBoxDelegate::createEditor\*](#) Return a *ComboBox* specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

#### Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

#### Returns

*ComboBox*

Implemented in [\*Gui::Widgets::Delegates::UnitComboDelegate\*](#), and [\*Gui::Widgets::Delegates::ProjectComboDelegate\*](#).

8.31.3.2 `void Gui::Widgets::Delegates::ComboBoxDelegate::paint ( QPainter * painter, const QStyleOptionViewItem & option, const QModelIndex & index ) const` `[pure virtual]`

[ComboBoxDelegate::paint](#) Renders the delegate using the given *painter* and style *option* for the item specified by *index*

## Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

Implemented in [Gui::Widgets::Delegates::UnitComboDelegate](#), and [Gui::Widgets::Delegates::ProjectComboDelegate](#).

8.31.3.3 void [Gui::Widgets::Delegates::ComboBoxDelegate::setEditorData](#) ( QWidget \* *editor*, const QModelIndex & *index* ) const

[ComboBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

## Parameters

<i>editor</i>	Data edited
<i>index</i>	Index of the model to edit

8.31.3.4 void [Gui::Widgets::Delegates::ComboBoxDelegate::setModelData](#) ( QWidget \* *editor*, QAbstractItemModel \* *model*, const QModelIndex & *index* ) const

[ComboBoxDelegate::setModelData](#) Gets data from the *editor* widget and stores it in the specified *model* at the item *index*

## Parameters

<i>editor</i>	Editor Widget
<i>model</i>	Model to store data
<i>index</i>	Item index

8.31.3.5 void [Gui::Widgets::Delegates::ComboBoxDelegate::updateEditorGeometry](#) ( QWidget \* *editor*, const QStyleOptionViewItem & *option*, const QModelIndex & *index* ) const

[ComboBoxDelegate::updateEditorGeometry](#) Update the *editor* for the item specified by *index* according to the style *option* given.

## Parameters

<i>editor</i>	Editor widget to update
<i>option</i>	Style option
<i>index</i>	Item index

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/comboboxdelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/comboboxdelegate.cpp

## 8.32 Gui::Widgets::ComboBoxModelWidget Class Reference

The [ComboBoxModelWidget](#) class Model of ComboBox.

```
#include <comboboxmodelwidget.h>
```

Inheritance diagram for [Gui::Widgets::ComboBoxModelWidget](#):



## Public Member Functions

- [ComboBoxModelWidget](#) ([QWidget](#) \*parent=0)  
*[ComboBoxModelWidget::ComboBoxModelWidget](#) Construct a [ComboBoxModelWidget](#).*

### 8.32.1 Detailed Description

The [ComboBoxModelWidget](#) class Model of ComboBox.

### 8.32.2 Constructor & Destructor Documentation

8.32.2.1 [Gui::Widgets::ComboBoxModelWidget::ComboBoxModelWidget](#) ( [QWidget](#) \* *parent* = 0 ) [explicit]

[ComboBoxModelWidget::ComboBoxModelWidget](#) Construct a [ComboBoxModelWidget](#).

Parameters

<i>parent</i>	<a href="#">QWidget</a> parent
---------------	--------------------------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/comboboxmodelwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/comboboxmodelwidget.cpp

## 8.33 Gui::Dialogs::ComputeTurnoverDialog Class Reference

The [ComputeTurnoverDialog](#) class window to compute a turnover with a period.

```
#include <computeturnoverdialog.h>
```

Inheritance diagram for [Gui::Dialogs::ComputeTurnoverDialog](#):



## Public Slots

- void [computeTurnover](#) ()  
*[ComputeTurnoverDialog::computeTurnover](#) compute the turnover between chosen dates in the window.*
- void [endDateControl](#) (const [QDate](#) end)  
*[ComputeTurnoverDialog::endDateControl](#) controls if the end date field is valid.*
- void [beginDateControl](#) (const [QDate](#) begin)  
*[ComputeTurnoverDialog::beginDateControl](#) controls if the begin date field is valid.*

## Public Member Functions

- **ComputeTurnoverDialog** (QWidget \*parent=0)
- void **fillLabels** (const int nbBillings, const int turnover)  
[ComputeTurnoverDialog::fillLabels](#) Fills the labels with nbBillings and turnover

### 8.33.1 Detailed Description

The [ComputeTurnoverDialog](#) class window to compute a turnover with a period.

Author

Manantsoa Razanajatovo

### 8.33.2 Member Function Documentation

**8.33.2.1** void Gui::Dialogs::ComputeTurnoverDialog::beginDateControl ( const QDate *begin* ) [slot]

[ComputeTurnoverDialog::beginDateControl](#) controls if the *begin* date field is valid.

Parameters

<i>begin</i>	
--------------	--

**8.33.2.2** void Gui::Dialogs::ComputeTurnoverDialog::endDateControl ( const QDate *end* ) [slot]

[ComputeTurnoverDialog::endDateControl](#) controls if the *end* date field is valid.

Parameters

<i>end</i>	
------------	--

**8.33.2.3** void Gui::Dialogs::ComputeTurnoverDialog::fillLabels ( const int *nbBillings*, const int *turnover* )

[ComputeTurnoverDialog::fillLabels](#) Fills the labels with *nbBillings* and *turnover*

Parameters

<i>nbBillings</i>	the number of Billings
<i>turnover</i>	the turnover computed

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/computeturnoverdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/computeturnoverdialog.cpp

## 8.34 Mustache::Context Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::Context:



## Public Member Functions

- [Context](#) ([PartialResolver](#) \*resolver=0)
- virtual QString [stringValue](#) (const QString &key) const =0
- virtual bool [isFalse](#) (const QString &key) const =0
- virtual int [listCount](#) (const QString &key) const =0
- virtual void [push](#) (const QString &key, int index=-1)=0
- virtual void [pop](#) ()=0
- QString [partialValue](#) (const QString &key) const
- [PartialResolver](#) \* [partialResolver](#) () const
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &\_template, [Renderer](#) \*renderer)

### 8.34.1 Detailed Description

[Context](#) is an interface that [Mustache::Renderer::render\(\)](#) uses to fetch substitutions for template tags.

### 8.34.2 Constructor & Destructor Documentation

#### 8.34.2.1 Context::Context ( [PartialResolver](#) \* *resolver* = 0 ) [explicit]

Create a context. *resolver* is used to fetch the expansions for any `{{>partial}}` tags which appear in a template.

### 8.34.3 Member Function Documentation

#### 8.34.3.1 bool Context::canEval ( const QString & *key* ) const [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

#### 8.34.3.2 QString Context::eval ( const QString & *key*, const QString & *\_template*, [Renderer](#) \* *renderer* ) [virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).



**8.34.3.3** `virtual bool Mustache::Context::isFalse ( const QString & key ) const` `[pure virtual]`

Returns true if the value for `key` is 'false' or an empty list. 'False' values typically include empty strings, the boolean value false etc.

When processing a section Mustache tag, the section is not rendered if the key is false, or for an inverted section tag, the section is only rendered if the key is false.

Implemented in [Mustache::QtVariantContext](#).

**8.34.3.4** `virtual int Mustache::Context::listCount ( const QString & key ) const` `[pure virtual]`

Returns the number of items in the list value for `key` or 0 if the value for `key` is not a list.

Implemented in [Mustache::QtVariantContext](#).

**8.34.3.5** `PartialResolver * Context::partialResolver ( ) const`

Returns the partial resolver passed to the constructor.

**8.34.3.6** `QString Context::partialValue ( const QString & key ) const`

Returns the partial template for a given `key`.

**8.34.3.7** `virtual void Mustache::Context::pop ( )` `[pure virtual]`

Exit the current context.

Implemented in [Mustache::QtVariantContext](#).

**8.34.3.8** `virtual void Mustache::Context::push ( const QString & key, int index = -1 )` `[pure virtual]`

Set the current context to the value for `key`. If `index` is  $\geq 0$ , set the current context to the `index`'th value in the list value for `key`.

Implemented in [Mustache::QtVariantContext](#).

**8.34.3.9** `virtual QString Mustache::Context::stringValue ( const QString & key ) const` `[pure virtual]`

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Implemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp`

## 8.35 ContributoriesDatabaseTest Class Reference

Inheritance diagram for ContributoriesDatabaseTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/database/contributoriesdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/contributoriesdatabasetest.cpp

## 8.36 Models::ContributoriesList Class Reference

The [ContributoriesList](#) class List of contributories.

```
#include <contributorieslist.h>
```

Inheritance diagram for Models::ContributoriesList:



### Public Member Functions

- [ContributoriesList](#) ()  
*ContributoriesList::ContributoriesList* Construct a [ContributoriesList](#).
- double [getPrice](#) (bool isPaied=false)  
*getPrice* Return the price of a contributories list
- double [getPrice](#) ([Models::Project](#) \*project)  
*getPrice* Return price of project
- double [getSumQuantity](#) ()  
*ContributoriesList::getSumQuantity* Return the sum of quantity (number of hours) of the Contributories.
- double [getSumQuantity](#) ([Models::Project](#) \*project)  
*ContributoriesList::getSumQuantity* Return the sum of quantity (number of hours) of the Contributories of project.
- [Models::Rate](#) [getRate](#) ([Models::Project](#) \*project)  
*ContributoriesList::getRate*.
- virtual void [commit](#) ()  
*ContributoriesList::commit* Update or insert data into the database.
- void [addContributory](#) ([Models::Contributory](#) &contributory)  
*ContributoriesList::addContributory* Add a new contributory
- void [addProject](#) ([Project](#) \*p, [Models::Rate](#) rate)  
*ContributoriesList::addProject* Add a [Project](#) p and it rate
- [QList< Contributory >](#) & [getContributories](#) ([Project](#) \*p)  
*ContributoriesList::getContributories* Return a list of Contributories for the [Project](#) p
- int [getldBilling](#) () const  
*ContributoriesList::getldBilling* Return the [Billing](#) ID.
- void [setldBilling](#) (int idBilling)  
*ContributoriesList::setldBilling* Change the [Billing](#) id by the new idBilling
- void [setAllldContributories](#) (int idContributory)

- [ContributoriesList::setAllIdContributories](#) Change all [Contributory](#) id with the same id.
- bool [isInsert](#) () const  
[ContributoriesList::isInsert](#) Return TRUE if an element is inserting else FALSE.
- void [setInsert](#) (bool insert)  
[ContributoriesList::setInsert](#) Change the state of insertion.
- int [getNbProjects](#) ()  
[ContributoriesList::getNbProjects](#) Return the number of projects.
- QSharedPointer< [Customer](#) > [getCustomer](#) ()  
[ContributoriesList::getCustomer](#) Return the Customers linked to theses contributories.
- QList< [Project](#) \* > [getProjects](#) ()  
[ContributoriesList::getProjects](#) List of Projects.
- QList< [Contributory](#) > \* [getAllContributories](#) ()  
[ContributoriesList::getAllContributories](#) List of all contributories (all contributories from all projects)
- QVariantList [getDataMap](#) ()  
[ContributoriesList::getDataMap](#) Return a list of [Billing](#) and it value linked which indicates if it is inserting or not.

### 8.36.1 Detailed Description

The [ContributoriesList](#) class List of contributories.

Author

Antoine de Roquemaurel

### 8.36.2 Member Function Documentation

#### 8.36.2.1 void Models::ContributoriesList::addContributory ( [Models::Contributory](#) & *contributory* )

[ContributoriesList::addContributory](#) Add a new *contributory*

Parameters

<i>contributory</i>	<a href="#">Contributory</a> to add
---------------------	-------------------------------------

#### 8.36.2.2 void Models::ContributoriesList::addProject ( [Project](#) \* *p*, [Models::Rate](#) *rate* )

[ContributoriesList::addProject](#) Add a [Project](#) *p* and it *rate*

Parameters

<i>p</i>	<a href="#">Project</a> to add
<i>rate</i>	<a href="#">Rate</a> of the project

#### 8.36.2.3 QList< [Contributory](#) > \* Models::ContributoriesList::getAllContributories ( )

[ContributoriesList::getAllContributories](#) List of all contributories (all contributories from all projects)

Returns

List of all contributories

#### 8.36.2.4 QList< [Contributory](#) > & Models::ContributoriesList::getContributories ( [Project](#) \* *p* )

[ContributoriesList::getContributories](#) Return a list of Contributories for the [Project](#) *p*

## Parameters

<i>p</i>	<a href="#">Project</a>
----------	-------------------------

## Returns

List of Contributories for a project

#### 8.36.2.5 QSharedPointer< [Customer](#) > [Models::ContributoriesList::getCustomer](#) ( )

[ContributoriesList::getCustomer](#) Return the Customers linked to theses contributories.

## Returns

[Customer](#)

#### 8.36.2.6 QList [Models::ContributoriesList::getDataMap](#) ( )

[ContributoriesList::getDataMap](#) Return a list of [Billing](#) and it value linked which indicates if it is inserting or not.

## Returns

List of billing and value linked

#### 8.36.2.7 int [Models::ContributoriesList::getIdBilling](#) ( ) const

[ContributoriesList::getIdBilling](#) Return the [Billing](#) ID.

## Returns

[Billing](#) id

#### 8.36.2.8 int [Models::ContributoriesList::getNbProjects](#) ( )

[ContributoriesList::getNbProjects](#) Return the number of projects.

## Returns

Count number of project

#### 8.36.2.9 double [Models::ContributoriesList::getPrice](#) ( bool *isPaied* = false ) [virtual]

[getPrice](#) Return the price of a contributories list

## Returns

The price

Implements [Models::Calculable](#).

#### 8.36.2.10 double [Models::ContributoriesList::getPrice](#) ( [Models::Project](#) \* *project* )

[getPrice](#) Return price of project

## Parameters

<i>project</i>	The project
----------------	-------------

## Returns

The price

8.36.2.11 `QList< Project * > Models::ContributoriesList::getProjects ( void )`

[ContributoriesList::getProjects](#) List of Projects.

## Returns

List of Projects

8.36.2.12 `Models::Rate Models::ContributoriesList::getRate ( Models::Project * project )`

[ContributoriesList::getRate](#).

## Parameters

<i>project</i>	
----------------	--

## Returns

8.36.2.13 `double Models::ContributoriesList::getSumQuantity ( ) [virtual]`

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of hours) of the Contributories.

## Returns

sum of quantity in days

Implements [Models::Calculable](#).

8.36.2.14 `double Models::ContributoriesList::getSumQuantity ( Models::Project * project )`

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of hours) of the Contributories of project.

## Parameters

<i>project</i>	The project
----------------	-------------

## Returns

sum of quantity in days

8.36.2.15 `bool Models::ContributoriesList::isInsert ( ) const`

[ContributoriesList::isInsert](#) Return TRUE if an element is inserting else FALSE.

## Returns

boolean

8.36.2.16 void Models::ContributoriesList::setAllIdContributories ( int *idContributory* )

[ContributoriesList::setAllIdContributories](#) Change all [Contributory](#) id with the same id.

## Parameters

<i>idContributory</i>	the new <a href="#">Contributory</a> id
-----------------------	-----------------------------------------

8.36.2.17 void Models::ContributoriesList::setIdBilling ( int *idBilling* )

[ContributoriesList::setIdBilling](#) Change the [Billing](#) id by the new *idBilling*

## Parameters

<i>idBilling</i>	Billing id
------------------	------------

8.36.2.18 void Models::ContributoriesList::setInsert ( bool *insert* )

[ContributoriesList::setInsert](#) Change the state of insertion.

## Parameters

<i>insert</i>	Boolean
---------------	---------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/contributorieslist.h
- /home/travis/build/FACT-Team/FactDev/src/models/contributorieslist.cpp

## 8.37 Gui::Widgets::WdgModels::ContributoriesTableModel Class Reference

The [ContributoriesTableModel](#) class for a custom table for contributories widget.

```
#include <contributoriesstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ContributoriesTableModel:



### Public Member Functions

- [ContributoriesTableModel](#) (QObject \*parent=0)  
[ContributoriesTableModel::ContributoriesTableModel](#) Construct a [ContributoriesTableModel](#).
- int [rowCount](#) (const QModelIndex &) const  
[ContributoriesTableModel::rowCount](#) Number of contributories row.
- int [columnCount](#) (const QModelIndex &) const  
[ContributoriesTableModel::columnCount](#) Number of column of a contributory.
- QVariant [data](#) (const QModelIndex &index, int role) const  
[ContributoriesTableModel::data](#) Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role) const  
[ContributoriesTableModel::headerData](#) Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)  
[ContributoriesTableModel::setData](#) Change data of a cell.
- void [append](#) (const [Contributory](#) &contributory)

- [\*ContributoriesTableModel::append\*](#) Add a new line in table.
- void [\*remove\*](#) (const int i)
- [\*ContributoriesTableModel::remove\*](#) Remove a line.
- Qt::ItemFlags [\*flags\*](#) (const QModelIndex &index) const
- [\*ContributoriesTableModel::flags\*](#) Differents table flags.
- QList< [\*Contributory\*](#) > [\*getContributories\*](#) ()
- [\*ContributoriesTableModel::getContributories\*](#) Get all contributories of table.
- int [\*count\*](#) ()
- [\*ContributoriesTableModel::count\*](#) Number of contributories in table.
- double [\*getSumQuantity\*](#) () const
- [\*ContributoriesTableModel::getSumQuantity\*](#) Return the sum of the hours of all contriburoies added.
- void [\*clear\*](#) ()
- [\*ContributoriesTableModel::clear\*](#) Remove all contributories.

### 8.37.1 Detailed Description

The [\*ContributoriesTableModel\*](#) class for a custom table for contributories widget.

#### Author

Antoine de Roquemaurel

#### See Also

[\*Contributory\*](#)

### 8.37.2 Constructor & Destructor Documentation

8.37.2.1 [\*Gui::Widgets::WdgModels::ContributoriesTableModel::ContributoriesTableModel \( QObject \\* parent = 0 \)\*](#)

[\*ContributoriesTableModel::ContributoriesTableModel\*](#) Construct a [\*ContributoriesTableModel\*](#).

#### Parameters

<i>parent</i>	Parent widget
---------------	---------------

### 8.37.3 Member Function Documentation

8.37.3.1 void [\*Gui::Widgets::WdgModels::ContributoriesTableModel::append \( const Contributory & contributory \)\*](#)

[\*ContributoriesTableModel::append\*](#) Add a new line in table.

#### Parameters

<i>contributory</i>	The new contributory
---------------------	----------------------

8.37.3.2 int [\*Gui::Widgets::WdgModels::ContributoriesTableModel::columnCount \( const QModelIndex & \)\*](#) const

[\*ContributoriesTableModel::columnCount\*](#) Number of column of a contributory.

#### Returns

The number of column



8.37.3.3 `int Gui::Widgets::WdgModels::ContributoriesTableModel::count ( )`

[ContributoriesTableModel::count](#) Number of contributories in table.

#### Returns

The number of contributories

8.37.3.4 `QVariant Gui::Widgets::WdgModels::ContributoriesTableModel::data ( const QModelIndex & index, int role ) const`

[ContributoriesTableModel::data](#) Obtains data of a specify cell.

#### Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

#### Returns

The data of cell

8.37.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::ContributoriesTableModel::flags ( const QModelIndex & index ) const`

[ContributoriesTableModel::flags](#) Differents table flags.

#### Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

#### Returns

Flags

8.37.3.6 `QList< Contributory > Gui::Widgets::WdgModels::ContributoriesTableModel::getContributories ( )`

[ContributoriesTableModel::getContributories](#) Get all contributories of table.

#### Returns

The contributory list

8.37.3.7 `double Gui::Widgets::WdgModels::ContributoriesTableModel::getSumQuantity ( ) const`

[ContributoriesTableModel::getSumQuantity](#) Return the sum of the hours of all contriburoies added.

#### Returns

sum quantity

8.37.3.8 `QVariant Gui::Widgets::WdgModels::ContributoriesTableModel::headerData ( int section, Qt::Orientation orientation, int role ) const`

[ContributoriesTableModel::headerData](#) Obtains header title of table.

## Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

## Returns

The Title header of column

**8.37.3.9** `void Gui::Widgets::WdgModels::ContributoriesTableModel::remove ( const int i )`

[ContributoriesTableModel::remove](#) Remove a line.

## Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

**8.37.3.10** `int Gui::Widgets::WdgModels::ContributoriesTableModel::rowCount ( const QModelIndex & ) const`

[ContributoriesTableModel::rowCount](#) Number of contributories row.

## Returns

The number of contributories

**8.37.3.11** `bool Gui::Widgets::WdgModels::ContributoriesTableModel::setData ( const QModelIndex & index, const QVariant & value, int role = Qt::EditRole )`

[ContributoriesTableModel::setData](#) Change data of a cell.

## Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

## Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/contributoriesstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/contributoriesstablemodel.cpp

## 8.38 Gui::Widgets::ContributoriesWidget Class Reference

The [ContributoriesWidget](#) class Widget of Contributories.

```
#include <contributorieswidget.h>
```

Inheritance diagram for Gui::Widgets::ContributoriesWidget:



## Public Slots

- void [add](#) (void)  
*ContributoriesWidget::add* Add a new empty contributory.
- void [remove](#) (void)  
*ContributoriesWidget::remove* Remove the current contributory.
- void [addProject](#) (QPair< [Project](#) \*, [Rate](#) > \*p=0)  
*ContributoriesWidget::addProject* Add a Projet and it rate p
- void [removeProject](#) (void)  
*ContributoriesWidget::removeProject* Remove the current Project.
- void [changeProject](#) (void)  
*ContributoriesWidget::changeProject* Change the current Project.
- void [editing](#) (void)  
*ContributoriesWidget::editing* Remove the current Project in the combobox not used.
- void [updateUi](#) (void)  
*ContributoriesWidget::updateUi* Update the User Interface.
- void [updatePrice](#) (void)  
*ContributoriesWidget::updatePrice* Update total price.

## Signals

- void [contributoryChanged](#) ()  
*ContributoriesWidget::contributoryChanged* Signal that a contributory has changed.

## Public Member Functions

- [ContributoriesWidget](#) (QSharedPointer< [Customer](#) > c, QWidget \*parent=0)  
*ContributoriesWidget::ContributoriesWidget* Construct a [ContributoriesWidget](#).
- [ContributoriesList](#) \* [getContributories](#) () const  
*ContributoriesWidget::getContributories* Get contributories List.
- int [count](#) ()  
*ContributoriesWidget::count* Numbers of contributories.
- void [add](#) ([ContributoriesList](#) &list)  
*ContributoriesWidget::add* Add contributorieslist list in the model.
- void [responsiveProjectsTable](#) ()  
*ContributoriesList::responsiveProjectsTable* Update UI to do responsive projects table.
- void [responsiveContributoriesTable](#) (QTableView \*view)  
*ContributoriesList::responsiveContributoriesTable* Update the contributories table view to do responsive.

### 8.38.1 Detailed Description

The [ContributoriesWidget](#) class Widget of Contributories.

## 8.38.2 Constructor & Destructor Documentation

8.38.2.1 `Gui::Widgets::ContributoriesWidget::ContributoriesWidget ( QSharedPointer< Customer > c, QWidget * parent = 0 ) [explicit]`

[ContributoriesWidget::ContributoriesWidget](#) Construct a [ContributoriesWidget](#).

## Parameters

<i>c</i>	Customer
<i>parent</i>	Widget parent

## 8.38.3 Member Function Documentation

8.38.3.1 void Gui::Widgets::ContributoriesWidget::add ( ContributoriesList & *list* )

[ContributoriesWidget::add](#) Add contributorieslist *list* in the model.

## Parameters

<i>list</i>	the <b>ContributoriesList</b>
-------------	-------------------------------

8.38.3.2 void Gui::Widgets::ContributoriesWidget::addProject ( QPair< Project \*, Rate > \* *p* = 0 ) [slot]

[ContributoriesWidget::addProject](#) Add a Projet and it rate *p*

## Parameters

<i>p</i>	Rate linked to Project
----------	------------------------

8.38.3.3 int Gui::Widgets::ContributoriesWidget::count ( )

[ContributoriesWidget::count](#) Numbers of contributories.

## Returns

Numbers of contributories

8.38.3.4 ContributoriesList \* Gui::Widgets::ContributoriesWidget::getContributories ( ) const

[ContributoriesWidget::getContributories](#) Get contributories List.

## Returns

ContributoriesList

8.38.3.5 void Gui::Widgets::ContributoriesWidget::responsiveContributoriesTable ( QTableView \* *view* )

ContributoriesList::responsiveContributoriesTable Update the contributories table *view* to do responsive.

## Parameters

<i>view</i>	Specific contributories table
-------------	-------------------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/contributorieswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/contributorieswidget.cpp

## 8.39 Models::Contributory Class Reference

The [Unit](#) enum Unity of work : hour or day.

```
#include <contributory.h>
```

Inheritance diagram for Models::Contributory:



### Public Member Functions

- [Contributory](#) ()  
*Contributory::Contributory* Construct a [Contributory](#).
- [Contributory](#) (int id)  
*Contributory::Contributory* Construct a [Contributory](#) and get data in database.
- [~Contributory](#) ()  
*Destroy an contributory object.*
- void [commit](#) ()  
*Contributory::commit* Update or insert a contributory to the database.
- void [hydrat](#) (int id)  
*Contributory::hydrat* Get data about the [Contributory](#) which is specified by the identify id
- void [remove](#) ()  
*Contributory::remove* Remove the current [Contributory](#).
- double [getPrice](#) (const bool paied=false)  
*getPrice* Return the price of a contributory
- double [getSumQuantity](#) ()  
*ContributoriesList::getSumQuantity* Return the sum of quantity (number of hours) of the [Contributories](#).
- QVariantHash [getDataMap](#) ()  
*getDataMap* Get all data of model with a HashMap key/value
- [Project](#) \* [getProject](#) () const  
*Contributory::getProject* Return the project linked to this [Contributory](#).
- void [setProject](#) ([Project](#) \*id)  
*Contributory::setProject* Modify the identify id of the [Project](#) linked to this [Contributory](#).
- double [getQuantity](#) () const  
*getNbHours* Number of work hour of a contributory
- void [setQuantity](#) (double value)  
*setNbHours* Change nbHours
- QString [getDescription](#) () const  
*getDescription* Description of a contributory
- void [setDescription](#) (const QString &[getDescription](#))  
*setDescription* Change the contributory description
- bool [operator==](#) (const [Contributory](#) &c)  
*operator ==* define the operator "==" to compare two [Contributory](#)
- bool [operator!=](#) (const [Contributory](#) &c)  
*operator !=* define the operator "!=" to compare two [Contributory](#)
- QString [getLongDescription](#) () const  
*getLongDescription* A contributory has a long description : display in tex appendix

- void [setLongDescription](#) (const QString &[getLongDescription](#))  
*setLongDescription* Change the long description
- [Unit](#) [getUnit](#) () const  
*getUnit* Return the unit (hour or day) of contributory
- void [setUnit](#) (const [Unit](#) &value)  
*setUnit* Change the unit
- double [getHourlyRate](#) () const  
*getHourlyRate* Hourly rate for this contributory
- void [setHourlyRate](#) (double value)  
*setHourlyRate* Change the hourly rate for this contributory

## Additional Inherited Members

### 8.39.1 Detailed Description

The [Unit](#) enum Unity of work : hour or day.

#### Author

The [Contributory](#) class

### 8.39.2 Constructor & Destructor Documentation

#### 8.39.2.1 Models::Contributory::Contributory ( int *id* )

[Contributory::Contributory](#) Construct a [Contributory](#) and get data in database.

#### Parameters

<i>id</i>	<a href="#">Contributory</a> 's id
-----------	------------------------------------

### 8.39.3 Member Function Documentation

#### 8.39.3.1 QVariantHash Models::Contributory::getDataMap ( ) [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

#### Returns

Model's data

Implements [Models::IModel](#).

#### 8.39.3.2 QString Models::Contributory::getDescription ( ) const

[getDescription](#) Description of a contributory

#### Returns

The description

#### 8.39.3.3 double Models::Contributory::getHourlyRate ( ) const

getHourlyRate Hourly rate for this contributory

##### Returns

The hourly rate

#### 8.39.3.4 QString Models::Contributory::getLongDescription ( ) const

getLongDescription A contributory has a long description : display in tex appendix

##### Returns

The long description

#### 8.39.3.5 double Models::Contributory::getPrice ( const bool *paied* = false ) [virtual]

getPrice Return the price of a contributory

##### Returns

The price

Implements [Models::Calculable](#).

#### 8.39.3.6 Project \* Models::Contributory::getProject ( ) const

[Contributory::getProject](#) Return the project linked to this [Contributory](#).

##### Returns

[Project](#) linked to this [Contributory](#)

#### 8.39.3.7 double Models::Contributory::getQuantity ( ) const

getNbHours Number of work hour of a contributory

##### Returns

Then number of hours

#### 8.39.3.8 double Models::Contributory::getSumQuantity ( ) [virtual]

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of hours) of the Contributories.

##### Returns

sum of quantity in hours

Implements [Models::Calculable](#).



**8.39.3.9 Unit Models::Contributory::getUnit ( ) const**

getUnit Return the unit (hour or day) of contributory

**Returns**

The unit

**8.39.3.10 void Models::Contributory::hydrat ( int *id* ) [virtual]**

[Contributory::hydrat](#) Get data about the [Contributory](#) which is specified by the identify *id*

**Parameters**

<i>id</i>	<a href="#">Contributory</a> identify
-----------	---------------------------------------

Implements [Models::IModel](#).

**8.39.3.11 bool Models::Contributory::operator!= ( const Contributory & *c* )**

operator != define the operator "!=" to compare two [Contributory](#)

**Parameters**

<i>c</i>	the <a href="#">Contributory</a> to compare with the current <a href="#">Contributory</a>
----------	-------------------------------------------------------------------------------------------

**Returns**

true if the [Contributory](#) are different else false

**8.39.3.12 bool Models::Contributory::operator== ( const Contributory & *c* )**

operator == define the operator "==" to compare two [Contributory](#)

**Parameters**

<i>c</i>	the <a href="#">Contributory</a> to compare with the current <a href="#">Contributory</a>
----------	-------------------------------------------------------------------------------------------

**Returns**

true if the [Contributory](#) are equals else false

**8.39.3.13 void Models::Contributory::setDescription ( const QString & *getDescription* )**

setDescription Change the contributory description

**Parameters**

<i>getDescription</i>	The new description
-----------------------	---------------------

**8.39.3.14 void Models::Contributory::setHourlyRate ( double *value* )**

setHourlyRate Change the hourly rate for this contributory

## Parameters

<i>value</i>	The hourly rate
--------------	-----------------

8.39.3.15 void Models::Contributory::setLongDescription ( const QString & *getLongDescription* )

setLongDescription Change the long description

## Parameters

<i>getLong-Description</i>	The new description
----------------------------	---------------------

8.39.3.16 void Models::Contributory::setProject ( Project \* *id* )

[Contributory::setProject](#) Modify the identify *id* of the [Project](#) linked to this [Contributory](#).

## Parameters

<i>id</i>	<a href="#">Project</a> Identify
-----------	----------------------------------

8.39.3.17 void Models::Contributory::setQuantity ( double *value* )

setNbHours Change nbHours

## Parameters

<i>value</i>	The new value of nbHours
--------------	--------------------------

8.39.3.18 void Models::Contributory::setUnit ( const Unit & *value* )

setUnit Change the unit

## Parameters

<i>value</i>	The new unit
--------------	--------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/contributory.h
- /home/travis/build/FACT-Team/FactDev/src/models/contributory.cpp

## 8.40 Databases::ContributoryDatabase Class Reference

The [ContributoryDatabase](#) class Contributory (or Quote) table database.

```
#include <contributorydatabase.h>
```

Inheritance diagram for Databases::ContributoryDatabase:



## Public Member Functions

- [Models::Contributory](#) \* [getContributory](#) (const int idContributory)  
*ContributoryDatabase::getCustomer* get informations about the Contributory identified by *pld*
- [Models::ContributoriesList](#) [getContributoriesByBilling](#) (const int billingId)  
*ContributoryDatabase::getContributoriesByBilling* get informations about the Contributory identified by *Billing*
- int [addContributory](#) (const [Models::Contributory](#) &)  
*ContributoryDatabase::addContributory* Add the Contributory *pContributory* to the database.
- void [updateContributory](#) (const [Models::Contributory](#) &)  
*ContributoryDatabase::updateCustomer* Update informations about the Contributory *pCustomer*
- void [removeContributory](#) (const int pld)  
*ContributoryDatabase::removeCustomer* Remove the Contributory with the id *pld*
- [Models::Contributory](#) \* [getContributory](#) (QString &q)  
*getContributory* Obtain a contributory without new query
- [Models::ContributoriesList](#) [getContributoriesByBillingAndProject](#) (const int billingId, const int projectId)  
*getContributory* Get contributories list by project and billing

## Static Public Member Functions

- static [ContributoryDatabase](#) \* [instance](#) () throw (DbException\*)  
*ContributoryDatabase::getInstance* Return an instance of [ContributoryDatabase](#)

## Additional Inherited Members

### 8.40.1 Detailed Description

The [ContributoryDatabase](#) class Contributory (or Quote) table database.

Author

See Also

[Database](#)  
Contributory/Quote

### 8.40.2 Member Function Documentation

8.40.2.1 int [Databases::ContributoryDatabase::addContributory](#) ( const [Models::Contributory](#) & *pContributory* )

[ContributoryDatabase::addContributory](#) Add the Contributory *pContributory* to the database.

Returns

Contributory id

8.40.2.2 [Models::ContributoriesList](#) [Databases::ContributoryDatabase::getContributoriesByBilling](#) ( const int *billingId* )

[ContributoryDatabase::getContributoriesByBilling](#) get informations about the Contributory identified by *Billing*

## Parameters

<i>idBilling</i>	Contributory id
------------------	-----------------

## Returns

the Contributory

#### 8.40.2.3 **Models::ContributoriesList** Databases::ContributoryDatabase::getContributoriesByBillingAndProject ( const int *billingId*, const int *projectId* )

getContributory Get contributories list by project and billing

## Parameters

<i>billingId</i>	
<i>projectId</i>	

## Returns

The contributories list by project and billing

#### 8.40.2.4 **Models::Contributory** \* Databases::ContributoryDatabase::getContributory ( const int *idContributory* )

ContributoryDatabase::getCustomer get informations about the Contributory identified by *pId*

## Parameters

<i>idContributory</i>	Contributory id
-----------------------	-----------------

## Returns

the Contributory

#### 8.40.2.5 **Models::Contributory** \* Databases::ContributoryDatabase::getContributory ( QSqlQuery & *q* )

getContributory Obtain a contributory without new query

## Parameters

<i>q</i>	The query to use
----------	------------------

## Returns

The contributory linked to *q*

#### 8.40.2.6 **ContributoryDatabase** \* Databases::ContributoryDatabase::instance ( ) throw DbException \* ) [static]

ContributoryDatabase::getInstance Return an instance of [ContributoryDatabase](#)

## See Also

DbException

## Returns

Instance of [ContributoryDatabase](#)

8.40.2.7 void Databases::ContributoryDatabase::removeContributory ( const int *pld* )

ContributoryDatabase::removeCustomer Remove the Contributory with the id *pld*

## Parameters

<i>pld</i>	Contributory id
------------	-----------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/contributorydatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/contributorydatabase.cpp

## 8.41 ContributoryListTest Class Reference

Inheritance diagram for ContributoryListTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/contributorylisttest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/contributorylisttest.cpp

## 8.42 ContributoryModelTest Class Reference

Inheritance diagram for ContributoryModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/contributorymodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/contributorymodeltest.cpp

## 8.43 CounterContext Class Reference

Inheritance diagram for CounterContext:



## Public Member Functions

- **CounterContext** (const QVariantHash &map)
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &\_template, [Mustache::Renderer](#) \*renderer)
- virtual QString [stringValue](#) (const QString &key) const
- **CounterContext** (const QVariantHash &map)
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &\_template, [Mustache::Renderer](#) \*renderer)
- virtual QString [stringValue](#) (const QString &key) const

## Public Attributes

- int **counter**

## Additional Inherited Members

### 8.43.1 Member Function Documentation

8.43.1.1 virtual bool CounterContext::canEval ( const QString & key ) const [inline], [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using `key`. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.2 virtual bool CounterContext::canEval ( const QString & key ) const [inline], [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using `key`. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.3 virtual QString CounterContext::eval ( const QString & key, const QString & \_template, [Mustache::Renderer](#) \* *renderer* ) [inline], [virtual]

Callback used to render a template section with the given `key`. `renderer` will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.4 virtual QString CounterContext::eval ( const QString & key, const QString & \_template, [Mustache::Renderer](#) \* *renderer* ) [inline], [virtual]

Callback used to render a template section with the given `key`. `renderer` will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.5 `virtual QString CounterContext::stringValue ( const QString & key ) const` `[inline], [virtual]`

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.6 `virtual QString CounterContext::stringValue ( const QString & key ) const` `[inline], [virtual]`

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Reimplemented from [Mustache::QtVariantContext](#).

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.cpp`

## 8.44 Models::Customer Class Reference

The [Customer](#) class [Customer](#).

```
#include <customer.h>
```

Inheritance diagram for Models::Customer:



### Public Member Functions

- [Customer](#) ()  
*Customer::Customer* Construct a [Customer](#).
- [Customer](#) (int id)  
*Customer::Customer* Construct a [Customer](#) who is specified by id
- void [commit](#) ()  
*Customer::Customer* Construct a [People](#) who is specified by id
- void [hydrat](#) (int id)  
*Customer::hydrat* Insert into database informations related to the [Customer](#) who is specified by id
- void [remove](#) ()  
*Customer::remove* Remove the current customer.
- QVariantHash [getDataMap](#) ()  
*getDataMap* Get all data of model with a HashMap key/value
- QString [getPath](#) () const  
*Customer::getPath* Return the path of the workspace for the current [Customer](#).
- QString [getNameFolder](#) () const  
*Customer::getNameFolder* Return the name of the current [Customer](#)'s folder in the workspace.
- double [getTurnover](#) () const  
*Customer::getTurnover* Return the turnover of the customer money that customer pay, revenue sales.



- QPixmap \* [getImage](#) ()  
*Customer::getImage* Return the compagny image.
- void [setImage](#) (QPixmap \*image)  
*Customer::setImage* Change the current image by the new image
- bool [isArchived](#) () const  
*Customer::isArchived* Return if the **Customer** is archived.
- void [setIsArchived](#) (const bool [isArchived](#))  
*Customer::setIsArchived* set the *isArchived* parameter.

## Additional Inherited Members

### 8.44.1 Detailed Description

The [Customer](#) class [Customer](#).

#### Author

Antoine de Roquemaurel  
Florent Berbie

### 8.44.2 Constructor & Destructor Documentation

#### 8.44.2.1 Models::Customer::Customer ( int *id* )

[Customer::Customer](#) Constuct a [Customer](#) who is specied by *id*

##### Parameters

<i>id</i>	<a href="#">Customer</a> identify
-----------	-----------------------------------

### 8.44.3 Member Function Documentation

#### 8.44.3.1 void Models::Customer::commit ( ) [virtual]

[Customer::Customer](#) Constuct a [People](#) who is specied by *id*

##### Parameters

<i>id</i>	<a href="#">Customer</a> identify
-----------	-----------------------------------

Implements [Models::IModel](#).

#### 8.44.3.2 QVariantHash Models::Customer::getDataMap ( ) [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

##### Returns

Model's data

Implements [Models::IModel](#).

#### 8.44.3.3 QPixmap \* Models::Customer::getImage ( )

[Customer::getImage](#) Return the compagny image.

##### Returns

compagny image

#### 8.44.3.4 QString Models::Customer::getNameFolder ( ) const

[Customer::getNameFolder](#) Return the name of the current [Customer](#)'s folder in the workspace.

##### Returns

name of the [Customer](#)'s folder

#### 8.44.3.5 QString Models::Customer::getPath ( ) const

[Customer::getPath](#) Return the path of the workspace for the current [Customer](#).

##### Returns

workspace path

#### 8.44.3.6 double Models::Customer::getTurnover ( ) const

[Customer::getTurnover](#) Return the turnover of the customer money that customer pay, revenue sales.

##### Returns

turnover

#### 8.44.3.7 void Models::Customer::hydrat ( int *id* ) [virtual]

[Customer::hydrat](#) Insert into database informations related to the [Customer](#) who is specified by *id*

##### Parameters

<i>id</i>	<a href="#">Customer</a> identify
-----------	-----------------------------------

Implements [Models::IModel](#).

#### 8.44.3.8 bool Models::Customer::isArchived ( ) const

[Customer::isArchived](#) Return if the [Customer](#) is archived.

##### Returns

true or false

#### 8.44.3.9 void Models::Customer::setImage ( QPixmap \* *image* ) [virtual]

[Customer::setImage](#) Change the current image by the new *image*

## Parameters

<i>image</i>	New image
--------------	-----------

Reimplemented from [Models::People](#).

8.44.3.10 void [Models::Customer::setIsArchived](#) ( const bool *isArchived* )

[Customer::setIsArchived](#) set the *isArchived* parameter.

## Parameters

<i>isArchived</i>	
-------------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/customer.h
- /home/travis/build/FACT-Team/FactDev/src/models/customer.cpp

## 8.45 Gui::Widgets::CustomerContextualMenu Class Reference

Display contextual menu on a customer.

```
#include <customercontextualmenu.h>
```

Inheritance diagram for `Gui::Widgets::CustomerContextualMenu`:



### Public Member Functions

- [CustomerContextualMenu](#) (QWidget \*w=0)  
[CustomerContextualMenu::CustomerContextualMenu](#) Construct a new contextual menu.
- [~CustomerContextualMenu](#) ()  
[CustomerContextualMenu::~Destruct](#) the contextual menu.

### 8.45.1 Detailed Description

Display contextual menu on a customer.

#### Author

Antoine de Roquemaurel

### 8.45.2 Constructor & Destructor Documentation

8.45.2.1 `Gui::Widgets::CustomerContextualMenu::CustomerContextualMenu ( QWidget * w = 0 )`

[CustomerContextualMenu::CustomerContextualMenu](#) Construct a new contextual menu.

## Parameters

w	Parent
---	--------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customercontextualmenu.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customercontextualmenu.cpp

## 8.46 Databases::CustomerDatabase Class Reference

The **CustomerDatabase** class Customer table database.

```
#include <customerdatabase.h>
```

Inheritance diagram for Databases::CustomerDatabase:



### Public Member Functions

- **WdgModels::CustomersTableModel \* getCustomersTable** (QString filter="") throw (DbException\*)  
*CustomerDatabase::getCustomersTable* Return an item model of customers for QTableView.
- **QStandardItemModel \* getTree** (QString filter="") throw (DbException\*)  
*CustomerDatabase::getTree* Return an item model of customers for QTree.
- **QSharedPointer< Models::Customer > getCustomer** (const int pld)  
*CustomerDatabase::getCustomer* get informations about the customer identified by pld
- **int addCustomer** (const Models::Customer &)  
*CustomerDatabase::addCustomer* Add the customer pCustomer to the database.
- **void updateCustomer** (Customer &)  
*CustomerDatabase::updateCustomer* Update informations about the customer pCustomer
- **void removeCustomer** (const int pld)  
*CustomerDatabase::removeCustomer* Remove the customer with the id pld
- **int getNbCustomers** ()  
*CustomerDatabase::getNbCustomers* Return the number of customers existing.
- **QStandardItem \* getItemRoot** ()  
*CustomerDatabase::getItemRoot* Return the first item for the QStandardItemModel.
- **QStandardItem \* getItemCustomer** (QString query q1)  
*CustomerDatabase::getItemCustomer* Return the customer item for the QStandardItemModel.
- **QStandardItem \* getItemProject** (QString query q2)  
*CustomerDatabase::getItemProject* Return the project item for the QStandardItemModel.
- **QSharedPointer< Models::Customer > getCustomer** (QString query &q)  
*CustomerDatabase::getCustomer* Add the element of the q request and return their.
- **void updateCustomer** (QString query &q, Customer &pCustomer)  
*CustomerDatabase::updateCustomer* Update customer data according to the request q
- **QPixmap getCustomerImage** (const int pld)  
*CustomerDatabase::getCustomerImage* Return a Customer image.
- **void setCustomerImage** (Customer &pCustomer)  
*CustomerDatabase::setCustomerImage* Change the image of the customer pCustomer
- **QList< Customer > getCustomers** ()  
*CustomerDatabase::getCustomers* Return all the customers.

## Static Public Member Functions

- static [CustomerDatabase](#) \* [instance](#) () throw (DbException\*)  
*[CustomerDatabase::instance](#) Return an instance of [CustomerDatabase](#)*

## Additional Inherited Members

### 8.46.1 Detailed Description

The [CustomerDatabase](#) class Customer table database.

#### Author

Antoine de Roquemaurel  
Manantsoa Razanajatovo  
Florent Berbie

#### See Also

[Database](#)  
[Customer](#)

### 8.46.2 Member Function Documentation

8.46.2.1 int Databases::CustomerDatabase::addCustomer ( const [Models::Customer](#) & *pCustomer* )

[CustomerDatabase::addCustomer](#) Add the customer *pCustomer* to the database.

#### Returns

customer id

8.46.2.2 [QSharedPointer](#)< [Models::Customer](#) > Databases::CustomerDatabase::getCustomer ( const int *pld* )

[CustomerDatabase::getCustomer](#) get informations about the customer identified by *pld*

#### Parameters

<i>pld</i>	customer id
------------	-------------

#### Returns

the Customer

8.46.2.3 [QSharedPointer](#)< [Models::Customer](#) > Databases::CustomerDatabase::getCustomer ( [QSqlQuery](#) & *q* )

[CustomerDatabase::getCustomer](#) Add the element of the *q* request and return their.

#### Parameters

<i>q</i>	SQL request
----------	-------------

#### Returns

a customer formed according to [QSharedPointer](#)

8.46.2.4 QPixmap Databases::CustomerDatabase::getCustomerImage ( const int *pld* )

[CustomerDatabase::getCustomerImage](#) Return a Customer image.

## Parameters

<i>pid</i>	Customer id
------------	-------------

## Returns

Customer image

**8.46.2.5** `QList< Customer > Databases::CustomerDatabase::getCustomers ( )`

[CustomerDatabase::getCustomers](#) Return all the customers.

## Returns

QList of customers

**8.46.2.6** `WdgModels::CustomersTableModel * Databases::CustomerDatabase::getCustomersTable ( QString filter = " " ) throw DbException *`

[CustomerDatabase::getCustomersTable](#) Return an item model of customers for QTableView.

## Parameters

<i>filter</i>	Select only customers who are specified by <i>filter</i>
---------------	----------------------------------------------------------

## Exceptions

<i>DbException</i>	
--------------------	--

## Returns

QStandardItemModel an item model for QTableView

**8.46.2.7** `QStandardItem * Databases::CustomerDatabase::getItemCustomer ( QSqlQuery q1 )`

[CustomerDatabase::getItemCustomer](#) Return the customer item for the QStandardItemModel.

## Parameters

<i>q1</i>	the row of the sql query for customers
-----------	----------------------------------------

## Returns

QStandardItem an item for QTree (level/depth 1)

**8.46.2.8** `QStandardItem * Databases::CustomerDatabase::getItemProject ( QSqlQuery q2 )`

[CustomerDatabase::getItemProject](#) Return the project item for the QStandardItemModel.

## Parameters

<i>q2</i>	the row of the sql query for projects
-----------	---------------------------------------

## Returns

QStandardItem an item for QTree (level/depth 2)

#### 8.46.2.9 `QStandardItem *` `Databases::CustomerDatabase::getItemRoot ( )`

[CustomerDatabase::getItemRoot](#) Return the first item for the `QStandardItemModel`.

##### Returns

`QStandardItem` an item for `QTree` (level/depth 0)

#### 8.46.2.10 `int` `Databases::CustomerDatabase::getNbCustomers ( )`

[CustomerDatabase::getNbCustomers](#) Return the number of customers existing.

##### Returns

number of customers

#### 8.46.2.11 `QStandardItemModel *` `Databases::CustomerDatabase::getTree ( QString filter = " " ) throw DbException *`

[CustomerDatabase::getTree](#) Return an item model of customers for `QTree`.

##### Parameters

<i>filter</i>	Select only customers who are specified by <i>filter</i>
---------------	----------------------------------------------------------

##### Exceptions

<i>DbException</i>	
--------------------	--

##### Returns

`QStandardItemModel` an item model for `QTreeView`

#### 8.46.2.12 `CustomerDatabase *` `Databases::CustomerDatabase::instance ( ) throw DbException *` `[static]`

[CustomerDatabase::instance](#) Return an instance of [CustomerDatabase](#)

##### See Also

`DbException`

##### Returns

Instance of [CustomerDatabase](#)

#### 8.46.2.13 `void` `Databases::CustomerDatabase::removeCustomer ( const int pld )`

[CustomerDatabase::removeCustomer](#) Remove the customer with the id *pld*

##### Parameters

<i>pld</i>	customer id
------------	-------------

#### 8.46.2.14 `void` `Databases::CustomerDatabase::setCustomerImage ( Models::Customer & pCustomer )`

[CustomerDatabase::setCustomerImage](#) Change the image of the customer *pCustomer*



## Parameters

<i>pCustomer</i>	Customer
------------------	----------

8.46.2.15 void Databases::CustomerDatabase::updateCustomer ( QSqlQuery & *q*, Customer & *pCustomer* )

[CustomerDatabase::updateCustomer](#) Update customer data according to the request *q*

## Parameters

<i>q</i>	SQL request
----------	-------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/customerdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/customerdatabase.cpp

## 8.47 CustomerDatabaseTest Class Reference

Inheritance diagram for CustomerDatabaseTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/customerdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/customerdatabasetest.cpp

## 8.48 Gui::Widgets::CustomerDataWidget Class Reference

Class for display info of a customer.

```
#include <customerdatawidget.h>
```

Inheritance diagram for Gui::Widgets::CustomerDataWidget:



### Public Member Functions

- [CustomerDataWidget](#) (QWidget \*parent=0)  
[CustomerDataWidget::CustomerDataWidget](#) Construct a [CustomerDataWidget](#).
- void [printUserData](#) ()  
[CustomerDataWidget::printUserData](#) Print Data of current user.
- void [printInformations](#) (int id)  
[CustomerDataWidget::printInformations](#) Print Data of customer id.

### 8.48.1 Detailed Description

Class for display info of a customer.

Author

### 8.48.2 Constructor & Destructor Documentation

8.48.2.1 `Gui::Widgets::CustomerDataWidget::CustomerDataWidget ( QWidget * parent = 0 ) [explicit]`

[CustomerDataWidget::CustomerDataWidget](#) Construct a [CustomerDataWidget](#).

Parameters

<i>parent</i>	Widget parent
---------------	---------------

### 8.48.3 Member Function Documentation

8.48.3.1 `void Gui::Widgets::CustomerDataWidget::printInformations ( int id )`

[CustomerDataWidget::printInformations](#) Print Data of customer id.

Parameters

<i>id</i>	of customer to print
-----------	----------------------

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/customerdatawidget.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/customerdatawidget.cpp`

## 8.49 CustomerModelTest Class Reference

Inheritance diagram for CustomerModelTest:



### Public Member Functions

- `void setup ()`

The documentation for this class was generated from the following files:


- `/home/travis/build/FACT-Team/FactDev/tests/models/customermodeltest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/models/customermodeltest.cpp`

## 8.50 Gui::Widgets::WdgModels::CustomersTableModel Class Reference

The [CustomersTableModel](#) class for a customer table.

```
#include <customerstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::CustomersTableModel:



### Public Member Functions

- [CustomersTableModel](#) (QObject \*parent=0)  
*CustomersTableModel::CustomersTableModel* Construct a [CustomersTableModel](#).
- int [rowCount](#) (const QModelIndex &) const  
*CustomersTableModel::rowCount* Number of customers row.
- int [columnCount](#) (const QModelIndex &) const  
*CustomersTableModel::columnCount* Number of column of a customer.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const  
*CustomersTableModel::data* Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const  
*CustomersTableModel::headerData* Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)  
*CustomersTableModel::setData* Change data of a cell.
- void [append](#) (const [Customer](#) &customer)  
*CustomersTableModel::append* Add a new line in table.
- void [remove](#) (const int i)  
*CustomersTableModel::remove* Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const  
*CustomersTableModel::flags* Differents table flags.
- int [count](#) ()  
*CustomersTableModel::count* Number of customers in table.
- QList< [Customer](#) > [getCustomers](#) () const  
*CustomersTableModel::getCustomers* Return the list of customers.

### 8.50.1 Detailed Description

The [CustomersTableModel](#) class for a customer table.

#### Author

Florent Berbie

#### See Also

[Customer](#)

## 8.50.2 Constructor & Destructor Documentation

### 8.50.2.1 `Gui::Widgets::WdgModels::CustomersTableModel::CustomersTableModel ( QObject * parent = 0 )`

[CustomersTableModel::CustomersTableModel](#) Construct a [CustomersTableModel](#).

## Parameters

<i>parent</i>	Parent widget
---------------	---------------

### 8.50.3 Member Function Documentation

8.50.3.1 void Gui::Widgets::WdgModels::CustomersTableModel::append ( const Customer & *customer* )

[CustomersTableModel::append](#) Add a new line in table.

## Parameters

<i>Customer</i>	The new customer
-----------------	------------------

8.50.3.2 int Gui::Widgets::WdgModels::CustomersTableModel::columnCount ( const QModelIndex & ) const

[CustomersTableModel::columnCount](#) Number of column of a customer.

## Returns

The number of column

8.50.3.3 int Gui::Widgets::WdgModels::CustomersTableModel::count ( )

[CustomersTableModel::count](#) Number of customers in table.

## Returns

The number of customers

8.50.3.4 QVariant Gui::Widgets::WdgModels::CustomersTableModel::data ( const QModelIndex & *index*, int *role* = Qt::DisplayRole ) const

[CustomersTableModel::data](#) Obtains data of a specify cell.

## Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

## Returns

The data of cell

8.50.3.5 Qt::ItemFlags Gui::Widgets::WdgModels::CustomersTableModel::flags ( const QModelIndex & *index* ) const

[CustomersTableModel::flags](#) Differents table flags.

## Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

## Returns

Flags

8.50.3.6 `QList< Customer > Gui::Widgets::WdgModels::CustomersTableModel::getCustomers ( ) const`

[CustomersTableModel::getCustomers](#) Return the list of customers.

Returns

list of Customers

8.50.3.7 `QVariant Gui::Widgets::WdgModels::CustomersTableModel::headerData ( int section, Qt::Orientation orientation, int role = Qt::DisplayRole ) const`

[CustomersTableModel::headerData](#) Obtains header title of table.

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.50.3.8 `void Gui::Widgets::WdgModels::CustomersTableModel::remove ( const int i )`

[CustomersTableModel::remove](#) Remove a line.

Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.50.3.9 `int Gui::Widgets::WdgModels::CustomersTableModel::rowCount ( const QModelIndex & ) const`

[CustomersTableModel::rowCount](#) Number of customers row.

Returns

The number of customers

8.50.3.10 `bool Gui::Widgets::WdgModels::CustomersTableModel::setData ( const QModelIndex & index, const QVariant & value, int role = Qt::EditRole )`

[CustomersTableModel::setData](#) Change data of a cell.

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/customerstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/customerstablemodel.cpp

## 8.51 Databases::Database Class Reference

The **Database** class Master class for all database access.

```
#include <database.h>
```

Inheritance diagram for Databases::Database:



### Public Member Functions

- QString **lastError** (const QSqlQuery &q) const  
*Database::lastError* Return an error message on the last error occurred during the SQL request q
- void **testCases** ()  
*Database::testCases* Realise a test cases.
- void **executeFile** (QString pName)  
*Database::executerFichier* Exeute a specified file named pName
- void **openTransaction** ()  
*Database::openTransaction* Open new transaction.
- void **closeTransaction** ()  
*Database::closeTransaction* Close current transaction.
- void **close** ()  
*Database::close* Close database access.
- void **open** ()  
*Database::open* Open database.
- **~Database** ()  
*Database::~Database* Suppression object, and close database access.
- void **setDatabase** (QSqlDatabase sql)  
*Database::setDatabase* Set database.
- void **updateBillingNumber** ()  
*Database::updateBillingNumber* Update the billing number.
- void **cleanDatabase** ()  
*Database::clearDatabase* Drop alls tables of *Database* WARNING: We can't restore data after.
- void **changeDatabase** (Databases::DbType dbType)  
*changeDatabase* Change the current database : mysql to sqlite or sqlite to mysql

### Static Public Member Functions

- static Database \* **instance** (bool tests=false) throw (DbException\*)  
*Database::getInstance* Return an instance of *Database*.

### Protected Member Functions

- Database (bool tests=false) throw (DbException\*)  
*Database::Database* *Database* is a singleton.
- QVariant **value** (const QSqlQuery &q, const QString &champ) const  
*Database::valeur* Value of database field.

## Protected Attributes

- QSettings \* [\\_settings](#)  
*settings*
- QSqlDatabase [mDatabase](#)  
*contains Database*
- QList< [Database](#) \* > [\\_instances](#)  
*List of instances.*

## Static Protected Attributes

- static [Database](#) \* [\\_instance](#) = 0  
*Instance.*
- static bool [\\_dbInstance](#) = 0  
*an instance of db is open*
- static bool [isOpen](#) = false  
*[Database](#) is open.*
- static bool [\\_isMysql](#) = false

### 8.51.1 Detailed Description

The [Database](#) class Master class for all database access.

#### Author

Antoine de Roquemaurel

### 8.51.2 Member Function Documentation

#### 8.51.2.1 void Databases::Database::changeDatabase ( [Databases::DbType dbType](#) )

changeDatabase Change the current database : mysql to sqlite or sqlite to mysql

##### Parameters

<a href="#">dbType</a>	: The new database type, Sqlite or Mysql
------------------------	------------------------------------------

#### 8.51.2.2 void Databases::Database::executeFile ( [QString pName](#) )

Database::executerFichier Exeute a specified file named *pName*

##### Parameters

<a href="#">pNom</a>	File name
----------------------	-----------

#### 8.51.2.3 [Database](#) \* [Databases::Database::instance](#) ( bool *tests* = false ) throw [DbException](#) \* ) [static]

[Database::getInstance](#) Return an instance of [Database](#).

##### Returns

Instance of [Database](#)



8.51.2.4 QString Databases::Database::lastError ( const QSqlQuery & *q* ) const [inline]

[Database::lastError](#) Return an error message on the last error occurred during the SQL request *q*

## Parameters

<i>q</i>	SQL request
----------	-------------

## Returns

an error message

8.51.2.5 void Databases::Database::setDatabase ( QSqlDatabase *sql* )

[Database::setDatabase](#) Set database.

## Parameters

<i>sql</i>	The new database
------------	------------------

8.51.2.6 QVariant Databases::Database::value ( const QSqlQuery & *q*, const QString & *champ* ) const [protected]

Database::valeur Value of database field.

## Parameters

<i>q</i>	Query
<i>champ</i>	Field

## Returns

The value

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/database.h
- /home/travis/build/FACT-Team/FactDev/src/database/database.cpp

## 8.52 Gui::Widgets::DatabaseSettingsWidget Class Reference

The [DatabaseSettingsWidget](#) class Windows of database settings.

```
#include <databasesettingswidget.h>
```

Inheritance diagram for Gui::Widgets::DatabaseSettingsWidget:



## Public Slots

- bool [isValid](#) ()  
*DatabaseSettingsWidget::isValid* Return TRUE if all fields are correctly inputed else FALSE.
- void [checkRepeatPassword](#) (QString text)  
*DatabaseSettingsWidget::checkRepeatLogin* Check if the second login field is the same than the first.
- void [userInterfaceChanged](#) ()  
*DatabaseSettingsWidget::userInterfaceChanged* User interface has changed.

## Signals

- void [textfieldChanged](#) ()  
*DatabaseSettingsWidget::textfieldChanged* Signal which indicates if a fieldtext has changed.

## Public Member Functions

- [DatabaseSettingsWidget](#) (QWidget \*parent=0)  
*DatabaseSettingsWidget::DatabaseSettingsWidget* Construct a [DatabaseSettingsWidget](#).
- void [fillFields](#) ()  
*DatabaseSettingsWidget::fillFields* Complete fields with a default value for field Database name, Username, IP address and port.
- QString [getDatabaseName](#) ()  
*DatabaseSettingsWidget::getDatabaseName* Return the database name.
- QString [getLogin](#) ()  
*DatabaseSettingsWidget::getLogin* Return the login of the user.
- QString [getPassword](#) ()  
*DatabaseSettingsWidget::getPassword* Return the password of the user.
- QString [getDomainNameOrIP](#) ()  
*DatabaseSettingsWidget::getDomainNameOrIP* Return the domain name or IP address on the machine where is the database.
- QString [getPort](#) ()  
*DatabaseSettingsWidget::getPort* Return the port of the database.

### 8.52.1 Detailed Description

The [DatabaseSettingsWidget](#) class Windows of database settings.

Author

### 8.52.2 Constructor & Destructor Documentation

8.52.2.1 [Gui::Widgets::DatabaseSettingsWidget::DatabaseSettingsWidget \( QWidget \\* \*parent\* = 0 \)](#) [explicit]

[DatabaseSettingsWidget::DatabaseSettingsWidget](#) Construct a [DatabaseSettingsWidget](#).

Parameters

<i>parent</i>	Parent widget of this windows
---------------	-------------------------------

### 8.52.3 Member Function Documentation

8.52.3.1 [QString Gui::Widgets::DatabaseSettingsWidget::getDatabaseName \( \)](#)

[DatabaseSettingsWidget::getDatabaseName](#) Return the database name.

Returns

Database name

#### 8.52.3.2 QString Gui::Widgets::DatabaseSettingsWidget::getDomainNameOrIP ( )

[DatabaseSettingsWidget::getDomainNameOrIP](#) Return the domain name or IP address on the machine where is the database.

##### Returns

Domain name or IP address

#### 8.52.3.3 QString Gui::Widgets::DatabaseSettingsWidget::getLogin ( )

[DatabaseSettingsWidget::getLogin](#) Return the login of the user.

##### Returns

Login of the user

#### 8.52.3.4 QString Gui::Widgets::DatabaseSettingsWidget::getPassword ( )

[DatabaseSettingsWidget::getPassword](#) Return the password of the user.

##### Returns

User password

#### 8.52.3.5 QString Gui::Widgets::DatabaseSettingsWidget::getPort ( )

[DatabaseSettingsWidget::getPort](#) Return the port of the database.

##### Returns

Database port

#### 8.52.3.6 bool Gui::Widgets::DatabaseSettingsWidget::isValid ( ) [slot]

[DatabaseSettingsWidget::isValid](#) Return TRUE if all fields are correctly inputed else FALSE.

##### Returns

boolean

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/databasesettingswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/databasesettingswidget.cpp

## 8.53 Exceptions::DbException Class Reference

The [DbException](#) class for database exception : queries, db file, ...

```
#include <dbexception.h>
```

Inheritance diagram for Exceptions::DbException:



## Public Member Functions

- [DbException](#) (const QString fct, const QString fctName, const QString logError, float errorCode)  
[DbException::DbException](#). Construct a [DbException](#).
- virtual [~DbException](#) () throw ()  
[~DbException](#)
- void [popupMessage](#) (QWidget \*parent)  
[DbException::popupMessage](#). Display a popup message with the message error.

### 8.53.1 Detailed Description

The [DbException](#) class for database exception : queries, db file, ...

#### Author

Antoine de Roquemaurel

### 8.53.2 Constructor & Destructor Documentation

8.53.2.1 [Exceptions::DbException::DbException](#) ( const QString *fct*, const QString *fctName*, const QString *logError*, float *errorCode* )

[DbException::DbException](#). Construct a [DbException](#).

#### Parameters

<i>userError</i>	ClassName of error
<i>fctName</i>	Function name
<i>logError</i>	Message error
<i>errorCode</i>	Code of error

### 8.53.3 Member Function Documentation

8.53.3.1 void [Exceptions::DbException::popupMessage](#) ( QWidget \* *parent* )

[DbException::popupMessage](#). Display a popup message with the message error.

#### Parameters

<i>parent</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/exceptions/dbexception.h
- /home/travis/build/FACT-Team/FactDev/src/exceptions/dbexception.cpp

## 8.54 Gui::Dialogs::DialogAddCustomer Class Reference

The [DialogAddCustomer](#) class Window to add or modify a Customer.

```
#include <dialogaddcustomer.h>
```

Inheritance diagram for Gui::Dialogs::DialogAddCustomer:



### Public Slots

- void [checkFields](#) ()  
[DialogAddCustomer::checkFields](#) Check if fields are valid.

### Public Member Functions

- [DialogAddCustomer](#) (int id=0, QWidget \*parent=0)  
[DialogAddCustomer::DialogAddCustomer](#) Construct a window to add/modify a Customer.
- void [fillFields](#) ()  
[DialogAddCustomer::fillFields](#) If the Customer exists, fill line edits with the data of the current Customer.
- void [accept](#) ()  
[DialogAddCustomer::accept](#) Valid data inputed by user and add these data in Database.
- void [reject](#) ()  
[DialogAddCustomer::reject](#) Cancel the operation and close the windows.

### 8.54.1 Detailed Description

The [DialogAddCustomer](#) class Window to add or modify a Customer.

Author

### 8.54.2 Constructor & Destructor Documentation

8.54.2.1 [Gui::Dialogs::DialogAddCustomer::DialogAddCustomer](#) ( int *id* = 0, QWidget \* *parent* = 0 ) [explicit]

[DialogAddCustomer::DialogAddCustomer](#) Construct a window to add/modify a Customer.

Parameters

<i>id</i>	Customer id
<i>parent</i>	QWidget parent

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/dialogaddcustomer.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/dialogaddcustomer.cpp

## 8.55 Utils::Directories Class Reference

### Static Public Member Functions

- static QString [makeDirectory](#) (QDir &directory, const QString path, const QString folder) throw (Exceptions::FileException\*)

*MainWindow::makeDirectory If not exists make a new directory folder*

### 8.55.1 Member Function Documentation

8.55.1.1 QString Utils::Directories::makeDirectory ( QDir & *directory*, const QString *path*, const QString *folder* ) throw Exceptions::FileException \*) [static]

MainWindow::makeDirectory If not exists make a new directory *folder*

#### Parameters

<i>path</i>	Return the path of the folder just created
<i>folder</i>	Folder name to create

#### Returns

Path of the folder just created

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/Utils/directories.h
- /home/travis/build/FACT-Team/FactDev/src/Utils/directories.cpp

## 8.56 DirectoriesTest Class Reference

Inheritance diagram for DirectoriesTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/Utils/directoriestest.h
- /home/travis/build/FACT-Team/FactDev/tests/Utils/directoriestest.cpp

## 8.57 DirectoriesTests Class Reference

Inheritance diagram for DirectoriesTests:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/utis/directoriestests.h
- /home/travis/build/FACT-Team/FactDev/tests/utis/directoriestests.cpp

## 8.58 Utils::Double Class Reference

The [Double](#) class Utils functions for [Double](#) calculs.

```
#include <double.h>
```

### Static Public Member Functions

- static double [round](#) (double *n*, unsigned int *d*)  
*round Roud a double value to d decimals*
- static double **round** (double *n*, unsigned int *d*)

#### 8.58.1 Detailed Description

The [Double](#) class Utils functions for [Double](#) calculs.

#### 8.58.2 Member Function Documentation

8.58.2.1 `double Utils::Double::round ( double n, unsigned int d ) [static]`

`round` Roud a double value to d decimals

##### Parameters

<i>n</i>	The number
<i>d</i>	The number of decimals who you want

##### Returns

The rounded value

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utis/double.h
- /home/travis/build/FACT-Team/FactDev/src/utis/double.cpp

## 8.59 Gui::Widgets::Delegates::DoubleSpinBoxDelegate Class Reference

The [DoubleSpinBoxDelegate](#) class.

```
#include <doublespinboxdelegate.h>
```

Inheritance diagram for `Gui::Widgets::Delegates::DoubleSpinBoxDelegate`:





## Public Member Functions

- [DoubleSpinBoxDelegate](#) (QObject \*parent=0)  
*[DoubleSpinBoxDelegate::DoubleSpinBoxDelegate](#).*
- QWidget \* [createEditor](#) (QWidget \*parent, const QStyleOptionViewItem &option, const QModelIndex &index) const  
*[DoubleSpinBoxDelegate::createEditor](#) Return a ComboBox specified by index item defined by the parent widget and style option which are used to control how the editor widgets appears.*
- void [setEditorData](#) (QWidget \*editor, const QModelIndex &index) const  
*[DoubleSpinBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index*
- void [setModelData](#) (QWidget \*editor, QAbstractItemModel \*model, const QModelIndex &index) const  
*[DoubleSpinBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index*
- void [updateEditorGeometry](#) (QWidget \*editor, const QStyleOptionViewItem &option, const QModelIndex &index) const  
*[DoubleSpinBoxDelegate::updateEditorGeometry](#) Update the editor for the item specified by index according to the style option given.*

### 8.59.1 Detailed Description

The [DoubleSpinBoxDelegate](#) class.

#### Author

Florent Berbie

### 8.59.2 Constructor & Destructor Documentation

#### 8.59.2.1 Gui::Widgets::Delegates::DoubleSpinBoxDelegate::DoubleSpinBoxDelegate ( QObject \* parent = 0 )

[DoubleSpinBoxDelegate::DoubleSpinBoxDelegate](#).

#### Parameters

<i>parent</i>	
---------------	--

### 8.59.3 Member Function Documentation

#### 8.59.3.1 QWidget \* Gui::Widgets::Delegates::DoubleSpinBoxDelegate::createEditor ( QWidget \* parent, const QStyleOptionViewItem & option, const QModelIndex & index ) const

[DoubleSpinBoxDelegate::createEditor](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

#### Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

#### Returns

[DoubleSpinBoxDelegate](#)

8.59.3.2 void Gui::Widgets::Delegates::DoubleSpinBoxDelegate::setEditorData ( QWidget \* *editor*, const QModelIndex & *index* ) const

[DoubleSpinBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

## Parameters

<i>editor</i>	Data edited
<i>index</i>	Index of the model to edit

8.59.3.3 void Gui::Widgets::Delegates::DoubleSpinBoxDelegate::setModelData ( QWidget \* *editor*, QAbstractItemModel \* *model*, const QModelIndex & *index* ) const

[DoubleSpinBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

## Parameters

<i>editor</i>	Data edited
<i>index</i>	Index of the model to edit

8.59.3.4 void Gui::Widgets::Delegates::DoubleSpinBoxDelegate::updateEditorGeometry ( QWidget \* *editor*, const QStyleOptionViewItem & *option*, const QModelIndex & *index* ) const

[DoubleSpinBoxDelegate::updateEditorGeometry](#) Update the *editor* for the item specified by *index* according to the style *option* given.

## Parameters

<i>editor</i>	Editor widget to update
<i>option</i>	Style option
<i>index</i>	Item index

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/doublespinboxdelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/doublespinboxdelegate.cpp

## 8.60 FileChoseWidget Class Reference

Inheritance diagram for FileChoseWidget:



### Public Member Functions

- **FileChoseWidget** (QWidget \*parent=0)

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/filechosewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/filechosewidget.cpp

## 8.61 Exceptions::FileException Class Reference

The [FileException](#) class for file/access file exception.

```
#include <fileexception.h>
```

### Public Member Functions

- [FileException](#) (const QString userError, const QString fctName, const QString logError, float errorCode)  
*[FileException::FileException](#). Construct a [FileException](#).*
- void [popupMessage](#) (QWidget \*parent)  
*[FileException::popupMessage](#). Display a popup message with the message error.*

### 8.61.1 Detailed Description

The [FileException](#) class for file/access file exception.

#### Author

Florent Berbie

### 8.61.2 Constructor & Destructor Documentation

8.61.2.1 Exceptions::FileException::FileException ( const QString *userError*, const QString *fctName*, const QString *logError*, float *errorCode* )

[FileException::FileException](#). Construct a [FileException](#).

#### Parameters

<i>userError</i>	ClassName of error
<i>fctName</i>	Function name
<i>logError</i>	Message error
<i>errorCode</i>	Code of error

### 8.61.3 Member Function Documentation

8.61.3.1 void Exceptions::FileException::popupMessage ( QWidget \* *parent* )

[FileException::popupMessage](#). Display a popup message with the message error.

#### Parameters

<i>parent</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/exceptions/fileexception.h
- /home/travis/build/FACT-Team/FactDev/src/exceptions/fileexception.cpp

## 8.62 Generation Class Reference

Inheritance diagram for Generation:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/generation.h
- /home/travis/build/FACT-Team/FactDev/tests/generation.cpp

## 8.63 Utils::HierarchicalSystem Class Reference

The [HierarchicalSystem](#) class Create class which contains hierarchical system of FactDev.

```
#include <hierarchichalsystem.h>
```

### Public Member Functions

- [HierarchicalSystem](#) ()  
*[HierarchicalSystem::HierarchicalSystem](#) Construct a [HierarchicalSystem](#).*
- void [getAllProjects](#) ()  
*[HierarchicalSystem::getAllProjects](#) Get all projects and add each project to Customer linked.*
- void [getAllBillings](#) ()  
*[HierarchicalSystem::getAllBillings](#) Get all billings and add each billing to Project linked.*
- void [updateData](#) ()  
*[HierarchicalSystem::updateData](#) Update data on Customers, Projects, Billings.*
- void [addProjectToCustomer](#) ([Project](#) \*p, [Customer](#) c)  
*[HierarchicalSystem::addProjectToCustomer](#) Add the Project p to the Customer c*
- void [addBillingToProject](#) ([Billing](#) \*b, [Project](#) \*p)  
*[HierarchicalSystem::addBillingToProject](#) Add the Billing b to the Project p*
- QMap< [Project](#) \*, [Customer](#) > [getCustomers](#) () const  
*[HierarchicalSystem::getCustomers](#) Return all customers and these projects linked.*
- QMap< [Billing](#) \*, [Project](#) \* > [getProjects](#) () const  
*[HierarchicalSystem::getProjects](#) Return all projects and these billing linked.*

### 8.63.1 Detailed Description

The [HierarchicalSystem](#) class Create class which contains hierarchical system of FactDev.

#### Author

Florent Berbie

#### See Also

Customer  
Project  
Billing

## 8.63.2 Member Function Documentation

8.63.2.1 void Utils::HierarchicalSystem::addBillingToProject ( Billing \* *b*, Project \* *p* )

[HierarchicalSystem::addBillingToProject](#) Add the Billing *b* to the Project *p*

## Parameters

<i>b</i>	Billing
<i>p</i>	Project

8.63.2.2 `void Utils::HierarchicalSystem::addProjectToCustomer ( Project * p, Customer c )`

[HierarchicalSystem::addProjectToCustomer](#) Add the Project *p* to the Customer *c*

## Parameters

<i>p</i>	Project
<i>c</i>	Customer

8.63.2.3 `QMap< Project *, Customer > Utils::HierarchicalSystem::getCustomers ( ) const`

[HierarchicalSystem::getCustomers](#) Return all customers and these projects linked.

## Returns

Projects linked to Customers

8.63.2.4 `QMap< Billing *, Project * > Utils::HierarchicalSystem::getProjects ( void ) const`

[HierarchicalSystem::getProjects](#) Return all projects and these billing linked.

## Returns

Billing linked to Projects

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utls/hierarchicalsistema.h
- /home/travis/build/FACT-Team/FactDev/src/utls/hierarchicalsistema.cpp

## 8.64 HierarchicalSystemTest Class Reference

Inheritance diagram for HierarchicalSystemTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/utls/hierarchicalsistemtest.h
- /home/travis/build/FACT-Team/FactDev/tests/utls/hierarchicalsistemtest.cpp

## 8.65 Gui::Widgets::CheckFields::ICheckField Class Reference

The [ICheckField](#) class Interface to check fields validity.

```
#include <icheckfield.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::ICheckField:



### Public Member Functions

- virtual bool [check](#) (QString text)=0  
*ICheckField::check* Check if the field (line edit) is valid Return TRUE if the field is valid, else FALSE.

#### 8.65.1 Detailed Description

The [ICheckField](#) class Interface to check fields validity.

#### 8.65.2 Member Function Documentation

8.65.2.1 virtual bool Gui::Widgets::CheckFields::ICheckField::check ( QString *text* ) [pure virtual]

[ICheckField::check](#) Check if the field (line edit) is valid Return TRUE if the field is valid, else FALSE.

#### Returns

boolean Validity of the text

Implemented in [Gui::Widgets::CheckFields::CheckEmail](#), [Gui::Widgets::CheckFields::CheckPortNumber](#), [Gui::Widgets::CheckFields::CheckFieldsNumbers](#), [Gui::Widgets::CheckFields::CheckIpAddress](#), [Gui::Widgets::CheckFields::CheckWebsite](#), [Gui::Widgets::CheckFields::CheckLogin](#), [Gui::Widgets::CheckFields::CheckPhone](#), [Gui::Widgets::CheckFields::CheckPostalCode](#), [Gui::Widgets::CheckFields::CheckSiretNumber](#), [Gui::Widgets::CheckFields::CheckUntilField](#), [Gui::Widgets::CheckFields::CheckFieldsLetters](#), and [Gui::Widgets::CheckFields::CheckValidField](#).

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/icheckfield.h

## 8.66 Gui::Utils::Image Class Reference

The [Image](#) class Contains generic methods on image formats.

```
#include <image.h>
```

### Static Public Member Functions

- static QByteArray [imageToBytes](#) (QImage image, const QString ext="PNG")  
*Image::imageToBytes* Return a QByteArray of the QImage image
- static QByteArray [pixmapToBytes](#) (const QPixmap pix, const QString ext="PNG")



- [\*Image::pixmapToBytes\*](#) Return a QByteArray of the QPixmap image
- static QImage [\*pixmapToImage\*](#) (const QPixmap pix)  
[\*Image::pixmapToImage\*](#) Return a QImage of QPixmap image
- static QPixmap [\*bytesToPixmap\*](#) (const QByteArray bytes)  
[\*Image::BytesToPixmap\*](#) Return QPixmap from an array of bytes.
- static QPixmap [\*getImage\*](#) (QString path, int width=256, int height=256)  
[\*Image::getImage\*](#) Return a scaled image from the icon specified by it path. The image returned has a resolution of width\*height (default 256\*256)

### 8.66.1 Detailed Description

The [\*Image\*](#) class Contains generic methods on image formats.

Author

### 8.66.2 Member Function Documentation

#### 8.66.2.1 QPixmap Gui::Utils::Image::bytesToPixmap ( const QByteArray bytes ) [static]

[\*Image::BytesToPixmap\*](#) Return QPixmap from an array of bytes.

Parameters

<i>bytes</i>	Array of bytes
--------------	----------------

Returns

QPixmap from bytes

#### 8.66.2.2 QPixmap Gui::Utils::Image::getImage ( QString path, int width = 256, int height = 256 ) [static]

[\*Image::getImage\*](#) Return a scaled image from the icon specified by it *path*. The image returned has a resolution of *width\*height* (default 256\*256)

Parameters

<i>path</i>	Icon path
<i>width</i>	Icon width
<i>height</i>	Icon height

Returns

Scaled image

#### 8.66.2.3 QByteArray Gui::Utils::Image::imageToBytes ( QImage image, const QString ext = "PNG" ) [static]

[\*Image::imageToBytes\*](#) Return a QByteArray of the QImage *image*

## Parameters

<i>image</i>	An image
<i>ext</i>	Extension file of the image (PNG as default value)

## Returns

array of bytes from an **QImage** image

8.66.2.4 `QByteArray Gui::Utils::Image::pixmapToBytes ( const QPixmap pix, const QString ext = "PNG" ) [static]`

[Image::pixmapToBytes](#) Return a QByteArray of the QPixmap *image*

## Parameters

<i>pix</i>	An image
<i>ext</i>	Extension file of the image (PNG as default value)

## Returns

array of bytes from an **QPixmap** image

8.66.2.5 `QImage Gui::Utils::Image::pixmapToImage ( const QPixmap pix ) [static]`

[Image::pixmapToImage](#) Return a QImage of QPixmap *image*

## Parameters

<i>pix</i>	An image
------------	----------

## Returns

QImage of pix

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/utils/image.h
- /home/travis/build/FACT-Team/FactDev/src/gui/utils/image.cpp

## 8.67 Models::IModel Class Reference

The [IModel](#) class.

```
#include <imodel.h>
```

Inheritance diagram for Models::IModel:



## Public Member Functions

- virtual [~IModel](#) ()  
*~IModel Remove an instance of [IModel](#)*
- virtual void [commit](#) ()=0  
*[IModel::commit](#) Update or insert data into the database.*
- virtual void [hydrat](#) (int id)=0  
*[IModel::hydrat](#) Get data of the element which is specified by the identify id from the database.*
- virtual void [remove](#) ()=0  
*[IModel::remove](#) Remove the current element in the database.*
- virtual QVariantHash [getDataMap](#) ()=0  
*[getDataMap](#) Get all data of model with a HashMap key/value*
- int [getId](#) () const  
*[IModel::getId](#) Return the identify of the element of the database.*
- void [setId](#) (int id)  
*[IModel::setId](#) Replace the current identify by id*
- bool [isToRemoved](#) () const  
*[toRemoved](#) return if object must be removed.*
- void [setToRemoved](#) (bool toRemoved)  
*[setToRemoved](#) Change the flag for removed object*

## Protected Attributes

- int [\\_id](#)  
*Element identify.*
- bool [\\_toRemoved](#)  
*Flag to know if the object must be removed.*

### 8.67.1 Detailed Description

The [IModel](#) class.

Author

Antoine de Roquemaurel

### 8.67.2 Member Function Documentation

#### 8.67.2.1 virtual QVariantHash Models::IModel::getDataMap ( ) [pure virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implemented in [Models::Contributory](#), [Models::Billing](#), [Models::Project](#), [Models::User](#), and [Models::Customer](#).

#### 8.67.2.2 int Models::IModel::getId ( ) const [inline]

[IModel::getId](#) Return the identify of the element of the database.

Returns

identity

**8.67.2.3** `virtual void Models::IModel::hydrat ( int id )` `[pure virtual]`

[`IModel::hydrat`](#) Get data of the element which is specified by the identify *id* from the database.

Parameters

<i>id</i>	
-----------	--

Implemented in [Models::Billing](#), [Models::Project](#), [Models::Contributory](#), [Models::User](#), and [Models::Customer](#).

**8.67.2.4** `bool Models::IModel::isToRemoved ( ) const` `[inline]`

toRemoved return if object must be removed.

Returns

boolean

**8.67.2.5** `void Models::IModel::setId ( int id )` `[inline]`

[`IModel::setId`](#) Replace the current identify by *id*

Parameters

<i>id</i>	New identify
-----------	--------------

**8.67.2.6** `void Models::IModel::setToRemoved ( bool toRemoved )` `[inline]`

setToRemoved Change the flag for removed object

Parameters

<i>toRemoved</i>	The new flag
------------------	--------------

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/models/imodel.h`

## 8.68 Utils::ItemType Class Reference

The [`ItemType`](#) class Item type model.

```
#include <itemtype.h>
```

### Public Member Functions

- [`ItemType`](#) (int type, QString name)  
[`ItemType::ItemType`](#) Construct an Item type.
- QString [`getName`](#) () const  
[`ItemType::getName`](#) Get item name.
- [Models::IModel](#) \* [`getModel`](#) (int id)  
[`ItemType::getModel`](#) Get the databasemodel of the [`ItemType`](#) according to this identity *id*
- void [`setName`](#) (const QString &name)  
[`ItemType::setName`](#) Modify the item name.
- int [`getType`](#) () const

- [`ItemType::getType`](#) *Get the type of the current item.*
- void [`setType`](#) (int type)  
[`ItemType::setType`](#) *Modify the type of the current item.*

### Static Public Attributes

- static const int [`CUSTOMER`](#) = 0  
*constant value assigned to Customer*
- static const int [`PROJECT`](#) = 1  
*constant value assigned to Project*
- static const int [`BILLING`](#) = 2  
*constant value assigned to Billing*
- static const int [`QUOTE`](#) = 3  
*constant value assigned to Quote*

### 8.68.1 Detailed Description

The [`ItemType`](#) class Item type model.

### 8.68.2 Constructor & Destructor Documentation

#### 8.68.2.1 Utils::ItemType::ItemType ( int type, QString name )

[`ItemType::ItemType`](#) Construct an Item type.

Parameters

<i>type</i>	Type of the item
<i>name</i>	Name of the item

### 8.68.3 Member Function Documentation

#### 8.68.3.1 Models::IModel \* Utils::ItemType::getModel ( int id )

[`ItemType::getModel`](#) Get the databasemodel of the [`ItemType`](#) according to this identity *id*

Parameters

<i>id</i>	Item type identity
-----------	--------------------

Returns

database model

#### 8.68.3.2 QString Utils::ItemType::getName ( ) const

[`ItemType::getName`](#) Get item name.

Returns

item name

8.68.3.3 `int Utils::ItemType::getType ( ) const`

[ItemType::getType](#) Get the type of the current item.

#### Returns

type of the current item

8.68.3.4 `void Utils::ItemType::setName ( const QString & name )`

[ItemType::setName](#) Modify the item name.

#### Parameters

<i>name</i>	New Item name
-------------	---------------

8.68.3.5 `void Utils::ItemType::setType ( int type )`

[ItemType::setType](#) Modify the type of the current item.

#### Parameters

<i>type</i>	New item type
-------------	---------------

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/Utils/itemtype.h`
- `/home/travis/build/FACT-Team/FactDev/src/Utils/itemtype.cpp`

## 8.69 ItemTypeTest Class Reference

Inheritance diagram for ItemTypeTest:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/Utils/itemtypetest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/Utils/itemtypetest.cpp`

## 8.70 Utils::Log Class Reference

The [Log](#) class for Simple management of log.

```
#include <log.h>
```

## Public Member Functions

- void [write](#) (const QString text)  
*[Log::write](#). Write log message in file.*
- [Log](#) ()  
*[Log::Log](#). [Log](#) is a singleton.*

## Static Public Member Functions

- static [Log](#) & [instance](#) (TypeLog type=INFO)  
*[Log::instance](#). Return the instance of logger.*

## Friends

- [Log](#) & [operator<<](#) ([Log](#) &logger, const QString &text)  
*[operator<<](#) for log writing*

### 8.70.1 Detailed Description

The [Log](#) class for Simple management of log.

### 8.70.2 Member Function Documentation

#### 8.70.2.1 [Log](#) & Utils::Log::instance ( TypeLog *type* = INFO ) [static]

[Log::instance](#). Return the instance of logger.

##### Parameters

<i>type</i>	Type of log : WARNING, INFO, ERROR
-------------	------------------------------------

##### Returns

Instance of logger.

#### 8.70.2.2 void Utils::Log::write ( const QString *text* )

[Log::write](#). Write log message in file.

##### Parameters

<i>text</i>	
-------------	--

### 8.70.3 Friends And Related Function Documentation

#### 8.70.3.1 [Log](#) & [operator<<](#) ( [Log](#) & *logger*, const QString & *text* ) [friend]

[operator<<](#) for log writing

## Parameters

<i>logger</i>	Instance of Logger
<i>text</i>	Text to write

## Returns

New logger.

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utils/log.h
- /home/travis/build/FACT-Team/FactDev/src/utils/log.cpp

## 8.71 Gui::MainWindow Class Reference

The [MainWindow](#) class Main Window of the software.

```
#include <mainwindow.h>
```

Inheritance diagram for Gui::MainWindow:



## Public Slots

- void [addCustomer](#) ()  
*MainWindow::addCustomer* open window to add a new customer.
- void [editCustomer](#) ()  
*MainWindow::editCustomer* open window to modify a customer.
- void [removeCustomer](#) ()  
*MainWindow::removeCustomer* open a popup to confirm the deletion of a customer, if ok remove the customer.
- void [archiveCustomer](#) ()  
*MainWindow::archiveCustomer* open a pop-up to confirm the archiving of the customer, if ok archive the customer.
- void [addQuote](#) ()  
*MainWindow::addQuote* open window to add a new quote.
- void [addBill](#) ()  
*MainWindow::addBill* open window to add a new bill.
- void [billingsIsPaid](#) ()  
*MainWindow::billingsIsPaid* Define the current billing as "paid".
- void [editUser](#) ()  
*MainWindow::editUser* modify the user.
- void [search](#) (QString s)  
*MainWindow::search* launch a new search.
- void [addProject](#) ()  
*MainWindow::addProject* Create a new project for a customer.
- void [removeProject](#) ()  
*MainWindow::removeProject* Remove a project for a customer.
- void [editProject](#) ()



- [\*MainWindow::editProject\*](#) *Modify the customer project.*
- void [aboutQt](#) ()
  - [\*MainWindow::aboutQt\*](#) *show Qt's details.*
- void [aboutFact](#) ()
  - [\*MainWindow::aboutFact\*](#) *show FACT's details (FACT team)*
- void [aboutFactDev](#) ()
  - [\*MainWindow::aboutFactDev\(\)\*](#) *show FactDev's details (FactDev Software)*
- void [aboutIcons](#) ()
  - [\*MainWindow::aboutIcons\(\)\*](#) *show icons's details.*
- void [updateButtons](#) ()
  - [\*updateButton\*](#) *Update all button to disable or enabled its*
- void [editDoc](#) ()
  - [\*MainWindow::editDoc\*](#) *Edit the quote or bill of the project.*
- void [removeDoc](#) ()
  - [\*MainWindow::removeDoc\*](#) *Remove the quote or bill of the project.*
- void [copyDoc](#) ()
  - [\*MainWindow::copyDoc\*](#) *Copy all elements of a quote or a bill and Display these elements in a new quote or bill.*
- void [openPdf](#) ()
  - [\*MainWindow::openPdf\*](#) *Open the PDF file of the current Quote or Billing selected in the TableView.*
- void [computeTurnover](#) ()
  - [\*MainWindow::computeTurnover\*](#) *open window to allow computation of a period turnover.*
- void [globalStatistics](#) ()
  - [\*MainWindow::globalStatistics.\*](#)
- void [customerStatistics](#) ()
  - [\*MainWindow::customerStatistics.\*](#)
- void [lockProject](#) ()
  - [\*lockProject\*](#) *Lock the current project*
- void [mergeDocks](#) ()
  - [\*MainWindow::mergeDocks.\*](#)

## Public Member Functions

- [MainWindow](#) (QWidget \*parent=0)
  - [\*MainWindow:\*](#) *Construct a window.*
- int [getCurrentCustomerId](#) ()
  - [\*MainWindow::getCurrentCustomerId\*](#) *get the selected customer.*
- int [getCurrentProjectId](#) ()
  - [\*MainWindow::getCurrentProjectId\*](#) *get the selected project id.*
- int [getCurrentQuoteId](#) ()
  - [\*MainWindow::getCurrentQuoteId\*](#) *get the selected quote id.*
- QString [getCurrentCustomerName](#) ()
  - [\*MainWindow::getCurrentCustomerName\*](#) *get the selected customer name in the customers' table.*
- QString [getCurrentProjectName](#) ()
  - [\*MainWindow::getCurrentProjectName\*](#) *get the selected project name in the table of projects.*
- int [treeLevel](#) ()
  - [\*MainWindow::treeLevel\*](#) *return the level of the node selected in the tree.*
- QModelIndex [rootTree](#) ()
  - [\*MainWindow::rootTree\*](#) *return the root of the tree "Tous les clients".*
- void [addDoc](#) (bool isBilling)
  - [\*MainWindow::addDoc\*](#) *open window to add a new document.*

- void [resizeEvent](#) (QResizeEvent \*event)  
*MainWindow::resizeEvent* Resize central TableView when you resize the [MainWindow](#)
- void [responsiveCustomerTable](#) ()  
*MainWindow::responsiveCustomerTable* Resize the Customer TableView according it resolution.
- void [responsiveProjectTable](#) ()  
*MainWindow::responsiveProjectTable* Resize the Project TableView according it resolution.
- void [responsiveBillingTable](#) ()  
*MainWindow::responsiveBillingTable* Resize the Billing TableView according it resolution.
- bool [isEasterEgg](#) (const QString filter)  
*MainWindow::isEasterEgg* Return TRUE if search filter is **FleuryMigeon42** else FALSE.

### 8.71.1 Detailed Description

The [MainWindow](#) class Main Window of the software.

Author

Everybody

### 8.71.2 Constructor & Destructor Documentation

8.71.2.1 [Gui::MainWindow::MainWindow](#) ( QWidget \* *parent* = 0 ) [explicit]

[MainWindow](#): Construct a window.

Parameters

<i>parent</i>	
---------------	--

### 8.71.3 Member Function Documentation

8.71.3.1 void [Gui::MainWindow::addBill](#) ( ) [slot]

[MainWindow::addBill](#) open window to add a new bill.

See Also

[AddQuoteDialog](#)

8.71.3.2 void [Gui::MainWindow::addDoc](#) ( bool *isBilling* )

[MainWindow::addDoc](#) open window to add a new document.

Parameters

<i>bool</i>	quote or bill
-------------	---------------

See Also

[addBill](#) [addQuote](#)

8.71.3.3 void Gui::MainWindow::addProject ( ) [slot]

[MainWindow::addProject](#) Create a new project for a customer.

See Also

AddProjectDialog

8.71.3.4 void Gui::MainWindow::addQuote ( ) [slot]

[MainWindow::addQuote](#) open window to add a new quote.

See Also

AddQuoteDialog

8.71.3.5 void Gui::MainWindow::editUser ( ) [slot]

[MainWindow::editUser](#) modify the user.

See Also

UserDataDialog

8.71.3.6 int Gui::MainWindow::getCurrentCustomerId ( )

[MainWindow::getCurrentCustomerId](#) get the selected customer.

Returns

id of the selected customer

8.71.3.7 QString Gui::MainWindow::getCurrentCustomerName ( )

[MainWindow::getCurrentCustomerName](#) get the selected customer name in the customers' table.

Returns

name of the selected customer

8.71.3.8 int Gui::MainWindow::getCurrentProjectId ( )

[MainWindow::getCurrentProjectId](#) get the selected project id.

Returns

id of the selected project

8.71.3.9 QString Gui::MainWindow::getCurrentProjectName ( )

[MainWindow::getCurrentProjectName](#) get the selected project name in the table of projects.

Returns

name of the selected project

#### 8.71.3.10 int Gui::MainWindow::getCurrentQuoteId ( )

[MainWindow::getCurrentQuoteId](#) get the selected quote id.

##### Returns

id of the selected quote

#### 8.71.3.11 bool Gui::MainWindow::isEasterEgg ( const QString *filter* )

[MainWindow::isEasterEgg](#) Return TRUE if search *filter* is **FleuryMigeon42** else FALSE.

##### Parameters

<i>filter</i>	Search filter
---------------	---------------

##### Returns

boolean

#### 8.71.3.12 void Gui::MainWindow::resizeEvent ( QResizeEvent \* *event* )

[MainWindow::resizeEvent](#) Resize central TableView when you resize the [MainWindow](#)

##### Parameters

<i>event</i>	Resize event
--------------	--------------

#### 8.71.3.13 QModelIndex Gui::MainWindow::rootTree ( )

[MainWindow::rootTree](#) return the root of the tree "Tous les clients".

##### Returns

QModelIndex

#### 8.71.3.14 void Gui::MainWindow::search ( QString *s* ) [slot]

[MainWindow::search](#) launch a new search.

##### Parameters

<i>s</i>	text in field
----------	---------------

#### 8.71.3.15 int Gui::MainWindow::treeLevel ( )

[MainWindow::treeLevel](#) return the level of the node selected in the tree.

##### Returns

integer, depth of the item in tree

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/mainwindow/mainwindow.h
- /home/travis/build/FACT-Team/FactDev/src/gui/mainwindow/mainwindow.cpp

## 8.72 Gui::Dialogs::MessageBox Class Reference

The [MessageBox](#) class Information window with message.

```
#include <messagebox.h>
```

Inheritance diagram for Gui::Dialogs::MessageBox:



### Public Member Functions

- [MessageBox](#) (QWidget \*parent=0)  
[MessageBox::MessageBox](#) Construt a [MessageBox](#)
- void [aboutFact](#) ()  
[MessageBox::aboutFact](#) Defines FACT team information.
- void [aboutFactDev](#) ()  
[MessageBox::aboutFactDev](#) Defines FactDev software information.
- void [aboutIcons](#) ()  
[MessageBox::aboutIcons](#) Defines icons theme information.
- void [setImage](#) (QString img, int width=128, int height=128)  
[MessageBox::setImage](#) Add the icon img to the current window.
- void [setText](#) (QString txt)  
[MessageBox::setText](#) Add the text txt to the current window.

### Static Public Member Functions

- static void [showAboutFact](#) ()  
[MessageBox::showAboutFact](#) Shows window about FACT team.
- static void [showAboutFactDev](#) ()  
[MessageBox::showAboutFactDev](#) Shows window about FactDev software.
- static void [showAboutIcons](#) ()  
[MessageBox::showAboutIcons](#) Shows about icons theme of FactDev software.

#### 8.72.1 Detailed Description

The [MessageBox](#) class Information window with message.

Author

Florent Berbie

#### 8.72.2 Constructor & Destructor Documentation

8.72.2.1 [Gui::Dialogs::MessageBox::MessageBox \( QWidget \\* parent = 0 \)](#) [explicit]

[MessageBox::MessageBox](#) Construt a [MessageBox](#)

## Parameters

<i>parent</i>	
---------------	--

### 8.72.3 Member Function Documentation

8.72.3.1 void Gui::Dialogs::MessageBox::setImage ( QString *img*, int *width* = 128, int *height* = 128 )

[MessageBox::setImage](#) Add the icon *img* to the current window.

## Parameters

<i>img</i>	Icon
<i>width</i>	Icon width (default: 128)
<i>height</i>	Icon height (default: 128)

8.72.3.2 void Gui::Dialogs::MessageBox::setText ( QString *txt* )

[MessageBox::setText](#) Add the text *txt* to the current window.

## Parameters

<i>txt</i>	Text inside the current window
------------	--------------------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/messagebox.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/messagebox.cpp

## 8.73 Parameters Class Reference

The [Parameters](#) class Class for simple user parameters.

```
#include <parameters.h>
```

### Static Public Attributes

- static const QString [DB\\_FILENAME](#) = "database.db"  
*DB\_FILENAME* The database sqlite file name.
- static const double [VERSION](#) = 1.0  
*VERSION* Version number of software.

### 8.73.1 Detailed Description

The [Parameters](#) class Class for simple user parameters.

## Author

Antoine de Roquemaurel

### 8.73.2 Member Data Documentation

8.73.2.1 const QString Parameters::DB\_FILENAME = "database.db" [static]

[DB\\_FILENAME](#) The database sqlite file name.

Database file name

8.73.2.2 `const double Parameters::VERSION = 1.0` `[static]`

VERSION Version number of software.

Application version

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/parameters.h`
- `/home/travis/build/FACT-Team/FactDev/src/parameters.cpp`

## 8.74 Mustache::PartialFileLoader Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialFileLoader:



### Public Member Functions

- **PartialFileLoader** (const QString &basePath)
- virtual QString [getPartial](#) (const QString &name)

### 8.74.1 Detailed Description

A partial fetcher when loads templates from '`<name>.mustache`' files in a given directory.

Once a partial has been loaded, it is cached for future use.

### 8.74.2 Member Function Documentation

8.74.2.1 `QString PartialFileLoader::getPartial ( const QString & name )` `[virtual]`

Returns the partial template with a given `name`.

Implements [Mustache::PartialResolver](#).

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp`

## 8.75 Mustache::PartialMap Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialMap:



## Public Member Functions

- **PartialMap** (const QHash< QString, QString > &partials)
- virtual QString [getPartial](#) (const QString &name)

### 8.75.1 Detailed Description

A simple partial fetcher which returns templates from a map of (partial name -> template)

### 8.75.2 Member Function Documentation

#### 8.75.2.1 QString PartialMap::getPartial ( const QString & name ) [virtual]

Returns the partial template with a given `name`.

Implements [Mustache::PartialResolver](#).


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

## 8.76 Mustache::PartialResolver Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialResolver:



## Public Member Functions

- virtual QString [getPartial](#) (const QString &name)=0

### 8.76.1 Detailed Description

Interface for fetching template partials.



## 8.76.2 Member Function Documentation

### 8.76.2.1 virtual QString Mustache::PartialResolver::getPartial ( const QString & *name* ) [pure virtual]

Returns the partial template with a given *name*.

Implemented in [Mustache::PartialFileLoader](#), and [Mustache::PartialMap](#).

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h

## 8.77 Generator::PdfGenerator Class Reference

The [PdfGenerator](#) class Generator of PDF files.

```
#include <pdfgenerator.h>
```

### Public Member Functions

- [PdfGenerator](#) (QString pdflatexPath="pdflatex")  
*PdfGenerator::PdfGenerator* Construct a *PdfGenerator*.
- void [generate](#) (QString inputDir, QString filename)  
*PdfGenerator::generate* Generate a PDF of the file named *filename* into the directory *inputDir*

### 8.77.1 Detailed Description

The [PdfGenerator](#) class Generator of PDF files.

### 8.77.2 Constructor & Destructor Documentation

#### 8.77.2.1 Generator::PdfGenerator::PdfGenerator ( QString pdflatexPath = "pdflatex" )

[PdfGenerator::PdfGenerator](#) Construct a [PdfGenerator](#).

Parameters

<i>pdflatexPath</i>	Path to the command to generate PDF file
---------------------	------------------------------------------

## 8.77.3 Member Function Documentation

### 8.77.3.1 void Generator::PdfGenerator::generate ( QString inputDir, QString filename )

[PdfGenerator::generate](#) Generate a PDF of the file named *filename* into the directory *inputDir*

Parameters

<i>inputDir</i>	Directory where is store the PDF generated
<i>filename</i>	File name

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/generator/pdfgenerator.h
- /home/travis/build/FACT-Team/FactDev/src/generator/pdfgenerator.cpp

## 8.78 Models::People Class Reference

The `People` class `People`.

```
#include <people.h>
```

Inheritance diagram for Models::People:



### Public Member Functions

- `People ()`  
*People::People Construct a `People`.*
- `People (int id)`  
*People::People Construct a `People`.*
- `QString getFirstname () const`  
*People::getFirstname Return the `People` firstname.*
- `void setFirstname (const QString &firstname)`  
*People::setFirstnament Modify the `People` firstname*
- `QString getLastname () const`  
*People::getLastname Return the `People` lastname.*
- `void setLastname (const QString &lastname)`  
*People::setLastname Modify the `People` lastname*
- `QString getCompany () const`  
*People::getCompany Return the `People` company.*
- `void setCompany (const QString &company)`  
*People::setCompany Modify the `People` company name.*
- `QString getAddress () const`  
*People::getAddress Return the company address (Number and name of street)*
- `void setAddress (const QString &address)`  
*People::setAddress Modify the `People` company address*
- `QString getPostalCode () const`  
*People::getPostalCode Return the postal code.*
- `void setPostalCode (const QString &postalCode)`  
*People::setPostalCode Modify the postal code postalCode*
- `QString getCity () const`  
*People::getCity Return the city.*
- `void setCity (const QString &city)`  
*People::setCity Modify the city*
- `QString getCountry () const`  
*People::getCountry Return the country of the `People`.*
- `void setCountry (const QString &country)`  
*People::setCountry Replace the country of the `People` by country*
- `QString getEmail () const`  
*People::getEmail Return the `People` professional email*

- void [setEmail](#) (const QString &email)  
*People::setEmail* Modify the [People](#) professional email
- QString [getPhone](#) () const  
*People::getPhone* Return the number of the desktop phone.
- void [setPhone](#) (const QString &phone)  
*People::setPhone* Modify the number of the desktop phone
- QString [getMobilePhone](#) () const  
*People::getMobilePhone* Return the number of the professional mobile phone.
- void [setMobilePhone](#) (const QString &mobilePhone)  
*People::setMobilePhone* Modify the number of the professional [People](#) mobile phone mobilePhone
- QString [getFax](#) () const  
*People::getFax* Return the fax number.
- void [setFax](#) (const QString &fax)  
*People::setFax* Replace the current fax number by fax
- virtual QPixmap \* [getImage](#) () const  
*People::getImage* Return the compagny image.
- virtual void [setImage](#) (QPixmap \*image)  
*People::setImage* Modify the current compagny image by image
- QString [getExtensionImage](#) () const  
*People::getExtensionImage* Return the extension of the image file.
- void [setExtensionImage](#) (const QString &ext)  
*People::setExtensionImage* Change the extension of the image file by the new ext
- QString [getAddressComplement](#) () const  
*getAddressComplement* Return the address complement (Building, Appartment, ...)
- void [setAddressComplement](#) (const QString &addressComplement)  
*setAddressComplement* Change the address complement
- QString [getWebsite](#) () const  
*getWebsite* Website of [People](#)
- void [setWebsite](#) (const QString &website)  
*setWebsite* Change the url of website
- bool [operator==](#) (const [People](#) &c)  
*People::operator ==* Re-define the operator "==" to compare if the current [People](#) is the same to the other [People](#) c  
Return TRUE if both Peoples are the same, else FALSE.
- bool [operator!=](#) (const [People](#) &c)  
*People::operator !=* Re-define the operator "!=" to compare if the current [People](#) is differnt to the other [People](#) c  
Return TRUE if both Peoples are different, else FALSE.

## Protected Attributes

- QPixmap \* [\\_image](#)  
*Compagny image.*

### 8.78.1 Detailed Description

The [People](#) class [People](#).

## 8.78.2 Member Function Documentation

### 8.78.2.1 QString Models::People::getAddress ( ) const

[People::getAddress](#) Return the company address (Number and name of street)

Returns

Address company

### 8.78.2.2 QString Models::People::getAddressComplement ( ) const

[getAddressComplement](#) Return the address complement (Building, Appartment, ...)

Returns

The address complement

### 8.78.2.3 QString Models::People::getCity ( ) const

[People::getCity](#) Return the city.

Returns

city

### 8.78.2.4 QString Models::People::getCompany ( ) const

[People::getCompany](#) Return the [People](#) company.

Returns

New company name

### 8.78.2.5 QString Models::People::getCountry ( ) const

[People::getCountry](#) Return the country of the [People](#).

Returns

country of the [People](#)

### 8.78.2.6 QString Models::People::getEmail ( ) const

[People::getEmail](#) Return the [People](#) professional *email*

Returns

professional email

#### 8.78.2.7 QString Models::People::getExtensionImage ( ) const

[People::getExtensionImage](#) Return the extension of the image file.

##### Returns

Extension of image file

#### 8.78.2.8 QString Models::People::getFax ( ) const

[People::getFax](#) Return the fax number.

##### Returns

fax number

#### 8.78.2.9 QString Models::People::getFirstname ( ) const

[People::getFirstname](#) Return the [People](#) firstname.

##### Returns

[People](#) firstname

#### 8.78.2.10 QPixmap \* Models::People::getImage ( ) const [virtual]

[People::getImage](#) Return the compagny image.

##### Returns

compagny image

#### 8.78.2.11 QString Models::People::getLastname ( ) const

[People::getLastname](#) Return the [People](#) lastname.

##### Returns

[People](#) lastname

#### 8.78.2.12 QString Models::People::getMobilePhone ( ) const

[People::getMobilePhone](#) Return the number of the professional mobile phone.

##### Returns

number of mobile phone

#### 8.78.2.13 QString Models::People::getPhone ( ) const

[People::getPhone](#) Return the number of the desktop phone.

##### Returns

number of the desktop phone

**8.78.2.14** QString Models::People::getPostalCode ( ) const

[People::getPostalCode](#) Return the postal code.

**Returns**

postal code

**8.78.2.15** QString Models::People::getWebsite ( ) const

[getWebsite](#) Website of [People](#)

**Returns**

The website url

**8.78.2.16** bool Models::People::operator!= ( const People & c )

[People::operator !=](#) Re-define the operator "!=" to compare if the current [People](#) is different to the other [People](#) c  
Return TRUE if both Peoples are different, else FALSE.

**Parameters**

<i>c</i>	<a href="#">People</a> to compare
----------	-----------------------------------

**Returns**

boolean

**8.78.2.17** bool Models::People::operator== ( const People & c )

[People::operator ==](#) Re-define the operator "==" to compare if the current [People](#) is the same to the other [People](#) c  
Return TRUE if both Peoples are the same, else FALSE.

**Parameters**

<i>c</i>	<a href="#">People</a> to compare
----------	-----------------------------------

**Returns**

boolean

**8.78.2.18** void Models::People::setAddress ( const QString & address )

[People::setAddress](#) Modify the [People](#) company *address*

**Parameters**

<i>address</i>	Company address (name and number of street)
----------------	---------------------------------------------

**8.78.2.19** void Models::People::setAddressComplement ( const QString & addressComplement )

[setAddressComplement](#) Change the address complement

## Parameters

<i>address-Complement</i>	The new complement
---------------------------	--------------------

8.78.2.20 void Models::People::setCity ( const QString & *city* )

[People::setCity](#) Modify the *city*

## Parameters

<i>city</i>	Company city address
-------------	----------------------

8.78.2.21 void Models::People::setCompany ( const QString & *company* )

[People::setCompany](#) Modify the [People](#) *company* name.

## Parameters

<i>company</i>	New <a href="#">People</a> company name
----------------	-----------------------------------------

8.78.2.22 void Models::People::setCountry ( const QString & *country* )

[People::setCountry](#) Replace the country of the [People](#) by *country*

## Parameters

<i>country</i>	New country of the <a href="#">People</a>
----------------	-------------------------------------------

8.78.2.23 void Models::People::setEmail ( const QString & *email* )

[People::setEmail](#) Modify the [People](#) professional *email*

## Parameters

<i>email</i>	The <a href="#">People</a> professional email
--------------	-----------------------------------------------

8.78.2.24 void Models::People::setExtensionImage ( const QString & *ext* )

[People::setExtensionImage](#) Change the extension of the image file by the new *ext*

## Parameters

<i>ext</i>	Extension file
------------	----------------

8.78.2.25 void Models::People::setFax ( const QString & *fax* )

[People::setFax](#) Replace the current fax number by *fax*

## Parameters

<i>fax</i>	new fax number
------------	----------------

8.78.2.26 void Models::People::setFirstname ( const QString & *firstname* )

People::setFirstname Modify the [People](#) *firstname*

Parameters

<i>firstname</i>	New <a href="#">People</a> firstname
------------------	--------------------------------------

8.78.2.27 void Models::People::setImage ( QPixmap \* *image* ) [virtual]

[People::setImage](#) Modify the current compagny image by *image*

Parameters

<i>image</i>	Compagny image
--------------	----------------

Reimplemented in [Models::User](#), and [Models::Customer](#).

8.78.2.28 void Models::People::setLastname ( const QString & *lastname* )

[People::setLastname](#) Modify the [People](#) *lastname*

Parameters

<i>lastname</i>	New <a href="#">People</a> lastname
-----------------	-------------------------------------

8.78.2.29 void Models::People::setMobilePhone ( const QString & *mobilePhone* )

[People::setMobilePhone](#) Modify the number of the professional [People](#) mobile phone *mobilePhone*

Parameters

<i>mobilePhone</i>	Number of the professional mobile phone
--------------------	-----------------------------------------

8.78.2.30 void Models::People::setPhone ( const QString & *phone* )

[People::setPhone](#) Modify the number of the desktop *phone*

Parameters

<i>phone</i>	Number of the desktop phone
--------------	-----------------------------

8.78.2.31 void Models::People::setPostalCode ( const QString & *postalCode* )

[People::setPostalCode](#) Modify the postal code *postalCode*

Parameters

<i>postalCode</i>	New postal code
-------------------	-----------------



8.78.2.32 void Models::People::setWebsite ( const QString & *website* )

setWebsite Change the url of website

## Parameters

<i>website</i>	The new URL
----------------	-------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/people.h
- /home/travis/build/FACT-Team/FactDev/src/models/people.cpp

## 8.79 Utils::pointers Class Reference

The pointers class.

```
#include <pointers.h>
```

### Static Public Member Functions

- static void [deleteIfNotNull](#) (QObject \*p)  
*[pointers::deleteIfNotNull](#) Remove to the memory the object *p* if it is not null*

### 8.79.1 Detailed Description

The pointers class.

#### Author

Antoine de Roquemaurel

### 8.79.2 Member Function Documentation

**8.79.2.1** void [Utils::pointers::deleteIfNotNull](#) ( QObject \* *p* ) [static]

[pointers::deleteIfNotNull](#) Remove to the memory the object *p* if it is not null

## Parameters

<i>p</i>	An object
----------	-----------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utis/pointers.h
- /home/travis/build/FACT-Team/FactDev/src/utis/pointers.cpp

## 8.80 PointersTest Class Reference

Inheritance diagram for PointersTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/utls/pointerstest.h
- /home/travis/build/FACT-Team/FactDev/tests/utls/pointerstest.cpp

## 8.81 Gui::Widgets::Popup Class Reference

Class for display popup quickly.

```
#include <popup.h>
```

### Static Public Member Functions

- static void [toImplement](#) (QString, QWidget \*)  
*[Popup::toImplement](#) Method to display a critical message : feature is not implemented now.*

### 8.81.1 Detailed Description

Class for display popup quickly.

Author

Antoine de Roquemaurel

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/popup.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/popup.cpp

## 8.82 Models::Project Class Reference

The [Project](#) class : [Project](#) linked to a [Customer](#).

```
#include <project.h>
```

Inheritance diagram for Models::Project:



### Public Member Functions

- [Project](#) ()  
*[Project::Project](#) Construct a [Project](#).*
- [Project](#) (QString name)  
*[Project::project](#) Construct a project with a name.*
- [Project](#) (int id)  
*[Project::Project](#) Construct a [Project](#) which is specified by an id*
- virtual [~Project](#) ()  
*[~Project](#) Desctruct project object*
- void [commit](#) ()

- Project::commit* Update project data in the database.

  - void **hydrat** (int id)

*Project::hydrat* Insert project data which is specified by id in the database.
- void **remove** ()

*Project::remove* Remove the current project.
- QVariantHash **getDataMap** ()

*getDataMap* Get all data of model with a HashMap key/value
- void **lock** ()

*lock* Lock the current project and change endDate by today();
- bool **isLocked** () const

*isLocked* Return true if the project is locked : end Date of project is passed.
- void **unlock** ()

*unlock* Unlock the current project;
- QString **getName** () const

*Project::getName* Return the project name.
- void **setName** (const QString &name)

*Project::setName* Modify the project name
- QString **getDescription** () const

*Project::getDescription* Return a project description.
- void **setDescription** (const QString &description)

*Project::setDescription* Modify the project description
- QDate **getBeginDate** () const

*Project::getBeginDate* return the date of creation of the **Project**
- void **setBeginDate** (QDate beginDate)

*Project::setBeginDate* Modify beginDate of a **Project**
- QDate **getEndDate** () const

*Project::getEndDate* Return the endDate of the **Project**
- void **setEndDate** (QDate endDate)

*Project::setEndDate* Modify endDate of **Project**
- double **getCost** () const

*Project::getCost* Return the **Project** cost
- double **getDailyRate** () const

*Project::getDailyRate* Return the daily rate estimated for this project.
- void **setDailyRate** (double dailyRate)

*Project::setDailyRate* Modify the daily rate dailyRate of the current project.
- QSharedPointer< **Customer** > **getCustomer** () const

*Project::getCustomer* Return the reference to the customer linked to this project.
- void **setCustomer** (QSharedPointer< **Customer** > customer)

*Project::setCustomer* Modify the customer linked to this project.
- bool **operator==** (const **Project** &p)

*Project::operator ==* Re-define the operator "==" to compare if the current project is the same to the other **Project** p  
Return TRUE if both projects are the same, else FALSE.
- bool **operator<** (const **Project** &p) const

*Project::operator <* defines the operator "<" to compare two **Project** and to see if the first is anterior to the second.
- bool **operator!=** (const **Project** &p)

*Project::operator !=* Re-define the operator "!=" to compare if the current project is different to the other **Project** p  
Return TRUE if both projects are different, else FALSE.

## Additional Inherited Members

### 8.82.1 Detailed Description

The [Project](#) class : [Project](#) linked to a [Customer](#).

#### Author

Florent Berbie

#### See Also

[IModel](#)

### 8.82.2 Constructor & Destructor Documentation

#### 8.82.2.1 Models::Project::Project ( int *id* )

[Project::Project](#) Construct a [Project](#) which is specified by an *id*

#### Parameters

<i>id</i>	
-----------	--

### 8.82.3 Member Function Documentation

#### 8.82.3.1 QDate Models::Project::getBeginDate ( ) const

[Project::getBeginDate](#) return the date of creation of the [Project](#)

#### Returns

the begin date of the [Project](#)

#### 8.82.3.2 double Models::Project::getCost ( ) const

[Project::getCost](#) Return the [Project](#) *cost*

#### Returns

the project cost

#### 8.82.3.3 QSharedPointer< Customer > Models::Project::getCustomer ( ) const

[Project::getCustomer](#) Return the reference to the customer linked to this project.

#### Returns

customer linked to this project

#### 8.82.3.4 double Models::Project::getDailyRate ( ) const

[Project::getDailyRate](#) Return the daily rate estimated for this project.

#### Returns

the daily rate linket to the current project

#### 8.82.3.5 QVariantHash Models::Project::getDataMap ( ) [virtual]

getDataMap Get all data of model with a HashMap key/value

##### Returns

Model's data

Implements [Models::IModel](#).

#### 8.82.3.6 QString Models::Project::getDescription ( ) const

[Project::getDescription](#) Return a project description.

##### Returns

project description

#### 8.82.3.7 QDate Models::Project::getEndDate ( ) const

[Project::getEndDate](#) Return the *endDate* of the [Project](#)

##### Returns

the end date of the project

#### 8.82.3.8 QString Models::Project::getName ( ) const

[Project::getName](#) Return the project name.

##### Returns

project name

#### 8.82.3.9 void Models::Project::hydrat ( int *id* ) [virtual]

[Project::hydrat](#) Insert project data which is specified by *id* in the database.

##### Parameters

<i>id</i>	<a href="#">Project</a> identify
-----------	----------------------------------

Implements [Models::IModel](#).

#### 8.82.3.10 bool Models::Project::operator!= ( const [Project](#) & *p* )

[Project::operator ==](#) Re-define the operator "!=" to compare if the current project is differnt to the other [Project](#) *p*  
Return TRUE if both projects are different, else FALSE.

##### Parameters

---

<i>c</i>	<a href="#">Project</a> to compare
----------	------------------------------------

## Returns

boolean

8.82.3.11 `bool Models::Project::operator< ( const Project & p ) const`[Project::operator <](#) defines the operator "<" to compare two [Project](#) and to see if the first is anterior to the second.

## Parameters

<i>b</i>	the <a href="#">Project</a> to compare with the current <a href="#">Project</a>
----------	---------------------------------------------------------------------------------

## Returns

true if the [Project](#) are different else false8.82.3.12 `bool Models::Project::operator== ( const Project & p )`[Project::operator ==](#) Re-define the operator "==" to compare if the current project is the same to the other [Project](#) *p*  
Return TRUE if both projects are the same, else FALSE.

## Parameters

<i>c</i>	<a href="#">Project</a> to compare
----------	------------------------------------

## Returns

boolean

8.82.3.13 `void Models::Project::setBeginDate ( QDate beginDate )`[Project::setBeginDate](#) Modify *beginDate* of a [Project](#)

## Parameters

<i>beginDate</i>	the new date of creation of the project
------------------	-----------------------------------------

8.82.3.14 `void Models::Project::setCustomer ( QSharedPointer< Customer > customer )`[Project::setCustomer](#) Modify the *customer* linked to this project.

## Parameters

<i>customer</i>	New customer associated to this project
-----------------	-----------------------------------------

8.82.3.15 `void Models::Project::setDailyRate ( double dailyRate )`[Project::setDailyRate](#) Modify the daily rate *dailyRate* of the current project.

## Parameters

<i>dailyRate</i>	New daily rate associated to the current project
------------------	--------------------------------------------------

8.82.3.16 void Models::Project::setDescription ( const QString & *description* )

[Project::setDescription](#) Modify the project *description*

## Parameters

<i>description</i>	New project description
--------------------	-------------------------

8.82.3.17 void Models::Project::setEndDate ( QDate *endDate* )

[Project::setEndDate](#) Modify *endDate* of [Project](#)

## Parameters

<i>endDate</i>	the new end date of the project
----------------	---------------------------------

8.82.3.18 void Models::Project::setName ( const QString & *name* )

[Project::setName](#) Modify the project *name*

## Parameters

<i>name</i>	<a href="#">Project</a> name
-------------	------------------------------

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/project.h
- /home/travis/build/FACT-Team/FactDev/src/models/project.cpp

## 8.83 Gui::Widgets::Delegates::ProjectComboDelegate Class Reference

The [ProjectComboDelegate](#) class.

```
#include <projectcombodelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::ProjectComboDelegate:

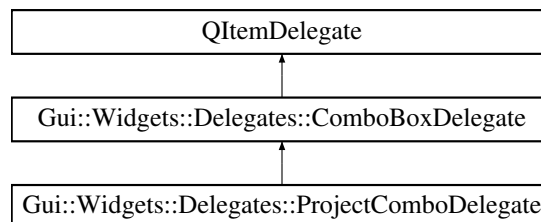

### Public Member Functions

- [ProjectComboDelegate](#) (QSharedPointer< [Models::Customer](#) > c, QObject \*parent=0)  
[ProjectComboDelegate::ProjectComboDelegate](#).



- `QWidget * createEditor (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const`  
*ProjectComboDelegate::createEditor* Return a ComboBox specified by *index* item defined by the *parent* widget and style option which are used to control how the editor widgets appears.
- `void paint (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const`  
*ProjectComboDelegate::paint* Renders the delegate using the given painter and style option for the item specified by *index*
- `void removeInCombo (QList< int > &l)`  
*ProjectComboDelegate::removeInCombo* Remove the items contained in the list *l* into the current ComboBox.
- `QMap< int, Models::Project > getProjects () const`  
*ProjectComboDelegate::getProjects* Return a list of projects linked to a Customer ID.
- `bool isLocked () const`  
*ProjectComboDelegate::isLocked* Return TRUE if is locked else FALSE.
- `void setLocked (bool locked)`  
*ProjectComboDelegate::setLocked* Change the state of the lock by a new value *locked*

### 8.83.1 Detailed Description

The [ProjectComboDelegate](#) class.

### 8.83.2 Constructor & Destructor Documentation

- 8.83.2.1 `Gui::Widgets::Delegates::ProjectComboDelegate::ProjectComboDelegate ( QSharedPointer< Models::Customer > c, QObject * parent = 0 )`

[ProjectComboDelegate::ProjectComboDelegate](#).

Parameters

<i>c</i>	
<i>parent</i>	

### 8.83.3 Member Function Documentation

- 8.83.3.1 `QWidget * Gui::Widgets::Delegates::ProjectComboDelegate::createEditor ( QWidget * parent, const QStyleOptionViewItem & option, const QModelIndex & index ) const` [virtual]

[ProjectComboDelegate::createEditor](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style option which are used to control how the editor widgets appears.

Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

Returns

ComboBox

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

8.83.3.2 `QMap< int, Models::Project > Gui::Widgets::Delegates::ProjectComboDelegate::getProjects ( ) const`

[ProjectComboDelegate::getProjects](#) Return a list of projects linked to a Customer ID.

Returns

Projets of a Customer

8.83.3.3 `bool Gui::Widgets::Delegates::ProjectComboDelegate::isLocked ( ) const`

[ProjectComboDelegate::isLocked](#) Return TRUE if is locked else FALSE.

Returns

boolean

8.83.3.4 `void Gui::Widgets::Delegates::ProjectComboDelegate::paint ( QPainter * painter, const QStyleOptionViewItem & option, const QModelIndex & index ) const [virtual]`

[ProjectComboDelegate::paint](#) Renders the delegate using the given *painter* and style *option* for the item specified by *index*

Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

8.83.3.5 `void Gui::Widgets::Delegates::ProjectComboDelegate::setLocked ( bool locked )`

[ProjectComboDelegate::setLocked](#) Change the state of the lock by a new value *locked*

Parameters

<i>locked</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/projectcombodelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/projectcombodelegate.cpp

## 8.84 Gui::Widgets::WdgModels::ProjectContributoriesTableModel Class Reference

The [ProjectContributoriesTableModel](#) class Table model of contributories linked to projects.

```
#include <projectcontributoriesstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ProjectContributoriesTableModel:



## Public Member Functions

- [ProjectContributoriesTableModel](#) (QObject \*parent=0)  
*[ProjectContributoriesTableModel::ProjectContributoriesTableModel](#) Construct a [ProjectContributoriesTableModel](#).*
- int [rowCount](#) (const QModelIndex &) const  
*[ProjectContributoriesTableModel::rowCount](#) Number of contributories row.*
- int [columnCount](#) (const QModelIndex &) const  
*[ProjectContributoriesTableModel::columnCount](#) Number of column of a contributory.*
- QVariant [data](#) (const QModelIndex &index, int role) const  
*[ProjectContributoriesTableModel::data](#) Obtains data of a specify cell.*
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role) const  
*[ProjectContributoriesTableModel::headerData](#) Obtains header title of table.*
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)  
*[ProjectContributoriesTableModel::setData](#) Change data of a cell.*
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const  
*[ProjectContributoriesTableModel::flags](#) Differents table flags.*
- void [append](#) (QPair< [Models::Project](#) \*, [Models::Rate](#) > p)  
*[ProjectContributoriesTableModel::append](#) Add a new rate p to a Project.*
- void [append](#) ()  
*[ProjectContributoriesTableModel::append](#) Add the current element to the list.*
- bool [allProjectsChosen](#) ()  
*[ProjectContributoriesTableModel::allProjectsChosen](#) Return TRUE if all projects have been selected else FALSE.*
- QList< int > & [getSelectedProjects](#) ()  
*[ProjectContributoriesTableModel::getSelectedProjects](#) Return the list of the Project id which are selected.*
- void [remove](#) (int index)  
*[ProjectContributoriesTableModel::remove](#) Remove the element to the index*
- QPair< [Models::Project](#) \*, [Models::Rate](#) > [getProject](#) (const int row)  
*[ProjectContributoriesTableModel::getProject](#) Return the project and it rate linked which correspond to the row*
- QList< QPair< [Models::Project](#) \*, [Models::Rate](#) > > [getProjects](#) (void)  
*[ProjectContributoriesTableModel::getProjects](#) Return a list of the set of projects and their rates linked.*

### 8.84.1 Detailed Description

The [ProjectContributoriesTableModel](#) class Table model of contributories linked to projects.

Author

Antoine de Roquemaurel

### 8.84.2 Constructor & Destructor Documentation

8.84.2.1 [Gui::Widgets::WdgModels::ProjectContributoriesTableModel::ProjectContributoriesTableModel](#) ( [QObject](#) \* *parent* = 0 )

[ProjectContributoriesTableModel::ProjectContributoriesTableModel](#) Construct a [ProjectContributoriesTableModel](#).

## Parameters

<i>parent</i>	Parent widget
---------------	---------------

## 8.84.3 Member Function Documentation

8.84.3.1 `bool Gui::Widgets::WdgModels::ProjectContributoriesTableModel::allProjectsChosen ( )`

[ProjectContributoriesTableModel::allProjectsChosen](#) Return TRUE if all projects have been selected else FALSE.

## Returns

boolean All projects selected

8.84.3.2 `void Gui::Widgets::WdgModels::ProjectContributoriesTableModel::append ( QPair< Models::Project *, Models::Rate > p )`

[ProjectContributoriesTableModel::append](#) Add a new rate *p* to a Project.

## Parameters

<i>p</i>	
----------	--

8.84.3.3 `int Gui::Widgets::WdgModels::ProjectContributoriesTableModel::columnCount ( const QModelIndex & ) const`

[ProjectContributoriesTableModel::columnCount](#) Number of column of a contributory.

## Returns

The number of column

8.84.3.4 `QVariant Gui::Widgets::WdgModels::ProjectContributoriesTableModel::data ( const QModelIndex & index, int role ) const`

[ProjectContributoriesTableModel::data](#) Obtains data of a specify cell.

## Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

## Returns

The data of cell

8.84.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::ProjectContributoriesTableModel::flags ( const QModelIndex & index ) const`

[ProjectContributoriesTableModel::flags](#) Differents table flags.

## Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

## Returns

Flags

8.84.3.6 QPair< Models::Project \*, Models::Rate > Gui::Widgets::WdgModels::ProjectContributoriesTableModel::getProject ( const int *row* )

[ProjectContributoriesTableModel::getProject](#) Return the project and it rate linked which correspond to the *row*

## Parameters

<i>row</i>	Row of the project to get
------------	---------------------------

## Returns

a Project and it rate

**8.84.3.7** `QList< QPair< Models::Project *, Models::Rate > > Gui::Widgets::WdgModels::ProjectContributoriesTableModel::getProjects ( void )`

[ProjectContributoriesTableModel::getProjects](#) Return a list of the set of projects and their rates linked.

## Returns

List of Projects and Rates linked

**8.84.3.8** `QList< int > & Gui::Widgets::WdgModels::ProjectContributoriesTableModel::getSelectedProjects ( )`

[ProjectContributoriesTableModel::getSelectedProjects](#) Return the list of the Project id which are selected.

## Returns

List of ID Project

**8.84.3.9** `QVariant Gui::Widgets::WdgModels::ProjectContributoriesTableModel::headerData ( int section, Qt::Orientation orientation, int role ) const`

[ProjectContributoriesTableModel::headerData](#) Obtains header title of table.

## Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

## Returns

The Title header of column

**8.84.3.10** `void Gui::Widgets::WdgModels::ProjectContributoriesTableModel::remove ( int index )`

[ProjectContributoriesTableModel::remove](#) Remove the element to the *index*

## Parameters

<i>index</i>	Index of the element to remove
--------------	--------------------------------

**8.84.3.11** `int Gui::Widgets::WdgModels::ProjectContributoriesTableModel::rowCount ( const QModelIndex & ) const`

[ProjectContributoriesTableModel::rowCount](#) Number of contributories row.

## Returns

The number of contributories

8.84.3.12 `bool Gui::Widgets::WdgModels::ProjectContributoriesTableModel::setData ( const QModelIndex & index, const QVariant & value, int role = Qt::EditRole )`

[ProjectContributoriesTableModel::setData](#) Change data of a cell.

## Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

## Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectcontributoriestablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectcontributoriestablemodel.cpp

## 8.85 Databases::ProjectDatabase Class Reference

The [ProjectDatabase](#) class Project table database.

```
#include <projectdatabase.h>
```

Inheritance diagram for Databases::ProjectDatabase:



### Public Member Functions

- [Models::Project](#) \* [getProject](#) (const int pld)  
*ProjectDatabase::getProject* Get informations about the project identified by 'pld'.
- [Models::Project](#) \* [getProject](#) (QStringQuery &q)  
*ProjectDatabase::getProject*.
- int [addProject](#) (const [Models::Project](#) &)  
*ProjectDatabase::addProject* Add the project 'pProject' to the database.
- void [updateProject](#) (const [Models::Project](#) &)  
*ProjectDatabase::updateProject* Update informations about the project.
- void [removeProject](#) (const int pld)  
*removeProject* Remove the project with the id 'pld'
- int [getNbProjects](#) ()  
*ProjectDatabase::getNbProjects* Return the number of projects existing.
- int [getNbProjects](#) (const int customerId)  
*Get the number of projects.*
- QMap< int, [Models::Project](#) > [getProjectsOfCustomer](#) (QSharedPointer< [Models::Customer](#) > c, const bool projectLocked=true)  
*getProjectsOfCustomer* Return all projects of a customer
- QList< [Models::Project](#) > [getProjects](#) (const int customerId)  
*getProjects* Return all projects of a customer
- [WdgModels::ProjectsTableModel](#) \* [getProjectsTable](#) (const int pld) throw (DbException\*)  
*getProjectsTable* Return all projects of a customer in QStandardItemModel
- QSharedPointer< [Project](#) > [updateProject](#) (QStringQuery &q)



- getProject* Obtain a project without new query
- `QList< Project * > getAllProjects ()`  
*Project::getAllProjects* Return the list of projects.
- `double getCostProjects (QList< Project * > projects)`  
*ProjectDatabase::getCostProjects* compute the cost of the project list given in parameter.

## Static Public Member Functions

- `static ProjectDatabase * instance () throw (DbException*)`  
*ProjectDatabase::getInstance* Return an instance of [ProjectDatabase](#).

## Additional Inherited Members

### 8.85.1 Detailed Description

The [ProjectDatabase](#) class Project table database.

#### Author

Florent Berbie

#### See Also

[Database](#)  
[Project](#)

### 8.85.2 Member Function Documentation

#### 8.85.2.1 `int Databases::ProjectDatabase::addProject ( const Models::Project & pProject )`

[ProjectDatabase::addProject](#) Add the project 'pProject' to the database.

#### Returns

project id

#### 8.85.2.2 `QList< Project * > Databases::ProjectDatabase::getAllProjects ( )`

*Project::getAllProjects* Return the list of projects.

#### Returns

Projects list

#### 8.85.2.3 `double Databases::ProjectDatabase::getCostProjects ( QList< Project * > projects )`

[ProjectDatabase::getCostProjects](#) compute the cost of the project list given in parameter.

## Parameters

<i>projects</i>	the list of projects
-----------------	----------------------

## Returns

the cost of the list given

**8.85.2.4** `int Databases::ProjectDatabase::getNbProjects ( )`

[ProjectDatabase::getNbProjects](#) Return the number of projects existing.

## Returns

number of projects

**8.85.2.5** `int Databases::ProjectDatabase::getNbProjects ( const int customerId )`

Get the number of projects.

## Parameters

<i>customerId</i>	If customerId isn't specified if it's not valid, get all projects else get the specified customer projects
-------------------	------------------------------------------------------------------------------------------------------------

## Returns

Number of projects in the database for all or for a customer

**8.85.2.6** `Models::Project * Databases::ProjectDatabase::getProject ( const int pld )`

[ProjectDatabase::getProject](#) Get informations about the project identified by 'pld'.

## Parameters

<i>pld</i>	project
------------	---------

## Returns

the project

**8.85.2.7** `Models::Project * Databases::ProjectDatabase::getProject ( QSqlQuery & q )`

[ProjectDatabase::getProject](#).

## Parameters

<i>q</i>	
----------	--

## Returns

**8.85.2.8** `QList< Project > Databases::ProjectDatabase::getProjects ( const int customerId )`

[getProjects](#) Return all projects of a customer

## Parameters

<i>customerId</i>	The customer id
-------------------	-----------------

## Returns

List with all projects of customer

**8.85.2.9** `QMap< int, Models::Project > Databases::ProjectDatabase::getProjectsOfCustomer ( QSharedPointer< Models::Customer > c, const bool projectLocked = true )`

getProjectsOfCustomer Return all projects of a customer

## Parameters

<i>c</i>	The customer
----------	--------------

## Returns

All projects of c with id in key

**8.85.2.10** `WdgModels::ProjectsTableModel * Databases::ProjectDatabase::getProjectsTable ( const int pld ) throw DbException *`

getProjectsTable Return all projects of a customer in QStandardItemModel

## Parameters

<i>filter</i>	Select only projects who are specified by <i>filter</i>
---------------	---------------------------------------------------------

## Returns

QStandardItemModel an item model for QTableView

**8.85.2.11** `ProjectDatabase * Databases::ProjectDatabase::instance ( ) throw DbException *` [static]

ProjectDatabase::getInstance Return an instance of [ProjectDatabase](#).

## Returns

Instance of [ProjectDatabase](#)

**8.85.2.12** `void Databases::ProjectDatabase::removeProject ( const int pld )`

removeProject Remove the project with the id 'pld'

## Parameters

<i>pld</i>	project id
------------	------------

**8.85.2.13** `QSharedPointer< Models::Project > Databases::ProjectDatabase::updateProject ( QSqlQuery & q )`

getProject Obtain a project without new query

**Parameters**

<i>q</i>	The query to use
----------	------------------

**Returns**

The project linked to *q*

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/projectdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/projectdatabase.cpp

**8.86 ProjectDatabaseTest Class Reference**

Inheritance diagram for ProjectDatabaseTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/projectdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/projectdatabasetest.cpp

**8.87 ProjectModelTest Class Reference**

Inheritance diagram for ProjectModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/projectmodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/projectmodeltest.cpp

**8.88 Gui::Widgets::WdgModels::ProjectsTableModel Class Reference**

The [ProjectsTableModel](#) class for a Project table.

```
#include <projectstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ProjectsTableModel:



## Public Member Functions

- [ProjectsTableModel](#) ()  
*[ProjectsTableModel::ProjectsTableModel](#) Construct a [ProjectsTableModel](#).*
- int [rowCount](#) (const QModelIndex &) const  
*[ProjectsTableModel::rowCount](#) Number of projects row.*
- int [columnCount](#) (const QModelIndex &) const  
*[ProjectsTableModel::columnCount](#) Number of column of a Project.*
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const  
*[ProjectsTableModel::data](#) Obtains data of a specify cell.*
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const  
*[ProjectsTableModel::headerData](#) Obtains header title of table.*
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)  
*[ProjectsTableModel::setData](#) Change data of a cell.*
- void [append](#) (const [Project](#) &project)  
*[ProjectsTableModel::append](#) Add a new line in table.*
- void [remove](#) (const int i)  
*[ProjectsTableModel::remove](#) Remove a line.*
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const  
*[ProjectsTableModel::flags](#) Differents table flags.*
- int [count](#) ()  
*[ProjectsTableModel::count](#) Number of projects in table.*
- QList< [Project](#) > [getProjects](#) () const  
*[ProjectsTableModel::getProjects](#) Return the list of projects.*

### 8.88.1 Detailed Description

The [ProjectsTableModel](#) class for a Project table.

#### Author

Florent Berbie

#### See Also

[Project](#)

### 8.88.2 Constructor & Destructor Documentation

#### 8.88.2.1 Gui::Widgets::WdgModels::ProjectsTableModel::ProjectsTableModel ( )

[ProjectsTableModel::ProjectsTableModel](#) Construct a [ProjectsTableModel](#).

## Parameters

<i>parent</i>	Parent widget
---------------	---------------

### 8.88.3 Member Function Documentation

8.88.3.1 void Gui::Widgets::WdgModels::ProjectsTableModel::append ( const Project & *project* )

[ProjectsTableModel::append](#) Add a new line in table.

## Parameters

<i>Project</i>	The new Project
----------------	-----------------

8.88.3.2 int Gui::Widgets::WdgModels::ProjectsTableModel::columnCount ( const QModelIndex & ) const

[ProjectsTableModel::columnCount](#) Number of column of a Project.

## Returns

The number of column

8.88.3.3 int Gui::Widgets::WdgModels::ProjectsTableModel::count ( )

[ProjectsTableModel::count](#) Number of projects in table.

## Returns

The number of projects

8.88.3.4 QVariant Gui::Widgets::WdgModels::ProjectsTableModel::data ( const QModelIndex & *index*, int *role* = Qt::DisplayRole ) const

[ProjectsTableModel::data](#) Obtains data of a specify cell.

## Parameters

<i>index</i>	The cell who we want data
<i>role</i>	The role of set

## Returns

The data of cell

8.88.3.5 Qt::ItemFlags Gui::Widgets::WdgModels::ProjectsTableModel::flags ( const QModelIndex & *index* ) const

[ProjectsTableModel::flags](#) Differents table flags.

## Parameters

<i>index</i>	The cell who we want to know flags
--------------	------------------------------------

## Returns

Flags

8.88.3.6 `QList< Project > Gui::Widgets::WdgModels::ProjectsTableModel::getProjects ( void ) const`

[ProjectsTableModel::getProjects](#) Return the list of projects.

Returns

list of projects

8.88.3.7 `QVariant Gui::Widgets::WdgModels::ProjectsTableModel::headerData ( int section, Qt::Orientation orientation, int role = Qt::DisplayRole ) const`

[ProjectsTableModel::headerData](#) Obtains header title of table.

Parameters

<i>section</i>	The number of column
<i>orientation</i>	The table orientation
<i>role</i>	

Returns

The Title header of column

8.88.3.8 `void Gui::Widgets::WdgModels::ProjectsTableModel::remove ( const int i )`

[ProjectsTableModel::remove](#) Remove a line.

Parameters

<i>i</i>	The number of line to remove
----------	------------------------------

8.88.3.9 `int Gui::Widgets::WdgModels::ProjectsTableModel::rowCount ( const QModelIndex & ) const`

[ProjectsTableModel::rowCount](#) Number of projects row.

Returns

The number of projects

8.88.3.10 `bool Gui::Widgets::WdgModels::ProjectsTableModel::setData ( const QModelIndex & index, const QVariant & value, int role = Qt::EditRole )`

[ProjectsTableModel::setData](#) Change data of a cell.

Parameters

<i>index</i>	The cell to change data
<i>value</i>	The new value
<i>role</i>	The role of cell

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/projectstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/projectstablemodel.cpp

## 8.89 Gui::Widgets::ProjectsWidget Class Reference

The [ProjectsWidget](#) class Actions on Project.

```
#include <projectswidget.h>
```

Inheritance diagram for Gui::Widgets::ProjectsWidget:



### Public Slots

- void [newProject](#) ()  
*ProjectsWidget::addProject* Event which sends a signal to add a new project.
- void [editSelectedProject](#) ()  
*ProjectsWidget::editSelectedProject* Event which sends a signal to edit the project selected.
- void [removeSelectedProject](#) ()  
*ProjectsWidget::removeSelectedProject* Event which sends a signal to remove the project selected.
- void [updateBtn](#) (bool b, bool remove=true, bool isLocked=false)  
*ProjectsWidget::updateBtn* Update the toolbar in tblProjects.
- void [lockSelectedProject](#) ()  
*lockSelectedProject* Event which sends a signal to lock the selected project.

### Signals

- void [addProject](#) ()  
*ProjectsWidget::addProject* Add a new project to the current Customer.
- void [editProject](#) ()  
*ProjectsWidget::editProject* Edit the current Project selected.
- void [removeProject](#) ()  
*ProjectsWidget::removeProject* Remove the current Project selected.
- void [lockProject](#) ()  
*lockProject* Lock the current project.

### Public Member Functions

- [ProjectsWidget](#) (QWidget \*parent=0)  
*ProjectsWidget::ProjectsWidget* Construct a [ProjectsWidget](#).

#### 8.89.1 Detailed Description

The [ProjectsWidget](#) class Actions on Project.

Author

Florent Berbie



## 8.89.2 Constructor & Destructor Documentation

8.89.2.1 Gui::Widgets::ProjectsWidget::ProjectsWidget ( QWidget \* *parent* = 0 ) [explicit]

[ProjectsWidget::ProjectsWidget](#) Construct a [ProjectsWidget](#).

## Parameters

<i>parent</i>	
---------------	--

## 8.89.3 Member Function Documentation

8.89.3.1 void Gui::Widgets::ProjectsWidget::updateBtn ( bool *b*, bool *remove* = true, bool *isLocked* = false ) [slot]

[ProjectsWidget::updateBtn](#) Update the toolbar in tblProjects.

## Parameters

<i>boolean</i>	if a row is selected
----------------	----------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/projectswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/projectswidget.cpp

## 8.90 Mustache::QtVariantContext Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::QtVariantContext:



## Public Types

- typedef QString(\* [fn\\_t](#))(const QString &, [Mustache::Renderer](#) \*, [Mustache::Context](#) \*)

## Public Member Functions

- **QtVariantContext** (const QVariant &root, [PartialResolver](#) \*resolver=0)
- virtual QString [stringValue](#) (const QString &key) const
- virtual bool [isFalse](#) (const QString &key) const
- virtual int [listCount](#) (const QString &key) const
- virtual void [push](#) (const QString &key, int index=-1)
- virtual void [pop](#) ()
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &\_template, [Mustache::Renderer](#) \*renderer)

## 8.90.1 Detailed Description

A context implementation which wraps a QVariantHash or QVariantMap.

## 8.90.2 Member Typedef Documentation

### 8.90.2.1 `typedef QString(* Mustache::QtVariantContext::fn_t)(const QString &, Mustache::Renderer *, Mustache::Context *)`

Construct a [QtVariantContext](#) which wraps a dictionary in a [QVariantHash](#) or a [QVariantMap](#).

## 8.90.3 Member Function Documentation

### 8.90.3.1 `bool QtVariantContext::canEval ( const QString & key ) const [virtual]`

Returns true if [eval\(\)](#) should be used to render section tags using `key`. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result. [canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

### 8.90.3.2 `QString QtVariantContext::eval ( const QString & key, const QString & _template, Mustache::Renderer * renderer ) [virtual]`

Callback used to render a template section with the given `key`. `renderer` will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

### 8.90.3.3 `bool QtVariantContext::isFalse ( const QString & key ) const [virtual]`

Returns true if the value for `key` is 'false' or an empty list. 'False' values typically include empty strings, the boolean value false etc.

When processing a section Mustache tag, the section is not rendered if the key is false, or for an inverted section tag, the section is only rendered if the key is false.

Implements [Mustache::Context](#).

### 8.90.3.4 `int QtVariantContext::listCount ( const QString & key ) const [virtual]`

Returns the number of items in the list value for `key` or 0 if the value for `key` is not a list.

Implements [Mustache::Context](#).

### 8.90.3.5 `void QtVariantContext::pop ( ) [virtual]`

Exit the current context.

Implements [Mustache::Context](#).

**8.90.3.6** void QtVariantContext::push ( const QString & key, int index = -1 ) [virtual]

Set the current context to the value for `key`. If `index` is  $\geq 0$ , set the current context to the `index`'th value in the list value for `key`.

Implements [Mustache::Context](#).

**8.90.3.7** QString QtVariantContext::stringValue ( const QString & key ) const [virtual]

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Implements [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

## 8.91 Models::Rate Class Reference

The [Rate](#) class [Rate](#) of a prestation.

```
#include <rate.h>
```

### Public Member Functions

- [Rate](#) ()  
*[Rate::Rate](#) Construct a [Rate](#).*
- [Rate](#) (double hourly)  
*[Rate::Rate](#) Construct a [Rate](#) with an hourly rate.*
- [Rate](#) (int idBilling, int idProject)  
*[Rate::Rate](#) Construct a [Rate](#) for the [Billing](#) with idBilling as identify and from the project identified by idProject*
- void [setDailyRate](#) (const double &)  
*[Rate::setDailyRate](#) Modify the daily rate with the new value.*
- void [setHourlyRate](#) (const double &)  
*[Rate::setHourlyRate](#) Modify the hourly rate with the new value.*
- double [getDailyRate](#) () const  
*[Rate::getDailyRate](#) Return the daily rate.*
- double [getHourlyRate](#) () const  
*[Rate::getHourlyRate](#) Return the hourly rate.*
- int [getNbDailyHours](#) () const  
*[Rate::getNbDailyHours](#) Return the number of daily hours.*
- double [getLegalRate](#) () const  
*[Rate::getLegalRate](#) Return the legal rate.*

### 8.91.1 Detailed Description

The [Rate](#) class [Rate](#) of a prestation.

Author

Antoine de Roquemaurel

## 8.91.2 Constructor & Destructor Documentation

### 8.91.2.1 Models::Rate::Rate ( double *hourly* )

[Rate::Rate](#) Construct a [Rate](#) with an hourly rate.

Parameters

<i>hourly</i>	Hourly rate
---------------	-------------

### 8.91.2.2 Models::Rate::Rate ( int *idBilling*, int *idProject* )

[Rate::Rate](#) Construct a [Rate](#) for the [Billing](#) with *idBilling* as identify and from the project identified by *idProject*

Parameters

<i>idBilling</i>	<a href="#">Billing</a> identify
<i>idProject</i>	<a href="#">Project</a> identify

## 8.91.3 Member Function Documentation

### 8.91.3.1 double Models::Rate::getDailyRate ( ) const

[Rate::getDailyRate](#) Return the daily rate.

Returns

### 8.91.3.2 double Models::Rate::getHourlyRate ( ) const

[Rate::getHourlyRate](#) Return the hourly rate.

Returns

### 8.91.3.3 double Models::Rate::getLegalRate ( ) const

[Rate::getLegalRate](#) Return the legal rate.

Returns

### 8.91.3.4 int Models::Rate::getNbDailyHours ( ) const

[Rate::getNbDailyHours](#) Return the number of daily hours.


Returns

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/rate.h
- /home/travis/build/FACT-Team/FactDev/src/models/rate.cpp

## 8.92 Databases::RateDatabase Class Reference

Inheritance diagram for Databases::RateDatabase:



### Public Member Functions

- void [addRateProject](#) (int idProject, int idBilling, double hourlyRate)  
[RateDatabase::addRateProject](#) Add a new rate *hourlyRate* to the Project identified by *idProject* of the Billing with *idBilling* as identify.
- double [getRate](#) (const int idBilling, const int idProject) const  
[RateDatabase::getRate](#) Return the rate of the Project identified by *idProject* of the Billing with *idBilling* as identify.
- void [updateRateProject](#) (int idProject, int idBilling, double hourlyRate)  
[RateDatabase::updateRateProject](#) Update the current rate by the new *hourlyRate* of the Project identified by *idProject* of the Billing with *idBilling* as identify.

### Static Public Member Functions

- static [RateDatabase](#) \* [instance](#) () throw (DbException\*)  
[RateDatabase::getInstance](#) Return an instance of [RateDatabase](#).

### Additional Inherited Members

#### 8.92.1 Member Function Documentation

8.92.1.1 void Databases::RateDatabase::addRateProject ( int *idProject*, int *idBilling*, double *hourlyRate* )

[RateDatabase::addRateProject](#) Add a new rate *hourlyRate* to the Project identified by *idProject* of the Billing with *idBilling* as identify.

Parameters

<i>idProject</i>	Project identify
<i>idBilling</i>	Billing identify
<i>hourlyRate</i>	New hourly rate

8.92.1.2 double Databases::RateDatabase::getRate ( const int *idBilling*, const int *idProject* ) const

[RateDatabase::getRate](#) Return the rate of the Project identified by *idProject* of the Billing with *idBilling* as identify.

Parameters

<i>idBilling</i>	Billing identify
<i>idProject</i>	Project identify

Returns

Rate of the Project of a Billing

8.92.1.3 **RateDatabase** \* Databases::RateDatabase::instance ( ) throw DbException \*) [static]

RateDatabase::getInstance Return an instance of [RateDatabase](#).

Returns

Instance of [RateDatabase](#)

8.92.1.4 void Databases::RateDatabase::updateRateProject ( int *idProject*, int *idBilling*, double *hourlyRate* )

[RateDatabase::updateRateProject](#) Update the current rate by the new *hourlyRate* of the Project identified by *id-Project* of the Billing with *idBilling* as identify.

Parameters

<i>idProject</i>	Project identify
<i>idBilling</i>	Billing identify
<i>hourlyRate</i>	New hourly rate

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/ratedatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/ratedatabase.cpp

## 8.93 RateModelTest Class Reference

Inheritance diagram for RateModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/ratemodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/ratemodeltest.cpp

## 8.94 Gui::Widgets::RateWidget Class Reference

Class for display Rate.

```
#include <ratewidget.h>
```

Inheritance diagram for Gui::Widgets::RateWidget:



## Public Slots

- void [setDailyRate](#) ()  
*setDailyRate* Set a new value for the daily rate
- void [setHourlyRate](#) ()  
*setHourlyRate* Set a new value for the hourly rate

## Public Member Functions

- [RateWidget](#) (QWidget \*parent=0)  
*RateWidget::RateWidget* Construct a rate widget.
- void [initRate](#) ()  
*RateWidget::initRate* Initialize the rate.
- void [setWidgetDailyRateValue](#) (double value)  
*RateWidget::setWidgetDailyRateValue* Modify the value of the daily rate spin box component.
- double [getDailyRate](#) ()  
*RateWidget::getDailyRate* Get the daily rate.
- double [getHourlyRate](#) ()  
*RateWidget::getHourlyRate* Get the hourly rate.
- void [setWidgetHourlyRateValue](#) (double value)  
*RateWidget::setWidgetHourlyRateValue* Modify the value of the hourly rate spin box component.
- void [updateConversionRate](#) ()  
*updateConversionRate* Update daily rate or hourly rate

### 8.94.1 Detailed Description

Class for display Rate.

Author

Florent Berbie

### 8.94.2 Constructor & Destructor Documentation

8.94.2.1 [Gui::Widgets::RateWidget::RateWidget](#) ( [QWidget \\* parent = 0](#) ) [[explicit](#)]

[RateWidget::RateWidget](#) Construct a rate widget.

Parameters

<i>parent</i>	The QWidget parent
---------------	--------------------

### 8.94.3 Member Function Documentation

8.94.3.1 double [Gui::Widgets::RateWidget::getDailyRate](#) ( )

[RateWidget::getDailyRate](#) Get the daily rate.

Returns

The daily rate



8.94.3.2 `double Gui::Widgets::RateWidget::getHourlyRate ( )`

[RateWidget::getHourlyRate](#) Get the hourly rate.

Returns

The hourly rate

8.94.3.3 `void Gui::Widgets::RateWidget::setDailyRate ( ) [slot]`

`setDailyRate` Set a new value for the daily rate

Parameters

<i>dailyRate</i>	The new daily rate
------------------	--------------------

8.94.3.4 `void Gui::Widgets::RateWidget::setHourlyRate ( ) [slot]`

`setHourlyRate` Set a new value for the hourly rate

Parameters

<i>hourlyRate</i>	The new hourly rate
-------------------	---------------------

8.94.3.5 `void Gui::Widgets::RateWidget::setWidgetDailyRateValue ( double value )`

[RateWidget::setWidgetDailyRateValue](#) Modify the *value* of the daily rate spin box component.

Parameters

<i>value</i>	New Value
--------------	-----------

8.94.3.6 `void Gui::Widgets::RateWidget::setWidgetHourlyRateValue ( double value )`

[RateWidget::setWidgetHourlyRateValue](#) Modify the *value* of the hourly rate spin box component.

Parameters

<i>value</i>	New value
--------------	-----------

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/ratewidget.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/ratewidget.cpp`

## 8.95 Mustache::Renderer Class Reference

```
#include <mustache.h>
```

### Public Member Functions

- `QString render (const QString &_template, Context *context)`
- `QString error () const`
- `int errorPos () const`

- QString [errorPartial](#) () const
- void [setTagMarkers](#) (const QString &startMarker, const QString &endMarker)

### 8.95.1 Detailed Description

Renders Mustache templates, replacing mustache tags with values from a provided context.

### 8.95.2 Member Function Documentation

#### 8.95.2.1 QString [Renderer::error](#) ( ) const

Returns a message describing the last error encountered by the previous [render\(\)](#) call.

#### 8.95.2.2 QString [Renderer::errorPartial](#) ( ) const

Returns the name of the partial where the error occurred, or an empty string if the error occurred in the main template.

#### 8.95.2.3 int [Renderer::errorPos](#) ( ) const

Returns the position in the template where the last error occurred when rendering the template or -1 if no error occurred.

If the error occurred in a partial template, the returned position is the offset in the partial template.

#### 8.95.2.4 QString [Renderer::render](#) ( const QString &\_template, Context \* context )

Render a Mustache template, using `context` to fetch the values used to replace Mustache tags.

#### 8.95.2.5 void [Renderer::setTagMarkers](#) ( const QString &startMarker, const QString &endMarker )

Sets the default tag start and end markers. This can be overridden within a template.

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

## 8.96 Models::Search Class Reference

The [Search](#) class.

```
#include <search.h>
```

### Public Member Functions

- [Search](#) ()  
*[Search::Search](#) Construct a search.*
- [~Search](#) ()  
*[Search::Search](#) Destruct a search.*
- QString [getFilter](#) ()

- Search::getFilter* Return the search filter.
- void **filterOnVarcharElements** (QString &filter, const QStringList list, QString element)
  - Search::filterOnVarcharElements* Search, for each word of the list from the filter, if it corresponds to the element in the database.
  - void **filterOnNumberElements** (QString &filter, const QStringList list, QString element)
  - Search::filterOnNumberElements* Search, for each number of the list from the filter, if it corresponds to the element in the database.
  - void **filterOnCompany** (QString &filter, const QStringList list)
  - Search::filterOnCompany* Search all companies contained in the list of the filter
  - void **filterOnReferentLastname** (QString &filter, const QStringList list)
  - Search::filterOnReferentLastname* Search all referents last name contained in the list of the filter
  - void **filterOnProjects** (QString &filter, const QStringList list)
  - Search::filterOnProjects* Search all projects contained in the list of the filter
  - void **filterOnContributories** (QString &filter, const QStringList list)
  - Search::filterOnContributories* Search all contributories contained in the list of the filter
  - void **filterOnBillsOrQuotes** (QString &filter, const QStringList list)
  - Search::filterOnBillsOrQuotes* Search all bills or quotes which are contained in the list of the filter
  - void **filterOnCustomersWithoutProject** (QString &filter, const QStringList list)
  - Search::filterOnCustomersWithoutProject* Search all customers which are contained in the list of the filter
- bool **getSearchInCompanies** () const
  - Search::getSearchInCompanies* Return if we search a company.
  - void **setSearchInCompanies** (bool searchInCompanies)
  - Search::setSearchInCompanies* Modify the filter of companies search.
  - bool **getSearchInReferentLastname** () const
  - Search::getSearchInReferentLastname* Return if we search a Last name referent.
  - void **setSearchInReferentLastname** (bool searchInReferentLastname)
  - Search::setSearchInReferentLastname* Modify the filter of referents last name search.
  - bool **getSearchInProjects** () const
  - Search::getSearchInProjects* Return TRUE if it exists one or more projets in database.
  - void **setSearchInProjects** (bool searchInProjects)
  - Search::setSearchInProjects* Modify the filter of projects search.
  - bool **searchInContributories** () const
  - Search::getSearchInContributories* Return TRUE if it exists one or more projets in database.
  - void **setSearchInContributories** (bool searchInContributories)
  - Search::setSearchInContributories* Modify the filter of contributories search.
  - bool **getSearchInBillsQuotes** () const
  - Search::searchInBillsQuotes* Return TRUE if it exists one or more bills or quotes in database.
  - void **setSearchInBillsQuotes** (bool searchInBillsQuotes)
  - Search::setSearchInBillsQuotes* Modify the filter of bills and quotes search.
  - bool **getGroupFilter** () const
  - Search::getGroupFilter* Return if the filter is activated.
  - void **setGroupFilter** (bool getGroupFilter)
  - Search::setGroupFilter* Modify if we active search filter.
  - QString **getText** () const
  - Search::getText* Return sql portion of filter.
  - void **setText** (const QString &getText)
  - Search::setText* Modify sql portion.

### 8.96.1 Detailed Description

The [Search](#) class.

#### Author

Antoine de Roquemaurel  
Florent Berbie

### 8.96.2 Member Function Documentation

#### 8.96.2.1 void Models::Search::filterOnBillsOrQuotes ( QString & *filter*, const QStringList *list* )

[Search::filterOnBillsOrQuotes](#) [Search](#) all bills or quotes which are contained in the *list* of the *filter*

##### Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of bills or quotes

#### 8.96.2.2 void Models::Search::filterOnCompany ( QString & *filter*, const QStringList *list* )

[Search::filterOnCompany](#) [Search](#) all companies contained in the *list* of the *filter*

##### Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of companies

#### 8.96.2.3 void Models::Search::filterOnContributories ( QString & *filter*, const QStringList *list* )

[Search::filterOnContributories](#) [Search](#) all contributories contained in the *list* of the *filter*

##### Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of contributories

#### 8.96.2.4 void Models::Search::filterOnCustomersWithoutProject ( QString & *filter*, const QStringList *list* )

[Search::filterOnCustomersWithoutProject](#) [Search](#) all customers which are contained in the *list* of the *filter*

##### Parameters

<i>filter</i>	Text inputed in searchbar
<i>list</i>	List of bills or quotes

#### 8.96.2.5 void Models::Search::filterOnNumberElements ( QString & *filter*, const QStringList *list*, QString *element* )

[Search::filterOnNumberElements](#) [Search](#), for each number of the *list* from the *filter*, if it corresponds to the *element* in the database.

## Parameters

<i>filter</i>	Text inputted in the searchbar
<i>list</i>	List of numbers from the <i>filter</i>
<i>element</i>	Attribute name into the database

8.96.2.6 void Models::Search::filterOnProjects ( QString & *filter*, const QStringList *list* )

[Search::filterOnProjects](#) Search all projects contained in the *list* of the *filter*

## Parameters

<i>filter</i>	Text inputted in searchbar
<i>list</i>	List of projects

8.96.2.7 void Models::Search::filterOnReferentLastname ( QString & *filter*, const QStringList *list* )

[Search::filterOnReferentLastname](#) Search all referents last name contained in the *list* of the *filter*

## Parameters

<i>filter</i>	Text inputted in searchbar
<i>list</i>	List of referent last name

8.96.2.8 void Models::Search::filterOnVarcharElements ( QString & *filter*, const QStringList *list*, QString *element* )

[Search::filterOnVarcharElements](#) Search, for each word of the *list* from the *filter*, if it corresponds to the *element* in the database.

## Parameters

<i>filter</i>	Text inputted in the searchbar
<i>list</i>	List of words from the <i>filter</i>
<i>element</i>	Attribute name into the database

8.96.2.9 QString Models::Search::getFilter ( )

[Search::getFilter](#) Return the search filter.

## Returns

filter selected (sql portion)

8.96.2.10 bool Models::Search::getGroupFilter ( ) const

[Search::getGroupFilter](#) Return if the filter is activated.

## Returns

boolean if search filter is activated

8.96.2.11 bool Models::Search::getSearchInBillsQuotes ( ) const

[Search::searchInBillsQuotes](#) Return TRUE if it exists one or more bills or quotes in database.

**Returns**

boolean if bills or quotes are existing

8.96.2.12 `bool Models::Search::getSearchInCompanies ( ) const`

[Search::getSearchInCompanies](#) Return if we search a company.

**Returns**

boolean if we search a company

8.96.2.13 `bool Models::Search::getSearchInProjects ( ) const`

[Search::getSearchInProjects](#) Return TRUE if it exists one or more projets in database.

**Returns**

boolean if project are existing

8.96.2.14 `bool Models::Search::getSearchInReferentLastname ( ) const`

[Search::getSearchInReferentLastname](#) Return if we search a Last name referent.

**Returns**

boolean if search concerns the last name of referent

8.96.2.15 `QString Models::Search::getText ( ) const`

[Search::getText](#) Return sql portion of filter.

**Returns**

QString the sql portion

8.96.2.16 `bool Models::Search::searchInContributories ( ) const`

[Search::getSearchInContributories](#) Return TRUE if it exists one or more projets in database.

**Returns**

boolean if contributories are existing

8.96.2.17 `void Models::Search::setGroupFilter ( bool getGroupFilter )`

[Search::setGroupFilter](#) Modify if we active search filter.

## Parameters

<i>getGroupFilter</i>	Get if filter is actived
-----------------------	--------------------------

8.96.2.18 void Models::Search::setSearchInBillsQuotes ( bool *searchInBillsQuotes* )

[Search::setSearchInBillsQuotes](#) Modify the filter of bills and quotes search.

## Parameters

<i>searchInBills-Quotes</i>	<a href="#">Search</a> in bills or quotes which are concerned
-----------------------------	---------------------------------------------------------------

8.96.2.19 void Models::Search::setSearchInCompanies ( bool *searchInCompanies* )

[Search::setSearchInCompanies](#) Modify the filter of companies search.

## Parameters

<i>getSearchIn-Companies</i>	<a href="#">Search</a> in companies is concerned
------------------------------	--------------------------------------------------

8.96.2.20 void Models::Search::setSearchInContributories ( bool *searchInContributories* )

[Search::setSearchInContributories](#) Modify the filter of contributories search.

## Parameters

<i>searchIn-Contributories</i>	<a href="#">Search</a> in contributories which are concerned
--------------------------------	--------------------------------------------------------------

8.96.2.21 void Models::Search::setSearchInProjects ( bool *searchInProjects* )

[Search::setSearchInProjects](#) Modify the filter of projects search.

## Parameters

<i>searchInProjects</i>	<a href="#">Search</a> in projects which are concerned
-------------------------	--------------------------------------------------------

8.96.2.22 void Models::Search::setSearchInReferentLastname ( bool *searchInReferentLastname* )

[Search::setSearchInReferentLastname](#) Modify the filter of referents last name search.

## Parameters

<i>searchIn-Referent-Lastname</i>	<a href="#">Search</a> in referents last name which are concerned
-----------------------------------	-------------------------------------------------------------------

8.96.2.23 void Models::Search::setText ( const QString & *getText* )

[Search::setText](#) Modify sql portion.

## Parameters

<i>getText</i>	Get sql portion
----------------	-----------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/search.h
- /home/travis/build/FACT-Team/FactDev/src/models/search.cpp

## 8.97 Gui::Docks::SearchDock Class Reference

The [SearchDock](#) class Dock which contains search bar.

```
#include <searchdock.h>
```

Inheritance diagram for Gui::Docks::SearchDock:



### Public Slots

- void [search](#) (QString text)  
[SearchDock::search](#) Search elements in database which correspond to the text

### Signals

- void [textChanged](#) (QString text)  
[SearchDock::textChanged](#) Current text changed by text

### Public Member Functions

- [SearchDock](#) (QWidget \*parent=0, Qt::WindowFlags flags=0)  
[SearchDock::SearchDock](#) Construct a [SearchDock](#).
- QString [getText](#) () const  
[SearchDock::getText](#) Get the current text searched.

#### 8.97.1 Detailed Description

The [SearchDock](#) class Dock which contains search bar.

#### 8.97.2 Constructor & Destructor Documentation

8.97.2.1 [Gui::Docks::SearchDock::SearchDock](#) ( [QWidget](#) \* *parent* = 0, [Qt::WindowFlags](#) *flags* = 0 ) [explicit]

[SearchDock::SearchDock](#) Construct a [SearchDock](#).



## Parameters

<i>parent</i>	Widget Parent
<i>flags</i>	Window flag

## 8.97.3 Member Function Documentation

## 8.97.3.1 QString Gui::Docks::SearchDock::getText ( ) const

[SearchDock::getText](#) Get the current text searched.

## Returns

Text searched

## 8.97.3.2 void Gui::Docks::SearchDock::search ( QString text ) [slot]

[SearchDock::search](#) Search elements in database which correspond to the *text*

## Parameters

<i>text</i>	Element to search
-------------	-------------------

## 8.97.3.3 void Gui::Docks::SearchDock::textChanged ( QString text ) [signal]

[SearchDock::textChanged](#) Current text changed by *text*

## Parameters

<i>text</i>	New text
-------------	----------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/docks/searchdock.h
- /home/travis/build/FACT-Team/FactDev/src/gui/docks/searchdock.cpp

## 8.98 searchTest Class Reference

Inheritance diagram for searchTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/searchtest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/searchtest.cpp

## 8.99 Gui::Widgets::searchWidget Class Reference

Class for search in database.

```
#include <searchwidget.h>
```

Inheritance diagram for Gui::Widgets::searchWidget:



### Public Slots

- void [search](#) (QString toSearch)  
*searchWidget::launch a search*
- void [getCustomerData](#) ()  
*searchWidget::getCustomerData Return data on the customer selected in the QTableView and display this data (First-name, Lastname, Company)*

### Signals

- void [selectCustomer](#) ()  
*searchWidget::selectCustomer Signal that the Customer selected has changed*

### Public Member Functions

- [searchWidget](#) (QWidget \*parent=0)  
*searchWidget::searchWidget Construct a search widget*
- int [getCurrentCustomerId](#) ()  
*searchWidget::getCurrentCustomerId Return the id of the customer selected in the table*
- bool [isCustomerSelected](#) () const  
*searchWidget::isCustomerSelected Return TRUE if a customer is selected, else FALSE*
- void [selectCustomer](#) (int id)  
*searchWidget::selectCustomer Select the Customer with it id*
- int [getIdCustomer](#) () const  
*searchWidget::getIdCustomer Return the Customer id of the Customer line selected*
- void [setIdCustomer](#) (int idCustomer)  
*searchWidget::setIdCustomer Change the customer id by the new idCustomer*

#### 8.99.1 Detailed Description

Class for search in database.

Author

Antoine de Roquemaurel

## 8.99.2 Constructor & Destructor Documentation

8.99.2.1 Gui::Widgets::searchWidget::searchWidget ( QWidget \* *parent* = 0 ) [explicit]

[searchWidget::searchWidget](#) Construct a search widget

## Parameters

<i>parent</i>	The QWidget parent
---------------	--------------------

### 8.99.3 Member Function Documentation

8.99.3.1 `int Gui::Widgets::searchWidget::getCurrentCustomerId ( )`

[searchWidget::getCurrentCustomerId](#) Return the id of the customer selected in the table

## Returns

id of the current customer

8.99.3.2 `int Gui::Widgets::searchWidget::getIdCustomer ( ) const`

[searchWidget::getIdCustomer](#) Return the Customer id of the Customer line selected

## Returns

The Customer ID

8.99.3.3 `bool Gui::Widgets::searchWidget::isCustomerSelected ( ) const`

[searchWidget::isCustomerSelected](#) Return TRUE if a customer is selected, else FALSE

## Returns

boolean

8.99.3.4 `void Gui::Widgets::searchWidget::search ( QString toSearch ) [slot]`

`searchWidget::launch` a search

## Parameters

<i>toSearch</i>	The value to search
-----------------	---------------------

8.99.3.5 `void Gui::Widgets::searchWidget::selectCustomer ( int id )`

[searchWidget::selectCustomer](#) Select the Customer with it *id*

## Parameters

<i>id</i>	Customer ID
-----------	-------------

8.99.3.6 `void Gui::Widgets::searchWidget::setIdCustomer ( int idCustomer )`

[searchWidget::setIdCustomer](#) Change the customer id by the new *idCustomer*

## Parameters

<i>idCustomer</i>	Customer id
-------------------	-------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/searchwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/searchwidget.cpp

## 8.100 Gui::Dialogs::StartedWindowsDialog Class Reference

The [StartedWindowsDialog](#) class Construct a Windows for the first begin.

```
#include <startedwindowsdialog.h>
```

Inheritance diagram for Gui::Dialogs::StartedWindowsDialog:



### Public Slots

- void [checkFields](#) ()  
*StartedWindowsDialog::checkFields* Check all fields of dialog components.
- void [backToPage2](#) ()  
*StartedWindowsDialog::backToPage2* Return to the second page.
- void [nextToPage2](#) ()  
*StartedWindowsDialog::nextToPage2* Go to the second page.
- void [nextToPage3](#) ()  
*StartedWindowsDialog::nextToPage3* Go to the third page.
- void [databaseTypeChanged](#) (const int index)  
*StartedWindowsDialog::databaseTypeChanged* Listener on the Database type combobox.
- void [databaseTypeChanged](#) (void)  
*StartedWindowsDialog::databaseTypeChanged* Listener on the Database type combobox.
- void [updateNextButton](#) ()  
*StartedWindowsDialog::updateNextButton* Check if the next button is enabled.
- void [accept](#) ()  
*StartedWindowsDialog::accept* Valid data inputed by user and add these data in Database.

### Public Member Functions

- [StartedWindowsDialog](#) (QWidget \*parent=0)  
*StartedWindowsDialog::StartedWindowsDialog* Construct a [StartedWindowsDialog](#).
- void [fillFields](#) ()  
*StartedWindowsDialog::fillFields* Fill line edits with the data of the user.
- QPixmap [getImage](#) (QString path, int width=256, int height=256)  
*StartedWindowsDialog::getImage* Return a scaled image from the icon specified by it path. The image returned has a resolution of width\*height (default 256\*256)
- bool [isDatabaseTypeValid](#) ()

[StartedWindowsDialog::isDatabaseTypeValid](#) Return *TRUE* if settings of database type is valid else return *FALSE*.

- bool [isDatabaseCentralized](#) ()

[StartedWindowsDialog::isDatabaseCentralized](#) Return *TRUE* if the current type of database is centralized else *FALSE*.

### 8.100.1 Detailed Description

The [StartedWindowsDialog](#) class Construct a Windows for the first begin.

#### Author

Florent Berbie

#### See Also

[DatabaseSettingsWidget](#)

### 8.100.2 Constructor & Destructor Documentation

8.100.2.1 [Gui::Dialogs::StartedWindowsDialog::StartedWindowsDialog \( QWidget \\* \*parent\* = 0 \)](#) [explicit]

[StartedWindowsDialog::StartedWindowsDialog](#) Construct a [StartedWindowsDialog](#).

#### Parameters

<i>parent</i>	QWidget parent
---------------	----------------

### 8.100.3 Member Function Documentation

8.100.3.1 [void Gui::Dialogs::StartedWindowsDialog::databaseTypeChanged \( const int \*index\* \)](#) [slot]

[StartedWindowsDialog::databaseTypeChanged](#) Listener on the Database type combobox.

#### Parameters

<i>index</i>	Current index selected
--------------	------------------------

8.100.3.2 [QPixmap Gui::Dialogs::StartedWindowsDialog::getImage \( QString \*path\*, int \*width\* = 256, int \*height\* = 256 \)](#)

[StartedWindowsDialog::getImage](#) Return a scaled image from the icon specified by it *path*. The image returned has a resolution of *width\*height* (default 256\*256)

#### Parameters

<i>path</i>	Icon path
<i>width</i>	Icon width
<i>height</i>	Icon height

#### Returns

Scaled image

8.100.3.3 `bool Gui::Dialogs::StartedWindowsDialog::isDatabaseCentralized ( )`

[StartedWindowsDialog::isDatabaseCentralized](#) Return TRUE if the current type of database is centralized else FALSE.

#### Returns

boolean

8.100.3.4 `bool Gui::Dialogs::StartedWindowsDialog::isDatabaseTypeValid ( )`

[StartedWindowsDialog::isDatabaseTypeValid](#) Return TRUE if settings of database type is valid else return FALSE.

#### Returns

boolean on the database type validity

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/gui/dialogs/startedwindowsdialog.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/dialogs/startedwindowsdialog.cpp`

## 8.101 **StatisticModelTest Class Reference**

Inheritance diagram for StatisticModelTest:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/models/statisticmodeltest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/models/statisticmodeltest.cpp`

## 8.102 **Models::Statistics Class Reference**

### Static Public Member Functions

- static `QPair< int, double >` [getTurnoverBetweenDates](#) (`QDate begin`, `QDate end`)  
*getTurnoverBetweenDates Compute the turnover between 2 dates*
- static `double` [getGlobalTurnover](#) ()  
*Get the global turnover.*

### 8.102.1 **Member Function Documentation**

8.102.1.1 `double Statistics::getGlobalTurnover ( )` `[static]`

Get the global turnover.

**Returns**

The global turnover

8.102.1.2 `QPair< int, double > Statistics::getTurnoverBetweenDates ( QDate begin, QDate end )` `[static]`

`getTurnoverBetweenDates` Compute the turnover between 2 dates

**Parameters**

<i>begin</i>	The beginning date
<i>end</i>	The ending date

**Returns**

A Qpair who contains the number of billing and their costs

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/models/statistics.h`
- `/home/travis/build/FACT-Team/FactDev/src/models/statistics.cpp`

## 8.103 Gui::Dialogs::StatisticsDialog Class Reference

The [StatisticsDialog](#) class window to have global informations or about a customer.

```
#include <statisticsdialog.h>
```

Inheritance diagram for `Gui::Dialogs::StatisticsDialog`:

**Public Member Functions**

- [StatisticsDialog](#) (bool `global=true`, int `idCustomer=0`, `QWidget *parent=0`)  
*Construct a windows [StatisticsDialog](#).*
- void [updateUi](#) (int `nbBills`, int `nbBillsPaid`, int `nbQuotes`, int `nbProjects`)  
*Update interface (text)*
- void [changeMainTitle](#) ()  
*Change the title of the windows if it's global stats or customer stats.*
- `QString` [singularPlural](#) (int `nb`)  
*Get the correct terminaison.*

### 8.103.1 Detailed Description

The [StatisticsDialog](#) class window to have global informations or about a customer.



### 8.103.2 Constructor & Destructor Documentation

8.103.2.1 Gui::Dialogs::StatisticsDialog::StatisticsDialog ( bool *global* = true, int *idCustomer* = 0, QWidget \* *parent* = 0 )  
[explicit]

Construct a windows [StatisticsDialog](#).

## Parameters

<i>global</i>	if it's the global stats or customer stats
<i>idCustomer</i>	the id of the Customer

### 8.103.3 Member Function Documentation

#### 8.103.3.1 QString Gui::Dialogs::StatisticsDialog::singularPlural ( int *nb* )

Get the correct terminaison.

## Parameters

<i>nb</i>	
-----------	--

#### 8.103.3.2 void Gui::Dialogs::StatisticsDialog::updateUi ( int *nbBills*, int *nbBillsPaid*, int *nbQuotes*, int *nbProjects* )

Update interface (text)

## Parameters

<i>nbBills</i>	
<i>nbBillsPaid</i>	
<i>nbQuotes</i>	
<i>nbProjects</i>	

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/statisticsdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/statisticsdialog.cpp

## 8.104 Utils::String Class Reference

The Utils class.

```
#include <string.h>
```

### Static Public Member Functions

- static QString [firstLetterToUpper](#) (QString s)  
*String::firstLetterToUpper* Put the first letter of a string in capslock.
- static QString [getExtensionFile](#) (QString fileName)  
*String::getExtensionFile* Get the extension file of the file named fileName

#### 8.104.1 Detailed Description

The Utils class.

#### Author

Antoine de Roquemaurel

## 8.104.2 Member Function Documentation

### 8.104.2.1 QString Utils::String::firstLetterToUpper ( QString s ) [static]

[String::firstLetterToUpper](#) Put the first letter of a string in capslock.

## Parameters

<i>s</i>	The string to display
----------	-----------------------

## Returns

The new string with caps

#### 8.104.2.2 QString Utils::String::getExtensionFile ( QString *fileName* ) [static]

[String::getExtensionFile](#) Get the extension file of the file named *fileName*

## Parameters

<i>file</i>	File name
-------------	-----------

## Returns

extension of file

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/Utils/string.h
- /home/travis/build/FACT-Team/FactDev/src/Utils/string.cpp

## 8.105 StringTest Class Reference

Inheritance diagram for StringTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/Utils/stringtest.h
- /home/travis/build/FACT-Team/FactDev/tests/Utils/stringtest.cpp

## 8.106 Mustache::Tag Struct Reference

```
#include <mustache.h>
```

## Public Types

- enum [Type](#) { **Null**, **Value**, [SectionStart](#), [InvertedSectionStart](#), [SectionEnd](#), [Partial](#), [Comment](#), [SetDelimiter](#) }
- enum **EscapeMode** { **Escape**, **Unescape**, **Raw** }

## Public Attributes

- [Type](#) **type**
- QString **key**
- int **start**
- int **end**
- EscapeMode **escapeMode**

### 8.106.1 Detailed Description

Holds properties of a tag in a mustache template.

### 8.106.2 Member Enumeration Documentation

#### 8.106.2.1 enum Mustache::Tag::Type

Enumerator

**SectionStart** A {{key}} or {{{key}}} tag.

**InvertedSectionStart** A {{#section}} tag.

**SectionEnd** An {{^inverted-section}} tag.

**Partial** A {{/section}} tag.

**Comment** A {{^partial}} tag.

**SetDelimiter** A {{! comment }} tag. A {{=<% %>=}} tag

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h

## 8.107 testadder Class Reference

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/QStringRunner/testadder.h

## 8.108 TestAdder< T > Class Template Reference

### Public Member Functions

- **TestAdder** (const QString &name)

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/QStringRunner/testadder.cpp

## 8.109 TestMustache Class Reference

Inheritance diagram for TestMustache:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test\_mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test\_mustache.cpp

## 8.110 TestRunner Class Reference

### Public Member Functions

- `template<typename T >`  
char **RegisterTest** (QString name)
- int **RunAll** ()

### Static Public Member Functions

- static [TestRunner](#) & **Instance** ()

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/QTestRunner/testrunner.h
- /home/travis/build/FACT-Team/FactDev/tests/QTestRunner/testrunner.cpp

## 8.111 Generator::TexGenerator Class Reference

The [TexGenerator](#) class Generate a LaTeX file.

```
#include <texgenerator.h>
```

### Public Member Functions

- [TexGenerator](#) (QString tpl)  
*[TexGenerator::TexGenerator](#) Construct a [TexGenerator](#).*
- void [generate](#) (QVariantHash data, QString path)  
*[TexGenerator::generate](#) Generate a LaTeX file into a file specified by the path and which contains data*

### 8.111.1 Detailed Description

The [TexGenerator](#) class Generate a LaTeX file.

## 8.111.2 Constructor & Destructor Documentation

### 8.111.2.1 Generator::TexGenerator::TexGenerator ( QString *tpl* )

[TexGenerator::TexGenerator](#) Construct a [TexGenerator](#).

## Parameters

<i>tpl</i>	Template LaTeX to apply
------------	-------------------------

## 8.111.3 Member Function Documentation

8.111.3.1 void Generator::TexGenerator::generate ( QVariantHash *data*, QString *path* )

[TexGenerator::generate](#) Generate a LaTeX file into a file specified by the *path* and which contains *data*

## Parameters

<i>data</i>	Data to integrate in the file
<i>path</i>	Path of the out file

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/generator/texgenerator.h
- /home/travis/build/FACT-Team/FactDev/src/generator/texgenerator.cpp

## 8.112 Gui::Widgets::Delegates::TextareaDelegate Class Reference

The [TextareaDelegate](#) class.

```
#include <textareadelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::TextareaDelegate:



## Public Member Functions

- [TextareaDelegate](#) (QWidget \*parent=0)  
[TextareaDelegate::TextareaDelegate](#).
- void [setModelData](#) (QWidget \*editor, QAbstractItemModel \*model, const QModelIndex &index) const  
[TextareaDelegate::setModelData](#) Sets the data model from content in editor.
- void [updateEditorGeometry](#) (QWidget \*editor, const QStyleOptionViewItem &option, const QModelIndex &) const  
[TextareaDelegate::updateEditorGeometry](#) Update the editor for the item specified by index according to the style option given.
- QWidget \* [createEditor](#) (QWidget \*parent, const QStyleOptionViewItem &, const QModelIndex &) const  
[TextareaDelegate::createEditor](#) Return a QTextEdit specified by index item defined by the parent widget and style option which are used to control how the editor widgets appears.
- void [setEditorData](#) (QWidget \*editor, const QModelIndex &index) const  
[TextareaDelegate::setEditorData](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index

## 8.112.1 Detailed Description

The [TextareaDelegate](#) class.



Author

Antoine de Roquemaurel

## 8.112.2 Constructor & Destructor Documentation

8.112.2.1 `Gui::Widgets::Delegates::TextareaDelegate::TextareaDelegate ( QWidget * parent = 0 )`

[TextareaDelegate::TextareaDelegate.](#)

Parameters

<i>parent</i>	
---------------	--

## 8.112.3 Member Function Documentation

8.112.3.1 `QWidget * Gui::Widgets::Delegates::TextareaDelegate::createEditor ( QWidget * parent, const QStyleOptionViewItem & , const QModelIndex & ) const`

[TextareaDelegate::createEditor](#) Return a QTextEdit specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

Returns

[TextareaDelegate](#)

8.112.3.2 `void Gui::Widgets::Delegates::TextareaDelegate::setEditorData ( QWidget * editor, const QModelIndex & index ) const`

[TextareaDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

Parameters

<i>editor</i>	Data edited
<i>index</i>	Index of the model to edit

8.112.3.3 `void Gui::Widgets::Delegates::TextareaDelegate::setModelData ( QWidget * editor, QAbstractItemModel * model, const QModelIndex & index ) const`

[TextareaDelegate::setModelData](#) Sets the data model from content in editor.

Parameters

<i>editor</i>	Data edited
<i>index</i>	Index of the model to edit

8.112.3.4 void Gui::Widgets::Delegates::TextareaDelegate::updateEditorGeometry ( QWidget \* *editor*, const QStyleOptionViewItem & *option*, const QModelIndex & ) const

[TextareaDelegate::updateEditorGeometry](#) Update the *editor* for the item specified by *index* according to the style *option* given.

## Parameters

<i>editor</i>	Editor widget to update
<i>option</i>	Style option
<i>index</i>	Item index

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/textareadelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/textareadelegate.cpp

## 8.113 Models::Unit Class Reference

The [Unit](#) class An unity for billing calculs.

```
#include <unit.h>
```

### Public Member Functions

- [Unit](#) ([TypeUnit](#) type)  
*Unit* Construct an unit with init type.
- [Unit](#) ()  
*Unit* Construct an unit.
- [QString](#) [toString](#) (const bool plural=false)  
*toString* Return String for unit type.
- [TypeUnit](#) [gettype](#) () const  
*gettype* The unit Type
- void [setType](#) (const [TypeUnit](#) &type)  
*setType* Change the unit Type
- bool [operator==](#) (const [Unit](#) &u)  
*operator ==* define the operator "==" to compare two [Unit](#)
- bool [operator!=](#) (const [Unit](#) &u)  
*operator !=* define the operator "!=" to compare two [Unit](#)

#### 8.113.1 Detailed Description

The [Unit](#) class An unity for billing calculs.

#### 8.113.2 Constructor & Destructor Documentation

##### 8.113.2.1 Models::Unit::Unit ( [TypeUnit](#) type )

[Unit](#) Construct an unit with init type.

## Parameters

<i>type</i>	The unit Type;
-------------	----------------

#### 8.113.3 Member Function Documentation

##### 8.113.3.1 [TypeUnit](#) Models::Unit::gettype ( ) const

*gettype* The unit Type

**Returns**

The unit Type

**8.113.3.2** `bool Models::Unit::operator!= ( const Unit & u )`

operator != define the operator "!=" to compare two [Unit](#)

**Parameters**

<code>c</code>	the <a href="#">Unit</a> to compare with the current <a href="#">Contributory</a>
----------------	-----------------------------------------------------------------------------------

**Returns**

true if the [Unit](#) are different else false

**8.113.3.3** `bool Models::Unit::operator== ( const Unit & u )`

operator == define the operator "==" to compare two [Unit](#)

**Parameters**

<code>c</code>	the <a href="#">Unit</a> to compare with the current <a href="#">Contributory</a>
----------------	-----------------------------------------------------------------------------------

**Returns**

true if the [Unit](#) are equals else false

**8.113.3.4** `void Models::Unit::setType ( const TypeUnit & type )`

setType Change the unit Type

**Parameters**

<code>type</code>	The new unit type.
-------------------	--------------------

**8.113.3.5** `QString Models::Unit::toString ( const bool plural = false )`

toString Return String for unit type.

**Returns**

The unit in String

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/unit.h
- /home/travis/build/FACT-Team/FactDev/src/models/unit.cpp

**8.114** **Gui::Widgets::Delegates::UnitComboDelegate Class Reference**

The [UnitComboDelegate](#) class.

```
#include <unitcomdelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::UnitComboDelegate:



## Public Member Functions

- [UnitComboDelegate](#) (QObject \*parent=0)  
[UnitComboDelegate::UnitComboDelegate](#).
- QWidget \* [createEditor](#) (QWidget \*parent, const QStyleOptionViewItem &option, const QModelIndex &index) const  
[UnitComboDelegate::createEditor](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.
- void [paint](#) (QPainter \*painter, const QStyleOptionViewItem &option, const QModelIndex &index) const  
[UnitComboDelegate::paint](#) Renders the delegate using the given painter and style option for the item specified by *index*

### 8.114.1 Detailed Description

The [UnitComboDelegate](#) class.

### 8.114.2 Constructor & Destructor Documentation

8.114.2.1 [Gui::Widgets::Delegates::UnitComboDelegate::UnitComboDelegate \( QObject \\* \*parent\* = 0 \)](#)

[UnitComboDelegate::UnitComboDelegate](#).

Parameters

<i>parent</i>	
---------------	--

### 8.114.3 Member Function Documentation

8.114.3.1 [QWidget \\* Gui::Widgets::Delegates::UnitComboDelegate::createEditor \( QWidget \\* \*parent\*, const QStyleOptionViewItem & \*option\*, const QModelIndex & \*index\* \) const](#) [virtual]

[UnitComboDelegate::createEditor](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

Returns

ComboBox

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

8.114.3.2 void Gui::Widgets::Delegates::UnitComboDelegate::paint ( QPainter \* *painter*, const QStyleOptionViewItem & *option*, const QModelIndex & *index* ) const [virtual]

[UnitComboDelegate::paint](#) Renders the delegate using the given *painter* and style *option* for the item specified by *index*

Parameters

<i>parent</i>	Widget parent
<i>option</i>	Option style
<i>index</i>	Index for editing

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/unitcombodelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/unitcombodelegate.cpp

## 8.115 Models::User Class Reference

The [User](#) class [User](#) of it application.

```
#include <user.h>
```

Inheritance diagram for Models::User:



### Public Member Functions

- [User](#) ()  
*User::User*. Construct an [User](#).
- [User](#) (int id)  
*User::User*. Construct a [User](#) with the identify *id*
- void [commit](#) ()  
*User::commit* Update user data in [User](#) table on the database.
- void [hydrat](#) (int id=1)  
*User::hydrat* Get data of the user who is specified by *id* from the database.
- void [remove](#) ()  
*remove* Remove the current [User](#)
- QVariantHash [getDataMap](#) ()  
*getDataMap* Get all data of model with a HashMap key/value
- void [updateFolders](#) (void)  
*MainWindow::updateFolders* Make directories which contain quotes and billings. Directories are the same than theirs of the Tree organisation (without Projects).
- QString [getTitle](#) () const  
*User::getTitle* Return a short description of [User](#) (company) activity.
- void [setTitle](#) (const QString &title)

- User::setTitle* Modify the user/company activities description
- QString **getNoSiret** () const
  - User::getNoSiret* Return the SIRET number (company registration number)
- void **setNoSiret** (const QString &noSiret)
  - User::setNoSiret* Modify the SIRET number (company registration number) noSiret
- QPixmap \* **getImage** ()
  - User::getImage* Return the compagny image.
- void **setImage** (QPixmap \*image)
  - User::setImage* Change the current image by the new image
- QString **getWorkspaceName** () const
  - User::getWorkspaceName* Return the name of the workspace user.
- void **setWorkspaceName** (const QString &workspaceName)
  - User::setWorkspaceName* Change the current workspace name by the new workspaceName
- QString **getWorkspacePath** () const
  - User::getWorkspacePath* Return the path of the workspace user.
- void **setWorkspacePath** (const QString &workspacePath)
  - User::setWorkspacePath* Change the current workspace path by the new workspacePath
- bool **operator==** (const User &u)
  - User::operator ==* Re-define the operator "==" to compare if the current User is the same to the other User c Return TRUE if both Users are the same, else FALSE.
- bool **operator!=** (const User &u)
  - User::operator !=* Re-define the operator "!=" to compare if the current User is differnt to the other User c Return TRUE if both Users are different, else FALSE.
- QString **getPdflatexPath** () const
  - getPdflatexPath* The path of pdflatex
- void **setPdflatexPath** (const QString &getPdflatexPath)
  - setPdflatexPath* Change the pdflatex command path.
- double **getNbHoursPerDay** () const
  - nbHoursPerDays* The number of hours per days who the user work.
- void **setNbHoursPerDay** (double value)
  - setNbHoursPerDay* Change the number of hours per day
- double **getNbDaysPerMonth** () const
  - getNbDaysPerMonths* The number of days per months who the user work.
- void **setNbDaysPerMonth** (double getNbDaysPerMonth)
  - setNbDaysPerMonth* Change the number of days per month
- double **getNbDaysPerWeek** () const
  - getNbDaysPerWeek* The number of days per week
- void **setNbDaysPerWeek** (double value)
  - setNbDaysPerWeek* Change the number of days per week
- double **getNbHoursPerWeek** () const
  - getNbHoursPerWeek* The number of hours per weeks.
- double **getNbHoursPerMonth** () const
  - getNbHoursPerMonth* The number of hours per months.

## Additional Inherited Members

### 8.115.1 Detailed Description

The User class User of it application.

Author

Florent Berbie

## 8.115.2 Constructor & Destructor Documentation

### 8.115.2.1 Models::User::User ( int *id* )

[User::User](#). Construct a [User](#) with the identify *id*

Parameters

<i>id</i>	<a href="#">User</a> <i>id</i>
-----------	--------------------------------

## 8.115.3 Member Function Documentation

### 8.115.3.1 QVariantHash Models::User::getDataMap ( ) [virtual]

getDataMap Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

### 8.115.3.2 QPixmap \* Models::User::getImage ( )

[User::getImage](#) Return the compagny image.

Returns

compagny image

### 8.115.3.3 double Models::User::getNbDaysPerMonth ( ) const

getNbDaysPerMonths The number of days per months who the user work.

Returns

The number of days per months

### 8.115.3.4 double Models::User::getNbDaysPerWeek ( ) const

getNbDaysPerWeek The number of days per week

Returns

The new value

### 8.115.3.5 double Models::User::getNbHoursPerDay ( ) const

nbHoursPerDays The number of hours per days who the user work.

Returns

The number of hours per days



8.115.3.6 `double Models::User::getNbHoursPerMonth ( ) const`

`getNbHoursPerMonth` The number of hours per months.

Returns

The number of hours.

8.115.3.7 `double Models::User::getNbHoursPerWeek ( ) const`

`getNbHoursPerWeek` The number of hours per weeks.

Returns

The number of hours

8.115.3.8 `QString Models::User::getNoSiret ( ) const`

[User::getNoSiret](#) Return the SIRET number (company registration number)

Returns

SIRET number

8.115.3.9 `QString Models::User::getPdflatexPath ( ) const`

`getPdflatexPath` The path of pdflatex

Returns

The pdflatex path

8.115.3.10 `QString Models::User::getTitle ( ) const`

[User::getTitle](#) Return a short description of [User](#) (company) activity.

Returns

a short description of user (company) activity

8.115.3.11 `QString Models::User::getWorkspaceName ( ) const`

[User::getWorkspaceName](#) Return the name of the workspace user.

Returns

workspace name

8.115.3.12 `QString Models::User::getWorkspacePath ( ) const`

[User::getWorkspacePath](#) Return the path of the workspace user.

Returns

workspace path

8.115.3.13 void Models::User::hydrat ( int *id* = 1 ) [virtual]

[User::hydrat](#) Get data of the user who is specified by *id* from the database.

## Parameters

<i>id</i>	User identify
-----------	---------------

Implements [Models::IModel](#).

8.115.3.14 bool Models::User::operator!= ( const User & *u* )

[User::operator !=](#) Re-define the operator "!=" to compare if the current [User](#) is differnt to the other [User](#) c Return TRUE if both Users are different, else FALSE.

## Parameters

<i>u</i>	User to compare
----------	-----------------

## Returns

boolean

8.115.3.15 bool Models::User::operator== ( const User & *u* )

[User::operator ==](#) Re-define the operator "==" to compare if the current [User](#) is the same to the other [User](#) c Return TRUE if both Users are the same, else FALSE.

## Parameters

<i>u</i>	User to compare
----------	-----------------

## Returns

boolean

8.115.3.16 void Models::User::setImage ( QPixmap \* *image* ) [virtual]

[User::setImage](#) Change the current image by the new *image*

## Parameters

<i>image</i>	New image
--------------	-----------

Reimplemented from [Models::People](#).

8.115.3.17 void Models::User::setNbDaysPerMonth ( double *getNbDaysPerMonth* )

[setNbDaysPerMonth](#) Change the number of days per month

## Parameters

<i>getNbDaysPer-Month</i>	The new value
---------------------------	---------------

8.115.3.18 void Models::User::setNbDaysPerWeek ( double *value* )

[setNbDaysPerWeek](#) Change the number of days per week

## Parameters

<i>value</i>	The new value
--------------	---------------

8.115.3.19 void Models::User::setNbHoursPerDay ( double *value* )

setNbHoursPerDay Change the number of hours per day

## Parameters

<i>value</i>	The new value
--------------	---------------

8.115.3.20 void Models::User::setNoSiret ( const QString & *noSiret* )

[User::setNoSiret](#) Modify the SIRET number (company registration number) *noSiret*

## Parameters

<i>noSiret</i>	SIRET number
----------------	--------------

8.115.3.21 void Models::User::setPdflatexPath ( const QString & *getPdflatexPath* )

setPdflatexPath Change the pdflatex command path.

## Parameters

<i>getPdflatexPath</i>	The new command
------------------------	-----------------

8.115.3.22 void Models::User::setTitle ( const QString & *title* )

[User::setTitle](#) Modify the user/company activities *description*

## Parameters

<i>title</i>	Short description on activity(ies) of <a href="#">User</a> company
--------------	--------------------------------------------------------------------

8.115.3.23 void Models::User::setWorkspaceName ( const QString & *workspaceName* )

[User::setWorkspaceName](#) Change the current workspace name by the new *workspaceName*

## Parameters

<i>workspaceName</i>	
----------------------	--

8.115.3.24 void Models::User::setWorkspacePath ( const QString & *workspacePath* )

[User::setWorkspacePath](#) Change the current workspace path by the new *workspacePath*

## Parameters

<i>workspacePath</i>	
----------------------	--

## 8.115.3.25 void Models::User::updateFolders ( void )

MainWindow::updateFolders Make directories which contain quotes and billings. Directories are the same than theirs of the Tree organisation (without Projects).

Organisation of folders are formed like this:

- COMPANY CustomerLastname CustomerFirstname/
  - Quotes/
    - \* quote1 ...
  - Billings/
    - \* billing1 ...

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/user.h
- /home/travis/build/FACT-Team/FactDev/src/models/user.cpp

## 8.116 Gui::Widgets::UserDailyHoursWidget Class Reference

The [UserDailyHoursWidget](#) class Define user quantity of work.

```
#include <userdailyhourswidget.h>
```

Inheritance diagram for Gui::Widgets::UserDailyHoursWidget:



## Public Slots

- void [dailyHoursValueHasChanged](#) (const double value)  
*[UserDailyHoursWidget::dailyHoursValueHasChanged](#) Daily hours value has been changed.*
- void [weeklyDaysValueHasChanged](#) (const double value)  
*[UserDailyHoursWidget::weeklyDaysValueHasChanged](#) Weekly days value has been changed.*
- void [monthlyDaysValueHasChanged](#) (const double value)  
*[UserDailyHoursWidget::monthlyDaysValueHasChanged](#) monthly days value has been changed.*
- double [getNbDaysPerWeek](#) () const  
*[getNbDaysPerWeek](#) The number of days per week*
- double [getNbDaysPerMonth](#) () const  
*[getNbDaysPerMonths](#) The number of days per months who the user work.*
- double [getNbHoursPerDay](#) () const  
*[nbHoursPerDays](#) The number of hours per days who the user work.*
- void [setNbDaysPerWeek](#) (double value)  
*[setNbDaysPerWeek](#) Change the number of days per week*
- void [setNbDaysPerMonth](#) (double [getNbDaysPerMonth](#))  
*[setNbDaysPerMonth](#) Change the number of days per month*
- void [setNbHoursPerDay](#) (double value)  
*[setNbHoursPerDay](#) Change the number of hours per day*

## Public Member Functions

- [UserDailyHoursWidget](#) (QWidget \*parent=0)  
[UserDailyHoursWidget::UserDailyHoursWidget](#) Cosntruct an [UserDailyHoursWidget](#).
- void [setupUI](#) ()  
[UserDailyHoursWidget::setupUI](#) Init the User Interface.

### 8.116.1 Detailed Description

The [UserDailyHoursWidget](#) class Define user quantity of work.

### 8.116.2 Constructor & Destructor Documentation

8.116.2.1 [Gui::Widgets::UserDailyHoursWidget::UserDailyHoursWidget \( QWidget \\* parent = 0 \)](#) [explicit]

[UserDailyHoursWidget::UserDailyHoursWidget](#) Cosntruct an [UserDailyHoursWidget](#).

Parameters

<i>parent</i>	QWidget parent
---------------	----------------

### 8.116.3 Member Function Documentation

8.116.3.1 void [Gui::Widgets::UserDailyHoursWidget::dailyHoursValueHasChanged \( const double value \)](#) [slot]

[UserDailyHoursWidget::dailyHoursValueHasChanged](#) Daily hours *value* has been changed.

Parameters

<i>value</i>	New daily hours value
--------------	-----------------------

8.116.3.2 double [Gui::Widgets::UserDailyHoursWidget::getNbDaysPerMonth \( \)](#) const [slot]

[getNbDaysPerMonths](#) The number of days per months who the user work.

Returns

The number of days per months

8.116.3.3 double [Gui::Widgets::UserDailyHoursWidget::getNbDaysPerWeek \( \)](#) const [slot]

[getNbDaysPerWeek](#) The number of days per week

Returns

The new value

8.116.3.4 double [Gui::Widgets::UserDailyHoursWidget::getNbHoursPerDay \( \)](#) const [slot]

[nbHoursPerDays](#) The number of hours per days who the user work.

Returns

The number of hours per days

8.116.3.5 void Gui::Widgets::UserDailyHoursWidget::monthlyDaysValueHasChanged ( const double *value* ) [slot]

[UserDailyHoursWidget::monthlyDaysValueHasChanged](#) monthly days *value* has been changed.

## Parameters

<i>value</i>	New monthly daysz value
--------------	-------------------------

8.116.3.6 void Gui::Widgets::UserDailyHoursWidget::setNbDaysPerMonth ( double *getNbDaysPerMonth* ) [slot]

setNbDaysPerMonth Change the number of days per month

## Parameters

<i>getNbDaysPerMonth</i>	The new value
--------------------------	---------------

8.116.3.7 void Gui::Widgets::UserDailyHoursWidget::setNbDaysPerWeek ( double *value* ) [slot]

setNbDaysPerWeek Change the number of days per week

## Parameters

<i>value</i>	The new value
--------------	---------------

8.116.3.8 void Gui::Widgets::UserDailyHoursWidget::setNbHoursPerDay ( double *value* ) [slot]

setNbHoursPerDay Change the number of hours per day

## Parameters

<i>value</i>	The new value
--------------	---------------

8.116.3.9 void Gui::Widgets::UserDailyHoursWidget::weeklyDaysValueHasChanged ( const double *value* ) [slot]

[UserDailyHoursWidget::weeklyDaysValueHasChanged](#) Weekly days *value* has been changed.

## Parameters

<i>value</i>	New Weekly days value
--------------	-----------------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/userdailyhourswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/userdailyhourswidget.cpp

## 8.117 Databases::UserDatabase Class Reference

The [UserDatabase](#) class Access to User data in the the table User of the [Database](#)

```
#include <userdatabase.h>
```

Inheritance diagram for Databases::UserDatabase:





## Public Member Functions

- [Models::User](#) \* [getUser](#) (const int pId=1)  
*[UserDatabase::getUser](#) Get informations about the user (identified by 'pId')*
- void [updateUser](#) (const [Models::User](#) &)  
*[UserDatabase::updateUser](#) Update informations about the user.*
- QPixmap [getUserImage](#) (const int pId=1)  
*[UserDatabase::getUserImage](#) Return a User image.*
- void [setUserImage](#) ([Models::User](#) &pUser)  
*[UserDatabase::setUserImage](#) Change the image of the customer pCustomer*

## Static Public Member Functions

- static [UserDatabase](#) \* [instance](#) () throw (DbException\*)  
*[UserDatabase::getInstance](#) Return an instance of [UserDatabase](#).*

## Additional Inherited Members

### 8.117.1 Detailed Description

The [UserDatabase](#) class Access to User data in the the table User of the [Database](#)

#### Author

Florent Berbie

#### See Also

[Database](#)  
[User](#)

### 8.117.2 Member Function Documentation

#### 8.117.2.1 [Models::User](#) \* [Databases::UserDatabase::getUser](#) ( const int *pId* = 1 )

[UserDatabase::getUser](#) Get informations about the user (identified by 'pId')

##### Parameters

<i>pId</i>	user id (1 default)
------------	---------------------

##### Returns

the user

#### 8.117.2.2 QPixmap [Databases::UserDatabase::getUserImage](#) ( const int *pId* = 1 )

[UserDatabase::getUserImage](#) Return a User image.

##### Parameters

<i>pId</i>	Customer id
------------	-------------

Returns

User image

**8.117.2.3** `UserDatabase * Databases::UserDatabase::instance ( ) throw DbException *` `[static]`

`UserDatabase::getInstance` Return an instance of [UserDatabase](#).

Returns

Instance of [UserDatabase](#)

**8.117.2.4** `void Databases::UserDatabase::setUserImage ( Models::User & pUser )`

[UserDatabase::setUserImage](#) Change the image of the customer *pCustomer*

Parameters

<i>pUser</i>	User
--------------	------

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/database/userdatabase.h`
- `/home/travis/build/FACT-Team/FactDev/src/database/userdatabase.cpp`

## 8.118 UserDatabaseTest Class Reference

Inheritance diagram for `UserDatabaseTest`:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/database/userdatabasetest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/database/userdatabasetest.cpp`

## 8.119 Gui::Dialogs::UserDataDialog Class Reference

The [UserDataDialog](#) class Window to fill user data.

```
#include <userdatadialog.h>
```

Inheritance diagram for `Gui::Dialogs::UserDataDialog`:



## Public Slots

- void [checkFields](#) ()  
*[UserDataDialog::checkFields](#) Check all fields of dialog components.*

## Public Member Functions

- [UserDataDialog](#) (QWidget \*parent=0)  
*[UserDataDialog::UserDataDialog](#) Construct a window with user data.*
- void [fillFields](#) ()  
*[UserDataDialog::fillFields](#) Fill line edits with the data of the user.*
- void [accept](#) ()  
*[UserDataDialog::accept](#) Valid data inputed by user and add these data in Database.*
- void [reject](#) ()  
*[UserDataDialog::reject](#) Cancel the operation and close the windows.*
- void [browseWorkspacePath](#) ()

### 8.119.1 Detailed Description

The [UserDataDialog](#) class Window to fill user data.

#### Author

Florent Berbie

#### See Also

[Project](#)

### 8.119.2 Constructor & Destructor Documentation

8.119.2.1 [Gui::Dialogs::UserDataDialog::UserDataDialog \( QWidget \\* \*parent\* = 0 \)](#) `[explicit]`

[UserDataDialog::UserDataDialog](#) Construct a window with user data.

#### Parameters

<i>parent</i>	
---------------	--

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/userdatadialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/userdatadialog.cpp

## 8.120 UserModelTest Class Reference

Inheritance diagram for UserModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/usermodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/usermodeltest.cpp

## 8.121 Gui::Utils::WindowSettings Class Reference

The [WindowSettings](#) class Utils function on windows.

```
#include <windowsettings.h>
```

### Static Public Member Functions

- static void [setMaximumSize](#) (QWidget &w)  
[WindowSettings::setMaximumSize](#) Adapt the resolution of the window *w* to take all screen.
- static void [setPositionToCenter](#) (QWidget &w)  
[WindowSettings::setPositionToCenter](#) Place the current window *w* to the center of the screen.

### 8.121.1 Detailed Description

The [WindowSettings](#) class Utils function on windows.

Author

Florent Berbie

### 8.121.2 Member Function Documentation

8.121.2.1 void Gui::Utils::WindowSettings::setMaximumSize ( QWidget & *w* ) [static]

[WindowSettings::setMaximumSize](#) Adapt the resolution of the window *w* to take all screen.

Parameters

<i>w</i>	Current Window
----------	----------------

8.121.2.2 void Gui::Utils::WindowSettings::setPositionToCenter ( QWidget & *w* ) [static]

[WindowSettings::setPositionToCenter](#) Place the current window *w* to the center of the screen.

Parameters

<i>w</i>	Current Window
----------	----------------

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/Utils/windowsettings.h
- /home/travis/build/FACT-Team/FactDev/src/gui/Utils/windowsettings.cpp

# Index

- add
  - Gui::Widgets::ContributoriesWidget, [91](#)
- addBill
  - Gui::MainWindow, [144](#)
- addBilling
  - Databases::BillingDatabase, [33](#)
- addBillingProject
  - Databases::BillingDatabase, [33](#)
- addBillingToProject
  - Utils::HierarchicalSystem, [132](#)
- addContributory
  - Databases::ContributoryDatabase, [97](#)
  - Models::Billing, [27](#)
  - Models::ContributoriesList, [81](#)
- addCustomer
  - Databases::CustomerDatabase, [107](#)
- addDoc
  - Gui::MainWindow, [144](#)
- addProject
  - Databases::ProjectDatabase, [174](#)
  - Gui::MainWindow, [144](#)
  - Gui::Widgets::ContributoriesWidget, [91](#)
  - Models::ContributoriesList, [81](#)
- AddProjectDialog
  - Gui::Dialogs::AddProjectDialog, [22](#)
- addProjectToCustomer
  - Utils::HierarchicalSystem, [133](#)
- addQuote
  - Gui::MainWindow, [145](#)
- AddQuoteDialog
  - Gui::Dialogs::AddQuoteDialog, [23](#)
- addRateProject
  - Databases::RateDatabase, [187](#)
- allProjectsChosen
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [170](#)
- append
  - Gui::Widgets::WdgModels::BillingsTableModel, [41](#)
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, [86](#)
  - Gui::Widgets::WdgModels::CustomersTableModel, [115](#)
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [170](#)
  - Gui::Widgets::WdgModels::ProjectsTableModel, [179](#)
- beginDateControl
  - Gui::Dialogs::ComputeTurnoverDialog, [77](#)
- Billing
  - Models::Billing, [27](#)
- BillingDatabaseTest, [39](#)
- BillingModelTest, [39](#)
- BillingsTableModel
  - Gui::Widgets::WdgModels::BillingsTableModel, [41](#)
- BrowseImageWidget
  - Gui::Widgets::BrowseImageWidget, [44](#)
- bytesToPixmap
  - Gui::Utils::Image, [135](#)
- canEval
  - CounterContext, [101](#)
  - Mustache::Context, [78](#)
  - Mustache::QtVariantContext, [183](#)
- changeDatabase
  - Databases::Database, [118](#)
- check
  - Gui::Widgets::CheckFields::CheckEmail, [48](#)
  - Gui::Widgets::CheckFields::CheckFieldsLetters, [50](#)
  - Gui::Widgets::CheckFields::CheckFieldsNumbers, [53](#)
  - Gui::Widgets::CheckFields::CheckIpAddress, [54](#)
  - Gui::Widgets::CheckFields::CheckLogin, [55](#)
  - Gui::Widgets::CheckFields::CheckPhone, [57](#)
  - Gui::Widgets::CheckFields::CheckPortNumber, [59](#)
  - Gui::Widgets::CheckFields::CheckPostalCode, [60](#)
  - Gui::Widgets::CheckFields::CheckSiretNumber, [63](#)
  - Gui::Widgets::CheckFields::CheckUntilField, [64](#)
  - Gui::Widgets::CheckFields::CheckValidField, [65](#)
  - Gui::Widgets::CheckFields::CheckWebsite, [66](#)
  - Gui::Widgets::CheckFields::ICheckField, [134](#)
- CheckCity
  - Gui::Widgets::CheckFields::CheckCity, [46](#)
- CheckCountry
  - Gui::Widgets::CheckFields::CheckCountry, [47](#)
- CheckEmail
  - Gui::Widgets::CheckFields::CheckEmail, [48](#)
- CheckFieldsLetters
  - Gui::Widgets::CheckFields::CheckFieldsLetters, [49](#)
- CheckFieldsNumbers
  - Gui::Widgets::CheckFields::CheckFieldsNumbers, [52](#)
- CheckIpAddress
  - Gui::Widgets::CheckFields::CheckIpAddress, [54](#)
- CheckLogin
  - Gui::Widgets::CheckFields::CheckLogin, [55](#)
- CheckName
  - Gui::Widgets::CheckFields::CheckName, [56](#)
- CheckPhone
  - Gui::Widgets::CheckFields::CheckPhone, [57](#)

- CheckPortNumber
  - Gui::Widgets::CheckFields::CheckPortNumber, 59
- CheckPostalCode
  - Gui::Widgets::CheckFields::CheckPostalCode, 60
- CheckQLineEdit
  - Gui::Widgets::CheckFields::CheckQLineEdit, 61
- CheckSiretNumber
  - Gui::Widgets::CheckFields::CheckSiretNumber, 63
- CheckUntilField
  - Gui::Widgets::CheckFields::CheckUntilField, 64
- CheckValidField
  - Gui::Widgets::CheckFields::CheckValidField, 65
- CheckWebsite
  - Gui::Widgets::CheckFields::CheckWebsite, 66
- ChoseDirectoryWidget
  - Gui::Widgets::Path::ChoseDirectoryWidget, 67
- ChoseFileWidget
  - Gui::Widgets::Path::ChoseFileWidget, 68
- ChosePathWidget
  - Gui::Widgets::Path::ChosePathWidget, 70
- CoffeeEasterEggWidget
  - Gui::Widgets::CoffeeEasterEggWidget, 72
- columnCount
  - Gui::Widgets::WdgModels::BillingsTableModel, 41
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, 86
  - Gui::Widgets::WdgModels::CustomersTableModel, 115
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 170
  - Gui::Widgets::WdgModels::ProjectsTableModel, 179
- ComboBoxDelegate
  - Gui::Widgets::Delegates::ComboBoxDelegate, 73
- ComboBoxModelWidget
  - Gui::Widgets::ComboBoxModelWidget, 76
- Comment
  - Mustache::Tag, 209
- commit
  - Models::Customer, 103
- Context
  - Mustache::Context, 78
- ContributoriesDatabaseTest, 79
- ContributoriesTableModel
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, 86
- ContributoriesWidget
  - Gui::Widgets::ContributoriesWidget, 90
- Contributory
  - Models::Contributory, 93
- ContributoryListTest, 100
- ContributoryModelTest, 100
- count
  - Gui::Widgets::ContributoriesWidget, 91
  - Gui::Widgets::WdgModels::BillingsTableModel, 41
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, 86
  - Gui::Widgets::WdgModels::CustomersTableModel, 115
  - Gui::Widgets::WdgModels::ProjectsTableModel, 179
- CounterContext, 100
  - canEval, 101
  - eval, 101
  - stringValue, 101, 102
- createEditor
  - Gui::Widgets::Delegates::ComboBoxDelegate, 73
  - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 127
  - Gui::Widgets::Delegates::ProjectComboDelegate, 168
  - Gui::Widgets::Delegates::TextareaDelegate, 213
  - Gui::Widgets::Delegates::UnitComboDelegate, 217
- Customer
  - Models::Customer, 103
- CustomerContextualMenu
  - Gui::Widgets::CustomerContextualMenu, 105
- CustomerDataWidget
  - Gui::Widgets::CustomerDataWidget, 112
- CustomerDatabaseTest, 111
- CustomerModelTest, 112
- CustomersTableModel
  - Gui::Widgets::WdgModels::CustomersTableModel, 114
- DB\_FILENAME
  - Parameters, 148
- dailyHoursValueHasChanged
  - Gui::Widgets::UserDailyHoursWidget, 226
- data
  - Gui::Widgets::WdgModels::BillingsTableModel, 41
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, 87
  - Gui::Widgets::WdgModels::CustomersTableModel, 115
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 171
  - Gui::Widgets::WdgModels::ProjectsTableModel, 179
- DatabaseSettingsWidget
  - Gui::Widgets::DatabaseSettingsWidget, 121
- databaseTypeChanged
  - Gui::Dialogs::StartedWindowsDialog, 202
- Databases, 17
- Databases::AccessDatabase, 21
- Databases::BillingDatabase, 31
  - addBilling, 33
  - addBillingProject, 33
  - getAllBillingsOfProject, 33
  - getBilling, 33
  - getBillingsTable, 35
  - getBills, 35
  - getBillsBetweenDates, 35
  - getBillsPaid, 35
  - getMaxBillingNumber, 36
  - getMaxBillingNumberOfCustomer, 36

- getMaxQuoteNumber, 36
- getMaxQuoteNumberOfCustomer, 36
- getNbBills, 36
- getNbBillsPaid, 37
- getNbDocs, 37
- getNbQuotes, 37
- instance, 37
- isBillingPaid, 37
- removeBilling, 39
- removeBillingProject, 39
- Databases::ContributoryDatabase, 96
  - addContributory, 97
  - getContributoriesByBilling, 97
  - getContributoriesByBillingAndProject, 98
  - getContributory, 98
  - instance, 98
  - removeContributory, 98
- Databases::CustomerDatabase, 106
  - addCustomer, 107
  - getCustomer, 107
  - getCustomerImage, 107
  - getCustomers, 109
  - getCustomersTable, 109
  - getItemCustomer, 109
  - getItemProject, 109
  - getItemRoot, 109
  - getNbCustomers, 110
  - getTree, 110
  - instance, 110
  - removeCustomer, 110
  - setCustomerImage, 110
  - updateCustomer, 111
- Databases::Database, 117
  - changeDatabase, 118
  - executeFile, 118
  - instance, 118
  - lastError, 118
  - setDatabase, 120
  - value, 120
- Databases::ProjectDatabase, 173
  - addProject, 174
  - getAllProjects, 174
  - getCostProjects, 174
  - getNbProjects, 174
  - getProject, 175
  - getProjects, 175
  - getProjectsOfCustomer, 175
  - getProjectsTable, 175
  - instance, 177
  - removeProject, 177
  - updateProject, 177
- Databases::RateDatabase, 186
  - addRateProject, 187
  - getRate, 187
  - instance, 187
  - updateRateProject, 187
- Databases::UserDatabase, 228
  - getUser, 229
  - getUserImage, 229
  - instance, 230
  - setUserImage, 230
- DbException
  - Exceptions::DbException, 123
- deleteIfNotNull
  - Utils::pointers, 160
- DialogAddCustomer
  - Gui::Dialogs::DialogAddCustomer, 124
- DirectoriesTest, 125
- DirectoriesTests, 125
- DoubleSpinBoxDelegate
  - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 127
- editUser
  - Gui::MainWindow, 145
- endDateControl
  - Gui::Dialogs::ComputeTurnoverDialog, 77
- error
  - Mustache::Renderer, 190
- errorPartial
  - Mustache::Renderer, 190
- errorPos
  - Mustache::Renderer, 190
- eval
  - CounterContext, 101
  - Mustache::Context, 78
  - Mustache::QtVariantContext, 183
- Exceptions::DbException, 122
  - DbException, 123
  - popupMessage, 123
- Exceptions::FileException, 130
  - FileException, 130
  - popupMessage, 130
- executeFile
  - Databases::Database, 118
- FileChoseWidget, 129
- FileException
  - Exceptions::FileException, 130
- fillLabels
  - Gui::Dialogs::ComputeTurnoverDialog, 77
- fillQuoteBilling
  - Gui::Dialogs::AddQuoteDialog, 24
- filterOnBillsOrQuotes
  - Models::Search, 192
- filterOnCompany
  - Models::Search, 192
- filterOnContributories
  - Models::Search, 192
- filterOnCustomersWithoutProject
  - Models::Search, 193
- filterOnNumberElements
  - Models::Search, 193
- filterOnProjects
  - Models::Search, 193
- filterOnReferentLastname
  - Models::Search, 193

- filterOnVarcharElements
  - Models::Search, [193](#)
- firstLetterToUpper
  - Utils::String, [207](#)
- flags
  - Gui::Widgets::WdgModels::BillingsTableModel, [42](#)
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, [87](#)
  - Gui::Widgets::WdgModels::CustomersTableModel, [115](#)
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [171](#)
  - Gui::Widgets::WdgModels::ProjectsTableModel, [180](#)
- fn\_t
  - Mustache::QtVariantContext, [183](#)
- generate
  - Generator::PdfGenerator, [151](#)
  - Generator::TexGenerator, [212](#)
- Generation, [130](#)
- Generator::PdfGenerator, [151](#)
  - generate, [151](#)
  - PdfGenerator, [151](#)
- Generator::TexGenerator, [210](#)
  - generate, [212](#)
  - TexGenerator, [211](#)
- getAddress
  - Models::People, [154](#)
- getAddressComplement
  - Models::People, [154](#)
- getAllBillingsOfProject
  - Databases::BillingDatabase, [33](#)
- getAllContributories
  - Models::ContributoriesList, [81](#)
- getAllProjects
  - Databases::ProjectDatabase, [174](#)
- getBeginDate
  - Models::Project, [163](#)
- getBilling
  - Databases::BillingDatabase, [33](#)
- getBillings
  - Gui::Widgets::WdgModels::BillingsTableModel, [42](#)
- getBillingsTable
  - Databases::BillingDatabase, [35](#)
- getBills
  - Databases::BillingDatabase, [35](#)
- getBillsBetweenDates
  - Databases::BillingDatabase, [35](#)
- getBillsPaid
  - Databases::BillingDatabase, [35](#)
- getBtnValid
  - Gui::Widgets::CheckFields::CheckQLineEdit, [62](#)
- getCity
  - Models::People, [154](#)
- getCompany
  - Models::People, [154](#)
- getContributories
  - Gui::Widgets::ContributoriesWidget, [91](#)
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, [87](#)
  - Models::Billing, [27](#)
  - Models::ContributoriesList, [81](#)
- getContributoriesByBilling
  - Databases::ContributoryDatabase, [97](#)
- getContributoriesByBillingAndProject
  - Databases::ContributoryDatabase, [98](#)
- getContributory
  - Databases::ContributoryDatabase, [98](#)
- getCopy
  - Gui::Dialogs::AddQuoteDialog, [24](#)
- getCost
  - Models::Project, [163](#)
- getCostProjects
  - Databases::ProjectDatabase, [174](#)
- getCountry
  - Gui::Widgets::CheckFields::CheckPhone, [57](#)
  - Gui::Widgets::CheckFields::CheckPostalCode, [60](#)
  - Models::People, [154](#)
- getCurrentCustomerId
  - Gui::MainWindow, [145](#)
  - Gui::Widgets::searchWidget, [200](#)
- getCurrentCustomerName
  - Gui::MainWindow, [145](#)
- getCurrentProjectId
  - Gui::MainWindow, [145](#)
- getCurrentProjectName
  - Gui::MainWindow, [145](#)
- getCurrentQuoteId
  - Gui::MainWindow, [145](#)
- getCustomer
  - Databases::CustomerDatabase, [107](#)
  - Models::ContributoriesList, [82](#)
  - Models::Project, [163](#)
- getCustomerImage
  - Databases::CustomerDatabase, [107](#)
- getCustomers
  - Databases::CustomerDatabase, [109](#)
  - Gui::Widgets::WdgModels::CustomersTableModel, [115](#)
  - Utils::HierarchicalSystem, [133](#)
- getCustomersTable
  - Databases::CustomerDatabase, [109](#)
- getDailyRate
  - Gui::Widgets::RateWidget, [189](#)
  - Models::Project, [163](#)
  - Models::Rate, [185](#)
- getDataMap
  - Models::Billing, [27](#)
  - Models::ContributoriesList, [82](#)
  - Models::Contributory, [93](#)
  - Models::Customer, [103](#)
  - Models::IModel, [137](#)
  - Models::Project, [163](#)
  - Models::User, [220](#)
- getDatabaseName
  - Gui::Widgets::DatabaseSettingsWidget, [121](#)



getDate  
    Models::Billing, 27  
getDefaultLocation  
    Gui::Widgets::Path::ChosePathWidget, 70  
getDescription  
    Models::Billing, 27  
    Models::Contributory, 93  
    Models::Project, 164  
getDomainNameOrIP  
    Gui::Widgets::DatabaseSettingsWidget, 121  
getEmail  
    Models::People, 154  
getEndDate  
    Models::Project, 164  
getExtension  
    Gui::Widgets::BrowseImageWidget, 44  
getExtensionFile  
    Utils::String, 208  
getExtensionImage  
    Models::People, 154  
getFax  
    Models::People, 155  
getField  
    Gui::Widgets::Path::ChosePathWidget, 70  
getFilename  
    Models::Billing, 28  
getFilter  
    Models::Search, 193  
getFirstname  
    Models::People, 155  
getFolder  
    Models::Billing, 28  
getGlobalTurnover  
    Models::Statistics, 203  
getGroupFilter  
    Models::Search, 194  
getHourlyRate  
    Gui::Widgets::RateWidget, 189  
    Models::Contributory, 93  
    Models::Rate, 185  
getId  
    Models::IModel, 137  
getIdBilling  
    Models::ContributoriesList, 82  
getIdCustomer  
    Gui::Dialogs::AddQuoteDialog, 24  
    Gui::Widgets::searchWidget, 200  
getImage  
    Gui::Dialogs::StartedWindowsDialog, 202  
    Gui::Utils::Image, 135  
    Gui::Widgets::BrowseImageWidget, 44  
    Models::Customer, 103  
    Models::People, 155  
    Models::User, 220  
getItem  
    Models::Billing, 28  
getItemCustomer  
    Databases::CustomerDatabase, 109  
getItemProject  
    Databases::CustomerDatabase, 109  
getItemRoot  
    Databases::CustomerDatabase, 109  
getLastName  
    Models::People, 155  
getLegalRate  
    Models::Rate, 186  
getLogin  
    Gui::Widgets::DatabaseSettingsWidget, 122  
getLongDescription  
    Models::Contributory, 94  
getMaxBillingNumber  
    Databases::BillingDatabase, 36  
getMaxBillingNumberOfCustomer  
    Databases::BillingDatabase, 36  
getMaxQuoteNumber  
    Databases::BillingDatabase, 36  
getMaxQuoteNumberOfCustomer  
    Databases::BillingDatabase, 36  
getMobilePhone  
    Models::People, 155  
getModel  
    Utils::ItemType, 139  
getName  
    Models::Project, 164  
    Utils::ItemType, 139  
getNameFolder  
    Models::Customer, 104  
getNbBills  
    Databases::BillingDatabase, 36  
getNbBillsPaid  
    Databases::BillingDatabase, 37  
getNbCustomers  
    Databases::CustomerDatabase, 110  
getNbDailyHours  
    Models::Rate, 186  
getNbDaysPerMonth  
    Gui::Widgets::UserDailyHoursWidget, 226  
    Models::User, 220  
getNbDaysPerWeek  
    Gui::Widgets::UserDailyHoursWidget, 226  
    Models::User, 220  
getNbDocs  
    Databases::BillingDatabase, 37  
getNbHoursPerDay  
    Gui::Widgets::UserDailyHoursWidget, 226  
    Models::User, 220  
getNbHoursPerMonth  
    Models::User, 220  
getNbHoursPerWeek  
    Models::User, 221  
getNbProjects  
    Databases::ProjectDatabase, 174  
    Models::ContributoriesList, 82  
getNbQuotes  
    Databases::BillingDatabase, 37  
getNoSiret

- Models::User, 221
- getNumber
  - Gui::Dialogs::AddQuoteDialog, 24
  - Models::Billing, 28
- getPartial
  - Mustache::PartialFileLoader, 149
  - Mustache::PartialMap, 150
  - Mustache::PartialResolver, 151
- getPassword
  - Gui::Widgets::DatabaseSettingsWidget, 122
- getPath
  - Models::Billing, 28
  - Models::Customer, 104
- getPdflatexPath
  - Models::User, 221
- getPhone
  - Models::People, 155
- getPort
  - Gui::Widgets::DatabaseSettingsWidget, 122
- getPostalCode
  - Models::People, 155
- getPrice
  - Models::Billing, 28
  - Models::Calculable, 45
  - Models::ContributoriesList, 82
  - Models::Contributory, 94
- getProject
  - Databases::ProjectDatabase, 175
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 171
  - Models::Contributory, 94
- getProjects
  - Databases::ProjectDatabase, 175
  - Gui::Widgets::Delegates::ProjectComboDelegate, 168
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 171
  - Gui::Widgets::WdgModels::ProjectsTableModel, 180
  - Models::ContributoriesList, 83
  - Utils::HierarchicalSystem, 133
- getProjectsOfCustomer
  - Databases::ProjectDatabase, 175
- getProjectsTable
  - Databases::ProjectDatabase, 175
- getQuantity
  - Models::Contributory, 94
- getRate
  - Databases::RateDatabase, 187
  - Models::ContributoriesList, 83
- getSearchInBillsQuotes
  - Models::Search, 194
- getSearchInCompanies
  - Models::Search, 194
- getSearchInProjects
  - Models::Search, 194
- getSearchInReferentLastname
  - Models::Search, 194
- getSelectedProjects
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 171
- getSumQuantity
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, 87
  - Models::Billing, 29
  - Models::Calculable, 45
  - Models::ContributoriesList, 83
  - Models::Contributory, 94
- getText
  - Gui::Docks::SearchDock, 197
  - Models::Search, 194
- getTitle
  - Models::Billing, 29
  - Models::User, 221
- getTree
  - Databases::CustomerDatabase, 110
- getTurnover
  - Models::Customer, 104
- getTurnoverBetweenDates
  - Models::Statistics, 204
- getType
  - Utils::ItemType, 139
- getUnit
  - Models::Contributory, 94
- getUser
  - Databases::UserDatabase, 229
- getUserImage
  - Databases::UserDatabase, 229
- getWebsite
  - Models::People, 156
- getWorkspaceName
  - Models::User, 221
- getWorkspacePath
  - Models::User, 221
- gettype
  - Models::Unit, 215
- gettypeFiles
  - Gui::Widgets::Path::ChoseFileWidget, 69
- Gui, 17
- Gui::Dialogs::AddProjectDialog, 21
  - AddProjectDialog, 22
- Gui::Dialogs::AddQuoteDialog, 22
  - AddQuoteDialog, 23
  - fillQuoteBilling, 24
  - getCopy, 24
  - getCustomerId, 24
  - getNumber, 24
  - setCopy, 24
  - setQuoteldNumber, 25
- Gui::Dialogs::ComputeTurnoverDialog, 76
  - beginDateControl, 77
  - endDateControl, 77
  - fillLabels, 77
- Gui::Dialogs::DialogAddCustomer, 124
  - DialogAddCustomer, 124
- Gui::Dialogs::MessageBox, 147

- MessageBox, 147
- setImage, 148
- setText, 148
- Gui::Dialogs::StartedWindowsDialog, 201
  - databaseTypeChanged, 202
  - getImage, 202
  - isDatabaseCentralized, 202
  - isDatabaseTypeValid, 203
  - StartedWindowsDialog, 202
- Gui::Dialogs::StatisticsDialog, 204
  - singularPlural, 206
  - StatisticsDialog, 205
  - updateUi, 206
- Gui::Dialogs::UserDataDialog, 230
  - UserDataDialog, 231
- Gui::Docks::SearchDock, 196
  - getText, 197
  - search, 197
  - SearchDock, 197
  - textChanged, 197
- Gui::MainWindow, 142
  - addBill, 144
  - addDoc, 144
  - addProject, 144
  - addQuote, 145
  - editUser, 145
  - getCurrentCustomerId, 145
  - getCurrentCustomerName, 145
  - getCurrentProjectId, 145
  - getCurrentProjectName, 145
  - getCurrentQuoteId, 145
  - isEasterEgg, 146
  - MainWindow, 144
  - resizeEvent, 146
  - rootTree, 146
  - search, 146
  - treeLevel, 146
- Gui::Utils::Image, 134
  - bytesToPixmap, 135
  - getImage, 135
  - imageToBytes, 135
  - pixmapToBytes, 136
  - pixmapToImage, 136
- Gui::Utils::WindowSettings, 232
  - setMaximumSize, 232
  - setPositionToCenter, 232
- Gui::Widgets, 18
- Gui::Widgets::BrowseImageWidget, 43
  - BrowseImageWidget, 44
  - getExtension, 44
  - getImage, 44
  - setImage, 44
  - setImageScaled, 44
- Gui::Widgets::CheckFields::CheckCity, 46
  - CheckCity, 46
- Gui::Widgets::CheckFields::CheckCountry, 47
  - CheckCountry, 47
- Gui::Widgets::CheckFields::CheckEmail, 47
  - check, 48
  - CheckEmail, 48
- Gui::Widgets::CheckFields::CheckFieldsLetters, 49
  - check, 50
  - CheckFieldsLetters, 49
- Gui::Widgets::CheckFields::CheckFieldsNumbers, 51
  - check, 53
  - CheckFieldsNumbers, 52
- Gui::Widgets::CheckFields::CheckIpAddress, 53
  - check, 54
  - CheckIpAddress, 54
- Gui::Widgets::CheckFields::CheckLogin, 54
  - check, 55
  - CheckLogin, 55
- Gui::Widgets::CheckFields::CheckName, 56
  - CheckName, 56
- Gui::Widgets::CheckFields::CheckPhone, 56
  - check, 57
  - CheckPhone, 57
  - getCountry, 57
  - setCountry, 58
- Gui::Widgets::CheckFields::CheckPortNumber, 58
  - check, 59
  - CheckPortNumber, 59
- Gui::Widgets::CheckFields::CheckPostalCode, 59
  - check, 60
  - CheckPostalCode, 60
  - getCountry, 60
  - setCountry, 60
- Gui::Widgets::CheckFields::CheckQLineEdit, 61
  - CheckQLineEdit, 61
  - getBtnValid, 62
  - isValid, 62
  - setBtnValid, 62
- Gui::Widgets::CheckFields::CheckSiretNumber, 62
  - check, 63
  - CheckSiretNumber, 63
- Gui::Widgets::CheckFields::CheckUntilField, 63
  - check, 64
  - CheckUntilField, 64
- Gui::Widgets::CheckFields::CheckValidField, 64
  - check, 65
  - CheckValidField, 65
- Gui::Widgets::CheckFields::CheckWebsite, 66
  - check, 66
  - CheckWebsite, 66
- Gui::Widgets::CheckFields::ICheckField, 134
  - check, 134
- Gui::Widgets::CoffeeEasterEggWidget, 71
  - CoffeeEasterEggWidget, 72
  - isDrunked, 72
- Gui::Widgets::ComboBoxModelWidget, 75
  - ComboBoxModelWidget, 76
- Gui::Widgets::ContributoriesWidget, 88
  - add, 91
  - addProject, 91
  - ContributoriesWidget, 90
  - count, 91

- getContributories, 91
- responsiveContributoriesTable, 91
- Gui::Widgets::CustomerContextualMenu, 105
  - CustomerContextualMenu, 105
- Gui::Widgets::CustomerDataWidget, 111
  - CustomerDataWidget, 112
  - printInformations, 112
- Gui::Widgets::DatabaseSettingsWidget, 120
  - DatabaseSettingsWidget, 121
  - getDatabaseName, 121
  - getDomainNameOrIP, 121
  - getLogin, 122
  - getPassword, 122
  - getPort, 122
  - isValid, 122
- Gui::Widgets::Delegates::ComboBoxDelegate, 72
  - ComboBoxDelegate, 73
  - createEditor, 73
  - paint, 73
  - setEditorData, 75
  - setModelData, 75
  - updateEditorGeometry, 75
- Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 126
  - createEditor, 127
  - DoubleSpinBoxDelegate, 127
  - setEditorData, 127
  - setModelData, 129
  - updateEditorGeometry, 129
- Gui::Widgets::Delegates::ProjectComboDelegate, 167
  - createEditor, 168
  - getProjects, 168
  - isLocked, 168
  - paint, 168
  - ProjectComboDelegate, 168
  - setLocked, 169
- Gui::Widgets::Delegates::TextareaDelegate, 212
  - createEditor, 213
  - setEditorData, 213
  - setModelData, 213
  - TextareaDelegate, 213
  - updateEditorGeometry, 213
- Gui::Widgets::Delegates::UnitComboDelegate, 216
  - createEditor, 217
  - paint, 217
  - UnitComboDelegate, 217
- Gui::Widgets::Path::ChoseDirectoryWidget, 67
  - ChoseDirectoryWidget, 67
- Gui::Widgets::Path::ChoseFileWidget, 68
  - ChoseFileWidget, 68
  - gettypeFiles, 69
  - setTypeFiles, 69
- Gui::Widgets::Path::ChosePathWidget, 69
  - ChosePathWidget, 70
  - getDefaultLocation, 70
  - getField, 70
  - setField, 70
- Gui::Widgets::Popup, 161
- Gui::Widgets::ProjectsWidget, 181
  - ProjectsWidget, 182
  - updateBtn, 182
- Gui::Widgets::RateWidget, 188
  - getDailyRate, 189
  - getHourlyRate, 189
  - RateWidget, 189
  - setDailyRate, 189
  - setHourlyRate, 189
  - setWidgetDailyRateValue, 189
  - setWidgetHourlyRateValue, 190
- Gui::Widgets::UserDailyHoursWidget, 225
  - dailyHoursValueHasChanged, 226
  - getNbDaysPerMonth, 226
  - getNbDaysPerWeek, 226
  - getNbHoursPerDay, 226
  - monthlyDaysValueHasChanged, 226
  - setNbDaysPerMonth, 228
  - setNbDaysPerWeek, 228
  - setNbHoursPerDay, 228
  - UserDailyHoursWidget, 226
  - weeklyDaysValueHasChanged, 228
- Gui::Widgets::WdgModels::BillingsTableModel, 40
  - append, 41
  - BillingsTableModel, 41
  - columnCount, 41
  - count, 41
  - data, 41
  - flags, 42
  - getBillings, 42
  - headerData, 42
  - remove, 42
  - rowCount, 42
  - setData, 43
- Gui::Widgets::WdgModels::ContributoriesTableModel, 85
  - append, 86
  - columnCount, 86
  - ContributoriesTableModel, 86
  - count, 86
  - data, 87
  - flags, 87
  - getContributories, 87
  - getSumQuantity, 87
  - headerData, 87
  - remove, 88
  - rowCount, 88
  - setData, 88
- Gui::Widgets::WdgModels::CustomersTableModel, 113
  - append, 115
  - columnCount, 115
  - count, 115
  - CustomersTableModel, 114
  - data, 115
  - flags, 115
  - getCustomers, 115
  - headerData, 116
  - remove, 116
  - rowCount, 116

- setData, 116
- Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 169
  - allProjectsChosen, 170
  - append, 170
  - columnCount, 170
  - data, 171
  - flags, 171
  - getProject, 171
  - getProjects, 171
  - getSelectedProjects, 171
  - headerData, 172
  - ProjectContributoriesTableModel, 170
  - remove, 172
  - rowCount, 172
  - setData, 172
- Gui::Widgets::WdgModels::ProjectsTableModel, 178
  - append, 179
  - columnCount, 179
  - count, 179
  - data, 179
  - flags, 180
  - getProjects, 180
  - headerData, 180
  - ProjectsTableModel, 179
  - remove, 180
  - rowCount, 180
  - setData, 181
- Gui::Widgets::searchWidget, 198
  - getCurrentCustomerId, 200
  - getCustomerId, 200
  - isCustomerSelected, 200
  - search, 200
  - searchWidget, 199
  - selectCustomer, 200
  - setCustomerId, 200
- headerData
  - Gui::Widgets::WdgModels::BillingsTableModel, 42
  - Gui::Widgets::WdgModels::ContributoriesTableModel, 87
  - Gui::Widgets::WdgModels::CustomersTableModel, 116
  - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 172
  - Gui::Widgets::WdgModels::ProjectsTableModel, 180
- HierarchicalSystemTest, 133
- hydrat
  - Models::Billing, 29
  - Models::Contributory, 95
  - Models::Customer, 104
  - Models::IModel, 137
  - Models::Project, 164
  - Models::User, 221
- imageToBytes
  - Gui::Utils::Image, 135
- instance
  - Databases::BillingDatabase, 37
  - Databases::ContributoryDatabase, 98
  - Databases::CustomerDatabase, 110
  - Databases::Database, 118
  - Databases::ProjectDatabase, 177
  - Databases::RateDatabase, 187
  - Databases::UserDatabase, 230
  - Utils::Log, 141
- InvertedSectionStart
  - Mustache::Tag, 209
- isArchived
  - Models::Customer, 104
- isBilling
  - Models::Billing, 29
- isBillingPaid
  - Databases::BillingDatabase, 37
- isCustomerSelected
  - Gui::Widgets::searchWidget, 200
- isDatabaseCentralized
  - Gui::Dialogs::StartedWindowsDialog, 202
- isDatabaseTypeValid
  - Gui::Dialogs::StartedWindowsDialog, 203
- isDrinked
  - Gui::Widgets::CoffeeEasterEggWidget, 72
- isEasterEgg
  - Gui::MainWindow, 146
- isFalse
  - Mustache::Context, 78
  - Mustache::QtVariantContext, 184
- isInsert
  - Models::ContributoriesList, 83
- isLocked
  - Gui::Widgets::Delegates::ProjectComboDelegate, 168
- isPaid
  - Models::Billing, 29
- isToRemoved
  - Models::IModel, 138
- isValid
  - Gui::Widgets::CheckFields::CheckQLineEdit, 62
  - Gui::Widgets::DatabaseSettingsWidget, 122
- ItemType
  - Utils::ItemType, 139
- ItemTypeTest, 140
- lastError
  - Databases::Database, 118
- listCount
  - Mustache::Context, 79
  - Mustache::QtVariantContext, 184
- MainWindow
  - Gui::MainWindow, 144
- makeDirectory
  - Utils::Directories, 125
- MessageBox
  - Gui::Dialogs::MessageBox, 147
- Models, 19
  - Models::Billing, 25

- addContributory, [27](#)
- Billing, [27](#)
- getContributories, [27](#)
- getDataMap, [27](#)
- getDate, [27](#)
- getDescription, [27](#)
- getFilename, [28](#)
- getFolder, [28](#)
- getItem, [28](#)
- getNumber, [28](#)
- getPath, [28](#)
- getPrice, [28](#)
- getSumQuantity, [29](#)
- getTitle, [29](#)
- hydrat, [29](#)
- isBilling, [29](#)
- isPaid, [29](#)
- operator<, [30](#)
- operator==, [30](#)
- setDate, [30](#)
- setDescription, [30](#)
- setIsBilling, [30](#)
- setIsPaid, [31](#)
- setNumber, [31](#)
- setTitle, [31](#)
- Models::Calculable, [45](#)
  - getPrice, [45](#)
  - getSumQuantity, [45](#)
- Models::ContributoriesList, [80](#)
  - addContributory, [81](#)
  - addProject, [81](#)
  - getAllContributories, [81](#)
  - getContributories, [81](#)
  - getCustomer, [82](#)
  - getDataMap, [82](#)
  - getIdBilling, [82](#)
  - getNbProjects, [82](#)
  - getPrice, [82](#)
  - getProjects, [83](#)
  - getRate, [83](#)
  - getSumQuantity, [83](#)
  - isInsert, [83](#)
  - setAllIdContributories, [83](#)
  - setIdBilling, [85](#)
  - setInsert, [85](#)
- Models::Contributory, [92](#)
  - Contributory, [93](#)
  - getDataMap, [93](#)
  - getDescription, [93](#)
  - getHourlyRate, [93](#)
  - getLongDescription, [94](#)
  - getPrice, [94](#)
  - getProject, [94](#)
  - getQuantity, [94](#)
  - getSumQuantity, [94](#)
  - getUnit, [94](#)
  - hydrat, [95](#)
  - operator==, [95](#)
  - setDescription, [95](#)
  - setHourlyRate, [95](#)
  - setLongDescription, [96](#)
  - setProject, [96](#)
  - setQuantity, [96](#)
  - setUnit, [96](#)
- Models::Customer, [102](#)
  - commit, [103](#)
  - Customer, [103](#)
  - getDataMap, [103](#)
  - getImage, [103](#)
  - getNameFolder, [104](#)
  - getPath, [104](#)
  - getTurnover, [104](#)
  - hydrat, [104](#)
  - isArchived, [104](#)
  - setImage, [104](#)
  - setIsArchived, [105](#)
- Models::IModel, [136](#)
  - getDataMap, [137](#)
  - getId, [137](#)
  - hydrat, [137](#)
  - isToRemoved, [138](#)
  - setId, [138](#)
  - setToRemoved, [138](#)
- Models::People, [152](#)
  - getAddress, [154](#)
  - getAddressComplement, [154](#)
  - getCity, [154](#)
  - getCompany, [154](#)
  - getCountry, [154](#)
  - getEmail, [154](#)
  - getExtensionImage, [154](#)
  - getFax, [155](#)
  - getFirstname, [155](#)
  - getImage, [155](#)
  - getLastname, [155](#)
  - getMobilePhone, [155](#)
  - getPhone, [155](#)
  - getPostalCode, [155](#)
  - getWebsite, [156](#)
  - operator==, [156](#)
  - setAddress, [156](#)
  - setAddressComplement, [156](#)
  - setCity, [157](#)
  - setCompany, [157](#)
  - setCountry, [157](#)
  - setEmail, [157](#)
  - setExtensionImage, [157](#)
  - setFax, [157](#)
  - setFirstname, [158](#)
  - setImage, [158](#)
  - setLastname, [158](#)
  - setMobilePhone, [158](#)
  - setPhone, [158](#)
  - setPostalCode, [158](#)
  - setWebsite, [158](#)
- Models::Project, [161](#)

- getBeginDate, 163
- getCost, 163
- getCustomer, 163
- getDailyRate, 163
- getDataMap, 163
- getDescription, 164
- getEndDate, 164
- getName, 164
- hydrat, 164
- operator<, 164
- operator==, 166
- Project, 163
- setBeginDate, 166
- setCustomer, 166
- setDailyRate, 166
- setDescription, 166
- setEndDate, 166
- setName, 167
- Models::Rate, 184
  - getDailyRate, 185
  - getHourlyRate, 185
  - getLegalRate, 186
  - getNbDailyHours, 186
  - Rate, 185
- Models::Search, 191
  - filterOnBillsOrQuotes, 192
  - filterOnCompany, 192
  - filterOnContributories, 192
  - filterOnCustomersWithoutProject, 193
  - filterOnNumberElements, 193
  - filterOnProjects, 193
  - filterOnReferentLastname, 193
  - filterOnVarcharElements, 193
  - getFilter, 193
  - getGroupFilter, 194
  - getSearchInBillsQuotes, 194
  - getSearchInCompanies, 194
  - getSearchInProjects, 194
  - getSearchInReferentLastname, 194
  - getText, 194
  - searchInContributories, 194
  - setGroupFilter, 195
  - setSearchInBillsQuotes, 195
  - setSearchInCompanies, 195
  - setSearchInContributories, 195
  - setSearchInProjects, 195
  - setSearchInReferentLastname, 195
  - setText, 196
- Models::Statistics, 203
  - getGlobalTurnover, 203
  - getTurnoverBetweenDates, 204
- Models::Unit, 215
  - gettype, 215
  - operator==, 216
  - setType, 216
  - toString, 216
  - Unit, 215
- Models::User, 218
  - getDataMap, 220
  - getImage, 220
  - getNbDaysPerMonth, 220
  - getNbDaysPerWeek, 220
  - getNbHoursPerDay, 220
  - getNbHoursPerMonth, 220
  - getNbHoursPerWeek, 221
  - getNoSiret, 221
  - getPdflatexPath, 221
  - getTitle, 221
  - getWorkspaceName, 221
  - getWorkspacePath, 221
  - hydrat, 221
  - operator==, 223
  - setImage, 223
  - setNbDaysPerMonth, 223
  - setNbDaysPerWeek, 223
  - setNbHoursPerDay, 224
  - setNoSiret, 224
  - setPdflatexPath, 224
  - setTitle, 224
  - setWorkspaceName, 224
  - setWorkspacePath, 224
  - updateFolders, 224
  - User, 220
- monthlyDaysValueHasChanged
  - Gui::Widgets::UserDailyHoursWidget, 226
- Mustache::Tag
  - Comment, 209
  - InvertedSectionStart, 209
  - Partial, 209
  - SectionEnd, 209
  - SectionStart, 209
  - SetDelimiter, 209
- Mustache::Context, 77
  - canEval, 78
  - Context, 78
  - eval, 78
  - isFalse, 78
  - listCount, 79
  - partialResolver, 79
  - partialValue, 79
  - pop, 79
  - push, 79
  - stringValue, 79
- Mustache::PartialFileLoader, 149
  - getPartial, 149
- Mustache::PartialMap, 149
  - getPartial, 150
- Mustache::PartialResolver, 150
  - getPartial, 151
- Mustache::QtVariantContext, 182
  - canEval, 183
  - eval, 183
  - fn\_t, 183
  - isFalse, 184
  - listCount, 184
  - pop, 184



- push, 184
  - stringValue, 184
- Mustache::Renderer, 190
  - error, 190
  - errorPartial, 190
  - errorPos, 190
  - render, 190
  - setTagMarkers, 191
- Mustache::Tag, 208
  - Type, 209
- operator<
  - Models::Billing, 30
  - Models::Project, 164
- operator<<
  - Utils::Log, 141
- operator==
  - Models::Billing, 30
  - Models::Contributory, 95
  - Models::People, 156
  - Models::Project, 166
  - Models::Unit, 216
  - Models::User, 223
- paint
  - Gui::Widgets::Delegates::ComboBoxDelegate, 73
  - Gui::Widgets::Delegates::ProjectComboDelegate, 168
  - Gui::Widgets::Delegates::UnitComboDelegate, 217
- Parameters, 148
  - DB\_FILENAME, 148
  - VERSION, 149
- Partial
  - Mustache::Tag, 209
- partialResolver
  - Mustache::Context, 79
- partialValue
  - Mustache::Context, 79
- PdfGenerator
  - Generator::PdfGenerator, 151
- pixmapToBytes
  - Gui::Utils::Image, 136
- pixmapToImage
  - Gui::Utils::Image, 136
- PointersTest, 160
- pop
  - Mustache::Context, 79
  - Mustache::QtVariantContext, 184
- popupMessage
  - Exceptions::DbException, 123
  - Exceptions::FileException, 130
- printInformations
  - Gui::Widgets::CustomerDataWidget, 112
- Project
  - Models::Project, 163
- ProjectComboDelegate
  - Gui::Widgets::Delegates::ProjectComboDelegate, 168
- ProjectContributoriesTableModel
  - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 170
- ProjectDatabaseTest, 177
- ProjectModelTest, 178
- ProjectsTableModel
  - Gui::Widgets::WdgModels::ProjectsTableModel, 179
- ProjectsWidget
  - Gui::Widgets::ProjectsWidget, 182
- push
  - Mustache::Context, 79
  - Mustache::QtVariantContext, 184
- Rate
  - Models::Rate, 185
- RateModelTest, 188
- RateWidget
  - Gui::Widgets::RateWidget, 189
- remove
  - Gui::Widgets::WdgModels::BillingsTableModel, 42
  - Gui::Widgets::WdgModels::ContributoriesTableModel, 88
  - Gui::Widgets::WdgModels::CustomersTableModel, 116
  - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 172
  - Gui::Widgets::WdgModels::ProjectsTableModel, 180
- removeBilling
  - Databases::BillingDatabase, 39
- removeBillingProject
  - Databases::BillingDatabase, 39
- removeContributory
  - Databases::ContributoryDatabase, 98
- removeCustomer
  - Databases::CustomerDatabase, 110
- removeProject
  - Databases::ProjectDatabase, 177
- render
  - Mustache::Renderer, 190
- resizeEvent
  - Gui::MainWindow, 146
- responsiveContributoriesTable
  - Gui::Widgets::ContributoriesWidget, 91
- rootTree
  - Gui::MainWindow, 146
- round
  - Utils::Double, 126
- rowCount
  - Gui::Widgets::WdgModels::BillingsTableModel, 42
  - Gui::Widgets::WdgModels::ContributoriesTableModel, 88
  - Gui::Widgets::WdgModels::CustomersTableModel, 116
  - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 172
  - Gui::Widgets::WdgModels::ProjectsTableModel, 180



- search
  - Gui::Docks::SearchDock, 197
  - Gui::MainWindow, 146
  - Gui::Widgets::searchWidget, 200
- SearchDock
  - Gui::Docks::SearchDock, 197
- searchInContributories
  - Models::Search, 194
- searchTest, 197
- searchWidget
  - Gui::Widgets::searchWidget, 199
- SectionEnd
  - Mustache::Tag, 209
- SectionStart
  - Mustache::Tag, 209
- selectCustomer
  - Gui::Widgets::searchWidget, 200
- SetDelimiter
  - Mustache::Tag, 209
- setAddress
  - Models::People, 156
- setAddressComplement
  - Models::People, 156
- setAllIdContributories
  - Models::ContributoriesList, 83
- setBeginDate
  - Models::Project, 166
- setBtnValid
  - Gui::Widgets::CheckFields::CheckQLineEdit, 62
- setCity
  - Models::People, 157
- setCompany
  - Models::People, 157
- setCopy
  - Gui::Dialogs::AddQuoteDialog, 24
- setCountry
  - Gui::Widgets::CheckFields::CheckPhone, 58
  - Gui::Widgets::CheckFields::CheckPostalCode, 60
  - Models::People, 157
- setCustomer
  - Models::Project, 166
- setCustomerImage
  - Databases::CustomerDatabase, 110
- setDailyRate
  - Gui::Widgets::RateWidget, 189
  - Models::Project, 166
- setData
  - Gui::Widgets::WdgModels::BillingsTableModel, 43
  - Gui::Widgets::WdgModels::ContributoriesTable-Model, 88
  - Gui::Widgets::WdgModels::CustomersTableModel, 116
  - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 172
  - Gui::Widgets::WdgModels::ProjectsTableModel, 181
- setDatabase
  - Databases::Database, 120
- setDate
  - Models::Billing, 30
- setDescription
  - Models::Billing, 30
  - Models::Contributory, 95
  - Models::Project, 166
- setEditorData
  - Gui::Widgets::Delegates::ComboBoxDelegate, 75
  - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 127
  - Gui::Widgets::Delegates::TextareaDelegate, 213
- setEmail
  - Models::People, 157
- setEndDate
  - Models::Project, 166
- setExtensionImage
  - Models::People, 157
- setFax
  - Models::People, 157
- setField
  - Gui::Widgets::Path::ChosePathWidget, 70
- setFirstname
  - Models::People, 158
- setGroupFilter
  - Models::Search, 195
- setHourlyRate
  - Gui::Widgets::RateWidget, 189
  - Models::Contributory, 95
- setId
  - Models::IModel, 138
- setIdBilling
  - Models::ContributoriesList, 85
- setIdCustomer
  - Gui::Widgets::searchWidget, 200
- setImage
  - Gui::Dialogs::MessageBox, 148
  - Gui::Widgets::BrowseImageWidget, 44
  - Models::Customer, 104
  - Models::People, 158
  - Models::User, 223
- setImageScaled
  - Gui::Widgets::BrowseImageWidget, 44
- setInsert
  - Models::ContributoriesList, 85
- setIsArchived
  - Models::Customer, 105
- setIsBilling
  - Models::Billing, 30
- setIsPaid
  - Models::Billing, 31
- setLastname
  - Models::People, 158
- setLocked
  - Gui::Widgets::Delegates::ProjectComboDelegate, 169
- setLongDescription
  - Models::Contributory, 96
- setMaximumSize

- Gui::Utils::WindowSettings, [232](#)
- setMobilePhone
  - Models::People, [158](#)
- setModelData
  - Gui::Widgets::Delegates::ComboBoxDelegate, [75](#)
  - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, [129](#)
  - Gui::Widgets::Delegates::TextareaDelegate, [213](#)
- setName
  - Models::Project, [167](#)
  - Utils::ItemType, [140](#)
- setNbDaysPerMonth
  - Gui::Widgets::UserDailyHoursWidget, [228](#)
  - Models::User, [223](#)
- setNbDaysPerWeek
  - Gui::Widgets::UserDailyHoursWidget, [228](#)
  - Models::User, [223](#)
- setNbHoursPerDay
  - Gui::Widgets::UserDailyHoursWidget, [228](#)
  - Models::User, [224](#)
- setNoSiret
  - Models::User, [224](#)
- setNumber
  - Models::Billing, [31](#)
- setPdflatexPath
  - Models::User, [224](#)
- setPhone
  - Models::People, [158](#)
- setPositionToCenter
  - Gui::Utils::WindowSettings, [232](#)
- setPostalCode
  - Models::People, [158](#)
- setProject
  - Models::Contributory, [96](#)
- setQuantity
  - Models::Contributory, [96](#)
- setQuoteIdNumber
  - Gui::Dialogs::AddQuoteDialog, [25](#)
- setSearchInBillsQuotes
  - Models::Search, [195](#)
- setSearchInCompanies
  - Models::Search, [195](#)
- setSearchInContributories
  - Models::Search, [195](#)
- setSearchInProjects
  - Models::Search, [195](#)
- setSearchInReferentLastname
  - Models::Search, [195](#)
- setTagMarkers
  - Mustache::Renderer, [191](#)
- setText
  - Gui::Dialogs::MessageBox, [148](#)
  - Models::Search, [196](#)
- setTitle
  - Models::Billing, [31](#)
  - Models::User, [224](#)
- setToRemoved
  - Models::IModel, [138](#)
- setType
  - Models::Unit, [216](#)
  - Utils::ItemType, [140](#)
- setTypeFiles
  - Gui::Widgets::Path::ChoseFileWidget, [69](#)
- setUnit
  - Models::Contributory, [96](#)
- setUserImage
  - Databases::UserDatabase, [230](#)
- setWebsite
  - Models::People, [158](#)
- setWidgetDailyRateValue
  - Gui::Widgets::RateWidget, [189](#)
- setWidgetHourlyRateValue
  - Gui::Widgets::RateWidget, [190](#)
- setWorkspaceName
  - Models::User, [224](#)
- setWorkspacePath
  - Models::User, [224](#)
- singularPlural
  - Gui::Dialogs::StatisticsDialog, [206](#)
- StartedWindowsDialog
  - Gui::Dialogs::StartedWindowsDialog, [202](#)
- StatisticModelTest, [203](#)
- StatisticsDialog
  - Gui::Dialogs::StatisticsDialog, [205](#)
- StringTest, [208](#)
- stringValue
  - CounterContext, [101](#), [102](#)
  - Mustache::Context, [79](#)
  - Mustache::QtVariantContext, [184](#)
- TestAdder< T >, [209](#)
- TestMustache, [210](#)
- TestRunner, [210](#)
- testadder, [209](#)
- TexGenerator
  - Generator::TexGenerator, [211](#)
- textChanged
  - Gui::Docks::SearchDock, [197](#)
- TextareaDelegate
  - Gui::Widgets::Delegates::TextareaDelegate, [213](#)
- toString
  - Models::Unit, [216](#)
- treeLevel
  - Gui::MainWindow, [146](#)
- Type
  - Mustache::Tag, [209](#)
- Unit
  - Models::Unit, [215](#)
- UnitComboDelegate
  - Gui::Widgets::Delegates::UnitComboDelegate, [217](#)
- updateBtn
  - Gui::Widgets::ProjectsWidget, [182](#)
- updateCustomer
  - Databases::CustomerDatabase, [111](#)
- updateEditorGeometry
  - Gui::Widgets::Delegates::ComboBoxDelegate, [75](#)

- Gui::Widgets::Delegates::DoubleSpinBoxDelegate,  
129
- Gui::Widgets::Delegates::TextareaDelegate, 213
- updateFolders
  - Models::User, 224
- updateProject
  - Databases::ProjectDatabase, 177
- updateRateProject
  - Databases::RateDatabase, 187
- updateUi
  - Gui::Dialogs::StatisticsDialog, 206
- User
  - Models::User, 220
- UserDailyHoursWidget
  - Gui::Widgets::UserDailyHoursWidget, 226
- UserDataDialog
  - Gui::Dialogs::UserDataDialog, 231
- UserDatabaseTest, 230
- UserModelTest, 231
- Utils::Directories, 125
  - makeDirectory, 125
- Utils::Double, 126
  - round, 126
- Utils::HierarchicalSystem, 131
  - addBillingToProject, 132
  - addProjectToCustomer, 133
  - getCustomers, 133
  - getProjects, 133
- Utils::ItemType, 138
  - getModel, 139
  - getName, 139
  - getType, 139
  - ItemType, 139
  - setName, 140
  - setType, 140
- Utils::Log, 140
  - instance, 141
  - operator<<, 141
  - write, 141
- Utils::String, 206
  - firstLetterToUpper, 207
  - getExtensionFile, 208
- Utils::pointers, 160
  - deleteIfNotNull, 160
- VERSION
  - Parameters, 149
- value
  - Databases::Database, 120
- weeklyDaysValueHasChanged
  - Gui::Widgets::UserDailyHoursWidget, 228
- write
  - Utils::Log, 141