

FactDev

0.1

Generated by Doxygen 1.8.6

Mon Apr 13 2015 21:00:41

Contents

| | | |
|----------|--|-----------|
| 1 | FactDev documentation | 1 |
| 2 | README | 3 |
| 3 | QTestRunner | 5 |
| 4 | Namespace Index | 7 |
| 4.1 | Namespace List | 7 |
| 5 | Hierarchical Index | 9 |
| 5.1 | Class Hierarchy | 9 |
| 6 | Class Index | 13 |
| 6.1 | Class List | 13 |
| 7 | Namespace Documentation | 17 |
| 7.1 | Databases Namespace Reference | 17 |
| 7.1.1 | Detailed Description | 17 |
| 7.2 | Gui Namespace Reference | 17 |
| 7.2.1 | Detailed Description | 18 |
| 7.3 | Gui::Widgets Namespace Reference | 18 |
| 7.3.1 | Detailed Description | 18 |
| 7.4 | Models Namespace Reference | 19 |
| 7.4.1 | Detailed Description | 19 |
| 8 | Class Documentation | 21 |
| 8.1 | Databases::AccessDatabase Class Reference | 21 |
| 8.2 | Gui::Dialogs::AddProjectDialog Class Reference | 21 |
| 8.2.1 | Detailed Description | 22 |
| 8.2.2 | Constructor & Destructor Documentation | 22 |
| 8.2.2.1 | AddProjectDialog | 22 |
| 8.3 | Gui::Dialogs::AddQuoteDialog Class Reference | 22 |
| 8.3.1 | Detailed Description | 23 |
| 8.3.2 | Constructor & Destructor Documentation | 23 |

| | | |
|----------|--|----|
| 8.3.2.1 | AddQuoteDialog | 23 |
| 8.3.3 | Member Function Documentation | 24 |
| 8.3.3.1 | fillQuoteBilling | 24 |
| 8.3.3.2 | getCopy | 24 |
| 8.3.3.3 | getIdCustomer | 24 |
| 8.3.3.4 | getNumber | 24 |
| 8.3.3.5 | setCopy | 24 |
| 8.3.3.6 | setQuoteIdNumber | 25 |
| 8.4 | Models::Billing Class Reference | 25 |
| 8.4.1 | Detailed Description | 27 |
| 8.4.2 | Constructor & Destructor Documentation | 27 |
| 8.4.2.1 | Billing | 27 |
| 8.4.3 | Member Function Documentation | 27 |
| 8.4.3.1 | addContributory | 27 |
| 8.4.3.2 | getContributories | 27 |
| 8.4.3.3 | getDataMap | 27 |
| 8.4.3.4 | getDate | 27 |
| 8.4.3.5 | getDescription | 28 |
| 8.4.3.6 | getFilename | 28 |
| 8.4.3.7 | getFolder | 28 |
| 8.4.3.8 | getItem | 28 |
| 8.4.3.9 | getNumber | 28 |
| 8.4.3.10 | getPath | 28 |
| 8.4.3.11 | getPrice | 29 |
| 8.4.3.12 | getSumQuantity | 29 |
| 8.4.3.13 | getTitle | 29 |
| 8.4.3.14 | hydrat | 29 |
| 8.4.3.15 | isBilling | 29 |
| 8.4.3.16 | isPaid | 29 |
| 8.4.3.17 | operator!= | 29 |
| 8.4.3.18 | operator< | 30 |
| 8.4.3.19 | operator== | 30 |
| 8.4.3.20 | setDate | 30 |
| 8.4.3.21 | setDescription | 30 |
| 8.4.3.22 | setIsBilling | 30 |
| 8.4.3.23 | setIsPaid | 31 |
| 8.4.3.24 | setNumber | 31 |
| 8.4.3.25 | setTitle | 31 |
| 8.5 | Databases::BillingDatabase Class Reference | 31 |
| 8.5.1 | Detailed Description | 33 |

| | | |
|----------|---|----|
| 8.5.2 | Member Function Documentation | 33 |
| 8.5.2.1 | addBilling | 33 |
| 8.5.2.2 | addBillingProject | 33 |
| 8.5.2.3 | getAllBillingsOfProject | 33 |
| 8.5.2.4 | getBilling | 33 |
| 8.5.2.5 | getBilling | 34 |
| 8.5.2.6 | getBillingsTable | 35 |
| 8.5.2.7 | getBills | 35 |
| 8.5.2.8 | getBillsBetweenDates | 35 |
| 8.5.2.9 | getBillsPaid | 35 |
| 8.5.2.10 | getMaxBillingNumber | 36 |
| 8.5.2.11 | getMaxBillingNumberOfCustomer | 36 |
| 8.5.2.12 | getMaxQuoteNumber | 36 |
| 8.5.2.13 | getMaxQuoteNumberOfCustomer | 36 |
| 8.5.2.14 | getNbBills | 36 |
| 8.5.2.15 | getNbBillsPaid | 37 |
| 8.5.2.16 | getNbDocs | 37 |
| 8.5.2.17 | getNbQuotes | 37 |
| 8.5.2.18 | instance | 37 |
| 8.5.2.19 | isBillingPaid | 38 |
| 8.5.2.20 | removeBilling | 39 |
| 8.5.2.21 | removeBillingProject | 39 |
| 8.6 | BillingDatabaseTest Class Reference | 39 |
| 8.7 | BillingModelTest Class Reference | 39 |
| 8.8 | Gui::Widgets::WdgModels::BillingsTableModel Class Reference | 40 |
| 8.8.1 | Detailed Description | 41 |
| 8.8.2 | Constructor & Destructor Documentation | 41 |
| 8.8.2.1 | BillingsTableModel | 41 |
| 8.8.3 | Member Function Documentation | 41 |
| 8.8.3.1 | append | 41 |
| 8.8.3.2 | columnCount | 41 |
| 8.8.3.3 | count | 41 |
| 8.8.3.4 | data | 41 |
| 8.8.3.5 | flags | 42 |
| 8.8.3.6 | getBillings | 42 |
| 8.8.3.7 | headerData | 42 |
| 8.8.3.8 | remove | 42 |
| 8.8.3.9 | rowCount | 43 |
| 8.8.3.10 | setData | 43 |
| 8.9 | Gui::Widgets::BrowseImageWidget Class Reference | 43 |

| | | |
|----------|---|----|
| 8.9.1 | Detailed Description | 44 |
| 8.9.2 | Constructor & Destructor Documentation | 44 |
| 8.9.2.1 | BrowseImageWidget | 44 |
| 8.9.3 | Member Function Documentation | 44 |
| 8.9.3.1 | getExtension | 44 |
| 8.9.3.2 | getImage | 44 |
| 8.9.3.3 | setImage | 44 |
| 8.9.3.4 | setImageScaled | 44 |
| 8.10 | Models::Calculable Class Reference | 45 |
| 8.10.1 | Detailed Description | 45 |
| 8.10.2 | Member Function Documentation | 45 |
| 8.10.2.1 | getPrice | 45 |
| 8.10.2.2 | getSumQuantity | 45 |
| 8.11 | Gui::Widgets::CheckFields::CheckCity Class Reference | 46 |
| 8.11.1 | Detailed Description | 46 |
| 8.11.2 | Constructor & Destructor Documentation | 46 |
| 8.11.2.1 | CheckCity | 46 |
| 8.12 | Gui::Widgets::CheckFields::CheckCountry Class Reference | 47 |
| 8.12.1 | Detailed Description | 47 |
| 8.12.2 | Constructor & Destructor Documentation | 47 |
| 8.12.2.1 | CheckCountry | 47 |
| 8.13 | Gui::Widgets::CheckFields::CheckEmail Class Reference | 47 |
| 8.13.1 | Detailed Description | 48 |
| 8.13.2 | Constructor & Destructor Documentation | 48 |
| 8.13.2.1 | CheckEmail | 48 |
| 8.13.3 | Member Function Documentation | 48 |
| 8.13.3.1 | check | 48 |
| 8.14 | Gui::Widgets::CheckFields::CheckFieldsLetters Class Reference | 49 |
| 8.14.1 | Detailed Description | 49 |
| 8.14.2 | Constructor & Destructor Documentation | 49 |
| 8.14.2.1 | CheckFieldsLetters | 49 |
| 8.14.3 | Member Function Documentation | 50 |
| 8.14.3.1 | check | 50 |
| 8.15 | Gui::Widgets::CheckFields::CheckFieldsNumbers Class Reference | 51 |
| 8.15.1 | Detailed Description | 51 |
| 8.15.2 | Constructor & Destructor Documentation | 52 |
| 8.15.2.1 | CheckFieldsNumbers | 52 |
| 8.15.3 | Member Function Documentation | 53 |
| 8.15.3.1 | check | 53 |
| 8.16 | Gui::Widgets::CheckFields::CheckIpAddress Class Reference | 53 |

| | |
|---|----|
| 8.16.1 Detailed Description | 53 |
| 8.16.2 Constructor & Destructor Documentation | 54 |
| 8.16.2.1 CheckIpAddress | 54 |
| 8.16.3 Member Function Documentation | 54 |
| 8.16.3.1 check | 54 |
| 8.17 Gui::Widgets::CheckFields::CheckLogin Class Reference | 54 |
| 8.17.1 Detailed Description | 55 |
| 8.17.2 Constructor & Destructor Documentation | 55 |
| 8.17.2.1 CheckLogin | 55 |
| 8.17.3 Member Function Documentation | 55 |
| 8.17.3.1 check | 55 |
| 8.18 Gui::Widgets::CheckFields::CheckName Class Reference | 56 |
| 8.18.1 Detailed Description | 56 |
| 8.18.2 Constructor & Destructor Documentation | 56 |
| 8.18.2.1 CheckName | 56 |
| 8.19 Gui::Widgets::CheckFields::CheckPhone Class Reference | 56 |
| 8.19.1 Detailed Description | 57 |
| 8.19.2 Constructor & Destructor Documentation | 57 |
| 8.19.2.1 CheckPhone | 57 |
| 8.19.3 Member Function Documentation | 57 |
| 8.19.3.1 check | 57 |
| 8.19.3.2 getCountry | 58 |
| 8.19.3.3 setCountry | 58 |
| 8.20 Gui::Widgets::CheckFields::CheckPortNumber Class Reference | 58 |
| 8.20.1 Detailed Description | 58 |
| 8.20.2 Constructor & Destructor Documentation | 59 |
| 8.20.2.1 CheckPortNumber | 59 |
| 8.20.3 Member Function Documentation | 59 |
| 8.20.3.1 check | 59 |
| 8.21 Gui::Widgets::CheckFields::CheckPostalCode Class Reference | 59 |
| 8.21.1 Detailed Description | 60 |
| 8.21.2 Constructor & Destructor Documentation | 60 |
| 8.21.2.1 CheckPostalCode | 60 |
| 8.21.3 Member Function Documentation | 60 |
| 8.21.3.1 check | 60 |
| 8.21.3.2 getCountry | 60 |
| 8.21.3.3 setCountry | 60 |
| 8.22 Gui::Widgets::CheckFields::CheckQLineEdit Class Reference | 61 |
| 8.22.1 Detailed Description | 61 |
| 8.22.2 Constructor & Destructor Documentation | 61 |

| | | |
|----------|---|----|
| 8.22.2.1 | CheckQLineEdit | 61 |
| 8.22.3 | Member Function Documentation | 62 |
| 8.22.3.1 | getBtnValid | 62 |
| 8.22.3.2 | isValid | 62 |
| 8.22.3.3 | setBtnValid | 62 |
| 8.23 | Gui::Widgets::CheckFields::CheckSiretNumber Class Reference | 62 |
| 8.23.1 | Detailed Description | 63 |
| 8.23.2 | Constructor & Destructor Documentation | 63 |
| 8.23.2.1 | CheckSiretNumber | 63 |
| 8.23.3 | Member Function Documentation | 63 |
| 8.23.3.1 | check | 63 |
| 8.24 | Gui::Widgets::CheckFields::CheckUntilField Class Reference | 63 |
| 8.24.1 | Detailed Description | 64 |
| 8.24.2 | Constructor & Destructor Documentation | 64 |
| 8.24.2.1 | CheckUntilField | 64 |
| 8.24.3 | Member Function Documentation | 64 |
| 8.24.3.1 | check | 64 |
| 8.25 | Gui::Widgets::CheckFields::CheckValidField Class Reference | 64 |
| 8.25.1 | Detailed Description | 65 |
| 8.25.2 | Constructor & Destructor Documentation | 65 |
| 8.25.2.1 | CheckValidField | 65 |
| 8.25.3 | Member Function Documentation | 65 |
| 8.25.3.1 | check | 65 |
| 8.26 | Gui::Widgets::CheckFields::CheckWebsite Class Reference | 66 |
| 8.26.1 | Detailed Description | 66 |
| 8.26.2 | Constructor & Destructor Documentation | 66 |
| 8.26.2.1 | CheckWebsite | 66 |
| 8.26.3 | Member Function Documentation | 66 |
| 8.26.3.1 | check | 66 |
| 8.27 | Gui::Widgets::Path::ChoseDirectoryWidget Class Reference | 67 |
| 8.27.1 | Detailed Description | 67 |
| 8.27.2 | Constructor & Destructor Documentation | 67 |
| 8.27.2.1 | ChoseDirectoryWidget | 67 |
| 8.28 | Gui::Widgets::Path::ChoseFileWidget Class Reference | 68 |
| 8.28.1 | Detailed Description | 68 |
| 8.28.2 | Constructor & Destructor Documentation | 68 |
| 8.28.2.1 | ChoseFileWidget | 68 |
| 8.28.3 | Member Function Documentation | 69 |
| 8.28.3.1 | getTypeFiles | 69 |
| 8.28.3.2 | setTypeFiles | 69 |

| | | |
|----------|---|----|
| 8.29 | Gui::Widgets::Path::ChosePathWidget Class Reference | 69 |
| 8.29.1 | Detailed Description | 70 |
| 8.29.2 | Constructor & Destructor Documentation | 70 |
| 8.29.2.1 | ChosePathWidget | 70 |
| 8.29.3 | Member Function Documentation | 70 |
| 8.29.3.1 | getDefaultLocation | 70 |
| 8.29.3.2 | getField | 70 |
| 8.29.3.3 | setField | 70 |
| 8.30 | Gui::Widgets::CoffeeEasterEggWidget Class Reference | 71 |
| 8.30.1 | Detailed Description | 72 |
| 8.30.2 | Constructor & Destructor Documentation | 72 |
| 8.30.2.1 | CoffeeEasterEggWidget | 72 |
| 8.30.3 | Member Function Documentation | 72 |
| 8.30.3.1 | isDrunked | 72 |
| 8.31 | Gui::Widgets::Delegates::ComboBoxDelegate Class Reference | 72 |
| 8.31.1 | Detailed Description | 73 |
| 8.31.2 | Constructor & Destructor Documentation | 73 |
| 8.31.2.1 | ComboBoxDelegate | 73 |
| 8.31.3 | Member Function Documentation | 73 |
| 8.31.3.1 | createEditor | 73 |
| 8.31.3.2 | paint | 74 |
| 8.31.3.3 | setEditorData | 75 |
| 8.31.3.4 | setModelData | 75 |
| 8.31.3.5 | updateEditorGeometry | 75 |
| 8.32 | Gui::Widgets::ComboBoxModelWidget Class Reference | 75 |
| 8.32.1 | Detailed Description | 76 |
| 8.32.2 | Constructor & Destructor Documentation | 76 |
| 8.32.2.1 | ComboBoxModelWidget | 76 |
| 8.33 | Gui::Dialogs::ComputeTurnoverDialog Class Reference | 76 |
| 8.33.1 | Detailed Description | 77 |
| 8.33.2 | Member Function Documentation | 77 |
| 8.33.2.1 | beginDateControl | 77 |
| 8.33.2.2 | endDateControl | 77 |
| 8.33.2.3 | fillLabels | 77 |
| 8.34 | Mustache::Context Class Reference | 77 |
| 8.34.1 | Detailed Description | 78 |
| 8.34.2 | Constructor & Destructor Documentation | 78 |
| 8.34.2.1 | Context | 78 |
| 8.34.3 | Member Function Documentation | 78 |
| 8.34.3.1 | canEval | 78 |

| | | |
|-----------|---|----|
| 8.34.3.2 | eval | 78 |
| 8.34.3.3 | isFalse | 79 |
| 8.34.3.4 | listCount | 79 |
| 8.34.3.5 | partialResolver | 79 |
| 8.34.3.6 | partialValue | 79 |
| 8.34.3.7 | pop | 79 |
| 8.34.3.8 | push | 79 |
| 8.34.3.9 | stringValue | 79 |
| 8.35 | ContributoriesDatabaseTest Class Reference | 79 |
| 8.36 | Models::ContributoriesList Class Reference | 80 |
| 8.36.1 | Detailed Description | 81 |
| 8.36.2 | Member Function Documentation | 81 |
| 8.36.2.1 | addContributory | 81 |
| 8.36.2.2 | addProject | 81 |
| 8.36.2.3 | getAllContributories | 81 |
| 8.36.2.4 | getContributories | 81 |
| 8.36.2.5 | getCustomer | 82 |
| 8.36.2.6 | getDataMap | 82 |
| 8.36.2.7 | getIdBilling | 82 |
| 8.36.2.8 | getNbProjects | 82 |
| 8.36.2.9 | getPrice | 82 |
| 8.36.2.10 | getPrice | 82 |
| 8.36.2.11 | getProjects | 83 |
| 8.36.2.12 | getRate | 83 |
| 8.36.2.13 | getSumQuantity | 83 |
| 8.36.2.14 | getSumQuantity | 83 |
| 8.36.2.15 | isInsert | 83 |
| 8.36.2.16 | setAllIdContributories | 84 |
| 8.36.2.17 | setIdBilling | 85 |
| 8.36.2.18 | setInsert | 85 |
| 8.37 | Gui::Widgets::WdgModels::ContributoriesTableModel Class Reference | 85 |
| 8.37.1 | Detailed Description | 86 |
| 8.37.2 | Constructor & Destructor Documentation | 86 |
| 8.37.2.1 | ContributoriesTableModel | 86 |
| 8.37.3 | Member Function Documentation | 86 |
| 8.37.3.1 | append | 86 |
| 8.37.3.2 | columnCount | 86 |
| 8.37.3.3 | count | 87 |
| 8.37.3.4 | data | 87 |
| 8.37.3.5 | flags | 87 |

| | | |
|-----------|--|----|
| 8.37.3.6 | getContributories | 87 |
| 8.37.3.7 | getSumQuantity | 87 |
| 8.37.3.8 | headerData | 87 |
| 8.37.3.9 | remove | 88 |
| 8.37.3.10 | rowCount | 88 |
| 8.37.3.11 | setData | 88 |
| 8.38 | Gui::Widgets::ContributoriesWidget Class Reference | 88 |
| 8.38.1 | Detailed Description | 89 |
| 8.38.2 | Constructor & Destructor Documentation | 90 |
| 8.38.2.1 | ContributoriesWidget | 90 |
| 8.38.3 | Member Function Documentation | 91 |
| 8.38.3.1 | add | 91 |
| 8.38.3.2 | addProject | 91 |
| 8.38.3.3 | count | 91 |
| 8.38.3.4 | getContributories | 91 |
| 8.39 | Models::Contributory Class Reference | 91 |
| 8.39.1 | Detailed Description | 93 |
| 8.39.2 | Constructor & Destructor Documentation | 93 |
| 8.39.2.1 | Contributory | 93 |
| 8.39.3 | Member Function Documentation | 93 |
| 8.39.3.1 | getDataMap | 93 |
| 8.39.3.2 | getDescription | 93 |
| 8.39.3.3 | getHourlyRate | 93 |
| 8.39.3.4 | getLongDescription | 94 |
| 8.39.3.5 | getPrice | 94 |
| 8.39.3.6 | getProject | 94 |
| 8.39.3.7 | getQuantity | 94 |
| 8.39.3.8 | getSumQuantity | 94 |
| 8.39.3.9 | getUnit | 94 |
| 8.39.3.10 | hydrat | 94 |
| 8.39.3.11 | operator!= | 95 |
| 8.39.3.12 | operator== | 95 |
| 8.39.3.13 | setDescription | 95 |
| 8.39.3.14 | setHourlyRate | 95 |
| 8.39.3.15 | setLongDescription | 95 |
| 8.39.3.16 | setProject | 96 |
| 8.39.3.17 | setQuantity | 97 |
| 8.39.3.18 | setUnit | 97 |
| 8.40 | Databases::ContributoryDatabase Class Reference | 97 |
| 8.40.1 | Detailed Description | 98 |

| | | |
|-----------|--|-----|
| 8.40.2 | Member Function Documentation | 98 |
| 8.40.2.1 | addContributory | 98 |
| 8.40.2.2 | getContributoriesByBilling | 98 |
| 8.40.2.3 | getContributoriesByBillingAndProject | 98 |
| 8.40.2.4 | getContributory | 99 |
| 8.40.2.5 | getContributory | 100 |
| 8.40.2.6 | instance | 100 |
| 8.40.2.7 | removeContributory | 100 |
| 8.41 | ContributoryListTest Class Reference | 100 |
| 8.42 | ContributoryModelTest Class Reference | 101 |
| 8.43 | CounterContext Class Reference | 101 |
| 8.43.1 | Member Function Documentation | 102 |
| 8.43.1.1 | canEval | 102 |
| 8.43.1.2 | canEval | 102 |
| 8.43.1.3 | eval | 102 |
| 8.43.1.4 | eval | 102 |
| 8.43.1.5 | stringValue | 102 |
| 8.43.1.6 | stringValue | 102 |
| 8.44 | Models::Customer Class Reference | 103 |
| 8.44.1 | Detailed Description | 104 |
| 8.44.2 | Constructor & Destructor Documentation | 104 |
| 8.44.2.1 | Customer | 104 |
| 8.44.3 | Member Function Documentation | 104 |
| 8.44.3.1 | commit | 104 |
| 8.44.3.2 | getDataMap | 104 |
| 8.44.3.3 | getImage | 104 |
| 8.44.3.4 | getNameFolder | 104 |
| 8.44.3.5 | getPath | 105 |
| 8.44.3.6 | getTurnover | 105 |
| 8.44.3.7 | hydrat | 105 |
| 8.44.3.8 | isArchived | 105 |
| 8.44.3.9 | setImage | 105 |
| 8.44.3.10 | setIsArchived | 105 |
| 8.45 | Gui::Widgets::CustomerContextualMenu Class Reference | 106 |
| 8.45.1 | Detailed Description | 106 |
| 8.45.2 | Constructor & Destructor Documentation | 106 |
| 8.45.2.1 | CustomerContextualMenu | 106 |
| 8.46 | Databases::CustomerDatabase Class Reference | 106 |
| 8.46.1 | Detailed Description | 107 |
| 8.46.2 | Member Function Documentation | 108 |

| | | |
|-----------|--|-----|
| 8.46.2.1 | addCustomer | 108 |
| 8.46.2.2 | getCustomer | 108 |
| 8.46.2.3 | getCustomer | 108 |
| 8.46.2.4 | getCustomerImage | 108 |
| 8.46.2.5 | getCustomers | 109 |
| 8.46.2.6 | getCustomersTable | 109 |
| 8.46.2.7 | getItemCustomer | 109 |
| 8.46.2.8 | getItemProject | 109 |
| 8.46.2.9 | getItemRoot | 109 |
| 8.46.2.10 | getNbCustomers | 110 |
| 8.46.2.11 | getTree | 110 |
| 8.46.2.12 | instance | 110 |
| 8.46.2.13 | removeCustomer | 110 |
| 8.46.2.14 | setCustomerImage | 110 |
| 8.46.2.15 | updateCustomer | 110 |
| 8.47 | CustomerDatabaseTest Class Reference | 111 |
| 8.48 | Gui::Widgets::CustomerDataWidget Class Reference | 111 |
| 8.48.1 | Detailed Description | 111 |
| 8.48.2 | Constructor & Destructor Documentation | 112 |
| 8.48.2.1 | CustomerDataWidget | 112 |
| 8.48.3 | Member Function Documentation | 112 |
| 8.48.3.1 | printInformations | 112 |
| 8.49 | CustomerModelTest Class Reference | 112 |
| 8.50 | Gui::Widgets::WdgModels::CustomersTableModel Class Reference | 112 |
| 8.50.1 | Detailed Description | 113 |
| 8.50.2 | Constructor & Destructor Documentation | 113 |
| 8.50.2.1 | CustomersTableModel | 113 |
| 8.50.3 | Member Function Documentation | 114 |
| 8.50.3.1 | append | 114 |
| 8.50.3.2 | columnCount | 114 |
| 8.50.3.3 | count | 114 |
| 8.50.3.4 | data | 114 |
| 8.50.3.5 | flags | 114 |
| 8.50.3.6 | getCustomers | 115 |
| 8.50.3.7 | headerData | 115 |
| 8.50.3.8 | remove | 115 |
| 8.50.3.9 | rowCount | 115 |
| 8.50.3.10 | setData | 115 |
| 8.51 | Databases::Database Class Reference | 116 |
| 8.51.1 | Detailed Description | 117 |

| | | |
|----------|--|-----|
| 8.51.2 | Member Function Documentation | 117 |
| 8.51.2.1 | changeDatabase | 117 |
| 8.51.2.2 | executeFile | 117 |
| 8.51.2.3 | instance | 117 |
| 8.51.2.4 | lastError | 118 |
| 8.51.2.5 | setDatabase | 119 |
| 8.51.2.6 | value | 119 |
| 8.52 | Gui::Widgets::DatabaseSettingsWidget Class Reference | 119 |
| 8.52.1 | Detailed Description | 120 |
| 8.52.2 | Constructor & Destructor Documentation | 120 |
| 8.52.2.1 | DatabaseSettingsWidget | 120 |
| 8.52.3 | Member Function Documentation | 120 |
| 8.52.3.1 | getDatabaseName | 120 |
| 8.52.3.2 | getDomainNameOrIP | 121 |
| 8.52.3.3 | getLogin | 121 |
| 8.52.3.4 | getPassword | 121 |
| 8.52.3.5 | getPort | 121 |
| 8.52.3.6 | isValid | 121 |
| 8.53 | Exceptions::DbException Class Reference | 121 |
| 8.53.1 | Detailed Description | 122 |
| 8.53.2 | Constructor & Destructor Documentation | 122 |
| 8.53.2.1 | DbException | 122 |
| 8.53.3 | Member Function Documentation | 122 |
| 8.53.3.1 | popupMessage | 122 |
| 8.54 | Gui::Dialogs::DialogAddCustomer Class Reference | 123 |
| 8.54.1 | Detailed Description | 123 |
| 8.54.2 | Constructor & Destructor Documentation | 123 |
| 8.54.2.1 | DialogAddCustomer | 123 |
| 8.55 | Utils::Directories Class Reference | 124 |
| 8.55.1 | Member Function Documentation | 124 |
| 8.55.1.1 | makeDirectory | 124 |
| 8.56 | DirectoriesTests Class Reference | 124 |
| 8.57 | Utils::Double Class Reference | 124 |
| 8.57.1 | Detailed Description | 125 |
| 8.57.2 | Member Function Documentation | 125 |
| 8.57.2.1 | round | 125 |
| 8.58 | Gui::Widgets::Delegates::DoubleSpinBoxDelegate Class Reference | 125 |
| 8.58.1 | Detailed Description | 126 |
| 8.58.2 | Constructor & Destructor Documentation | 126 |
| 8.58.2.1 | DoubleSpinBoxDelegate | 126 |

| | | |
|----------|--|-----|
| 8.58.3 | Member Function Documentation | 126 |
| 8.58.3.1 | createEditor | 126 |
| 8.58.3.2 | setEditorData | 126 |
| 8.58.3.3 | setModelData | 127 |
| 8.58.3.4 | updateEditorGeometry | 127 |
| 8.59 | FileChoseWidget Class Reference | 127 |
| 8.60 | Exceptions::FileException Class Reference | 128 |
| 8.60.1 | Detailed Description | 128 |
| 8.60.2 | Constructor & Destructor Documentation | 128 |
| 8.60.2.1 | FileException | 128 |
| 8.60.3 | Member Function Documentation | 128 |
| 8.60.3.1 | popupMessage | 128 |
| 8.61 | Generation Class Reference | 128 |
| 8.62 | Utils::HierarchicalSystem Class Reference | 129 |
| 8.62.1 | Detailed Description | 129 |
| 8.62.2 | Member Function Documentation | 130 |
| 8.62.2.1 | addBillingToProject | 130 |
| 8.62.2.2 | addProjectToCustomer | 131 |
| 8.62.2.3 | getCustomers | 131 |
| 8.62.2.4 | getProjects | 131 |
| 8.63 | HierarchicalSystemTest Class Reference | 131 |
| 8.64 | Gui::Widgets::CheckFields::ICheckField Class Reference | 132 |
| 8.64.1 | Detailed Description | 132 |
| 8.64.2 | Member Function Documentation | 132 |
| 8.64.2.1 | check | 132 |
| 8.65 | Gui::Utils::Image Class Reference | 132 |
| 8.65.1 | Detailed Description | 133 |
| 8.65.2 | Member Function Documentation | 133 |
| 8.65.2.1 | bytesToPixmap | 133 |
| 8.65.2.2 | getImage | 133 |
| 8.65.2.3 | imageToBytes | 133 |
| 8.65.2.4 | pixmapToBytes | 134 |
| 8.65.2.5 | pixmapToImage | 134 |
| 8.66 | Models::IModel Class Reference | 134 |
| 8.66.1 | Detailed Description | 135 |
| 8.66.2 | Member Function Documentation | 135 |
| 8.66.2.1 | getDataMap | 135 |
| 8.66.2.2 | getId | 135 |
| 8.66.2.3 | hydrat | 136 |
| 8.66.2.4 | isToRemoved | 136 |

| | | |
|-----------|--|-----|
| 8.66.2.5 | setId | 136 |
| 8.66.2.6 | setToRemoved | 136 |
| 8.67 | Utils::ItemType Class Reference | 136 |
| 8.67.1 | Detailed Description | 137 |
| 8.67.2 | Constructor & Destructor Documentation | 137 |
| 8.67.2.1 | ItemType | 137 |
| 8.67.3 | Member Function Documentation | 137 |
| 8.67.3.1 | getModel | 137 |
| 8.67.3.2 | getName | 137 |
| 8.67.3.3 | getType | 138 |
| 8.67.3.4 | setName | 138 |
| 8.67.3.5 | setType | 138 |
| 8.68 | ItemTypeTest Class Reference | 138 |
| 8.69 | Utils::Log Class Reference | 138 |
| 8.69.1 | Detailed Description | 139 |
| 8.69.2 | Member Function Documentation | 139 |
| 8.69.2.1 | instance | 139 |
| 8.69.2.2 | write | 139 |
| 8.69.3 | Friends And Related Function Documentation | 139 |
| 8.69.3.1 | operator<< | 139 |
| 8.70 | Gui::MainWindow Class Reference | 140 |
| 8.70.1 | Detailed Description | 142 |
| 8.70.2 | Constructor & Destructor Documentation | 142 |
| 8.70.2.1 | MainWindow | 142 |
| 8.70.3 | Member Function Documentation | 142 |
| 8.70.3.1 | addBill | 142 |
| 8.70.3.2 | addDoc | 142 |
| 8.70.3.3 | addProject | 142 |
| 8.70.3.4 | addQuote | 143 |
| 8.70.3.5 | editUser | 143 |
| 8.70.3.6 | getCurrentCustomerId | 143 |
| 8.70.3.7 | getCurrentCustomerName | 143 |
| 8.70.3.8 | getCurrentProjectId | 143 |
| 8.70.3.9 | getCurrentProjectName | 143 |
| 8.70.3.10 | getCurrentQuoteId | 143 |
| 8.70.3.11 | isEasterEgg | 144 |
| 8.70.3.12 | resizeEvent | 145 |
| 8.70.3.13 | rootTree | 145 |
| 8.70.3.14 | search | 145 |
| 8.70.3.15 | treeLevel | 145 |

| | | |
|----------|---|-----|
| 8.71 | Gui::Dialogs::MessageBox Class Reference | 145 |
| 8.71.1 | Detailed Description | 146 |
| 8.71.2 | Constructor & Destructor Documentation | 146 |
| 8.71.2.1 | MessageBox | 146 |
| 8.71.3 | Member Function Documentation | 146 |
| 8.71.3.1 | setImage | 146 |
| 8.71.3.2 | setText | 147 |
| 8.72 | Parameters Class Reference | 147 |
| 8.72.1 | Detailed Description | 147 |
| 8.72.2 | Member Data Documentation | 147 |
| 8.72.2.1 | DB_FILENAME | 147 |
| 8.72.2.2 | VERSION | 147 |
| 8.73 | Mustache::PartialFileLoader Class Reference | 148 |
| 8.73.1 | Detailed Description | 148 |
| 8.73.2 | Member Function Documentation | 148 |
| 8.73.2.1 | getPartial | 148 |
| 8.74 | Mustache::PartialMap Class Reference | 148 |
| 8.74.1 | Detailed Description | 149 |
| 8.74.2 | Member Function Documentation | 149 |
| 8.74.2.1 | getPartial | 149 |
| 8.75 | Mustache::PartialResolver Class Reference | 149 |
| 8.75.1 | Detailed Description | 149 |
| 8.75.2 | Member Function Documentation | 149 |
| 8.75.2.1 | getPartial | 149 |
| 8.76 | Generator::PdfGenerator Class Reference | 150 |
| 8.76.1 | Detailed Description | 150 |
| 8.76.2 | Constructor & Destructor Documentation | 150 |
| 8.76.2.1 | PdfGenerator | 150 |
| 8.76.3 | Member Function Documentation | 150 |
| 8.76.3.1 | generate | 150 |
| 8.77 | Models::People Class Reference | 150 |
| 8.77.1 | Detailed Description | 152 |
| 8.77.2 | Member Function Documentation | 152 |
| 8.77.2.1 | getAddress | 152 |
| 8.77.2.2 | getAddressComplement | 153 |
| 8.77.2.3 | getCity | 153 |
| 8.77.2.4 | getCompany | 153 |
| 8.77.2.5 | getCountry | 153 |
| 8.77.2.6 | getEmail | 153 |
| 8.77.2.7 | getExtensionImage | 153 |

| | | |
|-----------|--|-----|
| 8.77.2.8 | getFax | 153 |
| 8.77.2.9 | getFirstname | 154 |
| 8.77.2.10 | getImage | 154 |
| 8.77.2.11 | getLastName | 154 |
| 8.77.2.12 | getMobilePhone | 154 |
| 8.77.2.13 | getPhone | 154 |
| 8.77.2.14 | getPostalCode | 154 |
| 8.77.2.15 | getWebsite | 154 |
| 8.77.2.16 | operator!= | 155 |
| 8.77.2.17 | operator== | 156 |
| 8.77.2.18 | setAddress | 156 |
| 8.77.2.19 | setAddressComplement | 156 |
| 8.77.2.20 | setCity | 156 |
| 8.77.2.21 | setCompany | 156 |
| 8.77.2.22 | setCountry | 157 |
| 8.77.2.23 | setEmail | 157 |
| 8.77.2.24 | setExtensionImage | 157 |
| 8.77.2.25 | setFax | 157 |
| 8.77.2.26 | setFirstname | 157 |
| 8.77.2.27 | setImage | 157 |
| 8.77.2.28 | setLastName | 158 |
| 8.77.2.29 | setMobilePhone | 159 |
| 8.77.2.30 | setPhone | 159 |
| 8.77.2.31 | setPostalCode | 159 |
| 8.77.2.32 | setWebsite | 159 |
| 8.78 | Utils::pointers Class Reference | 159 |
| 8.78.1 | Detailed Description | 160 |
| 8.78.2 | Member Function Documentation | 160 |
| 8.78.2.1 | deleteIfNotNull | 160 |
| 8.79 | PointersTest Class Reference | 160 |
| 8.80 | Gui::Widgets::Popup Class Reference | 160 |
| 8.80.1 | Detailed Description | 160 |
| 8.81 | Models::Project Class Reference | 161 |
| 8.81.1 | Detailed Description | 162 |
| 8.81.2 | Constructor & Destructor Documentation | 162 |
| 8.81.2.1 | Project | 162 |
| 8.81.3 | Member Function Documentation | 163 |
| 8.81.3.1 | getBeginDate | 163 |
| 8.81.3.2 | getCost | 163 |
| 8.81.3.3 | getCustomer | 163 |

| | | |
|-----------|--|-----|
| 8.81.3.4 | getDailyRate | 163 |
| 8.81.3.5 | getDataMap | 163 |
| 8.81.3.6 | getDescription | 163 |
| 8.81.3.7 | getEndDate | 164 |
| 8.81.3.8 | getName | 164 |
| 8.81.3.9 | hydrat | 164 |
| 8.81.3.10 | operator!= | 164 |
| 8.81.3.11 | operator< | 164 |
| 8.81.3.12 | operator== | 164 |
| 8.81.3.13 | setBeginDate | 165 |
| 8.81.3.14 | setCustomer | 165 |
| 8.81.3.15 | setDailyRate | 165 |
| 8.81.3.16 | setDescription | 165 |
| 8.81.3.17 | setEndDate | 165 |
| 8.81.3.18 | setName | 165 |
| 8.82 | Gui::Widgets::Delegates::ProjectComboDelegate Class Reference | 166 |
| 8.82.1 | Detailed Description | 166 |
| 8.82.2 | Constructor & Destructor Documentation | 167 |
| 8.82.2.1 | ProjectComboDelegate | 167 |
| 8.82.3 | Member Function Documentation | 168 |
| 8.82.3.1 | createEditor | 168 |
| 8.82.3.2 | getProjects | 168 |
| 8.82.3.3 | isLocked | 168 |
| 8.82.3.4 | paint | 168 |
| 8.82.3.5 | setLocked | 169 |
| 8.83 | Gui::Widgets::WdgModels::ProjectContributoriesTableModel Class Reference | 169 |
| 8.83.1 | Detailed Description | 170 |
| 8.83.2 | Constructor & Destructor Documentation | 170 |
| 8.83.2.1 | ProjectContributoriesTableModel | 170 |
| 8.83.3 | Member Function Documentation | 170 |
| 8.83.3.1 | allProjectsChosen | 170 |
| 8.83.3.2 | append | 170 |
| 8.83.3.3 | columnCount | 170 |
| 8.83.3.4 | data | 171 |
| 8.83.3.5 | flags | 171 |
| 8.83.3.6 | getProject | 171 |
| 8.83.3.7 | getProjects | 171 |
| 8.83.3.8 | getSelectedProjects | 172 |
| 8.83.3.9 | headerData | 172 |
| 8.83.3.10 | remove | 172 |

| | |
|--|-----|
| 8.83.3.11 rowCount | 172 |
| 8.83.3.12 setData | 172 |
| 8.84 Databases::ProjectDatabase Class Reference | 173 |
| 8.84.1 Detailed Description | 174 |
| 8.84.2 Member Function Documentation | 174 |
| 8.84.2.1 addProject | 174 |
| 8.84.2.2 getAllProjects | 174 |
| 8.84.2.3 getCostProjects | 174 |
| 8.84.2.4 getNbProjects | 174 |
| 8.84.2.5 getNbProjects | 174 |
| 8.84.2.6 getProject | 175 |
| 8.84.2.7 getProject | 175 |
| 8.84.2.8 getProjects | 175 |
| 8.84.2.9 getProjectsOfCustomer | 175 |
| 8.84.2.10 getProjectsTable | 176 |
| 8.84.2.11 instance | 176 |
| 8.84.2.12 removeProject | 176 |
| 8.84.2.13 updateProject | 176 |
| 8.85 ProjectDatabaseTest Class Reference | 177 |
| 8.86 ProjectModelTest Class Reference | 177 |
| 8.87 Gui::Widgets::WdgModels::ProjectsTableModel Class Reference | 177 |
| 8.87.1 Detailed Description | 178 |
| 8.87.2 Constructor & Destructor Documentation | 178 |
| 8.87.2.1 ProjectsTableModel | 178 |
| 8.87.3 Member Function Documentation | 178 |
| 8.87.3.1 append | 178 |
| 8.87.3.2 columnCount | 179 |
| 8.87.3.3 count | 179 |
| 8.87.3.4 data | 179 |
| 8.87.3.5 flags | 179 |
| 8.87.3.6 getProjects | 179 |
| 8.87.3.7 headerData | 179 |
| 8.87.3.8 remove | 180 |
| 8.87.3.9 rowCount | 180 |
| 8.87.3.10 setData | 180 |
| 8.88 Gui::Widgets::ProjectsWidget Class Reference | 180 |
| 8.88.1 Detailed Description | 181 |
| 8.88.2 Constructor & Destructor Documentation | 181 |
| 8.88.2.1 ProjectsWidget | 181 |
| 8.88.3 Member Function Documentation | 182 |

| | | |
|----------|--|-----|
| 8.88.3.1 | updateBtn | 182 |
| 8.89 | Mustache::QtVariantContext Class Reference | 182 |
| 8.89.1 | Detailed Description | 182 |
| 8.89.2 | Member Typedef Documentation | 183 |
| 8.89.2.1 | fn_t | 183 |
| 8.89.3 | Member Function Documentation | 183 |
| 8.89.3.1 | canEval | 183 |
| 8.89.3.2 | eval | 183 |
| 8.89.3.3 | isFalse | 183 |
| 8.89.3.4 | listCount | 183 |
| 8.89.3.5 | pop | 183 |
| 8.89.3.6 | push | 184 |
| 8.89.3.7 | stringValue | 184 |
| 8.90 | Models::Rate Class Reference | 184 |
| 8.90.1 | Detailed Description | 184 |
| 8.90.2 | Constructor & Destructor Documentation | 185 |
| 8.90.2.1 | Rate | 185 |
| 8.90.2.2 | Rate | 185 |
| 8.90.3 | Member Function Documentation | 185 |
| 8.90.3.1 | getDailyRate | 185 |
| 8.90.3.2 | getHourlyRate | 185 |
| 8.90.3.3 | getLegalRate | 185 |
| 8.90.3.4 | getNbDailyHours | 185 |
| 8.91 | Databases::RateDatabase Class Reference | 186 |
| 8.91.1 | Member Function Documentation | 186 |
| 8.91.1.1 | addRateProject | 186 |
| 8.91.1.2 | getRate | 186 |
| 8.91.1.3 | instance | 187 |
| 8.91.1.4 | updateRateProject | 187 |
| 8.92 | RateModelTest Class Reference | 187 |
| 8.93 | Gui::Widgets::RateWidget Class Reference | 187 |
| 8.93.1 | Detailed Description | 188 |
| 8.93.2 | Constructor & Destructor Documentation | 188 |
| 8.93.2.1 | RateWidget | 188 |
| 8.93.3 | Member Function Documentation | 188 |
| 8.93.3.1 | getDailyRate | 188 |
| 8.93.3.2 | getHourlyRate | 189 |
| 8.93.3.3 | setDailyRate | 189 |
| 8.93.3.4 | setHourlyRate | 189 |
| 8.93.3.5 | setWidgetDailyRateValue | 189 |

| | | |
|-----------|--|-----|
| 8.93.3.6 | setWidgetHourlyRateValue | 189 |
| 8.94 | Mustache::Renderer Class Reference | 189 |
| 8.94.1 | Detailed Description | 190 |
| 8.94.2 | Member Function Documentation | 190 |
| 8.94.2.1 | error | 190 |
| 8.94.2.2 | errorPartial | 190 |
| 8.94.2.3 | errorPos | 190 |
| 8.94.2.4 | render | 190 |
| 8.94.2.5 | setTagMarkers | 190 |
| 8.95 | Models::Search Class Reference | 190 |
| 8.95.1 | Detailed Description | 192 |
| 8.95.2 | Member Function Documentation | 192 |
| 8.95.2.1 | filterOnBillsOrQuotes | 192 |
| 8.95.2.2 | filterOnCompany | 192 |
| 8.95.2.3 | filterOnContributories | 192 |
| 8.95.2.4 | filterOnCustomersWithoutProject | 192 |
| 8.95.2.5 | filterOnNumberElements | 192 |
| 8.95.2.6 | filterOnProjects | 193 |
| 8.95.2.7 | filterOnReferentLastname | 193 |
| 8.95.2.8 | filterOnVarcharElements | 193 |
| 8.95.2.9 | getFilter | 193 |
| 8.95.2.10 | getGroupFilter | 193 |
| 8.95.2.11 | getSearchInBillsQuotes | 193 |
| 8.95.2.12 | getSearchInCompanies | 194 |
| 8.95.2.13 | getSearchInProjects | 194 |
| 8.95.2.14 | getSearchInReferentLastname | 194 |
| 8.95.2.15 | getText | 194 |
| 8.95.2.16 | searchInContributories | 194 |
| 8.95.2.17 | setGroupFilter | 194 |
| 8.95.2.18 | setSearchInBillsQuotes | 195 |
| 8.95.2.19 | setSearchInCompanies | 195 |
| 8.95.2.20 | setSearchInContributories | 195 |
| 8.95.2.21 | setSearchInProjects | 195 |
| 8.95.2.22 | setSearchInReferentLastname | 195 |
| 8.95.2.23 | setText | 195 |
| 8.96 | Gui::Docks::SearchDock Class Reference | 196 |
| 8.96.1 | Detailed Description | 196 |
| 8.96.2 | Constructor & Destructor Documentation | 196 |
| 8.96.2.1 | SearchDock | 196 |
| 8.96.3 | Member Function Documentation | 197 |

| | | |
|-----------|--|-----|
| 8.96.3.1 | getText | 197 |
| 8.96.3.2 | search | 197 |
| 8.96.3.3 | textChanged | 197 |
| 8.97 | searchTest Class Reference | 197 |
| 8.98 | Gui::Widgets::searchWidget Class Reference | 198 |
| 8.98.1 | Detailed Description | 198 |
| 8.98.2 | Constructor & Destructor Documentation | 199 |
| 8.98.2.1 | searchWidget | 199 |
| 8.98.3 | Member Function Documentation | 200 |
| 8.98.3.1 | getCurrentCustomerId | 200 |
| 8.98.3.2 | getIdCustomer | 200 |
| 8.98.3.3 | isCustomerSelected | 200 |
| 8.98.3.4 | search | 200 |
| 8.98.3.5 | selectCustomer | 200 |
| 8.98.3.6 | setIdCustomer | 200 |
| 8.99 | Gui::Dialogs::StartedWindowsDialog Class Reference | 201 |
| 8.99.1 | Detailed Description | 202 |
| 8.99.2 | Constructor & Destructor Documentation | 202 |
| 8.99.2.1 | StartedWindowsDialog | 202 |
| 8.99.3 | Member Function Documentation | 202 |
| 8.99.3.1 | databaseTypeChanged | 202 |
| 8.99.3.2 | getImage | 202 |
| 8.99.3.3 | isDatabaseCentralized | 203 |
| 8.99.3.4 | isDatabaseTypeValid | 203 |
| 8.100 | StatisticModelTest Class Reference | 203 |
| 8.101 | Models::Statistics Class Reference | 203 |
| 8.101.1 | Member Function Documentation | 203 |
| 8.101.1.1 | getGlobalTurnover | 203 |
| 8.101.1.2 | getTurnoverBetweenDates | 204 |
| 8.102 | Gui::Dialogs::StatisticsDialog Class Reference | 204 |
| 8.102.1 | Detailed Description | 204 |
| 8.102.2 | Constructor & Destructor Documentation | 205 |
| 8.102.2.1 | StatisticsDialog | 205 |
| 8.102.3 | Member Function Documentation | 206 |
| 8.102.3.1 | singularPlural | 206 |
| 8.102.3.2 | updateUi | 206 |
| 8.103 | Utils::String Class Reference | 206 |
| 8.103.1 | Detailed Description | 206 |
| 8.103.2 | Member Function Documentation | 207 |
| 8.103.2.1 | firstLetterToUpper | 207 |

| | |
|--|-----|
| 8.103.2.2 getExtensionFile | 208 |
| 8.104 StringTest Class Reference | 208 |
| 8.105 Mustache::Tag Struct Reference | 208 |
| 8.105.1 Detailed Description | 209 |
| 8.105.2 Member Enumeration Documentation | 209 |
| 8.105.2.1 Type | 209 |
| 8.106 TestAdder< T > Class Template Reference | 209 |
| 8.107 testadder Class Reference | 209 |
| 8.108 TestMustache Class Reference | 210 |
| 8.109 TestRunner Class Reference | 210 |
| 8.110 Generator::TexGenerator Class Reference | 210 |
| 8.110.1 Detailed Description | 210 |
| 8.110.2 Constructor & Destructor Documentation | 211 |
| 8.110.2.1 TexGenerator | 211 |
| 8.110.3 Member Function Documentation | 212 |
| 8.110.3.1 generate | 212 |
| 8.111 Gui::Widgets::Delegates::TextareaDelegate Class Reference | 212 |
| 8.111.1 Detailed Description | 212 |
| 8.111.2 Constructor & Destructor Documentation | 213 |
| 8.111.2.1 TextareaDelegate | 213 |
| 8.111.3 Member Function Documentation | 213 |
| 8.111.3.1 createEditor | 213 |
| 8.111.3.2 setEditorData | 213 |
| 8.111.3.3 setModelData | 213 |
| 8.111.3.4 updateEditorGeometry | 214 |
| 8.112 Models::Unit Class Reference | 215 |
| 8.112.1 Detailed Description | 215 |
| 8.112.2 Constructor & Destructor Documentation | 215 |
| 8.112.2.1 Unit | 215 |
| 8.112.3 Member Function Documentation | 215 |
| 8.112.3.1 gettype | 215 |
| 8.112.3.2 operator!= | 216 |
| 8.112.3.3 operator== | 216 |
| 8.112.3.4 setType | 216 |
| 8.112.3.5 toString | 216 |
| 8.113 Gui::Widgets::Delegates::UnitComboDelegate Class Reference | 216 |
| 8.113.1 Detailed Description | 217 |
| 8.113.2 Constructor & Destructor Documentation | 217 |
| 8.113.2.1 UnitComboDelegate | 217 |
| 8.113.3 Member Function Documentation | 217 |

| | |
|---|-----|
| 8.113.3.1 createEditor | 217 |
| 8.113.3.2 paint | 218 |
| 8.114Models::User Class Reference | 218 |
| 8.114.1 Detailed Description | 219 |
| 8.114.2 Constructor & Destructor Documentation | 220 |
| 8.114.2.1 User | 220 |
| 8.114.3 Member Function Documentation | 220 |
| 8.114.3.1 getDataMap | 220 |
| 8.114.3.2 getImage | 220 |
| 8.114.3.3 getNbDaysPerMonth | 220 |
| 8.114.3.4 getNbDaysPerWeek | 220 |
| 8.114.3.5 getNbHoursPerDay | 220 |
| 8.114.3.6 getNbHoursPerMonth | 221 |
| 8.114.3.7 getNbHoursPerWeek | 221 |
| 8.114.3.8 getNoSiret | 221 |
| 8.114.3.9 getPdflatexPath | 221 |
| 8.114.3.10getTitle | 221 |
| 8.114.3.11getWorkspaceName | 221 |
| 8.114.3.12getWorkspacePath | 221 |
| 8.114.3.13hydrat | 222 |
| 8.114.3.14operator!= | 223 |
| 8.114.3.15operator== | 223 |
| 8.114.3.16setImage | 223 |
| 8.114.3.17setNbDaysPerMonth | 223 |
| 8.114.3.18setNbDaysPerWeek | 223 |
| 8.114.3.19setNbHoursPerDay | 224 |
| 8.114.3.20setNoSiret | 224 |
| 8.114.3.21setPdflatexPath | 224 |
| 8.114.3.22setTitle | 224 |
| 8.114.3.23setWorkspaceName | 224 |
| 8.114.3.24setWorkspacePath | 224 |
| 8.114.3.25updateFolders | 225 |
| 8.115Gui::Widgets::UserDailyHoursWidget Class Reference | 225 |
| 8.115.1 Detailed Description | 226 |
| 8.115.2 Constructor & Destructor Documentation | 226 |
| 8.115.2.1 UserDailyHoursWidget | 226 |
| 8.115.3 Member Function Documentation | 226 |
| 8.115.3.1 dailyHoursValueHasChanged | 226 |
| 8.115.3.2 getNbDaysPerMonth | 226 |
| 8.115.3.3 getNbDaysPerWeek | 226 |

| | |
|---|------------|
| 8.115.3.4 getNbHoursPerDay | 226 |
| 8.115.3.5 monthlyDaysValueHasChanged | 227 |
| 8.115.3.6 setNbDaysPerMonth | 228 |
| 8.115.3.7 setNbDaysPerWeek | 228 |
| 8.115.3.8 setNbHoursPerDay | 228 |
| 8.115.3.9 weeklyDaysValueHasChanged | 228 |
| 8.116Databases::UserDatabase Class Reference | 228 |
| 8.116.1 Detailed Description | 229 |
| 8.116.2 Member Function Documentation | 229 |
| 8.116.2.1 getUser | 229 |
| 8.116.2.2 getUserImage | 229 |
| 8.116.2.3 instance | 230 |
| 8.116.2.4 setUserImage | 230 |
| 8.117UserDatabaseTest Class Reference | 230 |
| 8.118Gui::Dialogs::UserDataDialog Class Reference | 230 |
| 8.118.1 Detailed Description | 231 |
| 8.118.2 Constructor & Destructor Documentation | 231 |
| 8.118.2.1 UserDataDialog | 231 |
| 8.119UserModelTest Class Reference | 231 |
| 8.120Gui::Utils::WindowSettings Class Reference | 232 |
| 8.120.1 Detailed Description | 232 |
| 8.120.2 Member Function Documentation | 232 |
| 8.120.2.1 setMaximumSize | 232 |
| 8.120.2.2 setPositionToCenter | 232 |
| Index | 233 |

Chapter 1

FactDev documentation

This website contains the documentation of FactDev, a billings and quotes software.

Team

FACT team is a team for University Project. Members of this team are :

- Florent Berbie ([KraTuX31](#))
- Antoine de Roquemaurel ([aroquemaurel](#))
- Cédric Rohaut ([Oxynos](#))
- Manantsoa Andriamihary Razanajatovo ([manantsoa](#))

For more informations, you can go to <http://fact-team.github.io>.

What is FactDev ?

FactDev is a software for quotes and billings developped by FACT team for university project in Toulouse III University – Paul Sabatier.

This software is developed with C++ and Qt framework, and there is differents features :

- Customers database
- Differents projects for customers
- Quotes
- Billings

Documentation

You can access to the documentation generated by Doxygen here :

- [HTML Documentation](#)
- [PDF Documentation](#)

Installation and using

- [User Manual](#)

Chapter 2

README

! [Build Status] (<https://travis-ci.org/robertknight/qt-mustache.svg?branch=master>)

Qt Mustache

qt-mustache is a simple library for rendering **Mustache templates**.

Example Usage

```
“cpp #include "mustache.h"
```

```
QVariantHash contact; contact["name"] = "John Smith"; contact["email"] = "john.smith@gmail.com";
```

```
QString contactTemplate = "<b>{{name}}</b> <a href='mailto:{{email}}'>{{email}}";
```

```
Mustache::Renderer renderer; Mustache::QtVariantContext context(contact);
```

```
QTextStream output(stdout); output << renderer.render(contactTemplate, &context); “
```

Outputs: John Smith john.smith@gmail.com

For further examples, see the tests in `test_mustache.cpp`

Building

- To build the tests, run `qmake` followed by `make`
- To use qt-mustache in your project, just add the `mustache.h` and `mustache.cpp` files to your project.

License

qt-mustache is licensed under the BSD license.

Dependencies

qt-mustache depends on the QtCore library. It is compatible with Qt 4 and Qt 5.

Usage

Syntax

qt-mustache uses the standard Mustache syntax. See the [Mustache manual](#) for details.

Data Sources

qt-mustache expands Mustache tags using values from a `Mustache::Context`. `Mustache::QtVariantContext` is a simple context implementation which wraps a `QVariantHash` or `QVariantMap`. If you want to render a template using a custom data source, you can either create a `QVariantHash` which mirrors the data source or you can re-implement `Mustache::Context`.

Partials

When a `{{>partial}}` Mustache tag is encountered, qt-mustache will attempt to load the partial using a `Mustache::PartialResolver` provided by the context. `Mustache::PartialMap` is a simple resolver which takes a `QHash<QString,QString>` map of partial names to values and looks up partials in that map. `Mustache::PartialFileLoader` is another simple resolver which fetches partials from `<partial name>.mustache` files in a specified directory.

You can re-implement the `Mustache::PartialResolver` interface if you want to load partials from a custom source (eg. a database).

Error Handling

If an error occurs when rendering a template, `Mustache::Renderer::errorPosition()` is set to non-negative value and template rendering stops. If the error occurs whilst rendering a partial template, `errorPartial()` contains the name of the partial.

Lambdas

The [Mustache manual](#) provides a mechanism to customize rendering of template sections by setting the value for a tag to a callable object (eg. a lambda in Ruby or Javascript), which takes the unrendered block of text for a template section and renders it itself. qt-mustache supports this via the `Context::canEval()` and `Context::eval()` methods.

Chapter 3

QTestRunner

A repo for Increase QTest productivity

Thanks to <https://marcoarena.wordpress.com/2012/06/23/increase-your-qtest-productivity/>!

The QTestLib framework is a tool for unit testing Qt based applications and libraries. I find it precious and simple to use, though it lacks some important features, supported, for example, by GTest. I'm not talking about mocking – for this you generally need an out-and-out framework (like GMock) – instead, I'm referring to simple things like fast deploying. Suppose you have written a test class like this:

This repo contains only the code in this article.

Chapter 4

Namespace Index

4.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

| | | |
|------------------------------|---|----|
| Databases | | |
| | Class for Database , contains queries | ?? |
| Gui | | ?? |
| Gui::Widgets | | |
| | Contains Widgets classes | ?? |
| Models | | |
| | Models classes | ?? |

Chapter 5

Hierarchical Index

5.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

| | |
|---|----|
| Databases::AccessDatabase | ?? |
| Models::Calculable | ?? |
| Models::Billing | ?? |
| Models::ContributoriesList | ?? |
| Models::Contributory | ?? |
| Mustache::Context | ?? |
| Mustache::QtVariantContext | ?? |
| CounterContext | ?? |
| CounterContext | ?? |
| Databases::Database | ?? |
| Databases::BillingDatabase | ?? |
| Databases::ContributoryDatabase | ?? |
| Databases::CustomerDatabase | ?? |
| Databases::ProjectDatabase | ?? |
| Databases::RateDatabase | ?? |
| Databases::UserDatabase | ?? |
| Utils::Directories | ?? |
| Utils::Double | ?? |
| exception | |
| Exceptions::DbException | ?? |
| Exceptions::FileException | ?? |
| Utils::HierarchicalSystem | ?? |
| Gui::Widgets::CheckFields::ICheckField | ?? |
| Gui::Widgets::CheckFields::CheckQLineEdit | ?? |
| Gui::Widgets::CheckFields::CheckEmail | ?? |
| Gui::Widgets::CheckFields::CheckPortNumber | ?? |
| Gui::Widgets::CheckFields::CheckSiretNumber | ?? |
| Gui::Widgets::CheckFields::CheckUntilField | ?? |
| Gui::Widgets::CheckFields::CheckFieldsLetters | ?? |
| Gui::Widgets::CheckFields::CheckCity | ?? |
| Gui::Widgets::CheckFields::CheckCountry | ?? |
| Gui::Widgets::CheckFields::CheckName | ?? |
| Gui::Widgets::CheckFields::CheckFieldsNumbers | ?? |
| Gui::Widgets::CheckFields::CheckIpAddress | ?? |
| Gui::Widgets::CheckFields::CheckLogin | ?? |
| Gui::Widgets::CheckFields::CheckPhone | ?? |
| Gui::Widgets::CheckFields::CheckPostalCode | ?? |

| | |
|--|----|
| Gui::Widgets::CheckFields::CheckValidField | ?? |
| Gui::Widgets::CheckFields::CheckWebsite | ?? |
| Gui::Utils::Image | ?? |
| Models::IModel | ?? |
| Models::Billing | ?? |
| Models::Contributory | ?? |
| Models::People | ?? |
| Models::Customer | ?? |
| Models::User | ?? |
| Models::Project | ?? |
| Utils::ItemType | ?? |
| Utils::Log | ?? |
| Parameters | ?? |
| Mustache::PartialResolver | ?? |
| Mustache::PartialFileLoader | ?? |
| Mustache::PartialMap | ?? |
| Generator::PdfGenerator | ?? |
| Utils::pointers | ?? |
| Gui::Widgets::Popup | ?? |
| QAbstractTableModel | |
| Gui::Widgets::WdgModels::BillingsTableModel | ?? |
| Gui::Widgets::WdgModels::ContributoriesTableModel | ?? |
| Gui::Widgets::WdgModels::CustomersTableModel | ?? |
| Gui::Widgets::WdgModels::ProjectContributoriesTableModel | ?? |
| Gui::Widgets::WdgModels::ProjectsTableModel | ?? |
| QDialog | |
| Gui::Dialogs::AddProjectDialog | ?? |
| Gui::Dialogs::AddQuoteDialog | ?? |
| Gui::Dialogs::ComputeTurnoverDialog | ?? |
| Gui::Dialogs::DialogAddCustomer | ?? |
| Gui::Dialogs::MessageBox | ?? |
| Gui::Dialogs::StartedWindowsDialog | ?? |
| Gui::Dialogs::StatisticsDialog | ?? |
| Gui::Dialogs::UserDataDialog | ?? |
| QDockWidget | |
| Gui::Docks::SearchDock | ?? |
| QItemDelegate | |
| Gui::Widgets::Delegates::ComboBoxDelegate | ?? |
| Gui::Widgets::Delegates::ProjectComboDelegate | ?? |
| Gui::Widgets::Delegates::UnitComboDelegate | ?? |
| Gui::Widgets::Delegates::DoubleSpinBoxDelegate | ?? |
| Gui::Widgets::Delegates::TextareaDelegate | ?? |
| QLineEdit | |
| Gui::Widgets::CheckFields::CheckQLineEdit | ?? |
| QMainWindow | |
| Gui::MainWindow | ?? |
| QMap | |
| Models::ContributoriesList | ?? |
| QMenu | |
| Gui::Widgets::CustomerContextualMenu | ?? |
| QObject | |
| BillingDatabaseTest | ?? |
| BillingModelTest | ?? |
| ContributoriesDatabaseTest | ?? |
| ContributoryListTest | ?? |
| ContributoryModelTest | ?? |
| CustomerDatabaseTest | ?? |

| | |
|--|----|
| CustomerModelTest | ?? |
| DirectoriesTests | ?? |
| Generation | ?? |
| HierarchicalSystemTest | ?? |
| ItemTypeTest | ?? |
| PointersTest | ?? |
| ProjectDatabaseTest | ?? |
| ProjectModelTest | ?? |
| RateModelTest | ?? |
| searchTest | ?? |
| StatisticModelTest | ?? |
| StringTest | ?? |
| TestMustache | ?? |
| TestMustache | ?? |
| UserDatabaseTest | ?? |
| UserModelTest | ?? |
| QWidget | |
| FileChoseWidget | ?? |
| Gui::Widgets::BrowseImageWidget | ?? |
| Gui::Widgets::CoffeeEasterEggWidget | ?? |
| Gui::Widgets::ComboBoxModelWidget | ?? |
| Gui::Widgets::ContributoriesWidget | ?? |
| Gui::Widgets::CustomerDataWidget | ?? |
| Gui::Widgets::DatabaseSettingsWidget | ?? |
| Gui::Widgets::Path::ChosePathWidget | ?? |
| Gui::Widgets::Path::ChoseDirectoryWidget | ?? |
| Gui::Widgets::Path::ChoseFileWidget | ?? |
| Gui::Widgets::ProjectsWidget | ?? |
| Gui::Widgets::RateWidget | ?? |
| Gui::Widgets::searchWidget | ?? |
| Gui::Widgets::UserDailyHoursWidget | ?? |
| Models::Rate | ?? |
| Mustache::Renderer | ?? |
| Models::Search | ?? |
| Models::Statistics | ?? |
| Utils::String | ?? |
| Mustache::Tag | ?? |
| TestAdder< T > | ?? |
| testadder | ?? |
| TestRunner | ?? |
| Generator::TexGenerator | ?? |
| Models::Unit | ?? |
| Gui::Utils::WindowSettings | ?? |

Chapter 6

Class Index

6.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

| | |
|--|----|
| Databases::AccessDatabase | ?? |
| Gui::Dialogs::AddProjectDialog | |
| Windows to add a new Project | ?? |
| Gui::Dialogs::AddQuoteDialog | |
| Window to add or modify a Quote | ?? |
| Models::Billing | |
| : Billing or Quote of a Customer | ?? |
| Databases::BillingDatabase | |
| The BillingDatabase class Billing (or Quote) table database | ?? |
| BillingDatabaseTest | ?? |
| BillingModelTest | ?? |
| Gui::Widgets::WdgModels::BillingsTableModel | |
| For a Billing table | ?? |
| Gui::Widgets::BrowseImageWidget | |
| Widget to add a new BrowseImageWidget | ?? |
| Models::Calculable | |
| The Calculable interface Models who are calculable | ?? |
| Gui::Widgets::CheckFields::CheckCity | |
| Line Edit of City with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckCountry | |
| CheckCountry::CheckCountry Line Edit of country with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckEmail | |
| Line Edit of email with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckFieldsLetters | |
| Field with only letters (no numbers) | ?? |
| Gui::Widgets::CheckFields::CheckFieldsNumbers | |
| Line Edit of number with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckIpAddress | |
| Line Edit of IP address with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckLogin | |
| Line Edit of login with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckName | |
| Line edit of name with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckPhone | |
| Line Edit of Phone number with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckPortNumber | |
| The CheckFieldsNumbers class Line Edit of number with a check icon | ?? |

| | |
|---|----|
| Gui::Widgets::CheckFields::CheckPostalCode | |
| Line Edit of postal code with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckQLineEdit | |
| LineEdit custom with a check of text inputed | ?? |
| Gui::Widgets::CheckFields::CheckSiretNumber | |
| Line Edit with a check icon | ?? |
| Gui::Widgets::CheckFields::CheckUntilField | |
| The CheckUntilField class | ?? |
| Gui::Widgets::CheckFields::CheckValidField | |
| Check field not required | ?? |
| Gui::Widgets::CheckFields::CheckWebsite | |
| Line Edit of website with a check icon | ?? |
| Gui::Widgets::Path::ChoseDirectoryWidget | |
| Open a QFileDialog.and display path in textfield | ?? |
| Gui::Widgets::Path::ChoseFileWidget | |
| Chose a File in computer | ?? |
| Gui::Widgets::Path::ChosePathWidget | |
| The ChoseDirectoryWidget class Open a QFileDialog.and display path in textfield | ?? |
| Gui::Widgets::CoffeeEasterEggWidget | |
| Easter egg class because we need coffee | ?? |
| Gui::Widgets::Delegates::ComboBoxDelegate | |
| The ComboBoxDelegate class | ?? |
| Gui::Widgets::ComboBoxModelWidget | |
| Model of ComboBox | ?? |
| Gui::Dialogs::ComputeTurnoverDialog | |
| Window to compute a turnover with a period | ?? |
| Mustache::Context | ?? |
| ContributoriesDatabaseTest | ?? |
| Models::ContributoriesList | |
| List of contributories | ?? |
| Gui::Widgets::WdgModels::ContributoriesTableModel | |
| For a custom table for contributories widget | ?? |
| Gui::Widgets::ContributoriesWidget | |
| Widget of Contributories | ?? |
| Models::Contributory | |
| The Unit enum Unity of work : hour or day | ?? |
| Databases::ContributoryDatabase | |
| The ContributoryDatabase class Contributory (or Quote) table database | ?? |
| ContributoryListTest | ?? |
| ContributoryModelTest | ?? |
| CounterContext | ?? |
| Models::Customer | |
| Customer | ?? |
| Gui::Widgets::CustomerContextualMenu | |
| Display contextual menu on a customer | ?? |
| Databases::CustomerDatabase | |
| The CustomerDatabase class Customer table database | ?? |
| CustomerDatabaseTest | ?? |
| Gui::Widgets::CustomerDataWidget | |
| Class for display info of a customer | ?? |
| CustomerModelTest | ?? |
| Gui::Widgets::WdgModels::CustomersTableModel | |
| For a customer table | ?? |
| Databases::Database | |
| The Database class Master class for all database access | ?? |
| Gui::Widgets::DatabaseSettingsWidget | |
| Windows of database settings | ?? |

| | |
|--|----|
| Exceptions::DbException | |
| For database exception : queries, db file, ... | ?? |
| Gui::Dialogs::DialogAddCustomer | |
| Window to add or modify a Customer | ?? |
| Utils::Directories | ?? |
| DirectoriesTests | ?? |
| Utils::Double | |
| Utils functions for Double calculs | ?? |
| Gui::Widgets::Delegates::DoubleSpinBoxDelegate | |
| The DoubleSpinBoxDelegate class | ?? |
| FileChoseWidget | ?? |
| Exceptions::FileException | |
| For file/access file exception | ?? |
| Generation | ?? |
| Utils::HierarchicalSystem | |
| Create class which contains hierarchical system of FactDev | ?? |
| HierarchicalSystemTest | ?? |
| Gui::Widgets::CheckFields::ICheckField | |
| Interface to check fields validity | ?? |
| Gui::Utils::Image | |
| Contains generic methods on image formats | ?? |
| Models::IModel | |
| The IModel class | ?? |
| Utils::ItemType | |
| Item type model | ?? |
| ItemTypeTest | ?? |
| Utils::Log | |
| For Simple management of log | ?? |
| Gui::MainWindow | |
| Main Window of the software | ?? |
| Gui::Dialogs::MessageBox | |
| Information window with message | ?? |
| Parameters | |
| Class for simple user parameters | ?? |
| Mustache::PartialFileLoader | ?? |
| Mustache::PartialMap | ?? |
| Mustache::PartialResolver | ?? |
| Generator::PdfGenerator | |
| Generator of PDF files | ?? |
| Models::People | |
| People | ?? |
| Utils::pointers | |
| The pointers class | ?? |
| PointersTest | ?? |
| Gui::Widgets::Popup | |
| Class for display popup quickly | ?? |
| Models::Project | |
| : Project linked to a Customer | ?? |
| Gui::Widgets::Delegates::ProjectComboDelegate | |
| The ProjectComboDelegate class | ?? |
| Gui::Widgets::WdgModels::ProjectContributoriesTableModel | |
| Table model of contributories linked to projets | ?? |
| Databases::ProjectDatabase | |
| Project table database | ?? |
| ProjectDatabaseTest | ?? |
| ProjectModelTest | ?? |
| Gui::Widgets::WdgModels::ProjectsTableModel | |
| For a Project table | ?? |

| | |
|---|----|
| Gui::Widgets::ProjectsWidget | |
| Actions on Project | ?? |
| Mustache::QtVariantContext | ?? |
| Models::Rate | |
| Rate of a prestation | ?? |
| Databases::RateDatabase | ?? |
| RateModelTest | ?? |
| Gui::Widgets::RateWidget | |
| Class for display Rate | ?? |
| Mustache::Renderer | ?? |
| Models::Search | |
| The Search class | ?? |
| Gui::Docks::SearchDock | |
| Dock which contains search bar | ?? |
| searchTest | ?? |
| Gui::Widgets::searchWidget | |
| Class for search in database | ?? |
| Gui::Dialogs::StartedWindowsDialog | |
| Construct a Windows for the first begin | ?? |
| StatisticModelTest | ?? |
| Models::Statistics | ?? |
| Gui::Dialogs::StatisticsDialog | |
| Window to have global informations or about a customer | ?? |
| Utils::String | |
| The Utils class | ?? |
| StringTest | ?? |
| Mustache::Tag | ?? |
| TestAdder< T > | ?? |
| testadder | ?? |
| TestMustache | ?? |
| TestRunner | ?? |
| Generator::TexGenerator | |
| Generate a LaTeX file | ?? |
| Gui::Widgets::Delegates::TextareaDelegate | |
| The TextareaDelegate class | ?? |
| Models::Unit | |
| An unity for billing calculs | ?? |
| Gui::Widgets::Delegates::UnitComboDelegate | |
| The UnitComboDelegate class | ?? |
| Models::User | |
| User of it application | ?? |
| Gui::Widgets::UserDailyHoursWidget | |
| Define user quantity of work | ?? |
| Databases::UserDatabase | |
| Access to User data in the the table User of the Database | ?? |
| UserDatabaseTest | ?? |
| Gui::Dialogs::UserDataDialog | |
| Window to fill user data | ?? |
| UserModelTest | ?? |
| Gui::Utils::WindowSettings | |
| Utils function on windows | ?? |

Chapter 7

Namespace Documentation

7.1 Databases Namespace Reference

Class for [Database](#), contains queries.

Classes

- class [AccessDatabase](#)
- class [BillingDatabase](#)
*The **BillingDatabase** class Billing (or Quote) table database.*
- class [ContributoryDatabase](#)
*The **ContributoryDatabase** class Contributory (or Quote) table database.*
- class [CustomerDatabase](#)
*The **CustomerDatabase** class Customer table database.*
- class [Database](#)
*The **Database** class Master class for all database access.*
- class [ProjectDatabase](#)
*The **ProjectDatabase** class Project table database.*
- class [RateDatabase](#)
- class [UserDatabase](#)
*The **UserDatabase** class Access to User data in the the table User of the **Database***

Enumerations

- enum **DbType** { [SQLITE](#), [MYSQL](#) }

7.1.1 Detailed Description

Class for [Database](#), contains queries.

7.2 Gui Namespace Reference

Namespaces

- [Widgets](#)
Contains [Widgets](#) classes.

Classes

- class [MainWindow](#)
The [MainWindow](#) class Main Window of the software.

7.2.1 Detailed Description

Classes for Graphical User Interface

7.3 Gui::Widgets Namespace Reference

Contains [Widgets](#) classes.

Classes

- class [BrowseImageWidget](#)
The [BrowseImageWidget](#) class Widget to add a new [BrowseImageWidget](#).
- class [CoffeeEasterEggWidget](#)
The [CoffeeEasterEggWidget](#) class Easter egg class because we need coffee.
- class [ComboBoxModelWidget](#)
The [ComboBoxModelWidget](#) class Model of ComboBox.
- class [ContributoriesWidget](#)
The [ContributoriesWidget](#) class Widget of Contributories.
- class [CustomerContextualMenu](#)
Display contextual menu on a customer.
- class [CustomerDataWidget](#)
Class for display info of a customer.
- class [DatabaseSettingsWidget](#)
The [DatabaseSettingsWidget](#) class Windows of database settings.
- class [Popup](#)
Class for display popup quickly.
- class [ProjectsWidget](#)
The [ProjectsWidget](#) class Actions on Project.
- class [RateWidget](#)
Class for display Rate.
- class [searchWidget](#)
Class for search in database.
- class [UserDailyHoursWidget](#)
The [UserDailyHoursWidget](#) class Define user quantity of work.

Enumerations

- enum [CoffeeState](#) {
 INIT, FIRST_STEP, SECOND_STEP, THIRD_STEP,
 FOURTH_STEP, READY }
The [CoffeeState](#) enum.

7.3.1 Detailed Description

Contains [Widgets](#) classes.

7.4 Models Namespace Reference

Models classes.

Classes

- class [Billing](#)
The [Billing](#) class : [Billing](#) or Quote of a [Customer](#).
- class [Calculable](#)
The [Calculable](#) interface [Models](#) who are calculable.
- class [ContributoriesList](#)
The [ContributoriesList](#) class List of contributories.
- class [Contributory](#)
The [Unit](#) enum Unity of work : hour or day.
- class [Customer](#)
The [Customer](#) class [Customer](#).
- class [IModel](#)
The [IModel](#) class.
- class [People](#)
The [People](#) class [People](#).
- class [Project](#)
The [Project](#) class : [Project](#) linked to a [Customer](#).
- class [Rate](#)
The [Rate](#) class [Rate](#) of a prestation.
- class [Search](#)
The [Search](#) class.
- class [Statistics](#)
- class [Unit](#)
The [Unit](#) class An unity for billing calculs.
- class [User](#)
The [User](#) class [User](#) of it application.

Enumerations

- enum [TypeUnit](#) { **HOURLY**, **DAILY**, **MONTHLY** }
The [TypeUnit](#) enum Type Unit : hour or days.

7.4.1 Detailed Description

Models classes.

Chapter 8

Class Documentation

8.1 Databases::AccessDatabase Class Reference

Static Public Member Functions

- static void **init** ()
- static void **commit** ()

Static Public Attributes

- static QString **_address**
- static int **_port**
- static QString **_userDb**
- static QString **_password**
- static QString **_dbName**
- static Databases::DbType **_dbType**
- static bool **_exists**

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/accessdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/accessdatabase.cpp

8.2 Gui::Dialogs::AddProjectDialog Class Reference

The [AddProjectDialog](#) class Windows to add a new Project.

```
#include <addprojectdialog.h>
```

Inheritance diagram for Gui::Dialogs::AddProjectDialog:



Public Slots

- void [checkFields](#) ()
AddProjectDialog::checkFields Check if fields are valid.

Public Member Functions

- [AddProjectDialog](#) (int idProject=0, int noRowCustomer=0, QWidget *parent=0)
AddProjectDialogAddProjectDialog Construct a windows according an idCustomer and, optionnaly, an idProject
- void [accept](#) ()
AddProjectDialog::accept Valid data inputed by user and add these data in Database.
- void [reject](#) ()
AddProjectDialog::reject Cancel the operation and close the windows.
- void [fillFields](#) ()
AddProjectDialog::fillFields Fill the differents fields of the current windows according the Project data existing As a project requires to be linked to a Customer, the Customer selection part may be disable.

8.2.1 Detailed Description

The [AddProjectDialog](#) class Windows to add a new Project.

Author

Florent Berbie

See Also

[Project](#)

8.2.2 Constructor & Destructor Documentation

8.2.2.1 [Gui::Dialogs::AddProjectDialog::AddProjectDialog](#) (int *idProject* = 0, int *noRowCustomer* = 0, QWidget * *parent* = 0) [explicit]

[AddProjectDialogAddProjectDialog](#) Construct a windows according an *idCustomer* and, optionnaly, an *idProject*

Parameters

| | |
|----------------------|--------------------------------|
| <i>noRowCustomer</i> | Row number of the Customer |
| <i>idProject</i> | Project identify |
| <i>parent</i> | QWidget of the current windows |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addprojectdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addprojectdialog.cpp

8.3 [Gui::Dialogs::AddQuoteDialog](#) Class Reference

The [AddQuoteDialog](#) class Window to add or modify a Quote.

```
#include <addquotedialog.h>
```

Inheritance diagram for [Gui::Dialogs::AddQuoteDialog](#):



Public Slots

- void **updateBtn** (void)
- void **changeDocType** ()

Public Member Functions

- [AddQuoteDialog](#) (bool isBilling, int idCustomer=0, int id=0, bool copy=false, QWidget *parent=0)
[AddQuoteDialog::AddQuoteDialog](#) Construct a windows [AddQuoteDialog](#).
- void [fillFields](#) ()
[AddQuoteDialog::fillFields](#) Fill line edits with the data of the quote.
- int [getNumber](#) ()
[AddQuoteDialog::getNumber](#) return the number of bill or quote.
- void [accept](#) ()
[AddQuoteDialog::accept](#) Valid data inputed by user and add these data in Database.
- bool [getCopy](#) () const
[AddQuoteDialog::getCopy](#) return if [AddQuoteDialog](#) is an add by copy of Billing/quote or if it's edition or add of Billing/quote.
- void [setCopy](#) (bool copy)
[AddQuoteDialog::setCopy](#) Change the _copy value to define if it's a copy of a Billing/quote or if it's a new Billing or a Billing edition.
- int [getIdCustomer](#) () const
[AddQuoteDialog::getIdCustomer](#) get the id of the customer changing his quote/billing.
- void [fillQuoteBilling](#) (bool isBilling)
[AddQuoteDialog::fillQuoteBilling](#) fill fields for a Billing or a quote.
- void [fillQuoteBillingCopy](#) (bool isBilling)
[AddQuoteDialog::fillQuoteBillingCopy](#) fill fields if it's a Billing or a quote for a copy.
- void [setQuoteIdNumber](#) (int id, int idCustomer, bool isBilling)
[AddQuoteDialog::setQuoteIdNumber](#) set id and number of the _quote

8.3.1 Detailed Description

The [AddQuoteDialog](#) class Window to add or modify a Quote.

Author

8.3.2 Constructor & Destructor Documentation

- 8.3.2.1 [Gui::Dialogs::AddQuoteDialog::AddQuoteDialog](#) (bool *isBilling*, int *idCustomer* = 0, int *id* = 0, bool *copy* = false, QWidget * *parent* = 0) [explicit]

[AddQuoteDialog::AddQuoteDialog](#) Construct a windows [AddQuoteDialog](#).

Parameters

| | |
|-------------------|--|
| <i>isBilling</i> | displaying of a quote or a Billing |
| <i>idCustomer</i> | the id of the Customer |
| <i>id</i> | the id of the quote or the billing of the Customer's Project |
| <i>edit</i> | if it's an edition or a copy of a quote/Billing |
| <i>parent</i> | QWidget of the current windows |

8.3.3 Member Function Documentation

8.3.3.1 void Gui::Dialogs::AddQuoteDialog::fillQuoteBilling (bool *isBilling*)

[AddQuoteDialog::fillQuoteBilling](#) fill fields for a Billing or a quote.

Parameters

| | |
|------------------|------------------------------|
| <i>isBilling</i> | if it's a quote or a Billing |
|------------------|------------------------------|

8.3.3.2 bool Gui::Dialogs::AddQuoteDialog::getCopy () const

[AddQuoteDialog::getCopy](#) return if [AddQuoteDialog](#) is an add by copy of Billing/quote or if it's edition or add of Billing/quote.

Returns

if it's a copy or not

8.3.3.3 int Gui::Dialogs::AddQuoteDialog::getIdCustomer () const

[AddQuoteDialog::getIdCustomer](#) get the id of the customer changing his quote/billing.

Returns

the id of the customer

8.3.3.4 int Gui::Dialogs::AddQuoteDialog::getNumber ()

[AddQuoteDialog::getNumber](#) return the number of bill or quote.

Returns

int

8.3.3.5 void Gui::Dialogs::AddQuoteDialog::setCopy (bool *copy*)

[AddQuoteDialog::setCopy](#) Change the `_copy` value to define if it's a copy of a Billing/quote or if it's a new Billing or a Billing edition.

Parameters

| | |
|-------------|--|
| <i>copy</i> | |
|-------------|--|

8.3.3.6 void Gui::Dialogs::AddQuoteDialog::setQuotedIdNumber (int *id*, int *idCustomer*, bool *isBilling*)

AddQuoteDialog::setQuotedIdNumber set id and number of the *_quote*

Parameters

| | |
|-------------------|---|
| <i>id</i> | the id of the Billing |
| <i>idCustomer</i> | the id of the customer to set the <i>number</i> |
| <i>isBilling</i> | if it's a quote or a Billing |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addquotedialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/addquotedialog.cpp

8.4 Models::Billing Class Reference

The **Billing** class : **Billing** or Quote of a **Customer**.

```
#include <billing.h>
```

Inheritance diagram for Models::Billing:



Public Member Functions

- **Billing** ()
Billing::Billing. Construct a **Billing**.
- **Billing** (int *id*)
Billing::Billing. Construct a **Billing** or quote.
- **~Billing** ()
destruct a billing object
- void **commit** ()
Billing::commit. Insert a modification in **Billing** table on the database.
- void **hydrat** (int *getId*)
Billing::hydrat. Update of the **Billing** which is specified by *getId*
- void **remove** ()
Billing::remove. Remove a **Billing**.
- QVariantHash **getDataMap** ()
Billing::getDataMap Get all data of model with a HashMap key/value.
- double **getPrice** (bool *paied=false*)
getPrice Return the price of a calculable object
- double **getSumQuantity** ()
ContributoriesList::getSumQuantity Return the sum of quantity (number of days) of the Contributories.
- void **generateTex** ()

- Billing::generateTex* Generate a .tex file for the billing.
- void **generatePdf** ()
 - Billing::generatePdf* Generate a .pdf file for the billing.
- QString **getPath** ()
 - Billing::getPath* Return the path of billing filename (without extension)
- QString **getFolder** ()
 - Billing::getFolder* Return the directory of billing.
- QString **getFilename** ()
 - Billing::getFilename* Return the filename of billing (without extension)
- **ContributoriesList** & **getContributories** ()
 - Billing::getContributories.* Return a map of **Contributory** for each **Project** of the **Billing**
- void **addContributory** (**Contributory** &c)
 - Billing::addContributories* Add a new contributory for project p.
- QString **getTitle** () const
 - Billing::getTitle.* return title of **Billing**
- void **setTitle** (const QString &**getTitle**)
 - Billing::setTitle.* Modify the title of **Billing**
- QString **getDescription** () const
 - Billing::getDescription.* return description of **Billing**
- void **setDescription** (const QString &**getDescription**)
 - Billing::setDescription.* Modify the description of **Billing**
- int **getNumber** () const
 - Billing::getNumber.* Return number of the **Billing**.
- void **setNumber** (int **getNumber**)
 - Billing::setNumber.* Modify _number of **Billing**.
- bool **isBilling** () const
 - Billing::isBilling.* Return if it's a billing or a quote.
- void **setIsBilling** (bool **isBilling**)
 - Billing::setIsBilling.* Modify isBilling of **Billing**.
- QDate **getDate** () const
 - Billing::getDate.* return date of the **Billing**
- void **setDate** (const QDate &**getDate**)
 - Billing::setDate.* Modify date of the **Billing**
- bool **isPaid** () const
 - Billing::isPaid* Return TRUE if thee current billing is paid else return FALSE.
- void **setIsPaid** (bool **isPaid**)
 - Billing::setIsPaid* Define the current billing according the argument isPaid
- bool **operator==** (const **Billing** &b)
 - Billing::operator ==* define the operator "==" to compare two billings and to see if they are the same.
- bool **operator!=** (const **Billing** &b)
 - Billing::operator !=* defines the operator "!=" to compare two **Billing** and to see if they are different.
- void **setContributories** (const **ContributoriesList** &contributories)
- bool **operator<** (const **Billing** &b) const
 - Billing::operator <* defines the operator "<" to compare two **Billing** and to see if the first is anterior to the second.
- QStandardItem * **getItem** ()
 - Billing::getItem* Return the bill/quote item.

Additional Inherited Members

8.4.1 Detailed Description

The [Billing](#) class : [Billing](#) or Quote of a [Customer](#).

Author

Antoine de Roquemaurel
Florent Berbie

8.4.2 Constructor & Destructor Documentation

8.4.2.1 Models::Billing::Billing (int *id*)

[Billing::Billing](#). Construct a [Billing](#) or quote.

Parameters

| | |
|------------|----|
| <i>int</i> | id |
|------------|----|

8.4.3 Member Function Documentation

8.4.3.1 void Models::Billing::addContributory (Contributory & *c*)

[Billing::addContributories](#) Add a new contributory for project p.

Parameters

| | |
|----------|--|
| <i>p</i> | The Project who contain Contributory |
| <i>c</i> | The new Contributory |

8.4.3.2 ContributoriesList & Models::Billing::getContributories ()

[Billing::getContributories](#). Return a map of [Contributory](#) for each [Project](#) of the [Billing](#)

Returns

QMap<[Project](#), QList<Contributory>>

8.4.3.3 QVariantHash Models::Billing::getDataMap () [virtual]

[Billing::getDataMap](#) Get all data of model with a HashMap key/value.

Returns

Model's data

Implements [Models::IModel](#).

8.4.3.4 QDate Models::Billing::getDate () const

[Billing::getDate](#). return date of the [Billing](#)

Returns

date of [Billing](#)

8.4.3.5 QString Models::Billing::getDescription () const

[Billing::getDescription](#). return description of [Billing](#)

Returns

description of [Billing](#)

8.4.3.6 QString Models::Billing::getFilename ()

[Billing::getFilename](#) Return the filename of billing (without extension)

Returns

Filename of Billing

8.4.3.7 QString Models::Billing::getFolder ()

[Billing::getFolder](#) Return the directory of billing.

Returns

[Billing](#) directory

8.4.3.8 QList<QStandardItem> * Models::Billing::getItem ()

[Billing::getItem](#) Return the bill/quote item.

Returns

QStandardItem an item for QTree (level/depth 3)

8.4.3.9 int Models::Billing::getNumber () const

[Billing::getNumber](#). Return number of the [Billing](#).

Returns

_number of [Billing](#)

8.4.3.10 QString Models::Billing::getPath ()

[Billing::getPath](#) Return the path of billing filename (without extension)

Returns

billing path

8.4.3.11 `double Models::Billing::getPrice (bool paied = false) [virtual]`

`getPrice` Return the price of a calculable object

Returns

The price

Implements [Models::Calculable](#).

8.4.3.12 `double Models::Billing::getSumQuantity () [virtual]`

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of days) of the Contributories.

Returns

sum of quantity in days

Implements [Models::Calculable](#).

8.4.3.13 `QString Models::Billing::getTitle () const`

[Billing::getTitle](#). return title of [Billing](#)

Returns

title of [Billing](#)

8.4.3.14 `void Models::Billing::hydrat (int getId) [virtual]`

[Billing::hydrat](#). Update of the [Billing](#) which is specified by *getId*

Parameters

| | |
|--------------|--|
| <i>getId</i> | |
|--------------|--|

Implements [Models::IModel](#).

8.4.3.15 `bool Models::Billing::isBilling () const`

[Billing::isBilling](#). Return if it's a billing or a quote.

Returns

if it's billing or a quote

8.4.3.16 `bool Models::Billing::isPaid () const`

[Billing::isPaid](#) Return TRUE if thee current billing is paid else return FALSE.

Returns

Boolean

8.4.3.17 `bool Models::Billing::operator!= (const Billing & b)`

[Billing::operator !=](#) defines the operator "!=" to compare two [Billing](#) and to see if they are different.

Parameters

| | |
|----------|---|
| <i>b</i> | the Billing to compare with the current Billing |
|----------|---|

Returns

true if the **Billing** are different else false

8.4.3.18 bool Models::Billing::operator< (const **Billing** & *b*) const

Billing::operator < defines the operator "<" to compare two **Billing** and to see if the first is anterior to the second.

Parameters

| | |
|----------|---|
| <i>b</i> | the Billing to compare with the current Billing |
|----------|---|

Returns

true if the **Billing** are different else false

8.4.3.19 bool Models::Billing::operator== (const **Billing** & *b*)

Billing::operator == define the operator "==" to compare two billings and to see if they are the same.

Parameters

| | |
|----------|---|
| <i>b</i> | the Billing to compare with the current Billing |
|----------|---|

Returns

true if they are the same billings else false

8.4.3.20 void Models::Billing::setDate (const QDate & *getDate*)

Billing::setDate. Modify *date* of the **Billing**

Parameters

| | |
|----------------|------------------------------------|
| <i>getDate</i> | the new date of the Billing |
|----------------|------------------------------------|

8.4.3.21 void Models::Billing::setDescription (const QString & *getDescription*)

Billing::setDescription. Modify the description of **Billing**

Parameters

| | |
|-----------------------|---|
| <i>getDescription</i> | Modify the description with <i>getDescription</i> |
|-----------------------|---|

8.4.3.22 void Models::Billing::setIsBilling (bool *isBilling*)

Billing::setIsBilling. Modify *isBilling* of **Billing**.

Parameters

| | |
|------------------|--|
| <i>isBilling</i> | |
|------------------|--|

8.4.3.23 void Models::Billing::setIsPaid (bool *isPaid*)

[Billing::setIsPaid](#) Define the current billing according the argument *isPaid*

Parameters

| | |
|---------------|---------|
| <i>isPaid</i> | Boolean |
|---------------|---------|

8.4.3.24 void Models::Billing::setNumber (int *getNumber*)

[Billing::setNumber](#). Modify *_number* of [Billing](#).

Parameters

| | |
|------------------|---|
| <i>getNumber</i> | the new number of the Billing |
|------------------|---|

8.4.3.25 void Models::Billing::setTitle (const QString & *getTitle*)

[Billing::setTitle](#). Modify the title of [Billing](#)

Parameters

| | |
|-----------------|---------------------------------------|
| <i>getTitle</i> | Modify the title with <i>getTitle</i> |
|-----------------|---------------------------------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/billing.h
- /home/travis/build/FACT-Team/FactDev/src/models/billing.cpp

8.5 Databases::BillingDatabase Class Reference

The [BillingDatabase](#) class Billing (or Quote) table database.

```
#include <billingdatabase.h>
```

Inheritance diagram for Databases::BillingDatabase:



Public Member Functions

- [Models::Billing * getBilling](#) (const int pld)
[BillingDatabase::getBilling](#) get informations about the billing identified by pld
- [WdgModels::BillingsTableModel * getBillingsTable](#) (const int idProject) throw (DbException*)
[BillingDatabase::getBillingsTable](#) Return an item model of billings for QTableView.
- int [addBilling](#) (const [Models::Billing](#) &)

- BillingDatabase::addBilling* Add the billing pBilling to the database.
- void **updateBilling** (const **Models::Billing** &)

BillingDatabase::updateCustomer Update informations about the billing pCustomer
- void **removeBilling** (const int pld)

BillingDatabase::removeCustomer Remove the billing with the id pld
- void **addBillingProject** (const int idProject, const int idBilling, const int idContributory)

BillingDatabase::addBillingProject Link a project, a billing and a contributory in the table BillingProject.
- bool **isBillingPaid** (const int pld)

BillingDatabase::isBillingPaid Return TRUE if the id pld correspond to a Billing and not quote (isBilling = 1) and if this billing is paid (isPaid = 1) else return FALSE.
- void **removeBillingProject** (const int idProject, const int idBilling, const int idContributory)

BillingDatabase::removeBillingProject remove a link between a project, a billing and a contributory in the table BillingProject.
- int **getMaxBillingNumber** ()

getMaxBillingNumber Get the last number of a billing
- int **getMaxQuoteNumber** ()

getMaxQuoteNumber Get the last number of a quote
- int **getMaxBillingNumberOfCustomer** (const int idCustomer)

BillingDatabase::getMaxBillingNumberOfCustomer Get the last number of a **Customer's** Billing.
- int **getMaxQuoteNumberOfCustomer** (const int idCustomer)

BillingDatabase::getMaxQuoteNumberOfCustomer Get the last number of a **Customer's** quote.
- QSharedPointer< **Models::Billing** > **getBilling** (QStringQuery &q)

BillingDatabase::getBilling Add the element of the q request and return their.
- QMap< **Project** *, **Billing** * > **getAllBillingsOfProject** ()

BillingDatabase::getAllBillingsOfProject Return a map with the project id as key linked to the billing.
- QList< **Billing** > **getBillsBetweenDates** (QDate begin, QDate end)

Get the bills between begin and end dates.
- QList< **Billing** > **getBills** (const int projectId=0)

Get the bills.
- QList< **Billing** > **getBillsPaid** (const int projectId=0)

Get the bills paid.
- int **getNbBills** (const int customerId=0)

Get the number of bills.
- int **getNbBillsPaid** (const int customerId=0)

Get the number of bills paid.
- int **getNbQuotes** (const int customerId=0)

Get the number of quotes.
- int **getNbDocs** (const int customerId=0)

Get the number of documents.

Static Public Member Functions

- static **BillingDatabase** * **instance** () throw (DbException*)

BillingDatabase::getInstance Return an instance of **BillingDatabase**

Additional Inherited Members

8.5.1 Detailed Description

The [BillingDatabase](#) class Billing (or Quote) table database.

Author

See Also

[Database](#)
Billing/Quote

8.5.2 Member Function Documentation

8.5.2.1 `int Databases::BillingDatabase::addBilling (const Models::Billing & pBilling)`

[BillingDatabase::addBilling](#) Add the billing *pBilling* to the database.

Returns

billing id

8.5.2.2 `void Databases::BillingDatabase::addBillingProject (const int idProject, const int idBilling, const int idContributory)`

[BillingDatabase::addBillingProject](#) Link a project, a billing and a contributory in the table BillingProject.

Parameters

| | |
|-----------------------|-----------------|
| <i>idProject</i> | Project id |
| <i>idBilling</i> | Billing id |
| <i>idContributory</i> | Contributory id |

8.5.2.3 `QMap< Project *, Billing * > Databases::BillingDatabase::getAllBillingsOfProject ()`

[BillingDatabase::getAllBillingsOfProject](#) Return a map with the project id as key linked to the billing.

Returns

Map with projects and Billing

8.5.2.4 `Models::Billing * Databases::BillingDatabase::getBilling (const int pld)`

[BillingDatabase::getBilling](#) get informations about the billing identified by *pld*

Parameters

| | |
|------------|------------|
| <i>pld</i> | billing id |
|------------|------------|

Returns

the Billing

8.5.2.5 QSharedPointer< Billing > Databases::BillingDatabase::getBilling (QSqlQuery & *q*)

[BillingDatabase::getBilling](#) Add the element of the *q* request and return their.

Parameters

| | |
|----------|-------------|
| <i>q</i> | SQL request |
|----------|-------------|

Returns

a billing formed according to QSharedPointer

8.5.2.6 `WdgModels::BillingsTableModel * Databases::BillingDatabase::getBillingsTable (const int idProject) throw DbException *`

[BillingDatabase::getBillingsTable](#) Return an item model of billings for QTableView.

Parameters

| | |
|------------|---|
| <i>pld</i> | the project id of the billings returned |
|------------|---|

Exceptions

| | |
|--------------------|--|
| <i>DbException</i> | |
|--------------------|--|

Returns

QStandardItemModel an item model for QTableView

8.5.2.7 `QList< Billing > Databases::BillingDatabase::getBills (const int projectId = 0)`

Get the bills.

Parameters

| | |
|------------------|---------------------------------|
| <i>projectId</i> | Get the specified project bills |
|------------------|---------------------------------|

Returns

The list of bills

8.5.2.8 `QList< Billing > Databases::BillingDatabase::getBillsBetweenDates (QDate begin, QDate end)`

Get the bills between *begin* and *end* dates.

Parameters

| | |
|--------------|--|
| <i>begin</i> | |
| <i>end</i> | |

Returns

the list of **Bills**

8.5.2.9 `QList< Billing > Databases::BillingDatabase::getBillsPaid (const int projectId = 0)`

Get the bills paid.

Parameters

| | |
|------------------|--------------------------------------|
| <i>projectId</i> | Get the specified project bills paid |
|------------------|--------------------------------------|

Returns

The list of bills paid

8.5.2.10 `int Databases::BillingDatabase::getMaxBillingNumber ()`

`getMaxBillingNumber` Get the last number of a billing

Returns

The max number

8.5.2.11 `int Databases::BillingDatabase::getMaxBillingNumberOfCustomer (const int idCustomer)`

[BillingDatabase::getMaxBillingNumberOfCustomer](#) Get the last number of a **Customer's** Billing.

Parameters

| | |
|-------------------|-------------|
| <i>idCustomer</i> | Customer id |
|-------------------|-------------|

Returns

the last number of the **Customer's** Billing

8.5.2.12 `int Databases::BillingDatabase::getMaxQuoteNumber ()`

`getMaxQuoteNumber` Get the last number of a quote

Returns

The last number

8.5.2.13 `int Databases::BillingDatabase::getMaxQuoteNumberOfCustomer (const int idCustomer)`

[BillingDatabase::getMaxQuoteNumberOfCustomer](#) Get the last number of a **Customer's** quote.

Parameters

| | |
|-------------------|-------------|
| <i>idCustomer</i> | Customer id |
|-------------------|-------------|

Returns

the last number of the **Customer's** quote

8.5.2.14 `int Databases::BillingDatabase::getNbBills (const int customerId = 0)`

Get the number of bills.

Parameters

| | |
|-------------------|---|
| <i>customerId</i> | If customerId isn't specified or if it's not valid, get all bills else get the specified customer bills |
|-------------------|---|

Returns

Number of bills in the database for all or for a customer

8.5.2.15 int Databases::BillingDatabase::getNbBillsPaid (const int *customerId* = 0)

Get the number of bills paid.

Parameters

| | |
|-------------------|--|
| <i>customerId</i> | If customerId isn't specified if it's not valid, get all bills paid else get the specified customer bills paid |
|-------------------|--|

Returns

Number of bills paid in the database for all or for a customer

8.5.2.16 int Databases::BillingDatabase::getNbDocs (const int *customerId* = 0)

Get the number of documents.

Parameters

| | |
|-------------------|---|
| <i>customerId</i> | If customerId isn't specified or if it's not valid, get all documents else get the specified customer documents |
|-------------------|---|

Returns

Number of quotes in the database for all or for a customer

8.5.2.17 int Databases::BillingDatabase::getNbQuotes (const int *customerId* = 0)

Get the number of quotes.

Parameters

| | |
|-------------------|---|
| <i>customerId</i> | If customerId isn't specified or if it's not valid, get all quotes else get the specified customer quotes |
|-------------------|---|

Returns

Number of quotes in the database for all or for a customer

8.5.2.18 BillingDatabase * Databases::BillingDatabase::instance () throw DbException * [static]

BillingDatabase::getInstance Return an instance of [BillingDatabase](#)

See Also

DbException

Returns

Instance of [BillingDatabase](#)

8.5.2.19 `bool Databases::BillingDatabase::isBillingPaid (const int pId)`

[BillingDatabase::isBillingPaid](#) Return TRUE if the id *pId* correspond to a Billing and not quote (isBilling = 1) and if this billing is paid (isPaid = 1) else return FALSE.

Parameters

| | |
|------------|------------|
| <i>pld</i> | Billing id |
|------------|------------|

Returns

TRUE if billing is paid

8.5.2.20 void Databases::BillingDatabase::removeBilling (const int *pld*)

BillingDatabase::removeCustomer Remove the billing with the id *pld*

Parameters

| | |
|------------|------------|
| <i>pld</i> | billing id |
|------------|------------|

8.5.2.21 void Databases::BillingDatabase::removeBillingProject (const int *idProject*, const int *idBilling*, const int *idContributory*)

[BillingDatabase::removeBillingProject](#) remove a link between a project, a billing and a contributory in the table BillingProject.

Parameters

| | |
|-----------------------|-----------------|
| <i>idProject</i> | Project id |
| <i>idBilling</i> | Billing id |
| <i>idContributory</i> | Contributory id |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/billingdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/billingdatabase.cpp

8.6 BillingDatabaseTest Class Reference

Inheritance diagram for BillingDatabaseTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/billingdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/billingdatabasetest.cpp

8.7 BillingModelTest Class Reference

Inheritance diagram for BillingModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/billingmodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/billingmodeltest.cpp

8.8 Gui::Widgets::WdgModels::BillingsTableModel Class Reference

The [BillingsTableModel](#) class for a Billing table.

```
#include <billingstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::BillingsTableModel:



Public Member Functions

- [BillingsTableModel](#) ()
BillingsTableModel::BillingsTableModel Construct a *BillingsTableModel*.
- int [rowCount](#) (const QModelIndex &) const
BillingsTableModel::rowCount Number of billings row.
- int [columnCount](#) (const QModelIndex &) const
BillingsTableModel::columnCount Number of column of a Billing.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const
BillingsTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const
BillingsTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
BillingsTableModel::setData Change data of a cell.
- void [append](#) (const [Billing](#) &billing)
BillingsTableModel::append Add a new line in table.
- void [remove](#) (const int i)
BillingsTableModel::remove Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
BillingsTableModel::flags Differents table flags.
- int [count](#) ()
BillingsTableModel::count Number of billings in table.
- QList< [Billing](#) > [getBillings](#) () const
BillingsTableModel::getbillings Return the list of billings.

8.8.1 Detailed Description

The [BillingsTableModel](#) class for a Billing table.

Author

Florent Berbie

See Also

[Billing](#)

8.8.2 Constructor & Destructor Documentation

8.8.2.1 Gui::Widgets::WdgModels::BillingsTableModel::BillingsTableModel ()

[BillingsTableModel::BillingsTableModel](#) Construct a [BillingsTableModel](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Parent widget |
|---------------|---------------|

8.8.3 Member Function Documentation

8.8.3.1 void Gui::Widgets::WdgModels::BillingsTableModel::append (const Billing & *billing*)

[BillingsTableModel::append](#) Add a new line in table.

Parameters

| | |
|----------------|-----------------|
| <i>Billing</i> | The new Billing |
|----------------|-----------------|

8.8.3.2 int Gui::Widgets::WdgModels::BillingsTableModel::columnCount (const QModelIndex &) const

[BillingsTableModel::columnCount](#) Number of column of a Billing.

Returns

The number of column

8.8.3.3 int Gui::Widgets::WdgModels::BillingsTableModel::count ()

[BillingsTableModel::count](#) Number of billings in table.

Returns

The number of billings

8.8.3.4 QVariant Gui::Widgets::WdgModels::BillingsTableModel::data (const QModelIndex & *index*, int *role* = Qt::DisplayRole) const

[BillingsTableModel::data](#) Obtains data of a specify cell.

Parameters

| | |
|--------------|---------------------------|
| <i>index</i> | The cell who we want data |
| <i>role</i> | The role of set |

Returns

The data of cell

8.8.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::BillingsTableModel::flags (const QModelIndex & index) const`

[BillingsTableModel::flags](#) Differents table flags.

Parameters

| | |
|--------------|------------------------------------|
| <i>index</i> | The cell who we want to know flags |
|--------------|------------------------------------|

Returns

Flags

8.8.3.6 `QList< Billing > Gui::Widgets::WdgModels::BillingsTableModel::getBillings () const`

[BillingsTableModel::getbillings](#) Return the list of billings.

Returns

list of billings

8.8.3.7 `QVariant Gui::Widgets::WdgModels::BillingsTableModel::headerData (int section, Qt::Orientation orientation, int role = Qt::DisplayRole) const`

[BillingsTableModel::headerData](#) Obtains header title of table.

Parameters

| | |
|--------------------|-----------------------|
| <i>section</i> | The number of column |
| <i>orientation</i> | The table orientation |
| <i>role</i> | |

Returns

The Title header of column

8.8.3.8 `void Gui::Widgets::WdgModels::BillingsTableModel::remove (const int i)`

[BillingsTableModel::remove](#) Remove a line.

Parameters

| | |
|----------|------------------------------|
| <i>i</i> | The number of line to remove |
|----------|------------------------------|

8.8.3.9 `int Gui::Widgets::WdgModels::BillingsTableModel::rowCount (const QModelIndex &) const`

[BillingsTableModel::rowCount](#) Number of billings row.

Returns

The number of billings

8.8.3.10 `bool Gui::Widgets::WdgModels::BillingsTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[BillingsTableModel::setData](#) Change data of a cell.

Parameters

| | |
|--------------|-------------------------|
| <i>index</i> | The cell to change data |
| <i>value</i> | The new value |
| <i>role</i> | The role of cell |

Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/billingstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/billingstablemodel.cpp

8.9 Gui::Widgets::BrowseImageWidget Class Reference

The [BrowseImageWidget](#) class Widget to add a new [BrowseImageWidget](#).

```
#include <browseimagewidget.h>
```

Inheritance diagram for Gui::Widgets::BrowseImageWidget:



Public Slots

- void [browseImagePath](#) ()
[BrowseImageWidget::browseImagePath\(\)](#) Open a new window to define the workspace path of the user.

Public Member Functions

- [BrowseImageWidget](#) (QWidget *parent=0)
[BrowseImageWidget::BrowseImageWidget](#) Construct a [BrowseImageWidget](#).
- void [setImageScaled](#) (QString path, int width=128, int height=128)
[BrowseImageWidget::getImageScaled](#) Modify the current image to a scaled image from the icon specified by it path.
The image has a resolution of width*height (default 128*128)

- QPixmap * [getImage](#) ()
BrowseImageWidget::getIcon Return the icon selected.
- void [setImage](#) (QPixmap *img)
BrowseImageWidget::setImage Change the current image by the new *img*
- QString [getExtension](#) () const
BrowseImageWidgetextension::getExtension Return extension of the image file.

8.9.1 Detailed Description

The [BrowseImageWidget](#) class Widget to add a new [BrowseImageWidget](#).

Author

Florent Berbie

8.9.2 Constructor & Destructor Documentation

8.9.2.1 [Gui::Widgets::BrowseImageWidget::BrowseImageWidget \(QWidget * parent = 0 \)](#) [explicit]

[BrowseImageWidget::BrowseImageWidget](#) Cosntruct a [BrowseImageWidget](#).

Parameters

| | |
|---------------|----------------|
| <i>parent</i> | QWidget parent |
|---------------|----------------|

8.9.3 Member Function Documentation

8.9.3.1 [QString Gui::Widgets::BrowseImageWidget::getExtension \(\)](#) const

BrowseImageWidgetextension::getExtension Return extension of the image file.

Returns

Extension of image file

8.9.3.2 [QPixmap * Gui::Widgets::BrowseImageWidget::getImage \(\)](#)

BrowseImageWidget::getIcon Return the icon selected.

Returns

image

8.9.3.3 [void Gui::Widgets::BrowseImageWidget::setImage \(QPixmap * img \)](#)

BrowseImageWidget::setImage Change the current image by the new *img*

Parameters

| | |
|------------|-----------|
| <i>img</i> | New image |
|------------|-----------|

8.9.3.4 [void Gui::Widgets::BrowseImageWidget::setImageScaled \(QString path, int width = 128, int height = 128 \)](#)

BrowseImageWidget::getImageScaled Modify the current image to a scaled image from the icon specified by it *path*. The image has a resolution of *width*height* (default 128*128)

Parameters

| | |
|---------------|-------------|
| <i>path</i> | Icon path |
| <i>width</i> | Icon width |
| <i>height</i> | Icon height |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/browseimagewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/browseimagewidget.cpp

8.10 Models::Calculable Class Reference

The [Calculable](#) interface [Models](#) who are calculable.

```
#include <calculable.h>
```

Inheritance diagram for Models::Calculable:



Public Member Functions

- virtual double [getPrice](#) (bool *paied*=false)=0
getPrice Return the price of a calculable object
- virtual double [getSumQuantity](#) ()=0
[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of days) of the Contributories.

8.10.1 Detailed Description

The [Calculable](#) interface [Models](#) who are calculable.

8.10.2 Member Function Documentation

8.10.2.1 virtual double Models::Calculable::getPrice (bool *paied* = false) [pure virtual]

getPrice Return the price of a calculable object

Returns

The price

Implemented in [Models::Billing](#), [Models::Contributory](#), and [Models::ContributoriesList](#).

8.10.2.2 virtual double Models::Calculable::getSumQuantity () [pure virtual]

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of days) of the Contributories.

Returns

sum of quantity in days

Implemented in [Models::Billing](#), [Models::Contributory](#), and [Models::ContributoriesList](#).

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/models/calculable.h`

8.11 Gui::Widgets::CheckFields::CheckCity Class Reference

The [CheckCity](#) class Line Edit of City with a check icon.

```
#include <checkcity.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckCity:

**Public Member Functions**

- [CheckCity](#) (QWidget *w=0, QPushButton *btn=0)
CheckCity::CheckCity Construct a CheckCity.

Additional Inherited Members

8.11.1 Detailed Description

The [CheckCity](#) class Line Edit of City with a check icon.

8.11.2 Constructor & Destructor Documentation

8.11.2.1 Gui::Widgets::CheckFields::CheckCity::CheckCity (QWidget * w = 0, QPushButton * btn = 0)

[CheckCity::CheckCity](#) Construct a [CheckCity](#).

Parameters

| | |
|----------|---|
| <i>w</i> | QWidget linked to CheckCity |
|----------|---|

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcity.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcity.cpp`

8.12 Gui::Widgets::CheckFields::CheckCountry Class Reference

[CheckCountry::CheckCountry](#) Line Edit of country with a check icon.

```
#include <checkcountry.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckCountry:



Public Member Functions

- [CheckCountry](#) (QWidget *w=0, QPushButton *btn=0)
[CheckCountry::CheckCountry](#) Construct a [CheckCountry](#).

Additional Inherited Members

8.12.1 Detailed Description

[CheckCountry::CheckCountry](#) Line Edit of country with a check icon.

8.12.2 Constructor & Destructor Documentation

8.12.2.1 [Gui::Widgets::CheckFields::CheckCountry::CheckCountry](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckCountry::CheckCountry](#) Construct a [CheckCountry](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckCountry |
|----------|--|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcountry.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkcountry.cpp

8.13 Gui::Widgets::CheckFields::CheckEmail Class Reference

The [CheckEmail](#) class Line Edit of email with a check icon.

```
#include <checkemail.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckEmail:



Public Member Functions

- [CheckEmail](#) (QWidget *w=0, QPushButton *btn=0)
[CheckEmail::CheckEmail](#) Construct a CheckMail.
- bool [check](#) (const QString text)
[CheckEmail::check](#) Check if the field email is valid. To be valid, an email address should be under this form: *me@me. - xx* An email address need:

Additional Inherited Members

8.13.1 Detailed Description

The [CheckEmail](#) class Line Edit of email with a check icon.

8.13.2 Constructor & Destructor Documentation

8.13.2.1 [Gui::Widgets::CheckFields::CheckEmail::CheckEmail](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckEmail::CheckEmail](#) Construct a CheckMail.

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckEmail |
|----------|--|

8.13.3 Member Function Documentation

8.13.3.1 bool [Gui::Widgets::CheckFields::CheckEmail::check](#) (const [QString](#) *text*) [virtual]

[CheckEmail::check](#) Check if the field email is valid. To be valid, an email address should be under this form: *me@me. xx* An email address need:

- 1 character [A-Z] or [a-z] minimum before the character *</i>*
- the character '@'
- 1 character [A-Z] or [a-z] after the character *</i>* minimum and before the character .
- 1 character [A-Z] or [a-z] minimum afer the character . Return TRUE if email address is valid, else FALSE

Parameters

| | |
|-------------|----------------------|
| <i>text</i> | <i>Text to check</i> |
|-------------|----------------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkemail.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkemail.cpp

8.14 Gui::Widgets::CheckFields::CheckFieldsLetters Class Reference

The [CheckFieldsLetters](#) class Field with only letters (no numbers)

```
#include <checkfieldsletters.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckFieldsLetters:



Public Member Functions

- [CheckFieldsLetters](#) (QWidget *w=0, QPushButton *btn=0)
CheckFieldsLetters::CheckFieldsLetters Construct a [CheckFieldsLetters](#).
- bool [check](#) (QString text)
CheckFieldsLetters::check Check if the field contains only letters.

Additional Inherited Members

8.14.1 Detailed Description

The [CheckFieldsLetters](#) class Field with only letters (no numbers)

8.14.2 Constructor & Destructor Documentation

8.14.2.1 Gui::Widgets::CheckFields::CheckFieldsLetters::CheckFieldsLetters (QWidget * w = 0, QPushButton * btn = 0)

[CheckFieldsLetters::CheckFieldsLetters](#) Construct a [CheckFieldsLetters](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckFieldsLetters |
|----------|--|

8.14.3 Member Function Documentation

8.14.3.1 `bool Gui::Widgets::CheckFields::CheckFieldsLetters::check (QString text)` `[virtual]`

[CheckFieldsLetters::check](#) Check if the field contains only letters.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsletters.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsletters.cpp

8.15 Gui::Widgets::CheckFields::CheckFieldsNumbers Class Reference

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

```
#include <checkfieldsnumbers.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckFieldsNumbers:



Public Member Functions

- [CheckFieldsNumbers](#) (QWidget *w=0, QPushButton *btn=0)
CheckFieldsNumbers::CheckFieldsNumbers Construct a *CheckFieldsNumbers*.
- bool [check](#) (QString text)
CheckFieldsNumbers::check Check if the field contains only numbers.

Additional Inherited Members

8.15.1 Detailed Description

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

Author

Florent BERBIE

See Also

[CheckQLineEdit](#)
[CheckUntilField](#)

8.15.2 Constructor & Destructor Documentation

8.15.2.1 `Gui::Widgets::CheckFields::CheckFieldsNumbers::CheckFieldsNumbers (QWidget * w = 0, QPushButton * btn = 0)`

[CheckFieldsNumbers::CheckFieldsNumbers](#) Construct a [CheckFieldsNumbers](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckFieldsNumbers |
|----------|--|

8.15.3 Member Function Documentation

8.15.3.1 bool Gui::Widgets::CheckFields::CheckFieldsNumbers::check (QString *text*) [virtual]

[CheckFieldsNumbers::check](#) Check if the field contains only numbers.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsnumbers.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkfieldsnumbers.cpp

8.16 Gui::Widgets::CheckFields::CheckIpAddress Class Reference

The [CheckIpAddress](#) class Line Edit of IP address with a check icon.

```
#include <checkipaddress.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckIpAddress:

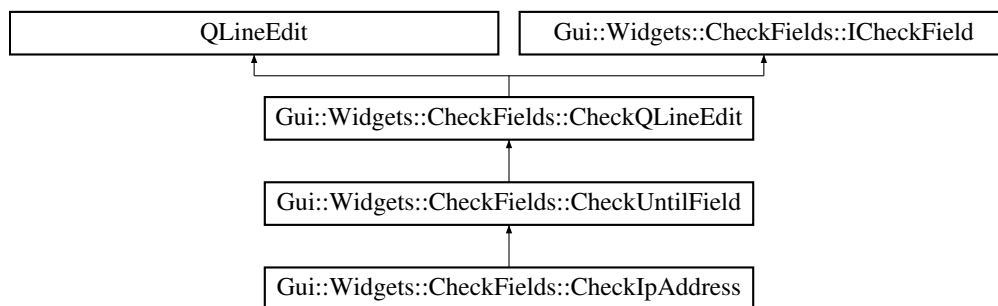

Public Member Functions

- [CheckIpAddress](#) (QWidget *w=0, QPushButton *btn=0)
[CheckIpAddress::CheckIpAddress](#) Construct a [CheckIpAddress](#).
- bool [check](#) (QString *text*)
[CheckIpAddress::check](#) Check if the field contains an IP address or domain name valid.

Additional Inherited Members

8.16.1 Detailed Description

The [CheckIpAddress](#) class Line Edit of IP address with a check icon.

Author

Florent BERBIE

See Also

[CheckQLineEdit](#)
[CheckUntilField](#)

8.16.2 Constructor & Destructor Documentation

8.16.2.1 `Gui::Widgets::CheckFields::CheckIpAddress::CheckIpAddress (QWidget * w = 0, QPushButton * btn = 0)`[CheckIpAddress::CheckIpAddress](#) Construct a [CheckIpAddress](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckIpAddress |
|----------|--|

8.16.3 Member Function Documentation

8.16.3.1 `bool Gui::Widgets::CheckFields::CheckIpAddress::check (QString text) [virtual]`[CheckIpAddress::check](#) Check if the field contains an IP address or domain name valid.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkipaddress.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkipaddress.cpp

8.17 Gui::Widgets::CheckFields::CheckLogin Class Reference

The [CheckLogin](#) class Line Edit of login with a check icon.

#include <checklogin.h>

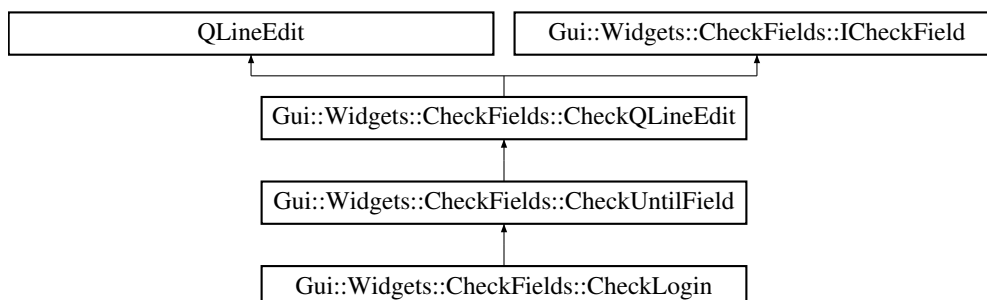Inheritance diagram for `Gui::Widgets::CheckFields::CheckLogin`:

Public Slots

- void [passwordPreviousInputed](#) (const QString &text)
[CheckLogin::fieldTextChanged](#) For each new characater inputed or removed, displays an icon to show if the field is valid or not.

Public Member Functions

- [CheckLogin](#) (QWidget *w=0, QPushButton *btn=0)
[CheckLogin::CheckLogin](#) Construct a [CheckLogin](#).
- bool [check](#) (QString text)
[CheckLogin::check](#) Check if the field contains only numbers.

8.17.1 Detailed Description

The [CheckLogin](#) class Line Edit of login with a check icon.

Author

Florent BERBIE

See Also

[CheckQLineEdit](#)
[CheckUntilField](#)

8.17.2 Constructor & Destructor Documentation

8.17.2.1 Gui::Widgets::CheckFields::CheckLogin::CheckLogin (QWidget * *w* = 0, QPushButton * *btn* = 0)

[CheckLogin::CheckLogin](#) Construct a [CheckLogin](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckIpAddress |
|----------|--|

8.17.3 Member Function Documentation

8.17.3.1 bool Gui::Widgets::CheckFields::CheckLogin::check (QString *text*) [virtual]

[CheckLogin::check](#) Check if the field contains only numbers.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checklogin.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checklogin.cpp

8.18 Gui::Widgets::CheckFields::CheckName Class Reference

The [CheckName](#) class Line edit of name with a check icon.

```
#include <checkname.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckName:



Public Member Functions

- [CheckName](#) (QWidget *w=0, QPushButton *btn=0)
[CheckName::CheckName](#) Construct a [CheckName](#).

Additional Inherited Members

8.18.1 Detailed Description

The [CheckName](#) class Line edit of name with a check icon.

8.18.2 Constructor & Destructor Documentation

8.18.2.1 Gui::Widgets::CheckFields::CheckName::CheckName (QWidget * w = 0, QPushButton * btn = 0)

[CheckName::CheckName](#) Construct a [CheckName](#).

Parameters

| | |
|----------|---|
| <i>w</i> | QWidget linked to CheckName |
|----------|---|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkname.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkname.cpp

8.19 Gui::Widgets::CheckFields::CheckPhone Class Reference

The [CheckPhone](#) class Line Edit of Phone number with a check icon.

```
#include <checkphone.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPhone:



Public Member Functions

- [CheckPhone](#) (QWidget *w=0, QPushButton *btn=0)
CheckPhone::CheckPhone Construct a [CheckPhone](#).
- bool [check](#) (QString text)
CheckPhone::check Check if the field is valid. To be valid, a name should be composed of a character.
- QString [getCountry](#) () const
CheckPhone::getCountry Return the country linked to current field.
- void [setCountry](#) (const QString &country)
CheckPhone::setCountry Modify the country linked to field.

Additional Inherited Members

8.19.1 Detailed Description

The [CheckPhone](#) class Line Edit of Phone number with a check icon.

8.19.2 Constructor & Destructor Documentation

8.19.2.1 [Gui::Widgets::CheckFields::CheckPhone::CheckPhone](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckPhone::CheckPhone](#) Construct a [CheckPhone](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckPhone |
|----------|--|

8.19.3 Member Function Documentation

8.19.3.1 bool [Gui::Widgets::CheckFields::CheckPhone::check](#) ([QString](#) *text*) [virtual]

[CheckPhone::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

8.19.3.2 QString Gui::Widgets::CheckFields::CheckPhone::getCountry () const

[CheckPhone::getCountry](#) Return the country linked to current field.

Returns

8.19.3.3 void Gui::Widgets::CheckFields::CheckPhone::setCountry (const QString & country)

[CheckPhone::setCountry](#) Modify the *country* linked to field.

Parameters

| | |
|----------------|-------------|
| <i>country</i> | New country |
|----------------|-------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkphone.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkphone.cpp

8.20 Gui::Widgets::CheckFields::CheckPortNumber Class Reference

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

```
#include <checkportnumber.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckPortNumber:



Public Member Functions

- [CheckPortNumber](#) (QWidget *w=0, QPushButton *btn=0)
CheckPortNumber.
- bool [check](#) (QString text)
CheckPortNumber::check Check if the field contains only numbers or an empty text.

Additional Inherited Members

8.20.1 Detailed Description

The [CheckFieldsNumbers](#) class Line Edit of number with a check icon.

Author

Florent BERBIE

See Also

[CheckQLineEdit](#)
[CheckUntilField](#)

8.20.2 Constructor & Destructor Documentation

8.20.2.1 `Gui::Widgets::CheckFields::CheckPortNumber::CheckPortNumber (QWidget * w = 0, QPushButton * btn = 0)`

[CheckPortNumber.](#)

Parameters

| | |
|------------|-----------------|
| <i>w</i> | Widget parent |
| <i>btn</i> | Button parretrn |

8.20.3 Member Function Documentation

8.20.3.1 `bool Gui::Widgets::CheckFields::CheckPortNumber::check (QString text)` `[virtual]`

[CheckPortNumber::check](#) Check if the field contains only numbers or an empty text.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkportnumber.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkportnumber.cpp

8.21 Gui::Widgets::CheckFields::CheckPostalCode Class Reference

The [CheckPostalCode](#) class Line Edit of postal code with a check icon.

```
#include <checkpostalcode.h>
```

Inheritance diagram for `Gui::Widgets::CheckFields::CheckPostalCode`:



Public Member Functions

- [CheckPostalCode](#) (QWidget *w=0, QPushButton *btn=0)
[CheckPostalCode::CheckPostalCode](#) Construct a [CheckPostalCode](#).
- bool [check](#) (QString text)
[CheckPostalCode::check](#) Check if the field is valid. To be valid, a name should be composed of a character.
- QString [getCountry](#) () const
[CheckPostalCode::getCountry](#) Return the country linked to current field.
- void [setCountry](#) (const QString &country)
[CheckPostalCode::setCountry](#) Modify the country linked to field.

Additional Inherited Members

8.21.1 Detailed Description

The [CheckPostalCode](#) class Line Edit of postal code with a check icon.

8.21.2 Constructor & Destructor Documentation

8.21.2.1 `Gui::Widgets::CheckFields::CheckPostalCode::CheckPostalCode (QWidget * w = 0, QPushButton * btn = 0)`

[CheckPostalCode::CheckPostalCode](#) Construct a [CheckPostalCode](#).

Parameters

| | |
|----------|---|
| <i>w</i> | QWidget linked to CheckPostalCode |
|----------|---|

8.21.3 Member Function Documentation

8.21.3.1 `bool Gui::Widgets::CheckFields::CheckPostalCode::check (QString text) [virtual]`

[CheckPostalCode::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

8.21.3.2 `QString Gui::Widgets::CheckFields::CheckPostalCode::getCountry () const`

[CheckPostalCode::getCountry](#) Return the country linked to current field.

Returns

country Country of the field

8.21.3.3 `void Gui::Widgets::CheckFields::CheckPostalCode::setCountry (const QString & country)`

[CheckPostalCode::setCountry](#) Modify the *country* linked to field.

Parameters

| | |
|----------------|-------------|
| <i>country</i> | New country |
|----------------|-------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkpostalcode.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkpostalcode.cpp

8.22 Gui::Widgets::CheckFields::CheckQLineEdit Class Reference

The `CheckQLineEdit` class `LineEdit` custom with a check of text inputed.

```
#include <checkqlineedit.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckQLineEdit:



Public Slots

- void `fieldTextChanged` (const QString &text)
CheckQLineEdit::fieldTextChanged For each new character inputted or removed, displays an icon to show if the field is valid or not.

Public Member Functions

- [CheckQLineEdit](#) (QWidget *parent=0, QPushButton *btn=0)
CheckQLineEdit::CheckQLineEdit Construct a [CheckQLineEdit](#).
- void [displayCheckValidFieldIcon](#) ()
CheckQLineEdit::displayCheckValidFieldIcon Display a valid icon into the field.
- void [displayCheckNoValidFieldIcon](#) ()
CheckQLineEdit::displayCheckNoValidFieldIcon Display a "no valid" icon into the field.
- QPushButton * [getBtnValid](#) () const
CheckQLineEdit::getBtnValid.
- void [setBtnValid](#) (QPushButton *[getBtnValid](#))
CheckQLineEdit::setBtnValid.
- bool [isValid](#) ()
isValid Return true if the current field if valid

8.22.1 Detailed Description

The `CheckQLineEdit` class `LineEdit` custom with a check of text inputed.

8.22.2 Constructor & Destructor Documentation

8.22.2.1 Gui::Widgets::CheckFields::CheckQLineEdit::CheckQLineEdit (QWidget * *parent* = 0, QPushButton * *btn* = 0)

[CheckQLineEdit::CheckQLineEdit](#) Construct a [CheckQLineEdit](#).

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.22.3 Member Function Documentation

8.22.3.1 `QPushButton * Gui::Widgets::CheckFields::CheckQLineEdit::getBtnValid () const`

[CheckQLineEdit::getBtnValid.](#)

Returns

a

8.22.3.2 `bool Gui::Widgets::CheckFields::CheckQLineEdit::isValid ()`

isValid Return true if the current field if valid

Returns

boolean

8.22.3.3 `void Gui::Widgets::CheckFields::CheckQLineEdit::setBtnValid (QPushButton * getBtnValid)`

[CheckQLineEdit::setBtnValid.](#)

Parameters

| | |
|--------------------|--|
| <i>getBtnValid</i> | |
|--------------------|--|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkqlineEdit.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkqlineEdit.cpp

8.23 Gui::Widgets::CheckFields::CheckSiretNumber Class Reference

The [CheckSiretNumber](#) class Line Edit with a check icon.

```
#include <checksiretnumber.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckSiretNumber:



Public Member Functions

- [CheckSiretNumber](#) (QWidget *w=0, QPushButton *btn=0)

[CheckSiretNumber::CheckSiretNumber](#) Construct a [CheckSiretNumber](#).

- bool [check](#) (QString text)

[CheckSiretNumber::check](#) Check if the field noSiret is valid. To be valid, a SIRET number should be composed of numbers.

Additional Inherited Members

8.23.1 Detailed Description

The [CheckSiretNumber](#) class Line Edit with a check icon.

8.23.2 Constructor & Destructor Documentation

8.23.2.1 [Gui::Widgets::CheckFields::CheckSiretNumber::CheckSiretNumber \(QWidget * *w* = 0, QPushButton * *btn* = 0 \)](#)

[CheckSiretNumber::CheckSiretNumber](#) Construct a [CheckSiretNumber](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckSiretNumber |
|----------|--|

8.23.3 Member Function Documentation

8.23.3.1 [bool Gui::Widgets::CheckFields::CheckSiretNumber::check \(QString *text* \)](#) [virtual]

[CheckSiretNumber::check](#) Check if the field noSiret is valid. To be valid, a SIRET number should be composed of numbers.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checksiretnumber.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checksiretnumber.cpp

8.24 Gui::Widgets::CheckFields::CheckUntilField Class Reference

The [CheckUntilField](#) class.

```
#include <checkuntilfield.h>
```

Inheritance diagram for [Gui::Widgets::CheckFields::CheckUntilField](#):



Public Member Functions

- [CheckUntilField](#) (QWidget *w=0, QPushButton *btn=0)
[CheckUntilField::CheckUntilField](#) Construct a [CheckUntilField](#).
- bool [check](#) (QString text)
[CheckUntilField::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Additional Inherited Members

8.24.1 Detailed Description

The [CheckUntilField](#) class.

8.24.2 Constructor & Destructor Documentation

8.24.2.1 [Gui::Widgets::CheckFields::CheckUntilField::CheckUntilField](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckUntilField::CheckUntilField](#) Construct a [CheckUntilField](#).

Parameters

| | |
|----------|---|
| <i>w</i> | QWidget linked to CheckUntilField |
|----------|---|

8.24.3 Member Function Documentation

8.24.3.1 bool [Gui::Widgets::CheckFields::CheckUntilField::check](#) ([QString](#) *text*) [\[virtual\]](#)

[CheckUntilField::check](#) Check if the field is valid. To be valid, a name should be composed of a character.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkuntilfield.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkuntilfield.cpp

8.25 Gui::Widgets::CheckFields::CheckValidField Class Reference

The [CheckValidField](#) class Check field not required.

```
#include <checkvalidfield.h>
```

Inheritance diagram for [Gui::Widgets::CheckFields::CheckValidField](#):



Public Member Functions

- [CheckValidField](#) (QWidget *w=0, QPushButton *btn=0)
[CheckValidField::CheckValidField](#).
- bool [check](#) (QString text)
[CheckValidField::check](#) Return TRUE : the field is not required.

Additional Inherited Members

8.25.1 Detailed Description

The [CheckValidField](#) class Check field not required.

8.25.2 Constructor & Destructor Documentation

8.25.2.1 [Gui::Widgets::CheckFields::CheckValidField::CheckValidField](#) (QWidget * w = 0, QPushButton * btn = 0)

[CheckValidField::CheckValidField](#).

Parameters

| | |
|----------|---|
| <i>w</i> | QWidget linked to CheckValidField |
|----------|---|

8.25.3 Member Function Documentation

8.25.3.1 bool [Gui::Widgets::CheckFields::CheckValidField::check](#) (QString *text*) [virtual]

[CheckValidField::check](#) Return TRUE : the field is not required.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Implements [Gui::Widgets::CheckFields::ICheckField](#).

Reimplemented in [Gui::Widgets::CheckFields::CheckWebsite](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkvalidfield.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkvalidfield.cpp

8.26 Gui::Widgets::CheckFields::CheckWebsite Class Reference

The [CheckWebsite](#) class Line Edit of website with a check icon.

```
#include <checkwebsite.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::CheckWebsite:



Public Member Functions

- [CheckWebsite](#) (QWidget *w=0, QPushButton *btn=0)
[CheckWebsite::CheckWebsite](#) Construct a [CheckWebsite](#).
- bool [check](#) (QString text)
[CheckWebsite::check](#) Check if the field contains an website address.

Additional Inherited Members

8.26.1 Detailed Description

The [CheckWebsite](#) class Line Edit of website with a check icon.

See Also

[CheckQLineEdit](#)
[CheckUntilField](#)
[CheckIpAddress](#)

8.26.2 Constructor & Destructor Documentation

8.26.2.1 [Gui::Widgets::CheckFields::CheckWebsite::CheckWebsite](#) ([QWidget](#) * *w* = 0, [QPushButton](#) * *btn* = 0)

[CheckWebsite::CheckWebsite](#) Construct a [CheckWebsite](#).

Parameters

| | |
|----------|--|
| <i>w</i> | QWidget linked to CheckWebsite |
|----------|--|

8.26.3 Member Function Documentation

8.26.3.1 bool [Gui::Widgets::CheckFields::CheckWebsite::check](#) ([QString](#) *text*) [virtual]

[CheckWebsite::check](#) Check if the field contains an website address.

Parameters

| | |
|-------------|---------------|
| <i>text</i> | Text to check |
|-------------|---------------|

Returns

boolean Validity of the text

Reimplemented from [Gui::Widgets::CheckFields::CheckValidField](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkwebsite.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/checkwebsite.cpp

8.27 Gui::Widgets::Path::ChoseDirectoryWidget Class Reference

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

```
#include <chosedirectorywidget.h>
```

Inheritance diagram for Gui::Widgets::Path::ChoseDirectoryWidget:



Public Slots

- void [fillField](#) ()
fillField Fill the textfield with path information

Public Member Functions

- [ChoseDirectoryWidget](#) (QWidget *parent=0)
ChoseDirectoryWidget Construct Widget.

Additional Inherited Members

8.27.1 Detailed Description

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

8.27.2 Constructor & Destructor Documentation

8.27.2.1 [Gui::Widgets::Path::ChoseDirectoryWidget::ChoseDirectoryWidget](#) (QWidget * *parent* = 0) [explicit]

[ChoseDirectoryWidget](#) Construct Widget.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | The parent widget |
|---------------|-------------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosedirectorywidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosedirectorywidget.cpp

8.28 Gui::Widgets::Path::ChoseFileWidget Class Reference

The [ChoseFileWidget](#) class Chose a File in computer.

```
#include <chosefilewidget.h>
```

Inheritance diagram for Gui::Widgets::Path::ChoseFileWidget:



Public Slots

- void [fillField](#) ()
fillField Fill the textfield with path information

Public Member Functions

- [ChoseFileWidget](#) (QWidget *parent=0)
ChoseFileWidget Construct a choseFileWidget.
- QString [gettypeFiles](#) () const
*gettypeFiles Return the types of files, by default it's **
- void [setTypeFiles](#) (const QString &[gettypeFiles](#))
*setTypeFiles Change the files types. By default it's **

Additional Inherited Members

8.28.1 Detailed Description

The [ChoseFileWidget](#) class Chose a File in computer.

8.28.2 Constructor & Destructor Documentation

8.28.2.1 [Gui::Widgets::Path::ChoseFileWidget::ChoseFileWidget \(QWidget * parent = 0 \)](#) [explicit]

[ChoseFileWidget](#) Construct a choseFileWidget.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | The parent widget |
|---------------|-------------------|

8.28.3 Member Function Documentation

8.28.3.1 QString Gui::Widgets::Path::ChoseFileWidget::getTypeFiles () const

getTypeFiles Return the types of files, by default it's *

Returns

The type of files

8.28.3.2 void Gui::Widgets::Path::ChoseFileWidget::setTypeFiles (const QString & *getTypeFiles*)

setTypeFiles Change the files types. By default it's *

Parameters

| | |
|---------------------|----------------------|
| <i>getTypeFiles</i> | The new files types. |
|---------------------|----------------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosefilewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosefilewidget.cpp

8.29 Gui::Widgets::Path::ChosePathWidget Class Reference

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

```
#include <chosepathwidget.h>
```

Inheritance diagram for Gui::Widgets::Path::ChosePathWidget:



Public Slots

- virtual void [fillField](#) ()
fillField Fill the textfield with path information

Signals

- void [textChanged](#) ()
textChanged Signal is send when path changed.

Public Member Functions

- [ChosePathWidget](#) (QWidget *parent=0)
[ChoseFileWidget](#) Construct a choseFileWidget.
- void [setField](#) (QString text)
setField Change the path in textfield
- QString [getField](#) ()
getField The text in field
- virtual QString [getDefaultLocation](#) ()
getDefaultLocation The default location when we open popup. In default case, it's ~/Documents

Protected Attributes

- Ui::ChosePathWidget * **ui**

8.29.1 Detailed Description

The [ChoseDirectoryWidget](#) class Open a QFileDialog.and display path in textfield.

8.29.2 Constructor & Destructor Documentation

8.29.2.1 Gui::Widgets::Path::ChosePathWidget::ChosePathWidget (QWidget * *parent* = 0) [explicit]

[ChoseFileWidget](#) Construct a choseFileWidget.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | The parent widget |
|---------------|-------------------|

8.29.3 Member Function Documentation

8.29.3.1 QString Gui::Widgets::Path::ChosePathWidget::getDefaultLocation () [virtual]

getDefaultLocation The default location when we open popup. In default case, it's ~/Documents

Returns

The default location

8.29.3.2 QString Gui::Widgets::Path::ChosePathWidget::getField (void)

getField The text in field

Returns

The path text

8.29.3.3 void Gui::Widgets::Path::ChosePathWidget::setField (QString *text*)

setField Change the path in textfield

Parameters

| | |
|-------------|--------------|
| <i>text</i> | The new text |
|-------------|--------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosepathwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/path/chosepathwidget.cpp

8.30 Gui::Widgets::CoffeeEasterEggWidget Class Reference

The [CoffeeEasterEggWidget](#) class Easter egg class because we need coffee.

```
#include <coffeeeastereggwidget.h>
```

Inheritance diagram for Gui::Widgets::CoffeeEasterEggWidget:



Public Slots

- void [makeCoffeeInProgress](#) ()
CoffeeEasterEggWidget::makeCoffeeInProgress Make Coffee.
- void [nextState](#) ()
CoffeeEasterEggWidget::nextState Go to the next state to make coffee.

Public Member Functions

- [CoffeeEasterEggWidget](#) (QWidget *parent=0)
CoffeeEasterEggWidget::CoffeeEasterEggWidget Construct a [CoffeeEasterEggWidget](#).
- void [setupUI](#) ()
CoffeeEasterEggWidget::setupUI Init user interface.
- void [makeCoffeeFirstStep](#) ()
CoffeeEasterEggWidget::makeCoffeeFirstStep First step to make coffee.
- void [makeCoffeeSecondStep](#) ()
CoffeeEasterEggWidget::makeCoffeeSecondStep Second step to make coffee.
- void [makeCoffeeThirdStep](#) ()
CoffeeEasterEggWidget::makeCoffeeThirdStep Third step to make coffee.
- void [makeCoffeeFourthStep](#) ()
CoffeeEasterEggWidget::makeCoffeeFourthStep Fourth step to make coffee.
- void [makeCoffeeReadyStep](#) ()
CoffeeEasterEggWidget::makeCoffeeReadyStep Last step to make coffee.
- bool [isDrinked](#) ()
CoffeeEasterEggWidget::isDrinked Return TRUE if coffee has been dranked, else FALSE.

8.30.1 Detailed Description

The [CoffeeEasterEggWidget](#) class Easter egg class because we need coffee.

Author

Florent Berbie

8.30.2 Constructor & Destructor Documentation

8.30.2.1 `Gui::Widgets::CoffeeEasterEggWidget::CoffeeEasterEggWidget (QWidget * parent = 0) [explicit]`

[CoffeeEasterEggWidget::CoffeeEasterEggWidget](#) Construct a [CoffeeEasterEggWidget](#).

Parameters

| | |
|---------------|----------------|
| <i>parent</i> | QWidget parent |
|---------------|----------------|

8.30.3 Member Function Documentation

8.30.3.1 `bool Gui::Widgets::CoffeeEasterEggWidget::isDrunked ()`

[CoffeeEasterEggWidget::isDrunked](#) Return TRUE if coffee has been drunked, else FALSE.

Returns

boolean

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/coffeeeastereggwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/coffeeeastereggwidget.cpp

8.31 Gui::Widgets::Delegates::ComboBoxDelegate Class Reference

The [ComboBoxDelegate](#) class.

```
#include <comboboxdelegate.h>
```

Inheritance diagram for `Gui::Widgets::Delegates::ComboBoxDelegate`:



Public Member Functions

- [ComboBoxDelegate](#) (QObject *parent=0)
[ComboBoxDelegate::ComboBoxDelegate](#) Construct a [ComboBoxDelegate](#).
- virtual QWidget * [createEditor](#) (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const =0

[*ComboBoxDelegate::createEditor*](#) Return a *ComboBox* specified by *index* item defined by the parent widget and style option which are used to control how the editor widgets appears.

- void [*paint*](#) (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const =0

[*ComboBoxDelegate::paint*](#) Renders the delegate using the given painter and style option for the item specified by *index*

- void [*setEditorData*](#) (QWidget *editor, const QModelIndex &index) const

[*ComboBoxDelegate::setEditorData*](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index

- void [*setModelData*](#) (QWidget *editor, QAbstractItemModel *model, const QModelIndex &index) const

[*ComboBoxDelegate::setModelData*](#) Gets data from the editor widget and stores it in the specified model at the item index

- void [*updateEditorGeometry*](#) (QWidget *editor, const QStyleOptionViewItem &option, const QModelIndex &index) const

[*ComboBoxDelegate::updateEditorGeometry*](#) Update the editor for the item specified by index according to the style option given.

8.31.1 Detailed Description

The [*ComboBoxDelegate*](#) class.

Author

Antoine de Roquemaurel

8.31.2 Constructor & Destructor Documentation

8.31.2.1 Gui::Widgets::Delegates::ComboBoxDelegate::ComboBoxDelegate (QObject * *parent* = 0)

[*ComboBoxDelegate::ComboBoxDelegate*](#) Construct a [*ComboBoxDelegate*](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Object parent |
|---------------|---------------|

8.31.3 Member Function Documentation

8.31.3.1 virtual QWidget* Gui::Widgets::Delegates::ComboBoxDelegate::createEditor (QWidget * *parent*, const QStyleOptionViewItem & *option*, const QModelIndex & *index*) const [pure virtual]

[*ComboBoxDelegate::createEditor*](#) Return a *ComboBox* specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Returns

ComboBox

Implemented in [*Gui::Widgets::Delegates::UnitComboDelegate*](#), and [*Gui::Widgets::Delegates::ProjectComboDelegate*](#).

8.31.3.2 `void Gui::Widgets::Delegates::ComboBoxDelegate::paint (QPainter * painter, const QStyleOptionViewItem & option, const QModelIndex & index) const` [pure virtual]

[ComboBoxDelegate::paint](#) Renders the delegate using the given *painter* and style *option* for the item specified by *index*

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Implemented in [Gui::Widgets::Delegates::UnitComboDelegate](#), and [Gui::Widgets::Delegates::ProjectComboDelegate](#).

8.31.3.3 void [Gui::Widgets::Delegates::ComboBoxDelegate::setEditorData](#) (QWidget * *editor*, const QModelIndex & *index*) const

[ComboBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

Parameters

| | |
|---------------|----------------------------|
| <i>editor</i> | Data edited |
| <i>index</i> | Index of the model to edit |

8.31.3.4 void [Gui::Widgets::Delegates::ComboBoxDelegate::setModelData](#) (QWidget * *editor*, QAbstractItemModel * *model*, const QModelIndex & *index*) const

[ComboBoxDelegate::setModelData](#) Gets data from the *editor* widget and stores it in the specified *model* at the item *index*

Parameters

| | |
|---------------|---------------------|
| <i>editor</i> | Editor Widget |
| <i>model</i> | Model to store data |
| <i>index</i> | Item index |

8.31.3.5 void [Gui::Widgets::Delegates::ComboBoxDelegate::updateEditorGeometry](#) (QWidget * *editor*, const QStyleOptionViewItem & *option*, const QModelIndex & *index*) const

[ComboBoxDelegate::updateEditorGeometry](#) Update the *editor* for the item specified by *index* according to the style *option* given.

Parameters

| | |
|---------------|-------------------------|
| <i>editor</i> | Editor widget to update |
| <i>option</i> | Style option |
| <i>index</i> | Item index |

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/comboboxdelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/comboboxdelegate.cpp

8.32 Gui::Widgets::ComboBoxModelWidget Class Reference

The [ComboBoxModelWidget](#) class Model of ComboBox.

```
#include <comboboxmodelwidget.h>
```

Inheritance diagram for [Gui::Widgets::ComboBoxModelWidget](#):



Public Member Functions

- [ComboBoxModelWidget](#) ([QWidget](#) *parent=0)
[ComboBoxModelWidget::ComboBoxModelWidget](#) Construct a [ComboBoxModelWidget](#).

8.32.1 Detailed Description

The [ComboBoxModelWidget](#) class Model of ComboBox.

8.32.2 Constructor & Destructor Documentation

8.32.2.1 [Gui::Widgets::ComboBoxModelWidget::ComboBoxModelWidget](#) ([QWidget](#) * *parent* = 0) [explicit]

[ComboBoxModelWidget::ComboBoxModelWidget](#) Construct a [ComboBoxModelWidget](#).

Parameters

| | |
|---------------|--------------------------------|
| <i>parent</i> | QWidget parent |
|---------------|--------------------------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/comboboxmodelwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/comboboxmodelwidget.cpp

8.33 Gui::Dialogs::ComputeTurnoverDialog Class Reference

The [ComputeTurnoverDialog](#) class window to compute a turnover with a period.

```
#include <computeturnoverdialog.h>
```

Inheritance diagram for [Gui::Dialogs::ComputeTurnoverDialog](#):



Public Slots

- void [computeTurnover](#) ()
[ComputeTurnoverDialog::computeTurnover](#) compute the turnover between chosen dates in the window.
- void [endDateControl](#) (const [QDate](#) end)
[ComputeTurnoverDialog::endDateControl](#) controls if the end date field is valid.
- void [beginDateControl](#) (const [QDate](#) begin)
[ComputeTurnoverDialog::beginDateControl](#) controls if the begin date field is valid.

Public Member Functions

- **ComputeTurnoverDialog** (QWidget *parent=0)
- void **fillLabels** (const int nbBillings, const int turnover)
[ComputeTurnoverDialog::fillLabels](#) Fills the labels with nbBillings and turnover

8.33.1 Detailed Description

The [ComputeTurnoverDialog](#) class window to compute a turnover with a period.

Author

Manantsoa Razanajatovo

8.33.2 Member Function Documentation

8.33.2.1 void Gui::Dialogs::ComputeTurnoverDialog::beginDateControl (const QDate *begin*) [slot]

[ComputeTurnoverDialog::beginDateControl](#) controls if the *begin* date field is valid.

Parameters

| | |
|--------------|--|
| <i>begin</i> | |
|--------------|--|

8.33.2.2 void Gui::Dialogs::ComputeTurnoverDialog::endDateControl (const QDate *end*) [slot]

[ComputeTurnoverDialog::endDateControl](#) controls if the *end* date field is valid.

Parameters

| | |
|------------|--|
| <i>end</i> | |
|------------|--|

8.33.2.3 void Gui::Dialogs::ComputeTurnoverDialog::fillLabels (const int *nbBillings*, const int *turnover*)

[ComputeTurnoverDialog::fillLabels](#) Fills the labels with *nbBillings* and *turnover*

Parameters

| | |
|-------------------|------------------------|
| <i>nbBillings</i> | the number of Billings |
| <i>turnover</i> | the turnover computed |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/computeturnoverdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/computeturnoverdialog.cpp

8.34 Mustache::Context Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::Context:



Public Member Functions

- [Context](#) ([PartialResolver](#) *resolver=0)
- virtual QString [stringValue](#) (const QString &key) const =0
- virtual bool [isFalse](#) (const QString &key) const =0
- virtual int [listCount](#) (const QString &key) const =0
- virtual void [push](#) (const QString &key, int index=-1)=0
- virtual void [pop](#) ()=0
- QString [partialValue](#) (const QString &key) const
- [PartialResolver](#) * [partialResolver](#) () const
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Renderer](#) *renderer)

8.34.1 Detailed Description

[Context](#) is an interface that [Mustache::Renderer::render\(\)](#) uses to fetch substitutions for template tags.

8.34.2 Constructor & Destructor Documentation

8.34.2.1 Context::Context ([PartialResolver](#) * *resolver* = 0) [explicit]

Create a context. *resolver* is used to fetch the expansions for any {{>partial}} tags which appear in a template.

8.34.3 Member Function Documentation

8.34.3.1 bool Context::canEval (const QString & *key*) const [virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

8.34.3.2 QString Context::eval (const QString & *key*, const QString & *_template*, [Renderer](#) * *renderer*) [virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

8.34.3.3 `virtual bool Mustache::Context::isFalse (const QString & key) const` `[pure virtual]`

Returns true if the value for `key` is 'false' or an empty list. 'False' values typically include empty strings, the boolean value false etc.

When processing a section Mustache tag, the section is not rendered if the key is false, or for an inverted section tag, the section is only rendered if the key is false.

Implemented in [Mustache::QtVariantContext](#).

8.34.3.4 `virtual int Mustache::Context::listCount (const QString & key) const` `[pure virtual]`

Returns the number of items in the list value for `key` or 0 if the value for `key` is not a list.

Implemented in [Mustache::QtVariantContext](#).

8.34.3.5 `PartialResolver * Context::partialResolver () const`

Returns the partial resolver passed to the constructor.

8.34.3.6 `QString Context::partialValue (const QString & key) const`

Returns the partial template for a given `key`.

8.34.3.7 `virtual void Mustache::Context::pop ()` `[pure virtual]`

Exit the current context.

Implemented in [Mustache::QtVariantContext](#).

8.34.3.8 `virtual void Mustache::Context::push (const QString & key, int index = -1)` `[pure virtual]`

Set the current context to the value for `key`. If `index` is ≥ 0 , set the current context to the `index`'th value in the list value for `key`.

Implemented in [Mustache::QtVariantContext](#).

8.34.3.9 `virtual QString Mustache::Context::stringValue (const QString & key) const` `[pure virtual]`

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Implemented in [CounterContext](#), [CounterContext](#), and [Mustache::QtVariantContext](#).

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h`
- `/home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp`

8.35 ContributoriesDatabaseTest Class Reference

Inheritance diagram for ContributoriesDatabaseTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/contributoriesdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/contributoriesdatabasetest.cpp

8.36 Models::ContributoriesList Class Reference

The [ContributoriesList](#) class List of contributories.

```
#include <contributorieslist.h>
```

Inheritance diagram for Models::ContributoriesList:



Public Member Functions

- [ContributoriesList](#) ()
ContributoriesList::ContributoriesList Construct a [ContributoriesList](#).
- double [getPrice](#) (bool isPaied=false)
getPrice Return the price of a contributories list
- double [getPrice](#) ([Models::Project](#) *project)
getPrice Return price of project
- double [getSumQuantity](#) ()
ContributoriesList::getSumQuantity Return the sum of quantity (number of hours) of the Contributories.
- double [getSumQuantity](#) ([Models::Project](#) *project)
ContributoriesList::getSumQuantity Return the sum of quantity (number of hours) of the Contributories of project.
- [Models::Rate](#) [getRate](#) ([Models::Project](#) *project)
ContributoriesList::getRate.
- virtual void [commit](#) ()
ContributoriesList::commit Update or insert data into the database.
- void [addContributory](#) ([Models::Contributory](#) &contributory)
ContributoriesList::addContributory Add a new contributory
- void [addProject](#) ([Project](#) *p, [Models::Rate](#) rate)
ContributoriesList::addProject Add a [Project](#) p and it rate
- [QList< Contributory >](#) & [getContributories](#) ([Project](#) *p)
ContributoriesList::getContributories Return a list of Contributories for the [Project](#) p
- int [getldBilling](#) () const
ContributoriesList::getldBilling Return the [Billing](#) ID.
- void [setldBilling](#) (int idBilling)
ContributoriesList::setldBilling Change the [Billing](#) id by the new idBilling
- void [setAllldContributories](#) (int idContributory)

- [ContributoriesList::setAllIdContributories](#) Change all [Contributory](#) id with the same id.
- bool [isInsert](#) () const
[ContributoriesList::isInsert](#) Return TRUE if an element is inserting else FALSE.
- void [setInsert](#) (bool insert)
[ContributoriesList::setInsert](#) Change the state of insertion.
- int [getNbProjects](#) ()
[ContributoriesList::getNbProjects](#) Return the number of projects.
- QSharedPointer< [Customer](#) > [getCustomer](#) ()
[ContributoriesList::getCustomer](#) Return the Customers linked to theses contributories.
- QList< [Project](#) * > [getProjects](#) ()
[ContributoriesList::getProjects](#) List of Projects.
- QList< [Contributory](#) > * [getAllContributories](#) ()
[ContributoriesList::getAllContributories](#) List of all contributories (all contributories from all projects)
- QVariantList [getDataMap](#) ()
[ContributoriesList::getDataMap](#) Return a list of [Billing](#) and it value linked which indicates if it is inserting or not.

8.36.1 Detailed Description

The [ContributoriesList](#) class List of contributories.

Author

Antoine de Roquemaurel

8.36.2 Member Function Documentation

8.36.2.1 void Models::ContributoriesList::addContributory ([Models::Contributory](#) & *contributory*)

[ContributoriesList::addContributory](#) Add a new *contributory*

Parameters

| | |
|---------------------|-------------------------------------|
| <i>contributory</i> | Contributory to add |
|---------------------|-------------------------------------|

8.36.2.2 void Models::ContributoriesList::addProject ([Project](#) * *p*, [Models::Rate](#) *rate*)

[ContributoriesList::addProject](#) Add a [Project](#) *p* and it *rate*

Parameters

| | |
|-------------|-------------------------------------|
| <i>p</i> | Project to add |
| <i>rate</i> | Rate of the project |

8.36.2.3 QList< [Contributory](#) > * Models::ContributoriesList::getAllContributories ()

[ContributoriesList::getAllContributories](#) List of all contributories (all contributories from all projects)

Returns

List of all contributories

8.36.2.4 QList< [Contributory](#) > & Models::ContributoriesList::getContributories ([Project](#) * *p*)

[ContributoriesList::getContributories](#) Return a list of Contributories for the [Project](#) *p*

Parameters

| | |
|----------|-------------------------|
| <i>p</i> | Project |
|----------|-------------------------|

Returns

List of Contributions for a project

8.36.2.5 `QSharedPointer< Customer > Models::ContributoriesList::getCustomer ()`

[ContributoriesList::getCustomer](#) Return the Customers linked to theses contributories.

Returns

[Customer](#)

8.36.2.6 `QVariantList Models::ContributoriesList::getDataMap ()`

[ContributoriesList::getDataMap](#) Return a list of [Billing](#) and it value linked which indicates if it is inserting or not.

Returns

List of billing and value linked

8.36.2.7 `int Models::ContributoriesList::getIdBilling () const`

[ContributoriesList::getIdBilling](#) Return the [Billing](#) ID.

Returns

[Billing](#) id

8.36.2.8 `int Models::ContributoriesList::getNbProjects ()`

[ContributoriesList::getNbProjects](#) Return the number of projects.

Returns

Count number of project

8.36.2.9 `double Models::ContributoriesList::getPrice (bool isPaied = false) [virtual]`

[getPrice](#) Return the price of a contributories list

Returns

The price

Implements [Models::Calculable](#).

8.36.2.10 `double Models::ContributoriesList::getPrice (Models::Project * project)`

[getPrice](#) Return price of project

Parameters

| | |
|----------------|-------------|
| <i>project</i> | The project |
|----------------|-------------|

Returns

The price

8.36.2.11 `QList< Project * > Models::ContributoriesList::getProjects (void)`

[ContributoriesList::getProjects](#) List of Projects.

Returns

List of Projects

8.36.2.12 `Models::Rate Models::ContributoriesList::getRate (Models::Project * project)`

[ContributoriesList::getRate](#).

Parameters

| | |
|----------------|--|
| <i>project</i> | |
|----------------|--|

Returns

8.36.2.13 `double Models::ContributoriesList::getSumQuantity () [virtual]`

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of hours) of the Contributories.

Returns

sum of quantity in days

Implements [Models::Calculable](#).

8.36.2.14 `double Models::ContributoriesList::getSumQuantity (Models::Project * project)`

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of hours) of the Contributories of project.

Parameters

| | |
|----------------|-------------|
| <i>project</i> | The project |
|----------------|-------------|

Returns

sum of quantity in days

8.36.2.15 `bool Models::ContributoriesList::isInsert () const`

[ContributoriesList::isInsert](#) Return TRUE if an element is inserting else FALSE.

Returns

boolean

8.36.2.16 void Models::ContributoriesList::setAllIdContributories (int *idContributory*)

[ContributoriesList::setAllIdContributories](#) Change all [Contributory](#) id with the same id.

Parameters

| | |
|-----------------------|---|
| <i>idContributory</i> | the new Contributory id |
|-----------------------|---|

8.36.2.17 void Models::ContributoriesList::setIdBilling (int *idBilling*)

[ContributoriesList::setIdBilling](#) Change the [Billing](#) id by the new *idBilling*

Parameters

| | |
|------------------|------------|
| <i>idBilling</i> | Billing id |
|------------------|------------|

8.36.2.18 void Models::ContributoriesList::setInsert (bool *insert*)

[ContributoriesList::setInsert](#) Change the state of insertion.

Parameters

| | |
|---------------|---------|
| <i>insert</i> | Boolean |
|---------------|---------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/contributorieslist.h
- /home/travis/build/FACT-Team/FactDev/src/models/contributorieslist.cpp

8.37 Gui::Widgets::WdgModels::ContributoriesTableModel Class Reference

The [ContributoriesTableModel](#) class for a custom table for contributories widget.

```
#include <contributoriestablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ContributoriesTableModel:



Public Member Functions

- [ContributoriesTableModel](#) (QObject *parent=0)
ContributoriesTableModel::ContributoriesTableModel Construct a [ContributoriesTableModel](#).
- int [rowCount](#) (const QModelIndex &) const
ContributoriesTableModel::rowCount Number of contributories row.
- int [columnCount](#) (const QModelIndex &) const
ContributoriesTableModel::columnCount Number of column of a contributory.
- QVariant [data](#) (const QModelIndex &index, int role) const
ContributoriesTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role) const
ContributoriesTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
ContributoriesTableModel::setData Change data of a cell.
- void [append](#) (const [Contributory](#) &contributory)

- [*ContributoriesTableModel::append*](#) Add a new line in table.
- void [*remove*](#) (const int i)
- [*ContributoriesTableModel::remove*](#) Remove a line.
- Qt::ItemFlags [*flags*](#) (const QModelIndex &index) const
- [*ContributoriesTableModel::flags*](#) Differents table flags.
- QList< [*Contributory*](#) > [*getContributories*](#) ()
- [*ContributoriesTableModel::getContributories*](#) Get all contributories of table.
- int [*count*](#) ()
- [*ContributoriesTableModel::count*](#) Number of contributories in table.
- double [*getSumQuantity*](#) () const
- [*ContributoriesTableModel::getSumQuantity*](#) Return the sum of the hours of all contributories added.
- void [*clear*](#) ()
- [*ContributoriesTableModel::clear*](#) Remove all contributories.

8.37.1 Detailed Description

The [*ContributoriesTableModel*](#) class for a custom table for contributories widget.

Author

Antoine de Roquemaurel

See Also

[*Contributory*](#)

8.37.2 Constructor & Destructor Documentation

8.37.2.1 [*Gui::Widgets::WdgModels::ContributoriesTableModel::ContributoriesTableModel \(QObject * parent = 0 \)*](#)

[*ContributoriesTableModel::ContributoriesTableModel*](#) Construct a [*ContributoriesTableModel*](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Parent widget |
|---------------|---------------|

8.37.3 Member Function Documentation

8.37.3.1 void [*Gui::Widgets::WdgModels::ContributoriesTableModel::append \(const Contributory & contributory \)*](#)

[*ContributoriesTableModel::append*](#) Add a new line in table.

Parameters

| | |
|---------------------|----------------------|
| <i>contributory</i> | The new contributory |
|---------------------|----------------------|

8.37.3.2 int [*Gui::Widgets::WdgModels::ContributoriesTableModel::columnCount \(const QModelIndex & \)*](#) const

[*ContributoriesTableModel::columnCount*](#) Number of column of a contributory.

Returns

The number of column

8.37.3.3 `int Gui::Widgets::WdgModels::ContributoriesTableModel::count ()`

[ContributoriesTableModel::count](#) Number of contributories in table.

Returns

The number of contributories

8.37.3.4 `QVariant Gui::Widgets::WdgModels::ContributoriesTableModel::data (const QModelIndex & index, int role) const`

[ContributoriesTableModel::data](#) Obtains data of a specify cell.

Parameters

| | |
|--------------|---------------------------|
| <i>index</i> | The cell who we want data |
| <i>role</i> | The role of set |

Returns

The data of cell

8.37.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::ContributoriesTableModel::flags (const QModelIndex & index) const`

[ContributoriesTableModel::flags](#) Differents table flags.

Parameters

| | |
|--------------|------------------------------------|
| <i>index</i> | The cell who we want to know flags |
|--------------|------------------------------------|

Returns

Flags

8.37.3.6 `QList< Contributory > Gui::Widgets::WdgModels::ContributoriesTableModel::getContributories ()`

[ContributoriesTableModel::getContributories](#) Get all contributories of table.

Returns

The contributory list

8.37.3.7 `double Gui::Widgets::WdgModels::ContributoriesTableModel::getSumQuantity () const`

[ContributoriesTableModel::getSumQuantity](#) Return the sum of the hours of all contriburoies added.

Returns

sum quantity

8.37.3.8 `QVariant Gui::Widgets::WdgModels::ContributoriesTableModel::headerData (int section, Qt::Orientation orientation, int role) const`

[ContributoriesTableModel::headerData](#) Obtains header title of table.

Parameters

| | |
|--------------------|-----------------------|
| <i>section</i> | The number of column |
| <i>orientation</i> | The table orientation |
| <i>role</i> | |

Returns

The Title header of column

8.37.3.9 `void Gui::Widgets::WdgModels::ContributoriesTableModel::remove (const int i)`

[ContributoriesTableModel::remove](#) Remove a line.

Parameters

| | |
|----------|------------------------------|
| <i>i</i> | The number of line to remove |
|----------|------------------------------|

8.37.3.10 `int Gui::Widgets::WdgModels::ContributoriesTableModel::rowCount (const QModelIndex &) const`

[ContributoriesTableModel::rowCount](#) Number of contributories row.

Returns

The number of contributories

8.37.3.11 `bool Gui::Widgets::WdgModels::ContributoriesTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[ContributoriesTableModel::setData](#) Change data of a cell.

Parameters

| | |
|--------------|-------------------------|
| <i>index</i> | The cell to change data |
| <i>value</i> | The new value |
| <i>role</i> | The role of cell |

Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/contributoriesstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/contributoriesstablemodel.cpp

8.38 Gui::Widgets::ContributoriesWidget Class Reference

The [ContributoriesWidget](#) class Widget of Contributories.

```
#include <contributorieswidget.h>
```

Inheritance diagram for Gui::Widgets::ContributoriesWidget:



Public Slots

- void [add](#) (void)
ContributoriesWidget::add Add a new empty contributory.
- void [remove](#) (void)
ContributoriesWidget::remove Remove the current contributory.
- void [addProject](#) (QPair< [Project](#) *, [Rate](#) > *p=0)
ContributoriesWidget::addProject Add a Projet and it rate p
- void [removeProject](#) (void)
ContributoriesWidget::removeProject Remove the current Project.
- void [changeProject](#) (void)
ContributoriesWidget::changeProject Change the current Project.
- void [editing](#) (void)
ContributoriesWidget::editing Remove the current Project in the combobox not used.
- void [updateUi](#) (void)
ContributoriesWidget::updateUi Update the User Interface.
- void [updatePrice](#) (void)
ContributoriesWidget::updatePrice Update total price.

Signals

- void [contributoryChanged](#) ()
ContributoriesWidget::contributoryChanged Signal that a contributory has changed.

Public Member Functions

- [ContributoriesWidget](#) (QSharedPointer< [Customer](#) > c, QWidget *parent=0)
ContributoriesWidget::ContributoriesWidget Construct a [ContributoriesWidget](#).
- [ContributoriesList](#) * [getContributories](#) () const
ContributoriesWidget::getContributories Get contributories List.
- int [count](#) ()
ContributoriesWidget::count Numbers of contributories.
- void [add](#) ([ContributoriesList](#) &list)
ContributoriesWidget::add Add contributorieslist list in the model.
- void [responsiveProjectsTable](#) ()
- void [responsiveContributoriesTable](#) (QTableView *view)

8.38.1 Detailed Description

The [ContributoriesWidget](#) class Widget of Contributories.

8.38.2 Constructor & Destructor Documentation

8.38.2.1 `Gui::Widgets::ContributoriesWidget::ContributoriesWidget (QSharedPointer< Customer > c, QWidget * parent = 0) [explicit]`

[ContributoriesWidget::ContributoriesWidget](#) Construct a [ContributoriesWidget](#).

Parameters

| | |
|---------------|---------------|
| <i>c</i> | Customer |
| <i>parent</i> | Widget parent |

8.38.3 Member Function Documentation

8.38.3.1 void Gui::Widgets::ContributoriesWidget::add (ContributoriesList & *list*)

[ContributoriesWidget::add](#) Add contributorieslist *list* in the model.

Parameters

| | |
|-------------|-------------------------------|
| <i>list</i> | the ContributoriesList |
|-------------|-------------------------------|

8.38.3.2 void Gui::Widgets::ContributoriesWidget::addProject (QPair< Project *, Rate > * *p* = 0) [slot]

[ContributoriesWidget::addProject](#) Add a Projet and it rate *p*

Parameters

| | |
|----------|------------------------|
| <i>p</i> | Rate linked to Project |
|----------|------------------------|

8.38.3.3 int Gui::Widgets::ContributoriesWidget::count ()

[ContributoriesWidget::count](#) Numbers of contributories.

Returns

Numbers of contributories

8.38.3.4 ContributoriesList * Gui::Widgets::ContributoriesWidget::getContributories () const

[ContributoriesWidget::getContributories](#) Get contributories List.

Returns

ContributoriesList

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/contributorieswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/contributorieswidget.cpp

8.39 Models::Contributory Class Reference

The [Unit](#) enum Unity of work : hour or day.

```
#include <contributory.h>
```

Inheritance diagram for Models::Contributory:



Public Member Functions

- [Contributory](#) ()
Contributory::Contributory Construct a [Contributory](#).
- [Contributory](#) (int id)
Contributory::Contributory Construct a [Contributory](#) and get data in database.
- [~Contributory](#) ()
Destroy an contributory object.
- void [commit](#) ()
Contributory::commit Update or insert a contributory to the database.
- void [hydrat](#) (int id)
Contributory::hydrat Get data about the [Contributory](#) which is specified by the identify id
- void [remove](#) ()
Contributory::remove Remove the current [Contributory](#).
- double [getPrice](#) (const bool paied=false)
getPrice Return the price of a contributory
- double [getSumQuantity](#) ()
ContributoriesList::getSumQuantity Return the sum of quantity (number of hours) of the Contributories.
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- [Project](#) * [getProject](#) () const
Contributory::getProject Return the project linked to this [Contributory](#).
- void [setProject](#) ([Project](#) *id)
Contributory::setProject Modify the identify id of the [Project](#) linked to this [Contributory](#).
- double [getQuantity](#) () const
getNbHours Number of work hour of a contributory
- void [setQuantity](#) (double value)
setNbHours Change nbHours
- QString [getDescription](#) () const
getDescription Description of a contributory
- void [setDescription](#) (const QString &[getDescription](#))
setDescription Change the contributory description
- bool [operator==](#) (const [Contributory](#) &c)
operator == define the operator "==" to compare two [Contributory](#)
- bool [operator!=](#) (const [Contributory](#) &c)
operator != define the operator "!=" to compare two [Contributory](#)
- QString [getLongDescription](#) () const
getLongDescription A contributory has a long description : display in tex appendix
- void [setLongDescription](#) (const QString &[getLongDescription](#))
setLongDescription Change the long description
- [Unit](#) [getUnit](#) () const
getUnit Return the unit (hour or day) of contributory
- void [setUnit](#) (const [Unit](#) &value)
setUnit Change the unit

- double [getHourlyRate](#) () const
getHourlyRate Hourly rate for this contributory
- void [setHourlyRate](#) (double value)
setHourlyRate Change the hourly rate for this contributory

Additional Inherited Members

8.39.1 Detailed Description

The [Unit](#) enum Unity of work : hour or day.

Author

The [Contributory](#) class

8.39.2 Constructor & Destructor Documentation

8.39.2.1 Models::Contributory::Contributory (int *id*)

[Contributory::Contributory](#) Construct a [Contributory](#) and get data in database.

Parameters

| | |
|-----------|------------------------------------|
| <i>id</i> | Contributory 's id |
|-----------|------------------------------------|

8.39.3 Member Function Documentation

8.39.3.1 QVariantHash Models::Contributory::getDataMap () [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.39.3.2 QString Models::Contributory::getDescription () const

[getDescription](#) Description of a contributory

Returns

The description

8.39.3.3 double Models::Contributory::getHourlyRate () const

[getHourlyRate](#) Hourly rate for this contributory

Returns

The hourly rate

8.39.3.4 QString Models::Contributory::getLongDescription () const

getLongDescription A contributory has a long description : display in tex appendix

Returns

The long description

8.39.3.5 double Models::Contributory::getPrice (const bool *paied* = false) [virtual]

getPrice Return the price of a contributory

Returns

The price

Implements [Models::Calculable](#).

8.39.3.6 Project * Models::Contributory::getProject () const

[Contributory::getProject](#) Return the project linked to this [Contributory](#).

Returns

[Project](#) linked to this [Contributory](#)

8.39.3.7 double Models::Contributory::getQuantity () const

getNbHours Number of work hour of a contributory

Returns

Then number of hours

8.39.3.8 double Models::Contributory::getSumQuantity () [virtual]

[ContributoriesList::getSumQuantity](#) Return the sum of quantity (number of hours) of the Contributories.

Returns

sum of quantity in hours

Implements [Models::Calculable](#).

8.39.3.9 Unit Models::Contributory::getUnit () const

getUnit Return the unit (hour or day) of contributory

Returns

The unit

8.39.3.10 void Models::Contributory::hydrat (int *id*) [virtual]

[Contributory::hydrat](#) Get data about the [Contributory](#) which is specified by the identify *id*

Parameters

| | |
|-----------|---------------------------------------|
| <i>id</i> | Contributory identify |
|-----------|---------------------------------------|

Implements [Models::IModel](#).

8.39.3.11 `bool Models::Contributory::operator!= (const Contributory & c)`

operator != define the operator "!=" to compare two [Contributory](#)

Parameters

| | |
|----------|---|
| <i>c</i> | the Contributory to compare with the current Contributory |
|----------|---|

Returns

true if the [Contributory](#) are different else false

8.39.3.12 `bool Models::Contributory::operator== (const Contributory & c)`

operator == define the operator "==" to compare two [Contributory](#)

Parameters

| | |
|----------|---|
| <i>c</i> | the Contributory to compare with the current Contributory |
|----------|---|

Returns

true if the [Contributory](#) are equals else false

8.39.3.13 `void Models::Contributory::setDescription (const QString & getDescription)`

setDescription Change the contributory description

Parameters

| | |
|-----------------------|---------------------|
| <i>getDescription</i> | The new description |
|-----------------------|---------------------|

8.39.3.14 `void Models::Contributory::setHourlyRate (double value)`

setHourlyRate Change the hourly rate for this contributory

Parameters

| | |
|--------------|-----------------|
| <i>value</i> | The hourly rate |
|--------------|-----------------|

8.39.3.15 `void Models::Contributory::setLongDescription (const QString & getLongDescription)`

setLongDescription Change the long description

Parameters

| | |
|----------------------------|---------------------|
| <i>getLong-Description</i> | The new description |
|----------------------------|---------------------|

8.39.3.16 void Models::Contributory::setProject (Project * *id*)

[Contributory::setProject](#) Modify the identify *id* of the [Project](#) linked to this [Contributory](#).

Parameters

| | |
|-----------|----------------------------------|
| <i>id</i> | Project Identify |
|-----------|----------------------------------|

8.39.3.17 void Models::Contributory::setQuantity (double *value*)

setNbHours Change nbHours

Parameters

| | |
|--------------|--------------------------|
| <i>value</i> | The new value of nbHours |
|--------------|--------------------------|

8.39.3.18 void Models::Contributory::setUnit (const Unit & *value*)

setUnit Change the unit

Parameters

| | |
|--------------|--------------|
| <i>value</i> | The new unit |
|--------------|--------------|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/contributory.h
- /home/travis/build/FACT-Team/FactDev/src/models/contributory.cpp

8.40 Databases::ContributoryDatabase Class Reference

The [ContributoryDatabase](#) class Contributory (or Quote) table database.

```
#include <contributorydatabase.h>
```

Inheritance diagram for Databases::ContributoryDatabase:



Public Member Functions

- [Models::Contributory](#) * [getContributory](#) (const int idContributory)
ContributoryDatabase::getCustomer get informations about the Contributory identified by pld
- [Models::ContributoriesList](#) [getContributoriesByBilling](#) (const int billingId)
ContributoryDatabase::getContributoriesByBilling get informations about the Contributory identified by Billing
- int [addContributory](#) (const [Models::Contributory](#) &)

- [*ContributoryDatabase::addContributory*](#) Add the Contributory *pContributory* to the database.
- void [*updateContributory*](#) (const [Models::Contributory](#) &)
ContributoryDatabase::updateCustomer Update informations about the Contributory *pCustomer*
- void [*removeContributory*](#) (const int *pId*)
ContributoryDatabase::removeCustomer Remove the Contributory with the id *pId*
- [Models::Contributory](#) * [*getContributory*](#) (QString &q)
getContributory Obtain a contributory without new query
- [Models::ContributorList](#) [*getContributorListByBillingAndProject*](#) (const int *billingId*, const int *projectId*)
getContributory Get contributories list by project and billing

Static Public Member Functions

- static [ContributoryDatabase](#) * [*instance*](#) () throw (DbException*)
ContributoryDatabase::getInstance Return an instance of [ContributoryDatabase](#)

Additional Inherited Members

8.40.1 Detailed Description

The [ContributoryDatabase](#) class Contributory (or Quote) table database.

Author

See Also

[Database](#)
[Contributory/Quote](#)

8.40.2 Member Function Documentation

8.40.2.1 int [Databases::ContributoryDatabase::addContributory](#) (const [Models::Contributory](#) & *pContributory*)

[*ContributoryDatabase::addContributory*](#) Add the Contributory *pContributory* to the database.

Returns

Contributory id

8.40.2.2 [Models::ContributorList](#) [Databases::ContributoryDatabase::getContributorListByBilling](#) (const int *billingId*)

[*ContributoryDatabase::getContributorListByBilling*](#) get informations about the Contributory identified by *Billing*

Parameters

| | |
|------------------|-----------------|
| <i>idBilling</i> | Contributory id |
|------------------|-----------------|

Returns

the Contributory

8.40.2.3 [Models::ContributorList](#) [Databases::ContributoryDatabase::getContributorListByBillingAndProject](#) (const int *billingId*, const int *projectId*)

getContributory Get contributories list by project and billing

Parameters

| | |
|------------------|--|
| <i>billingId</i> | |
| <i>projectId</i> | |

Returns

The contributories list by project and billing

8.40.2.4 **Models::Contributory** * **Databases::ContributoryDatabase::getContributory** (**const int** *idContributory*)

ContributoryDatabase::getCustomer get informations about the Contributory identified by *pld*

Parameters

| | |
|-----------------------|-----------------|
| <i>idContributory</i> | Contributory id |
|-----------------------|-----------------|

Returns

the Contributory

8.40.2.5 **Models::Contributory** * **Databases::ContributoryDatabase::getContributory** (**QStringQuery** & *q*)

getContributory Obtain a contributory without new query

Parameters

| | |
|----------|------------------|
| <i>q</i> | The query to use |
|----------|------------------|

Returns

The contributory linked to q

8.40.2.6 **ContributoryDatabase** * **Databases::ContributoryDatabase::instance** () **throw DbException *** [static]

ContributoryDatabase::getInstance Return an instance of [ContributoryDatabase](#)

See Also

DbException

Returns

Instance of [ContributoryDatabase](#)

8.40.2.7 **void Databases::ContributoryDatabase::removeContributory** (**const int** *pld*)

ContributoryDatabase::removeCustomer Remove the Contributory with the id *pld*

Parameters


| | |
|------------|-----------------|
| <i>pld</i> | Contributory id |
|------------|-----------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/contributorydatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/contributorydatabase.cpp

8.41 ContributoryListTest Class Reference

Inheritance diagram for ContributoryListTest:




The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/contributorylisttest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/contributorylisttest.cpp

8.42 ContributoryModelTest Class Reference

Inheritance diagram for ContributoryModelTest:




The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/contributorymodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/contributorymodeltest.cpp

8.43 CounterContext Class Reference

Inheritance diagram for CounterContext:

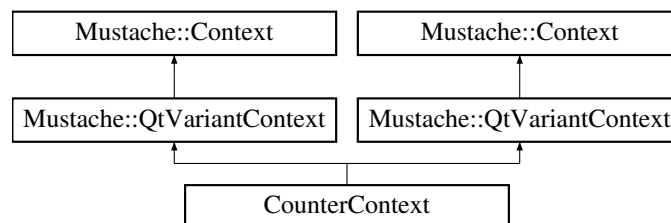

Public Member Functions

- **CounterContext** (const QVariantHash &map)
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer)
- virtual QString [stringValue](#) (const QString &key) const
- **CounterContext** (const QVariantHash &map)

- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer)
- virtual QString [stringValue](#) (const QString &key) const

Public Attributes

- int **counter**

Additional Inherited Members

8.43.1 Member Function Documentation

8.43.1.1 virtual bool CounterContext::canEval (const QString &key) const [inline],[virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.2 virtual bool CounterContext::canEval (const QString &key) const [inline],[virtual]

Returns true if [eval\(\)](#) should be used to render section tags using *key*. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.3 virtual QString CounterContext::eval (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer) [inline],[virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.4 virtual QString CounterContext::eval (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer) [inline],[virtual]

Callback used to render a template section with the given *key*. *renderer* will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.5 virtual QString CounterContext::stringValue (const QString &key) const [inline],[virtual]

Returns a string representation of the value for *key* in the current context. This is used to replace a Mustache value tag.

Reimplemented from [Mustache::QtVariantContext](#).

8.43.1.6 virtual QString CounterContext::stringValue (const QString & key) const [inline], [virtual]

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Reimplemented from [Mustache::QtVariantContext](#).

The documentation for this class was generated from the following file:


- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.cpp

8.44 Models::Customer Class Reference

The [Customer](#) class [Customer](#).

```
#include <customer.h>
```

Inheritance diagram for Models::Customer:



Public Member Functions

- [Customer](#) ()
Customer::Customer Construct a [Customer](#).
- [Customer](#) (int id)
Customer::Customer Construct a [Customer](#) who is specified by id
- void [commit](#) ()
Customer::Customer Construct a [People](#) who is specified by id
- void [hydrat](#) (int id)
Customer::hydrat Insert into database informations related to the [Customer](#) who is specified by id
- void [remove](#) ()
Customer::remove Remove the current customer.
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- QString [getPath](#) () const
Customer::getPath Return the path of the workspace for the current [Customer](#).
- QString [getNameFolder](#) () const
Customer::getNameFolder Return the name of the current [Customer](#)'s folder in the workspace.
- double [getTurnover](#) () const
Customer::getTurnover Return the turnover of the customer money that customer pay, revenue sales.
- QPixmap * [getImage](#) ()
Customer::getImage Return the compagny image.
- void [setImage](#) (QPixmap *image)

- [Customer::setImage](#) Change the current image by the new image
- bool [isArchived](#) () const
[Customer::isArchived](#) Return if the **Customer** is archived.
- void [setIsArchived](#) (const bool [isArchived](#))
[Customer::setIsArchived](#) set the [isArchived](#) parameter.

Additional Inherited Members

8.44.1 Detailed Description

The [Customer](#) class [Customer](#).

Author

Antoine de Roquemaurel
 Florent Berbie

8.44.2 Constructor & Destructor Documentation

8.44.2.1 Models::Customer::Customer (int *id*)

[Customer::Customer](#) Construct a [Customer](#) who is specidied by *id*

Parameters

| | |
|-----------|-----------------------------------|
| <i>id</i> | Customer identify |
|-----------|-----------------------------------|

8.44.3 Member Function Documentation

8.44.3.1 void Models::Customer::commit () [virtual]

[Customer::Customer](#) Construct a [People](#) who is specidied by *id*

Parameters

| | |
|-----------|-----------------------------------|
| <i>id</i> | Customer identify |
|-----------|-----------------------------------|

Implements [Models::IModel](#).

8.44.3.2 QVariantHash Models::Customer::getDataMap () [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.44.3.3 QPixmap * Models::Customer::getImage ()

[Customer::getImage](#) Return the compagny image.

Returns

compagny image

8.44.3.4 QString Models::Customer::getNameFolder () const

[Customer::getNameFolder](#) Return the name of the current [Customer](#)'s folder in the workspace.

Returns

name of the [Customer](#)'s folder

8.44.3.5 QString Models::Customer::getPath () const

[Customer::getPath](#) Return the path of the workspace for the current [Customer](#).

Returns

workspace path

8.44.3.6 double Models::Customer::getTurnover () const

[Customer::getTurnover](#) Return the turnover of the customer money that customer pay, revenue sales.

Returns

turnover

8.44.3.7 void Models::Customer::hydrat (int *id*) [virtual]

[Customer::hydrat](#) Insert into database informations related to the [Customer](#) who is specified by *id*

Parameters

| | |
|-----------|-----------------------------------|
| <i>id</i> | Customer identify |
|-----------|-----------------------------------|

Implements [Models::IModel](#).

8.44.3.8 bool Models::Customer::isArchived () const

[Customer::isArchived](#) Return if the [Customer](#) is archived.

Returns

true or false

8.44.3.9 void Models::Customer::setImage (QPixmap * *image*) [virtual]

[Customer::setImage](#) Change the current image by the new *image*

Parameters

| | |
|--------------|-----------|
| <i>image</i> | New image |
|--------------|-----------|

Reimplemented from [Models::People](#).

8.44.3.10 void Models::Customer::setIsArchived (const bool *isArchived*)

[Customer::setIsArchived](#) set the *isArchived* parameter.

Parameters

| | |
|-------------------|--|
| <i>isArchived</i> | |
|-------------------|--|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/customer.h
- /home/travis/build/FACT-Team/FactDev/src/models/customer.cpp

8.45 Gui::Widgets::CustomerContextualMenu Class Reference

Display contextual menu on a customer.

```
#include <customercontextualmenu.h>
```

Inheritance diagram for Gui::Widgets::CustomerContextualMenu:



Public Member Functions

- [CustomerContextualMenu](#) (QWidget *w=0)
CustomerContextualMenu::CustomerContextualMenu Construct a new contextual menu.
- [~CustomerContextualMenu](#) ()
CustomerContextualMenu::Destruct the contextual menu.

8.45.1 Detailed Description

Display contextual menu on a customer.

Author

Antoine de Roquemaurel

8.45.2 Constructor & Destructor Documentation

8.45.2.1 Gui::Widgets::CustomerContextualMenu::CustomerContextualMenu (QWidget * w = 0)

[CustomerContextualMenu::CustomerContextualMenu](#) Construct a new contextual menu.

Parameters

| | |
|----------|--------|
| <i>w</i> | Parent |
|----------|--------|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customercontextualmenu.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/customercontextualmenu.cpp

8.46 Databases::CustomerDatabase Class Reference

The **CustomerDatabase** class Customer table database.

```
#include <customerdatabase.h>
```

Inheritance diagram for Databases::CustomerDatabase:



Public Member Functions

- **WdgModels::CustomersTableModel * getCustomersTable** (QString filter=("")) throw (DbException*)
CustomerDatabase::getCustomersTable Return an item model of customers for QTableView.
- **QStandardItemModel * getTree** (QString filter=("")) throw (DbException*)
CustomerDatabase::getTree Return an item model of customers for QTree.
- **QSharedPointer< Models::Customer > getCustomer** (const int pld)
CustomerDatabase::getCustomer get informations about the customer identified by pld
- **int addCustomer** (const Models::Customer &)
CustomerDatabase::addCustomer Add the customer pCustomer to the database.
- **void updateCustomer** (Customer &)
CustomerDatabase::updateCustomer Update informations about the customer pCustomer
- **void removeCustomer** (const int pld)
CustomerDatabase::removeCustomer Remove the customer with the id pld
- **int getNbCustomers** ()
CustomerDatabase::getNbCustomers Return the number of customers existing.
- **QStandardItem * getItemRoot** ()
CustomerDatabase::getItemRoot Return the first item for the QStandardItemModel.
- **QStandardItem * getItemCustomer** (QString query q1)
CustomerDatabase::getItemCustomer Return the customer item for the QStandardItemModel.
- **QStandardItem * getItemProject** (QString query q2)
CustomerDatabase::getItemProject Return the project item for the QStandardItemModel.
- **QSharedPointer< Models::Customer > getCustomer** (QString query &q)
CustomerDatabase::getCustomer Add the element of the q request and return their.
- **void updateCustomer** (QString query &q, Customer &pCustomer)
CustomerDatabase::updateCustomer Update customer data according to the request q
- **QPixmap getCustomerImage** (const int pld)
CustomerDatabase::getCustomerImage Return a Customer image.
- **void setCustomerImage** (Customer &pCustomer)
CustomerDatabase::setCustomerImage Change the image of the customer pCustomer
- **QList< Customer > getCustomers** ()
CustomerDatabase::getCustomers Return all the customers.

Static Public Member Functions

- **static CustomerDatabase * instance** () throw (DbException*)
CustomerDatabase::instance Return an instance of **CustomerDatabase**

Additional Inherited Members

8.46.1 Detailed Description

The [CustomerDatabase](#) class Customer table database.

Author

Antoine de Roquemaurel
Manantsoa Razanajatovo
Florent Berbie

See Also

[Database](#)
[Customer](#)

8.46.2 Member Function Documentation

8.46.2.1 `int Databases::CustomerDatabase::addCustomer (const Models::Customer & pCustomer)`

[CustomerDatabase::addCustomer](#) Add the customer *pCustomer* to the database.

Returns

customer id

8.46.2.2 `QSharedPointer< Models::Customer > Databases::CustomerDatabase::getCustomer (const int pld)`

[CustomerDatabase::getCustomer](#) get informations about the customer identified by *pld*

Parameters

| | |
|------------|-------------|
| <i>pld</i> | customer id |
|------------|-------------|

Returns

the Customer

8.46.2.3 `QSharedPointer< Models::Customer > Databases::CustomerDatabase::getCustomer (QSqlQuery & q)`

[CustomerDatabase::getCustomer](#) Add the element of the *q* request and return their.

Parameters

| | |
|----------|-------------|
| <i>q</i> | SQL request |
|----------|-------------|

Returns

a customer formed according to QSharedPointer

8.46.2.4 `QPixmap Databases::CustomerDatabase::getCustomerImage (const int pld)`

[CustomerDatabase::getCustomerImage](#) Return a Customer image.

Parameters

| | |
|------------|-------------|
| <i>pid</i> | Customer id |
|------------|-------------|

Returns

Customer image

8.46.2.5 `QList< Customer > Databases::CustomerDatabase::getCustomers ()`

[CustomerDatabase::getCustomers](#) Return all the customers.

Returns

QList of customers

8.46.2.6 `WdgModels::CustomersTableModel * Databases::CustomerDatabase::getCustomersTable (QString filter = " ") throw DbException *`

[CustomerDatabase::getCustomersTable](#) Return an item model of customers for QTableView.

Parameters

| | |
|---------------|--|
| <i>filter</i> | Select only customers who are specified by <i>filter</i> |
|---------------|--|

Exceptions

| | |
|--------------------|--|
| <i>DbException</i> | |
|--------------------|--|

Returns

QStandardItemModel an item model for QTableView

8.46.2.7 `QStandardItem * Databases::CustomerDatabase::getItemCustomer (QSqlQuery q1)`

[CustomerDatabase::getItemCustomer](#) Return the customer item for the QStandardItemModel.

Parameters

| | |
|-----------|--|
| <i>q1</i> | the row of the sql query for customers |
|-----------|--|

Returns

QStandardItem an item for QTree (level/depth 1)

8.46.2.8 `QStandardItem * Databases::CustomerDatabase::getItemProject (QSqlQuery q2)`

[CustomerDatabase::getItemProject](#) Return the project item for the QStandardItemModel.

Parameters

| | |
|-----------|---------------------------------------|
| <i>q2</i> | the row of the sql query for projects |
|-----------|---------------------------------------|

Returns

QStandardItem an item for QTree (level/depth 2)

8.46.2.9 `QStandardItem *` `Databases::CustomerDatabase::getItemRoot ()`

[CustomerDatabase::getItemRoot](#) Return the first item for the `QStandardItemModel`.

Returns

`QStandardItem` an item for `QTree` (level/depth 0)

8.46.2.10 `int` `Databases::CustomerDatabase::getNbCustomers ()`

[CustomerDatabase::getNbCustomers](#) Return the number of customers existing.

Returns

number of customers

8.46.2.11 `QStandardItemModel *` `Databases::CustomerDatabase::getTree (QString filter = " ") throw DbException *`

[CustomerDatabase::getTree](#) Return an item model of customers for `QTree`.

Parameters

| | |
|---------------|--|
| <i>filter</i> | Select only customers who are specified by <i>filter</i> |
|---------------|--|

Exceptions

| | |
|--------------------|--|
| <i>DbException</i> | |
|--------------------|--|

Returns

`QStandardItemModel` an item model for `QTreeView`

8.46.2.12 `CustomerDatabase *` `Databases::CustomerDatabase::instance () throw DbException *` `[static]`

[CustomerDatabase::instance](#) Return an instance of [CustomerDatabase](#)

See Also

`DbException`

Returns

Instance of [CustomerDatabase](#)

8.46.2.13 `void` `Databases::CustomerDatabase::removeCustomer (const int pId)`

[CustomerDatabase::removeCustomer](#) Remove the customer with the id *pId*

Parameters

| | |
|------------|-------------|
| <i>pId</i> | customer id |
|------------|-------------|

8.46.2.14 `void` `Databases::CustomerDatabase::setCustomerImage (Models::Customer & pCustomer)`

[CustomerDatabase::setCustomerImage](#) Change the image of the customer *pCustomer*

Parameters

| | |
|------------------|----------|
| <i>pCustomer</i> | Customer |
|------------------|----------|

8.46.2.15 void Databases::CustomerDatabase::updateCustomer (QSqlQuery & *q*, Customer & *pCustomer*)

[CustomerDatabase::updateCustomer](#) Update customer data according to the request *q*

Parameters


| | |
|----------|-------------|
| <i>q</i> | SQL request |
|----------|-------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/customerdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/customerdatabase.cpp

8.47 CustomerDatabaseTest Class Reference

Inheritance diagram for CustomerDatabaseTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/database/customerdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/customerdatabasetest.cpp

8.48 Gui::Widgets::CustomerDataWidget Class Reference

Class for display info of a customer.

```
#include <customerdatawidget.h>
```

Inheritance diagram for Gui::Widgets::CustomerDataWidget:



Public Member Functions

- [CustomerDataWidget](#) (QWidget *parent=0)
[CustomerDataWidget::CustomerDataWidget](#) Construct a [CustomerDataWidget](#).
- void [printUserData](#) ()
[CustomerDataWidget::printUserData](#) Print Data of current user.
- void [printInformations](#) (int id)
[CustomerDataWidget::printInformations](#) Print Data of customer id.

8.48.1 Detailed Description

Class for display info of a customer.

Author

8.48.2 Constructor & Destructor Documentation

8.48.2.1 `Gui::Widgets::CustomerDataWidget::CustomerDataWidget (QWidget * parent = 0)` `[explicit]`

[CustomerDataWidget::CustomerDataWidget](#) Construct a [CustomerDataWidget](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Widget parent |
|---------------|---------------|

8.48.3 Member Function Documentation

8.48.3.1 `void Gui::Widgets::CustomerDataWidget::printInformations (int id)`

[CustomerDataWidget::printInformations](#) Print Data of customer id.

Parameters


| | |
|-----------|----------------------|
| <i>id</i> | of customer to print |
|-----------|----------------------|

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/customerdatawidget.h`
- `/home/travis/build/FACT-Team/FactDev/src/gui/widgets/customerdatawidget.cpp`

8.49 CustomerModelTest Class Reference

Inheritance diagram for CustomerModelTest:



Public Member Functions

- `void setup ()`

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/models/customermodeltest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/models/customermodeltest.cpp`

8.50 Gui::Widgets::WdgModels::CustomersTableModel Class Reference

The [CustomersTableModel](#) class for a customer table.

```
#include <customerstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::CustomersTableModel:



Public Member Functions

- [CustomersTableModel](#) (QObject *parent=0)
CustomersTableModel::CustomersTableModel Construct a [CustomersTableModel](#).
- int [rowCount](#) (const QModelIndex &) const
CustomersTableModel::rowCount Number of customers row.
- int [columnCount](#) (const QModelIndex &) const
CustomersTableModel::columnCount Number of column of a customer.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const
CustomersTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const
CustomersTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
CustomersTableModel::setData Change data of a cell.
- void [append](#) (const [Customer](#) &customer)
CustomersTableModel::append Add a new line in table.
- void [remove](#) (const int i)
CustomersTableModel::remove Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
CustomersTableModel::flags Differents table flags.
- int [count](#) ()
CustomersTableModel::count Number of customers in table.
- QList< [Customer](#) > [getCustomers](#) () const
CustomersTableModel::getCustomers Return the list of customers.

8.50.1 Detailed Description

The [CustomersTableModel](#) class for a customer table.

Author

Florent Berbie

See Also

[Customer](#)

8.50.2 Constructor & Destructor Documentation

8.50.2.1 `Gui::Widgets::WdgModels::CustomersTableModel::CustomersTableModel (QObject * parent = 0)`

[CustomersTableModel::CustomersTableModel](#) Construct a [CustomersTableModel](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Parent widget |
|---------------|---------------|

8.50.3 Member Function Documentation

8.50.3.1 void Gui::Widgets::WdgModels::CustomersTableModel::append (const Customer & *customer*)

[CustomersTableModel::append](#) Add a new line in table.

Parameters

| | |
|-----------------|------------------|
| <i>Customer</i> | The new customer |
|-----------------|------------------|

8.50.3.2 int Gui::Widgets::WdgModels::CustomersTableModel::columnCount (const QModelIndex &) const

[CustomersTableModel::columnCount](#) Number of column of a customer.

Returns

The number of column

8.50.3.3 int Gui::Widgets::WdgModels::CustomersTableModel::count ()

[CustomersTableModel::count](#) Number of customers in table.

Returns

The number of customers

8.50.3.4 QVariant Gui::Widgets::WdgModels::CustomersTableModel::data (const QModelIndex & *index*, int *role* = Qt::DisplayRole) const

[CustomersTableModel::data](#) Obtains data of a specify cell.

Parameters

| | |
|--------------|---------------------------|
| <i>index</i> | The cell who we want data |
| <i>role</i> | The role of set |

Returns

The data of cell

8.50.3.5 Qt::ItemFlags Gui::Widgets::WdgModels::CustomersTableModel::flags (const QModelIndex & *index*) const

[CustomersTableModel::flags](#) Differents table flags.

Parameters

| | |
|--------------|------------------------------------|
| <i>index</i> | The cell who we want to know flags |
|--------------|------------------------------------|

Returns

Flags

8.50.3.6 `QList< Customer > Gui::Widgets::WdgModels::CustomersTableModel::getCustomers () const`

[CustomersTableModel::getCustomers](#) Return the list of customers.

Returns

list of Customers

8.50.3.7 `QVariant Gui::Widgets::WdgModels::CustomersTableModel::headerData (int section, Qt::Orientation orientation, int role = Qt::DisplayRole) const`

[CustomersTableModel::headerData](#) Obtains header title of table.

Parameters

| | |
|--------------------|-----------------------|
| <i>section</i> | The number of column |
| <i>orientation</i> | The table orientation |
| <i>role</i> | |

Returns

The Title header of column

8.50.3.8 `void Gui::Widgets::WdgModels::CustomersTableModel::remove (const int i)`

[CustomersTableModel::remove](#) Remove a line.

Parameters

| | |
|----------|------------------------------|
| <i>i</i> | The number of line to remove |
|----------|------------------------------|

8.50.3.9 `int Gui::Widgets::WdgModels::CustomersTableModel::rowCount (const QModelIndex &) const`

[CustomersTableModel::rowCount](#) Number of customers row.

Returns

The number of customers

8.50.3.10 `bool Gui::Widgets::WdgModels::CustomersTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[CustomersTableModel::setData](#) Change data of a cell.

Parameters

| | |
|--------------|-------------------------|
| <i>index</i> | The cell to change data |
| <i>value</i> | The new value |
| <i>role</i> | The role of cell |

Returns

True if we could edit

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/customerstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetsmodels/customerstablemodel.cpp

8.51 Databases::Database Class Reference

The **Database** class Master class for all database access.

```
#include <database.h>
```

Inheritance diagram for Databases::Database:



Public Member Functions

- QString **lastError** (const QSqlQuery &q) const
Database::lastError Return an error message on the last error occurred during the SQL request q
- void **testCases** ()
Database::testCases Realise a test cases.
- void **executeFile** (QString pName)
Database::executerFichier Exeute a specified file named pName
- void **openTransaction** ()
Database::openTransaction Open new transaction.
- void **closeTransaction** ()
Database::closeTransaction Close current transaction.
- void **close** ()
Database::close Close database access.
- void **open** ()
Database::open Open database.
- **~Database** ()
Database::~Database Suppression object, and close database access.
- void **setDatabase** (QSqlDatabase sql)
Database::setDatabase Set database.
- void **updateBillingNumber** ()
Database::updateBillingNumber Update the billing number.
- void **cleanDatabase** ()
Database::clearDatabase Drop alls tables of *Database* WARNING: We can't restore data after.
- void **changeDatabase** (Databases::DbType dbType)
changeDatabase Change the current database : mysql to sqlite or sqlite to mysql

Static Public Member Functions

- static Database * **instance** (bool tests=false) throw (DbException*)
Database::getInstance Return an instance of *Database*.

Protected Member Functions

- Database (bool tests=false) throw (DbException*)
Database::Database *Database* is a singleton.
- QVariant **value** (const QSqlQuery &q, const QString &champ) const
Database::valeur Value of database field.

Protected Attributes

- QSettings * [_settings](#)
settings
- QSqlDatabase [mDatabase](#)
contains Database
- QList< [Database](#) * > [_instances](#)
List of instances.

Static Protected Attributes

- static [Database](#) * [_instance](#) = 0
Instance.
- static bool [_dbInstance](#) = 0
an instance of db is open
- static bool [isOpen](#) = false
[Database](#) is open.
- static bool [_isMysql](#) = false

8.51.1 Detailed Description

The [Database](#) class Master class for all database access.

Author

Antoine de Roquemaurel

8.51.2 Member Function Documentation

8.51.2.1 void Databases::Database::changeDatabase (Databases::DbType *dbType*)

changeDatabase Change the current database : mysql to sqlite or sqlite to mysql

Parameters

| | |
|---------------|--|
| <i>dbType</i> | : The new database type, Sqlite or Mysql |
|---------------|--|

8.51.2.2 void Databases::Database::executeFile (QString *pName*)

Database::executerFichier Exeute a specified file named *pName*

Parameters

| | |
|-------------|-----------|
| <i>pNom</i> | File name |
|-------------|-----------|

8.51.2.3 Database * Databases::Database::instance (bool *tests* = false) throw DbException *) [static]

Database::getInstance Return an instance of [Database](#).

Returns

Instance of [Database](#)

8.51.2.4 QString Databases::Database::lastError (const QSqlQuery & *q*) const [inline]

[Database::lastError](#) Return an error message on the last error occurred during the SQL request *q*

Parameters

| | |
|----------|-------------|
| <i>q</i> | SQL request |
|----------|-------------|

Returns

an error message

8.51.2.5 void Databases::Database::setDatabase (QSqlDatabase *sql*)

[Database::setDatabase](#) Set database.

Parameters

| | |
|------------|------------------|
| <i>sql</i> | The new database |
|------------|------------------|

8.51.2.6 QVariant Databases::Database::value (const QSqlQuery & *q*, const QString & *champ*) const [protected]

Database::valeur Value of database field.

Parameters

| | |
|--------------|-------|
| <i>q</i> | Query |
| <i>champ</i> | Field |

Returns

The value

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/database/database.h
- /home/travis/build/FACT-Team/FactDev/src/database/database.cpp

8.52 Gui::Widgets::DatabaseSettingsWidget Class Reference

The [DatabaseSettingsWidget](#) class Windows of database settings.

```
#include <databasesettingswidget.h>
```

Inheritance diagram for Gui::Widgets::DatabaseSettingsWidget:



Public Slots

- bool [isValid](#) ()
DatabaseSettingsWidget::isValid Return TRUE if all fields are correctly inputed else FALSE.
- void [checkRepeatPassword](#) (QString text)
DatabaseSettingsWidget::checkRepeatLogin Check if the second login field is the same than the first.
- void [userInterfaceChanged](#) ()
DatabaseSettingsWidget::userInterfaceChanged User interface has changed.

Signals

- void [textfieldChanged](#) ()
DatabaseSettingsWidget::textfieldChanged Signal which indicates if a fieldtext has changed.

Public Member Functions

- [DatabaseSettingsWidget](#) (QWidget *parent=0)
DatabaseSettingsWidget::DatabaseSettingsWidget Construct a [DatabaseSettingsWidget](#).
- void [fillFields](#) ()
DatabaseSettingsWidget::fillFields Complete fields with a default value for field Database name, Username, IP address and port.
- QString [getDatabaseName](#) ()
DatabaseSettingsWidget::getDatabaseName Return the database name.
- QString [getLogin](#) ()
DatabaseSettingsWidget::getLogin Return the login of the user.
- QString [getPassword](#) ()
DatabaseSettingsWidget::getPassword Return the password of the user.
- QString [getDomainNameOrIP](#) ()
DatabaseSettingsWidget::getDomainNameOrIP Return the domain name or IP address on the machine where is the database.
- QString [getPort](#) ()
DatabaseSettingsWidget::getPort Return the port of the database.

8.52.1 Detailed Description

The [DatabaseSettingsWidget](#) class Windows of database settings.

Author

8.52.2 Constructor & Destructor Documentation

8.52.2.1 [Gui::Widgets::DatabaseSettingsWidget::DatabaseSettingsWidget \(QWidget * *parent* = 0 \)](#) [explicit]

[DatabaseSettingsWidget::DatabaseSettingsWidget](#) Construct a [DatabaseSettingsWidget](#).

Parameters

| | |
|---------------|-------------------------------|
| <i>parent</i> | Parent widget of this windows |
|---------------|-------------------------------|

8.52.3 Member Function Documentation

8.52.3.1 [QString Gui::Widgets::DatabaseSettingsWidget::getDatabaseName \(\)](#)

[DatabaseSettingsWidget::getDatabaseName](#) Return the database name.

Returns

Database name

8.52.3.2 QString Gui::Widgets::DatabaseSettingsWidget::getDomainNameOrIP ()

[DatabaseSettingsWidget::getDomainNameOrIP](#) Return the domain name or IP address on the machine where is the database.

Returns

Domain name or IP address

8.52.3.3 QString Gui::Widgets::DatabaseSettingsWidget::getLogin ()

[DatabaseSettingsWidget::getLogin](#) Return the login of the user.

Returns

Login of the user

8.52.3.4 QString Gui::Widgets::DatabaseSettingsWidget::getPassword ()

[DatabaseSettingsWidget::getPassword](#) Return the password of the user.

Returns

User password

8.52.3.5 QString Gui::Widgets::DatabaseSettingsWidget::getPort ()

[DatabaseSettingsWidget::getPort](#) Return the port of the database.

Returns

Database port

8.52.3.6 bool Gui::Widgets::DatabaseSettingsWidget::isValid () [slot]

[DatabaseSettingsWidget::isValid](#) Return TRUE if all fields are correctly inputed else FALSE.

Returns

boolean

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/databasesettingswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/databasesettingswidget.cpp

8.53 Exceptions::DbException Class Reference

The [DbException](#) class for database exception : queries, db file, ...

```
#include <dbexception.h>
```

Inheritance diagram for Exceptions::DbException:



Public Member Functions

- [DbException](#) (const QString fct, const QString fctName, const QString logError, float errorCode)
[DbException::DbException](#). Construct a [DbException](#).
- virtual [~DbException](#) () throw ()
[~DbException](#)
- void [popupMessage](#) (QWidget *parent)
[DbException::popupMessage](#). Display a popup message with the message error.

8.53.1 Detailed Description

The [DbException](#) class for database exception : queries, db file, ...

Author

Antoine de Roquemaurel

8.53.2 Constructor & Destructor Documentation

8.53.2.1 [Exceptions::DbException::DbException](#) (const QString *fct*, const QString *fctName*, const QString *logError*, float *errorCode*)

[DbException::DbException](#). Construct a [DbException](#).

Parameters

| | |
|------------------|--------------------|
| <i>userError</i> | ClassName of error |
| <i>fctName</i> | Function name |
| <i>logError</i> | Message error |
| <i>errorCode</i> | Code of error |

8.53.3 Member Function Documentation

8.53.3.1 void [Exceptions::DbException::popupMessage](#) (QWidget * *parent*)

[DbException::popupMessage](#). Display a popup message with the message error.

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/exceptions/dbexception.h
- /home/travis/build/FACT-Team/FactDev/src/exceptions/dbexception.cpp

8.54 Gui::Dialogs::DialogAddCustomer Class Reference

The [DialogAddCustomer](#) class Window to add or modify a Customer.

```
#include <dialogaddcustomer.h>
```

Inheritance diagram for Gui::Dialogs::DialogAddCustomer:



Public Slots

- void [checkFields](#) ()
[DialogAddCustomer::checkFields](#) Check if fields are valid.

Public Member Functions

- [DialogAddCustomer](#) (int id=0, QWidget *parent=0)
[DialogAddCustomer::DialogAddCustomer](#) Construct a window to add/modify a Customer.
- void [fillFields](#) ()
[DialogAddCustomer::fillFields](#) If the Customer exists, fill line edits with the data of the current Customer.
- void [accept](#) ()
[DialogAddCustomer::accept](#) Valid data inputed by user and add these data in Database.
- void [reject](#) ()
[DialogAddCustomer::reject](#) Cancel the operation and close the windows.

8.54.1 Detailed Description

The [DialogAddCustomer](#) class Window to add or modify a Customer.

Author

8.54.2 Constructor & Destructor Documentation

8.54.2.1 [Gui::Dialogs::DialogAddCustomer::DialogAddCustomer](#) (int *id* = 0, QWidget * *parent* = 0) [explicit]

[DialogAddCustomer::DialogAddCustomer](#) Construct a window to add/modify a Customer.

Parameters

| | |
|---------------|----------------|
| <i>id</i> | Customer id |
| <i>parent</i> | QWidget parent |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/dialogaddcustomer.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/dialogaddcustomer.cpp

8.55 Utils::Directories Class Reference

Static Public Member Functions

- static QString [makeDirectory](#) (QDir &directory, const QString path, const QString folder) throw (Exceptions::FileException*)

MainWindow::makeDirectory If not exists make a new directory folder

8.55.1 Member Function Documentation

8.55.1.1 QString Utils::Directories::makeDirectory (QDir & *directory*, const QString *path*, const QString *folder*) throw Exceptions::FileException *) [static]

MainWindow::makeDirectory If not exists make a new directory *folder*

Parameters

| | |
|---------------|--|
| <i>path</i> | Return the path of the folder just created |
| <i>folder</i> | Folder name to create |

Returns


Path of the folder just created

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/Utils/directories.h
- /home/travis/build/FACT-Team/FactDev/src/Utils/directories.cpp

8.56 DirectoriesTests Class Reference

Inheritance diagram for DirectoriesTests:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/Utils/directoriestests.h
- /home/travis/build/FACT-Team/FactDev/tests/Utils/directoriestests.cpp

8.57 Utils::Double Class Reference

The [Double](#) class Utils functions for [Double](#) calculs.

```
#include <double.h>
```

Static Public Member Functions

- static double [round](#) (double *n*, unsigned int *d*)
round Roud a double value to d decimals
- static double **round** (double *n*, unsigned int *d*)

8.57.1 Detailed Description

The [Double](#) class Utils functions for [Double](#) calculs.

8.57.2 Member Function Documentation

8.57.2.1 double Utils::Double::round (double *n*, unsigned int *d*) [static]

round Roud a double value to d decimals

Parameters

| | |
|----------|-------------------------------------|
| <i>n</i> | The number |
| <i>d</i> | The number of decimals who you want |

Returns

The rounded value

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/utils/double.h
- /home/travis/build/FACT-Team/FactDev/src/utils/double.cpp

8.58 Gui::Widgets::Delegates::DoubleSpinBoxDelegate Class Reference

The [DoubleSpinBoxDelegate](#) class.

```
#include <doublespinboxdelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::DoubleSpinBoxDelegate:



Public Member Functions

- [DoubleSpinBoxDelegate](#) (QObject *parent=0)
DoubleSpinBoxDelegate::DoubleSpinBoxDelegate.
- QWidget * [createEditor](#) (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
DoubleSpinBoxDelegate::createEditor Return a ComboBox specified by index item defined by the parent widget and style option which are used to control how the editor widgets appears.
- void [setEditorData](#) (QWidget *editor, const QModelIndex &index) const

[*DoubleSpinBoxDelegate::setEditorData*](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index

- void [*setModelData*](#) (QWidget *editor, QAbstractItemModel *model, const QModelIndex &index) const

[*DoubleSpinBoxDelegate::setEditorData*](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index

- void [*updateEditorGeometry*](#) (QWidget *editor, const QStyleOptionViewItem &option, const QModelIndex &index) const

[*DoubleSpinBoxDelegate::updateEditorGeometry*](#) Update the editor for the item specified by index according to the style option given.

8.58.1 Detailed Description

The [*DoubleSpinBoxDelegate*](#) class.

Author

Florent Berbie

8.58.2 Constructor & Destructor Documentation

- 8.58.2.1 [*Gui::Widgets::Delegates::DoubleSpinBoxDelegate::DoubleSpinBoxDelegate \(QObject * parent = 0 \)*](#)

[*DoubleSpinBoxDelegate::DoubleSpinBoxDelegate.*](#)

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.58.3 Member Function Documentation

- 8.58.3.1 [*QWidget * Gui::Widgets::Delegates::DoubleSpinBoxDelegate::createEditor \(QWidget * parent, const QStyleOptionViewItem & option, const QModelIndex & index \) const*](#)

[*DoubleSpinBoxDelegate::createEditor*](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Returns

[*DoubleSpinBoxDelegate*](#)

- 8.58.3.2 [*void Gui::Widgets::Delegates::DoubleSpinBoxDelegate::setEditorData \(QWidget * editor, const QModelIndex & index \) const*](#)

[*DoubleSpinBoxDelegate::setEditorData*](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

Parameters

| | |
|---------------|----------------------------|
| <i>editor</i> | Data edited |
| <i>index</i> | Index of the model to edit |

8.58.3.3 void Gui::Widgets::Delegates::DoubleSpinBoxDelegate::setModelData (QWidget * *editor*, QAbstractItemModel * *model*, const QModelIndex & *index*) const

[DoubleSpinBoxDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

Parameters

| | |
|---------------|----------------------------|
| <i>editor</i> | Data edited |
| <i>index</i> | Index of the model to edit |

8.58.3.4 void Gui::Widgets::Delegates::DoubleSpinBoxDelegate::updateEditorGeometry (QWidget * *editor*, const QStyleOptionViewItem & *option*, const QModelIndex & *index*) const

[DoubleSpinBoxDelegate::updateEditorGeometry](#) Update the *editor* for the item specified by *index* according to the style *option* given.

Parameters


| | |
|---------------|-------------------------|
| <i>editor</i> | Editor widget to update |
| <i>option</i> | Style option |
| <i>index</i> | Item index |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/doublespinboxdelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/doublespinboxdelegate.cpp

8.59 FileChoseWidget Class Reference

Inheritance diagram for FileChoseWidget:



Public Member Functions

- **FileChoseWidget** (QWidget *parent=0)

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/filechosewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/filechosewidget.cpp

8.60 Exceptions::FileException Class Reference

The [FileException](#) class for file/access file exception.

```
#include <fileexception.h>
```

Public Member Functions

- [FileException](#) (const QString userError, const QString fctName, const QString logError, float errorCode)
[FileException::FileException](#). Construct a [FileException](#).
- void [popupMessage](#) (QWidget *parent)
[FileException::popupMessage](#). Display a popup message with the message error.

8.60.1 Detailed Description

The [FileException](#) class for file/access file exception.

Author

Florent Berbie

8.60.2 Constructor & Destructor Documentation

8.60.2.1 Exceptions::FileException::FileException (const QString *userError*, const QString *fctName*, const QString *logError*, float *errorCode*)

[FileException::FileException](#). Construct a [FileException](#).

Parameters

| | |
|------------------|--------------------|
| <i>userError</i> | ClassName of error |
| <i>fctName</i> | Function name |
| <i>logError</i> | Message error |
| <i>errorCode</i> | Code of error |

8.60.3 Member Function Documentation

8.60.3.1 void Exceptions::FileException::popupMessage (QWidget * *parent*)

[FileException::popupMessage](#). Display a popup message with the message error.

Parameters


| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/exceptions/fileexception.h
- /home/travis/build/FACT-Team/FactDev/src/exceptions/fileexception.cpp

8.61 Generation Class Reference

Inheritance diagram for Generation:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/generation.h
- /home/travis/build/FACT-Team/FactDev/tests/generation.cpp

8.62 Utils::HierarchicalSystem Class Reference

The [HierarchicalSystem](#) class Create class which contains hierarchical system of FactDev.

```
#include <hierarchichalsystem.h>
```

Public Member Functions

- [HierarchicalSystem](#) ()
HierarchicalSystem::HierarchicalSystem Construct a [HierarchicalSystem](#).
- void [getAllProjects](#) ()
HierarchicalSystem::getAllProjects Get all projects and add each project to Customer linked.
- void [getAllBillings](#) ()
HierarchicalSystem::getAllBillings Get all billings and add each billing to Project linked.
- void [updateData](#) ()
HierarchicalSystem::updateData Update data on Customers, Projects, Billings.
- void [addProjectToCustomer](#) (Project *p, Customer c)
HierarchicalSystem::addProjectToCustomer Add the Project p to the Customer c
- void [addBillingToProject](#) (Billing *b, Project *p)
HierarchicalSystem::addBillingToProject Add the Billing b to the Project p
- QMap< [Project](#) *, [Customer](#) > [getCustomers](#) () const
HierarchicalSystem::getCustomers Return all customers and these projects linked.
- QMap< [Billing](#) *, [Project](#) * > [getProjects](#) () const
HierarchicalSystem::getProjects Return all projects and these billing linked.

8.62.1 Detailed Description

The [HierarchicalSystem](#) class Create class which contains hierarchical system of FactDev.

Author

Florent Berbie

See Also

Customer
Project
Billing

8.62.2 Member Function Documentation

8.62.2.1 void Utils::HierarchicalSystem::addBillingToProject (Billing * *b*, Project * *p*)

[HierarchicalSystem::addBillingToProject](#) Add the Billing *b* to the Project *p*

Parameters

| | |
|----------|---------|
| <i>b</i> | Billing |
| <i>p</i> | Project |

8.62.2.2 `void Utils::HierarchicalSystem::addProjectToCustomer (Project * p, Customer c)`

[HierarchicalSystem::addProjectToCustomer](#) Add the Project *p* to the Customer *c*

Parameters

| | |
|----------|----------|
| <i>p</i> | Project |
| <i>c</i> | Customer |

8.62.2.3 `QMap< Project *, Customer > Utils::HierarchicalSystem::getCustomers () const`

[HierarchicalSystem::getCustomers](#) Return all customers and these projects linked.

Returns

Projects linked to Customers

8.62.2.4 `QMap< Billing *, Project * > Utils::HierarchicalSystem::getProjects (void) const`

[HierarchicalSystem::getProjects](#) Return all projects and these billing linked.

Returns


Billing linked to Projects

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utls/hierarchicalsistema.h
- /home/travis/build/FACT-Team/FactDev/src/utls/hierarchicalsistema.cpp

8.63 HierarchicalSystemTest Class Reference

Inheritance diagram for HierarchicalSystemTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/utls/hierarchicalsistemtest.h
- /home/travis/build/FACT-Team/FactDev/tests/utls/hierarchicalsistemtest.cpp

8.64 Gui::Widgets::CheckFields::ICheckField Class Reference

The [ICheckField](#) class Interface to check fields validity.

```
#include <icheckfield.h>
```

Inheritance diagram for Gui::Widgets::CheckFields::ICheckField:



Public Member Functions

- virtual bool [check](#) (QString text)=0
ICheckField::check Check if the field (line edit) is valid Return TRUE if the field is valid, else FALSE.

8.64.1 Detailed Description

The [ICheckField](#) class Interface to check fields validity.

8.64.2 Member Function Documentation

8.64.2.1 virtual bool Gui::Widgets::CheckFields::ICheckField::check (QString *text*) [pure virtual]

[ICheckField::check](#) Check if the field (line edit) is valid Return TRUE if the field is valid, else FALSE.

Returns

boolean Validity of the text

Implemented in [Gui::Widgets::CheckFields::CheckEmail](#), [Gui::Widgets::CheckFields::CheckPortNumber](#), [Gui::Widgets::CheckFields::CheckFieldsNumbers](#), [Gui::Widgets::CheckFields::CheckIpAddress](#), [Gui::Widgets::CheckFields::CheckWebsite](#), [Gui::Widgets::CheckFields::CheckLogin](#), [Gui::Widgets::CheckFields::CheckPhone](#), [Gui::Widgets::CheckFields::CheckPostalCode](#), [Gui::Widgets::CheckFields::CheckSiretNumber](#), [Gui::Widgets::CheckFields::CheckUntilField](#), [Gui::Widgets::CheckFields::CheckFieldsLetters](#), and [Gui::Widgets::CheckFields::CheckValidField](#).

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/checkfields/icheckfield.h

8.65 Gui::Utils::Image Class Reference

The [Image](#) class Contains generic methods on image formats.

```
#include <image.h>
```

Static Public Member Functions

- static QByteArray [imageToBytes](#) (QImage image, const QString ext="PNG")
Image::imageToBytes Return a QByteArray of the QImage image
- static QByteArray [pixmapToBytes](#) (const QPixmap pix, const QString ext="PNG")

- [*Image::pixmapToBytes*](#) Return a QByteArray of the QPixmap image
- static QImage [`pixmapToImage`](#) (const QPixmap pix)
[*Image::pixmapToImage*](#) Return a QImage of QPixmap image
- static QPixmap [`bytesToPixmap`](#) (const QByteArray bytes)
[*Image::BytesToPixmap*](#) Return QPixmap from an array of bytes.
- static QPixmap [`getImage`](#) (QString path, int width=256, int height=256)
[*Image::getImage*](#) Return a scaled image from the icon specified by it path. The image returned has a resolution of width*height (default 256*256)

8.65.1 Detailed Description

The [`Image`](#) class Contains generic methods on image formats.

Author

8.65.2 Member Function Documentation

8.65.2.1 QPixmap Gui::Utils::Image::bytesToPixmap (const QByteArray *bytes*) [static]

[*Image::BytesToPixmap*](#) Return QPixmap from an array of bytes.

Parameters

| | |
|--------------|----------------|
| <i>bytes</i> | Array of bytes |
|--------------|----------------|

Returns

QPixmap from bytes

8.65.2.2 QPixmap Gui::Utils::Image::getImage (QString *path*, int *width* = 256, int *height* = 256) [static]

[*Image::getImage*](#) Return a scaled image from the icon specified by it *path*. The image returned has a resolution of *width*height* (default 256*256)

Parameters

| | |
|---------------|-------------|
| <i>path</i> | Icon path |
| <i>width</i> | Icon width |
| <i>height</i> | Icon height |

Returns

Scaled image

8.65.2.3 QByteArray Gui::Utils::Image::imageToBytes (QImage *image*, const QString *ext* = "PNG") [static]

[*Image::imageToBytes*](#) Return a QByteArray of the QImage *image*

Parameters

| | |
|--------------|--|
| <i>image</i> | An image |
| <i>ext</i> | Extension file of the image (PNG as default value) |

Returns

array of bytes from an **QImage** image

8.65.2.4 `QByteArray Gui::Utils::Image::pixmapToBytes (const QPixmap pix, const QString ext = "PNG") [static]`

[Image::pixmapToBytes](#) Return a QByteArray of the QPixmap *image*

Parameters

| | |
|------------|--|
| <i>pix</i> | An image |
| <i>ext</i> | Extension file of the image (PNG as default value) |

Returns

array of bytes from an **QPixmap** image

8.65.2.5 `QImage Gui::Utils::Image::pixmapToImage (const QPixmap pix) [static]`

[Image::pixmapToImage](#) Return a QImage of QPixmap *image*

Parameters

| | |
|------------|----------|
| <i>pix</i> | An image |
|------------|----------|

Returns

QImage of pix

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/utils/image.h
- /home/travis/build/FACT-Team/FactDev/src/gui/utils/image.cpp

8.66 Models::IModel Class Reference

The [IModel](#) class.

```
#include <imodel.h>
```

Inheritance diagram for Models::IModel:

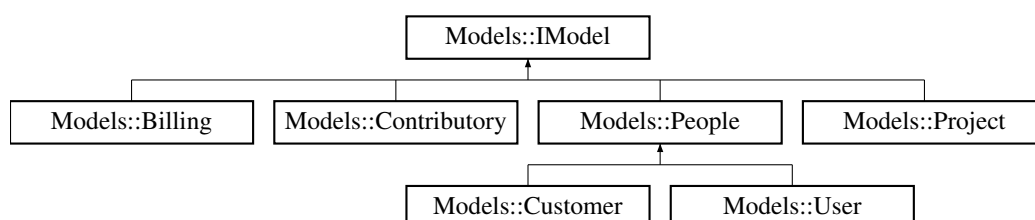

Public Member Functions

- virtual `~IModel ()`
~IModel Remove an instance of `IModel`
- virtual void `commit ()=0`
`IModel::commit` Update or insert data into the database.
- virtual void `hydrat (int id)=0`
`IModel::hydrat` Get data of the element which is specified by the identify id from the database.
- virtual void `remove ()=0`
`IModel::remove` Remove the current element in the database.
- virtual QVariantHash `getDataMap ()=0`
`getDataMap` Get all data of model with a HashMap key/value
- int `getId () const`
`IModel::getId` Return the identify of the element of the database.
- void `setId (int id)`
`IModel::setId` Replace the current identify by id
- bool `isToRemoved () const`
`toRemoved` return if object must be removed.
- void `setToRemoved (bool toRemoved)`
`setToRemoved` Change the flag for removed object

Protected Attributes

- int `_id`
Element identify.
- bool `_toRemoved`
Flag to know if the object must be removed.

8.66.1 Detailed Description

The `IModel` class.

Author

Antoine de Roquemaurel

8.66.2 Member Function Documentation

8.66.2.1 virtual QVariantHash Models::IModel::getDataMap () [pure virtual]

`getDataMap` Get all data of model with a HashMap key/value

Returns

Model's data

Implemented in `Models::Contributory`, `Models::Billing`, `Models::Project`, `Models::User`, and `Models::Customer`.

8.66.2.2 int Models::IModel::getId () const [inline]

`IModel::getId` Return the identify of the element of the database.

Returns

identity

8.66.2.3 `virtual void Models::IModel::hydrat (int id) [pure virtual]`

[IModel::hydrat](#) Get data of the element which is specified by the identify *id* from the database.

Parameters

| | |
|-----------|--|
| <i>id</i> | |
|-----------|--|

Implemented in [Models::Billing](#), [Models::Project](#), [Models::Contributory](#), [Models::User](#), and [Models::Customer](#).

8.66.2.4 `bool Models::IModel::isToRemoved () const [inline]`

toRemoved return if object must be removed.

Returns

boolean

8.66.2.5 `void Models::IModel::setId (int id) [inline]`

[IModel::setId](#) Replace the current identify by *id*

Parameters

| | |
|-----------|--------------|
| <i>id</i> | New identify |
|-----------|--------------|

8.66.2.6 `void Models::IModel::setToRemoved (bool toRemoved) [inline]`

setToRemoved Change the flag for removed object

Parameters

| | |
|------------------|--------------|
| <i>toRemoved</i> | The new flag |
|------------------|--------------|

The documentation for this class was generated from the following file:

- `/home/travis/build/FACT-Team/FactDev/src/models/imodel.h`

8.67 Utils::ItemType Class Reference

The [ItemType](#) class Item type model.

```
#include <itemtype.h>
```

Public Member Functions

- [ItemType](#) (int type, QString name)
ItemType::ItemType Construct an Item type.
- QString [getName](#) () const
ItemType::getName Get item name.
- [Models::IModel](#) * [getModel](#) (int id)
ItemType::getModel Get the databasemodel of the [ItemType](#) according to this identity *id*
- void [setName](#) (const QString &name)
ItemType::setName Modify the item name.
- int [getType](#) () const

- [`ItemType::getType`](#) *Get the type of the current item.*
- void [`setType`](#) (int type)
[`ItemType::setType`](#) *Modify the type of the current item.*

Static Public Attributes

- static const int [`CUSTOMER`](#) = 0
constant value assigned to Customer
- static const int [`PROJECT`](#) = 1
constant value assigned to Project
- static const int [`BILLING`](#) = 2
constant value assigned to Billing
- static const int [`QUOTE`](#) = 3
constant value assigned to Quote

8.67.1 Detailed Description

The [`ItemType`](#) class Item type model.

8.67.2 Constructor & Destructor Documentation

8.67.2.1 `Utils::ItemType::ItemType (int type, QString name)`

[`ItemType::ItemType`](#) Construct an Item type.

Parameters

| | |
|-------------|------------------|
| <i>type</i> | Type of the item |
| <i>name</i> | Name of the item |

8.67.3 Member Function Documentation

8.67.3.1 `Models::IModel * Utils::ItemType::getModel (int id)`

[`ItemType::getModel`](#) Get the databasemodel of the [`ItemType`](#) according to this identity *id*

Parameters

| | |
|-----------|--------------------|
| <i>id</i> | Item type identity |
|-----------|--------------------|

Returns

database model

8.67.3.2 `QString Utils::ItemType::getName () const`

[`ItemType::getName`](#) Get item name.

Returns

item name

8.67.3.3 `int Utils::ItemType::getType () const`

[ItemType::getType](#) Get the type of the current item.

Returns

type of the current item

8.67.3.4 `void Utils::ItemType::setName (const QString & name)`

[ItemType::setName](#) Modify the item name.

Parameters

| | |
|-------------|---------------|
| <i>name</i> | New Item name |
|-------------|---------------|

8.67.3.5 `void Utils::ItemType::setType (int type)`

[ItemType::setType](#) Modify the type of the current item.

Parameters


| | |
|-------------|---------------|
| <i>type</i> | New item type |
|-------------|---------------|

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/utils/itemtype.h`
- `/home/travis/build/FACT-Team/FactDev/src/utils/itemtype.cpp`

8.68 ItemTypeTest Class Reference

Inheritance diagram for ItemTypeTest:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/utils/itemtypetest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/utils/itemtypetest.cpp`

8.69 Utils::Log Class Reference

The [Log](#) class for Simple management of log.

```
#include <log.h>
```

Public Member Functions

- void [write](#) (const QString text)
[Log::write](#). Write log message in file.
- [Log](#) ()
[Log::Log](#). [Log](#) is a singleton.

Static Public Member Functions

- static [Log](#) & [instance](#) (TypeLog type=INFO)
[Log::instance](#). Return the instance of logger.

Friends

- [Log](#) & [operator<<](#) ([Log](#) &logger, const QString &text)
[operator <<](#) for log writing

8.69.1 Detailed Description

The [Log](#) class for Simple management of log.

8.69.2 Member Function Documentation

8.69.2.1 [Log](#) & [Utils::Log::instance](#) (TypeLog *type* = INFO) [static]

[Log::instance](#). Return the instance of logger.

Parameters

| | |
|-------------|------------------------------------|
| <i>type</i> | Type of log : WARNING, INFO, ERROR |
|-------------|------------------------------------|

Returns

Instance of logger.

8.69.2.2 void [Utils::Log::write](#) (const QString *text*)

[Log::write](#). Write log message in file.

Parameters

| | |
|-------------|--|
| <i>text</i> | |
|-------------|--|

8.69.3 Friends And Related Function Documentation

8.69.3.1 [Log](#) & [operator<<](#) ([Log](#) & *logger*, const QString & *text*) [friend]

[operator <<](#) for log writing

Parameters

| | |
|---------------|--------------------|
| <i>logger</i> | Instance of Logger |
| <i>text</i> | Text to write |

Returns

New logger.

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/utils/log.h
- /home/travis/build/FACT-Team/FactDev/src/utils/log.cpp

8.70 Gui::MainWindow Class Reference

The [MainWindow](#) class Main Window of the software.

```
#include <mainwindow.h>
```

Inheritance diagram for Gui::MainWindow:



Public Slots

- void [addCustomer](#) ()
MainWindow::addCustomer open window to add a new customer.
- void [editCustomer](#) ()
MainWindow::editCustomer open window to modify a customer.
- void [removeCustomer](#) ()
MainWindow::removeCustomer open a popup to confirm the deletion of a customer, if ok remove the customer.
- void [archiveCustomer](#) ()
MainWindow::archiveCustomer open a pop-up to confirm the archiving of the customer, if ok archive the customer.
- void [addQuote](#) ()
MainWindow::addQuote open window to add a new quote.
- void [addBill](#) ()
MainWindow::addBill open window to add a new bill.
- void [billingsIsPaid](#) ()
MainWindow::billingsIsPaid Define the current billing as "paid".
- void [editUser](#) ()
MainWindow::editUser modify the user.
- void [search](#) (QString s)
MainWindow::search launch a new search.
- void [addProject](#) ()
MainWindow::addProject Create a new project for a customer.
- void [removeProject](#) ()
MainWindow::removeProject Remove a project for a customer.
- void [editProject](#) ()

- [*MainWindow::editProject*](#) *Modify the customer project.*
- void [aboutQt](#) ()
 - [*MainWindow::aboutQt*](#) *show Qt's details.*
- void [aboutFact](#) ()
 - [*MainWindow::aboutFact*](#) *show FACT's details (FACT team)*
- void [aboutFactDev](#) ()
 - [*MainWindow::aboutFactDev\(\)*](#) *show FactDev's details (FactDev Software)*
- void [aboutIcons](#) ()
 - [*MainWindow::aboutIcons\(\)*](#) *show icons's details.*
- void [updateButtons](#) ()
 - [*updateButton*](#) *Update all button to disable or enabled its*
- void [editDoc](#) ()
 - [*MainWindow::editDoc*](#) *Edit the quote or bill of the project.*
- void [removeDoc](#) ()
 - [*MainWindow::removeDoc*](#) *Remove the quote or bill of the project.*
- void [copyDoc](#) ()
 - [*MainWindow::copyDoc*](#) *Copy all elements of a quote or a bill and Display these elements in a new quote or bill.*
- void [openPdf](#) ()
 - [*MainWindow::openPdf*](#) *Open the PDF file of the current Quote or Billing selected in the TableView.*
- void [computeTurnover](#) ()
 - [*MainWindow::computeTurnover*](#) *open window to allow computation of a period turnover.*
- void [globalStatistics](#) ()
 - [*MainWindow::globalStatistics.*](#)
- void [customerStatistics](#) ()
 - [*MainWindow::customerStatistics.*](#)
- void [lockProject](#) ()
 - [*lockProject*](#) *Lock the current project*

Public Member Functions

- [MainWindow](#) (QWidget *parent=0)
 - [*MainWindow:*](#) *Construct a window.*
- int [getCurrentCustomerId](#) ()
 - [*MainWindow::getCurrentCustomerId*](#) *get the selected customer.*
- int [getCurrentProjectId](#) ()
 - [*MainWindow::getCurrentProjectId*](#) *get the selected project id.*
- int [getCurrentQuoteId](#) ()
 - [*MainWindow::getCurrentQuoteId*](#) *get the selected quote id.*
- QString [getCurrentCustomerName](#) ()
 - [*MainWindow::getCurrentCustomerName*](#) *get the selected customer name in the customers' table.*
- QString [getCurrentProjectName](#) ()
 - [*MainWindow::getCurrentProjectName*](#) *get the selected project name in the table of projects.*
- int [treeLevel](#) ()
 - [*MainWindow::treeLevel*](#) *return the level of the node selected in the tree.*
- QModelIndex [rootTree](#) ()
 - [*MainWindow::rootTree*](#) *return the root of the tree "Tous les clients".*
- void [addDoc](#) (bool isBilling)
 - [*MainWindow::addDoc*](#) *open window to add a new document.*
- void [resizeEvent](#) (QResizeEvent *event)
 - [*MainWindow::resizeEvent*](#) *Resize central TableView when you resize the [MainWindow](#)*

- void [responsiveCustomerTable](#) ()
MainWindow::responsiveCustomerTable Resize the Customer TableView according it resolution.
- void [responsiveProjectTable](#) ()
MainWindow::responsiveProjectTable Resize the Project TableView according it resolution.
- void [responsiveBillingTable](#) ()
MainWindow::responsiveBillingTable Resize the Billing TableView according it resolution.
- bool [isEasterEgg](#) (const QString filter)
MainWindow::isEasterEgg Return TRUE if search filter is **FleuryMigeon42** else FALSE.

8.70.1 Detailed Description

The [MainWindow](#) class Main Window of the software.

Author

Everybody

8.70.2 Constructor & Destructor Documentation

8.70.2.1 [Gui::MainWindow::MainWindow](#) ([QWidget](#) * *parent* = 0) [[explicit](#)]

[MainWindow](#): Construct a window.

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.70.3 Member Function Documentation

8.70.3.1 void [Gui::MainWindow::addBill](#) () [[slot](#)]

[MainWindow::addBill](#) open window to add a new bill.

See Also

[AddQuoteDialog](#)

8.70.3.2 void [Gui::MainWindow::addDoc](#) (bool *isBilling*)

[MainWindow::addDoc](#) open window to add a new document.

Parameters

| | |
|-------------|---------------|
| <i>bool</i> | quote or bill |
|-------------|---------------|

See Also

[addBill](#) [addQuote](#)

8.70.3.3 void [Gui::MainWindow::addProject](#) () [[slot](#)]

[MainWindow::addProject](#) Create a new project for a customer.

See Also

[AddProjectDialog](#)

8.70.3.4 void Gui::MainWindow::addQuote () [slot]

[MainWindow::addQuote](#) open window to add a new quote.

See Also

AddQuoteDialog

8.70.3.5 void Gui::MainWindow::editUser () [slot]

[MainWindow::editUser](#) modify the user.

See Also

UserDataDialog

8.70.3.6 int Gui::MainWindow::getCurrentCustomerId ()

[MainWindow::getCurrentCustomerId](#) get the selected customer.

Returns

id of the selected customer

8.70.3.7 QString Gui::MainWindow::getCurrentCustomerName ()

[MainWindow::getCurrentCustomerName](#) get the selected customer name in the customers' table.

Returns

name of the selected customer

8.70.3.8 int Gui::MainWindow::getCurrentProjectId ()

[MainWindow::getCurrentProjectId](#) get the selected project id.

Returns

id of the selected project

8.70.3.9 QString Gui::MainWindow::getCurrentProjectName ()

[MainWindow::getCurrentProjectName](#) get the selected project name in the table of projects.

Returns

name of the selected project

8.70.3.10 int Gui::MainWindow::getCurrentQuoteId ()

[MainWindow::getCurrentQuoteId](#) get the selected quote id.

Returns

id of the selected quote

8.70.3.11 bool Gui::MainWindow::isEasterEgg (const QString *filter*)

[MainWindow::isEasterEgg](#) Return TRUE if search *filter* is **FleuryMigeon42** else FALSE.

Parameters

| | |
|---------------|---------------|
| <i>filter</i> | Search filter |
|---------------|---------------|

Returns

boolean

8.70.3.12 void Gui::MainWindow::resizeEvent (QResizeEvent * *event*)

[MainWindow::resizeEvent](#) Resize central TableView when you resize the [MainWindow](#)

Parameters

| | |
|--------------|--------------|
| <i>event</i> | Resize event |
|--------------|--------------|

8.70.3.13 QModelIndex Gui::MainWindow::rootTree ()

[MainWindow::rootTree](#) return the root of the tree "Tous les clients".

Returns

QModelIndex

8.70.3.14 void Gui::MainWindow::search (QString *s*) [slot]

[MainWindow::search](#) launch a new search.

Parameters

| | |
|----------|---------------|
| <i>s</i> | text in field |
|----------|---------------|

8.70.3.15 int Gui::MainWindow::treeLevel ()

[MainWindow::treeLevel](#) return the level of the node selected in the tree.

Returns

integer, depth of the item in tree

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/mainwindow/mainwindow.h
- /home/travis/build/FACT-Team/FactDev/src/gui/mainwindow/mainwindow.cpp

8.71 Gui::Dialogs::MessageBox Class Reference

The [MessageBox](#) class Information window with message.

```
#include <messagebox.h>
```

Inheritance diagram for Gui::Dialogs::MessageBox:



Public Member Functions

- [MessageBox](#) (QWidget *parent=0)
[MessageBox::MessageBox](#) Construt a **MessageBox**
- void [aboutFact](#) ()
[MessageBox::aboutFact](#) Defines FACT team information.
- void [aboutFactDev](#) ()
[MessageBox::aboutFactDev](#) Defines FactDev software information.
- void [aboutIcons](#) ()
[MessageBox::aboutIcons](#) Defines icons theme information.
- void [setImage](#) (QString img, int width=128, int height=128)
[MessageBox::setImage](#) Add the icon img to the current window.
- void [setText](#) (QString txt)
[MessageBox::setText](#) Add the text txt to the current window.

Static Public Member Functions

- static void [showAboutFact](#) ()
[MessageBox::showAboutFact](#) Shows window about FACT team.
- static void [showAboutFactDev](#) ()
[MessageBox::showAboutFactDev](#) Shows window about FactDev software.
- static void [showAboutIcons](#) ()
[MessageBox::showAboutIcons](#) Shows about icons theme of FactDev software.

8.71.1 Detailed Description

The [MessageBox](#) class Information window with message.

Author

Florent Berbie

8.71.2 Constructor & Destructor Documentation

8.71.2.1 [Gui::Dialogs::MessageBox::MessageBox \(QWidget * parent = 0 \)](#) [explicit]

[MessageBox::MessageBox](#) Construt a **MessageBox**

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.71.3 Member Function Documentation

8.71.3.1 void [Gui::Dialogs::MessageBox::setImage \(QString img, int width = 128, int height = 128 \)](#)

[MessageBox::setImage](#) Add the icon *img* to the current window.

Parameters

| | |
|---------------|----------------------------|
| <i>img</i> | Icon |
| <i>width</i> | Icon width (default: 128) |
| <i>height</i> | Icon height (default: 128) |

8.71.3.2 void Gui::Dialogs::MessageBox::setText (QString txt)

[MessageBox::setText](#) Add the text *txt* to the current window.

Parameters

| | |
|------------|--------------------------------|
| <i>txt</i> | Text inside the current window |
|------------|--------------------------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/messagebox.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/messagebox.cpp

8.72 Parameters Class Reference

The [Parameters](#) class Class for simple user parameters.

```
#include <parameters.h>
```

Static Public Attributes

- static const QString [DB_FILENAME](#) = "database.db"
DB_FILENAME The database sqlite file name.
- static const double [VERSION](#) = 1.0
VERSION Version number of software.

8.72.1 Detailed Description

The [Parameters](#) class Class for simple user parameters.

Author

Antoine de Roquemaurel

8.72.2 Member Data Documentation

8.72.2.1 const QString Parameters::DB_FILENAME = "database.db" [static]

[DB_FILENAME](#) The database sqlite file name.

Database file name

8.72.2.2 const double Parameters::VERSION = 1.0 [static]

[VERSION](#) Version number of software.

Application version


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/parameters.h
- /home/travis/build/FACT-Team/FactDev/src/parameters.cpp

8.73 Mustache::PartialFileLoader Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialFileLoader:



Public Member Functions

- **PartialFileLoader** (const QString &basePath)
- virtual QString [getPartial](#) (const QString &name)

8.73.1 Detailed Description

A partial fetcher when loads templates from '`<name>.mustache`' files in a given directory. Once a partial has been loaded, it is cached for future use.

8.73.2 Member Function Documentation

8.73.2.1 QString PartialFileLoader::getPartial (const QString & name) [virtual]

Returns the partial template with a given `name`.

Implements [Mustache::PartialResolver](#).


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

8.74 Mustache::PartialMap Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialMap:



Public Member Functions

- **PartialMap** (const QHash< QString, QString > &partials)
- virtual QString [getPartial](#) (const QString &name)

8.74.1 Detailed Description

A simple partial fetcher which returns templates from a map of (partial name -> template)

8.74.2 Member Function Documentation

8.74.2.1 QString PartialMap::getPartial (const QString & name) [virtual]

Returns the partial template with a given `name`.

Implements [Mustache::PartialResolver](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

8.75 Mustache::PartialResolver Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::PartialResolver:



Public Member Functions

- virtual QString [getPartial](#) (const QString &name)=0

8.75.1 Detailed Description

Interface for fetching template partials.

8.75.2 Member Function Documentation

8.75.2.1 virtual QString Mustache::PartialResolver::getPartial (const QString & name) [pure virtual]

Returns the partial template with a given `name`.

Implemented in [Mustache::PartialFileLoader](#), and [Mustache::PartialMap](#).

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h

8.76 Generator::PdfGenerator Class Reference

The [PdfGenerator](#) class Generator of PDF files.

```
#include <pdfgenerator.h>
```

Public Member Functions

- [PdfGenerator](#) (QString pdflatexPath="pdflatex")
[PdfGenerator::PdfGenerator](#) Construct a [PdfGenerator](#).
- void [generate](#) (QString inputDir, QString filename)
[PdfGenerator::generate](#) Generate a PDF of the file named filename into the directory inputDir

8.76.1 Detailed Description

The [PdfGenerator](#) class Generator of PDF files.

8.76.2 Constructor & Destructor Documentation

8.76.2.1 Generator::PdfGenerator::PdfGenerator (QString pdflatexPath = "pdflatex")

[PdfGenerator::PdfGenerator](#) Construct a [PdfGenerator](#).

Parameters

| | |
|---------------------|--|
| <i>pdflatexPath</i> | Path to the command to generate PDF file |
|---------------------|--|

8.76.3 Member Function Documentation

8.76.3.1 void Generator::PdfGenerator::generate (QString inputDir, QString filename)

[PdfGenerator::generate](#) Generate a PDF of the file named filename into the directory inputDir

Parameters

| | |
|-----------------|--|
| <i>inputDir</i> | Directory where is store the PDF generated |
| <i>filename</i> | File name |

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/generator/pdfgenerator.h
- /home/travis/build/FACT-Team/FactDev/src/generator/pdfgenerator.cpp

8.77 Models::People Class Reference

The [People](#) class [People](#).

```
#include <people.h>
```

Inheritance diagram for Models::People:

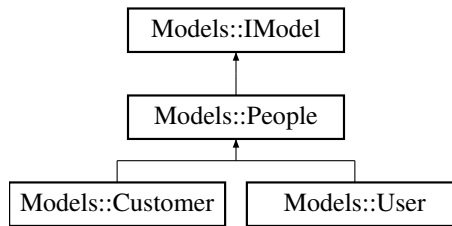

Public Member Functions

- [People](#) ()
People::People Construct a *People*.
- [People](#) (int id)
People::People Construct a *People*.
- [QString](#) [getFirstname](#) () const
People::getFirstname Return the *People* firstname.
- void [setFirstname](#) (const [QString](#) &firstname)
People::setFirstnament Modify the *People* firstname
- [QString](#) [getLastname](#) () const
People::getLastname Return the *People* lastname.
- void [setLastname](#) (const [QString](#) &lastname)
People::setLastname Modify the *People* lastname
- [QString](#) [getCompany](#) () const
People::getCompany Return the *People* company.
- void [setCompany](#) (const [QString](#) &company)
People::setCompany Modify the *People* company name.
- [QString](#) [getAddress](#) () const
People::getAddress Return the company address (Number and name of street)
- void [setAddress](#) (const [QString](#) &address)
People::setAddress Modify the *People* company address
- [QString](#) [getPostalCode](#) () const
People::getPostalCode Return the postal code.
- void [setPostalCode](#) (const [QString](#) &postalCode)
People::setPostalCode Modify the postal code postalCode
- [QString](#) [getCity](#) () const
People::getCity Return the city.
- void [setCity](#) (const [QString](#) &city)
People::setCity Modify the city
- [QString](#) [getCountry](#) () const
People::getCountry Return the country of the *People*.
- void [setCountry](#) (const [QString](#) &country)
People::setCountry Replace the country of the *People* by country
- [QString](#) [getEmail](#) () const
People::getEmail Return the *People* professional email
- void [setEmail](#) (const [QString](#) &email)
People::setEmail Modify the *People* professional email
- [QString](#) [getPhone](#) () const
People::getPhone Return the number of the desktop phone.
- void [setPhone](#) (const [QString](#) &phone)
People::setPhone Modify the number of the desktop phone

- QString [getMobilePhone](#) () const
People::getMobilePhone Return the number of the professional mobile phone.
- void [setMobilePhone](#) (const QString &mobilePhone)
People::setMobilePhone Modify the number of the professional [People](#) mobile phone mobilePhone
- QString [getFax](#) () const
People::getFax Return the fax number.
- void [setFax](#) (const QString &fax)
People::setFax Replace the current fax number by fax
- virtual QPixmap * [getImage](#) () const
People::getImage Return the compagny image.
- virtual void [setImage](#) (QPixmap *image)
People::setImage Modify the current compagny image by image
- QString [getExtensionImage](#) () const
People::getExtensionImage Return the extension of the image file.
- void [setExtensionImage](#) (const QString &ext)
People::setExtensionImage Change the extension of the image file by the new ext
- QString [getAddressComplement](#) () const
getAddressComplement Return the address complement (Building, Appartment, ...)
- void [setAddressComplement](#) (const QString &addressComplement)
setAddressComplement Change the address complement
- QString [getWebsite](#) () const
getWebsite Website of [People](#)
- void [setWebsite](#) (const QString &website)
setWebsite Change the url of website
- bool [operator==](#) (const [People](#) &c)
People::operator == Re-define the operator "==" to compare if the current [People](#) is the same to the other [People](#) c
Return TRUE if both Peoples are the same, else FALSE.
- bool [operator!=](#) (const [People](#) &c)
People::operator != Re-define the operator "!=" to compare if the current [People](#) is differnt to the other [People](#) c
Return TRUE if both Peoples are different, else FALSE.

Protected Attributes

- QPixmap * [_image](#)
Compagny image.

8.77.1 Detailed Description

The [People](#) class [People](#).

8.77.2 Member Function Documentation

8.77.2.1 QString Models::People::getAddress () const

[People::getAddress](#) Return the company address (Number and name of street)

Returns

Address company

8.77.2.2 QString Models::People::getAddressComplement () const

getAddressComplement Return the address complement (Building, Appartment, ...)

Returns

The address complement

8.77.2.3 QString Models::People::getCity () const

[People::getCity](#) Return the city.

Returns

city

8.77.2.4 QString Models::People::getCompany () const

[People::getCompany](#) Return the [People](#) company.

Returns

New company name

8.77.2.5 QString Models::People::getCountry () const

[People::getCountry](#) Return the country of the [People](#).

Returns

country of the [People](#)

8.77.2.6 QString Models::People::getEmail () const

[People::getEmail](#) Return the [People](#) professional *email*

Returns

professional email

8.77.2.7 QString Models::People::getExtensionImage () const

[People::getExtensionImage](#) Return the extension of the image file.

Returns

Extension of image file

8.77.2.8 QString Models::People::getFax () const

[People::getFax](#) Return the fax number.

Returns

fax number

8.77.2.9 QString Models::People::getFirstname () const

[People::getFirstname](#) Return the [People](#) firstname.

Returns

[People](#) firstname

8.77.2.10 QPixmap * Models::People::getImage () const [virtual]

[People::getImage](#) Return the compagny image.

Returns

compagny image

8.77.2.11 QString Models::People::getLastname () const

[People::getLastname](#) Return the [People](#) lastname.

Returns

[People](#) lastname

8.77.2.12 QString Models::People::getMobilePhone () const

[People::getMobilePhone](#) Return the number of the professional mobile phone.

Returns

number of mobile phone

8.77.2.13 QString Models::People::getPhone () const

[People::getPhone](#) Return the number of the desktop phone.

Returns

number of the desktop phone

8.77.2.14 QString Models::People::getPostalCode () const

[People::getPostalCode](#) Return the postal code.

Returns

postal code

8.77.2.15 QString Models::People::getWebsite () const

[getWebsite](#) Website of [People](#)

Returns

The website url

8.77.2.16 `bool Models::People::operator!=(const People & c)`

`People::operator ==` Re-define the operator "!=" to compare if the current `People` is different to the other `People` `c`
Return TRUE if both Peoples are different, else FALSE.

Parameters

| | |
|----------|-------------------|
| <i>c</i> | People to compare |
|----------|-------------------|

Returns

boolean

8.77.2.17 bool Models::People::operator== (const People & *c*)

People::operator == Re-define the operator "==" to compare if the current **People** is the same to the other **People** *c*
Return TRUE if both Peoples are the same, else FALSE.

Parameters

| | |
|----------|-------------------|
| <i>c</i> | People to compare |
|----------|-------------------|

Returns

boolean

8.77.2.18 void Models::People::setAddress (const QString & *address*)

People::setAddress Modify the **People** company *address*

Parameters

| | |
|----------------|---|
| <i>address</i> | Company address (name and number of street) |
|----------------|---|

8.77.2.19 void Models::People::setAddressComplement (const QString & *addressComplement*)

setAddressComplement Change the address complement

Parameters

| | |
|---------------------------|--------------------|
| <i>address-Complement</i> | The new complement |
|---------------------------|--------------------|

8.77.2.20 void Models::People::setCity (const QString & *city*)

People::setCity Modify the *city*

Parameters

| | |
|-------------|----------------------|
| <i>city</i> | Company city address |
|-------------|----------------------|

8.77.2.21 void Models::People::setCompany (const QString & *company*)

People::setCompany Modify the **People** *company* name.

Parameters

| | |
|----------------|---|
| <i>company</i> | New People company name |
|----------------|---|

8.77.2.22 void Models::People::setCountry (const QString & *country*)

[People::setCountry](#) Replace the country of the [People](#) by *country*

Parameters

| | |
|----------------|---|
| <i>country</i> | New country of the People |
|----------------|---|

8.77.2.23 void Models::People::setEmail (const QString & *email*)

[People::setEmail](#) Modify the [People](#) professional *email*

Parameters

| | |
|--------------|---|
| <i>email</i> | The People professional email |
|--------------|---|

8.77.2.24 void Models::People::setExtensionImage (const QString & *ext*)

[People::setExtensionImage](#) Change the extension of the image file by the new *ext*

Parameters

| | |
|------------|----------------|
| <i>ext</i> | Extension file |
|------------|----------------|

8.77.2.25 void Models::People::setFax (const QString & *fax*)

[People::setFax](#) Replace the current fax number by *fax*

Parameters

| | |
|------------|----------------|
| <i>fax</i> | new fax number |
|------------|----------------|

8.77.2.26 void Models::People::setFirstname (const QString & *firstname*)

[People::setFirstname](#) Modify the [People](#) *firstname*

Parameters

| | |
|------------------|--------------------------------------|
| <i>firstname</i> | New People firstname |
|------------------|--------------------------------------|

8.77.2.27 void Models::People::setImage (QPixmap * *image*) [virtual]

[People::setImage](#) Modify the current compagny image by *image*

Parameters

| | |
|--------------|----------------|
| <i>image</i> | Compagny image |
|--------------|----------------|

Reimplemented in [Models::User](#), and [Models::Customer](#).

8.77.2.28 void Models::People::setLastname (const QString & *lastname*)

[People::setLastname](#) Modify the [People](#) *lastname*

Parameters

| | |
|-----------------|-------------------------------------|
| <i>lastname</i> | New People lastname |
|-----------------|-------------------------------------|

8.77.2.29 void Models::People::setMobilePhone (const QString & *mobilePhone*)

[People::setMobilePhone](#) Modify the number of the professional [People](#) mobile phone *mobilePhone*

Parameters

| | |
|--------------------|---|
| <i>mobilePhone</i> | Number of the professional mobile phone |
|--------------------|---|

8.77.2.30 void Models::People::setPhone (const QString & *phone*)

[People::setPhone](#) Modify the number of the desktop *phone*

Parameters

| | |
|--------------|-----------------------------|
| <i>phone</i> | Number of the desktop phone |
|--------------|-----------------------------|

8.77.2.31 void Models::People::setPostalCode (const QString & *postalCode*)

[People::setPostalCode](#) Modify the postal code *postalCode*

Parameters

| | |
|-------------------|-----------------|
| <i>postalCode</i> | New postal code |
|-------------------|-----------------|

8.77.2.32 void Models::People::setWebsite (const QString & *website*)

setWebsite Change the url of website

Parameters

| | |
|----------------|-------------|
| <i>website</i> | The new URL |
|----------------|-------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/people.h
- /home/travis/build/FACT-Team/FactDev/src/models/people.cpp

8.78 Utils::pointers Class Reference

The pointers class.

```
#include <pointers.h>
```

Static Public Member Functions

- static void [deleteIfNotNull](#) (QObject *p)
[pointers::deleteIfNotNull](#) Remove to the memory the object p if it is not null

8.78.1 Detailed Description

The pointers class.

Author

Antoine de Roquemaurel

8.78.2 Member Function Documentation

8.78.2.1 `void Utils::pointers::deleteIfNotNull (QObject * p) [static]`

`pointers::deleteIfNotNull` Remove to the memory the object *p* if it is not null

Parameters


| | |
|----------|-----------|
| <i>p</i> | An object |
|----------|-----------|

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/Utils/pointers.h`
- `/home/travis/build/FACT-Team/FactDev/src/Utils/pointers.cpp`

8.79 PointersTest Class Reference

Inheritance diagram for PointersTest:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/Utils/pointerstest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/Utils/pointerstest.cpp`

8.80 Gui::Widgets::Popup Class Reference

Class for display popup quickly.

```
#include <popup.h>
```

Static Public Member Functions

- static void `toImplement` (QString, QWidget *)
Popup::toImplement Method to display a critical message : feature is not implemented now.

8.80.1 Detailed Description

Class for display popup quickly.

Author

Antoine de Roquemaurel

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/popup.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/popup.cpp

8.81 Models::Project Class Reference

The [Project](#) class : [Project](#) linked to a [Customer](#).

```
#include <project.h>
```

Inheritance diagram for Models::Project:



Public Member Functions

- [Project](#) ()
Project::Project Construct a [Project](#).
- [Project](#) (QString name)
Project::project Construct a project with a name.
- [Project](#) (int id)
Project::Project Construct a [Project](#) which is specified by an id
- virtual [~Project](#) ()
~Project Desctruct project object
- void [commit](#) ()
Project::commit Update project data in the database.
- void [hydrat](#) (int id)
Project::hydrat Insert project data which is specified by id in the database.
- void [remove](#) ()
Project::remove Remove the current project.
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- void [lock](#) ()
lock Lock the current project and change endDate by today();
- bool [isLocked](#) () const
isLocked Return true if the project is locked : end Date of project is passed.
- void [unlock](#) ()
unlock Unlock the current project;
- QString [getName](#) () const
Project::getName Return the project name.
- void [setName](#) (const QString &name)
Project::setName Modify the project name
- QString [getDescription](#) () const

- *Project::getDescription* Return a project description.
- void *setDescription* (const QString &description)
- *Project::setDescription* Modify the project description
- QDate *getBeginDate* () const
- *Project::getBeginDate* return the date of creation of the **Project**
- void *setBeginDate* (QDate beginDate)
- *Project::setBeginDate* Modify beginDate of a **Project**
- QDate *getEndDate* () const
- *Project::getEndDate* Return the endDate of the **Project**
- void *setEndDate* (QDate endDate)
- *Project::setEndDate* Modify endDate of **Project**
- double *getCost* () const
- *Project::getCost* Return the **Project** cost
- double *getDailyRate* () const
- *Project::getDailyRate* Return the daily rate estimated for this project.
- void *setDailyRate* (double dailyRate)
- *Project::setDailyRate* Modify the daily rate dailyRate of the current project.
- QSharedPointer< **Customer** > *getCustomer* () const
- *Project::getCustomer* Return the reference to the customer linked to this project.
- void *setCustomer* (QSharedPointer< **Customer** > customer)
- *Project::setCustomer* Modify the customer linked to this project.
- bool *operator==* (const **Project** &p)
- *Project::operator ==* Re-define the operator "==" to compare if the current project is the same to the other **Project** p
Return TRUE if both projects are the same, else FALSE.
- bool *operator<* (const **Project** &p) const
- *Project::operator <* defines the operator "<" to compare two **Project** and to see if the first is anterior to the second.
- bool *operator!=* (const **Project** &p)
- *Project::operator !=* Re-define the operator "!=" to compare if the current project is different to the other **Project** p
Return TRUE if both projects are different, else FALSE.

Additional Inherited Members

8.81.1 Detailed Description

The **Project** class : **Project** linked to a **Customer**.

Author

Florent Berbie

See Also

[IModel](#)

8.81.2 Constructor & Destructor Documentation

8.81.2.1 Models::Project::Project (int id)

Project::Project Construct a **Project** which is specified by an *id*

Parameters

| | |
|-----------|--|
| <i>id</i> | |
|-----------|--|

8.81.3 Member Function Documentation

8.81.3.1 QDate Models::Project::getBeginDate () const

[Project::getBeginDate](#) return the date of creation of the [Project](#)

Returns

the begin date of the [Project](#)

8.81.3.2 double Models::Project::getCost () const

[Project::getCost](#) Return the [Project](#) cost

Returns

the project cost

8.81.3.3 QSharedPointer< Customer > Models::Project::getCustomer () const

[Project::getCustomer](#) Return the reference to the customer linked to this project.

Returns

customer linked to this project

8.81.3.4 double Models::Project::getDailyRate () const

[Project::getDailyRate](#) Return the daily rate estimated for this project.

Returns

the daily rate linket to the current project

8.81.3.5 QVariantHash Models::Project::getDataMap () [virtual]

[getDataMap](#) Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.81.3.6 QString Models::Project::getDescription () const

[Project::getDescription](#) Return a project description.

Returns

project description

8.81.3.7 QDate Models::Project::getEndDate () const

[Project::getEndDate](#) Return the *endDate* of the [Project](#)

Returns

the end date of the project

8.81.3.8 QString Models::Project::getName () const

[Project::getName](#) Return the project name.

Returns

project name

8.81.3.9 void Models::Project::hydrat (int *id*) [virtual]

[Project::hydrat](#) Insert project data which is specified by *id* in the database.

Parameters

| | |
|-----------|----------------------------------|
| <i>id</i> | Project identify |
|-----------|----------------------------------|

Implements [Models::IModel](#).

8.81.3.10 bool Models::Project::operator!= (const [Project](#) & *p*)

[Project::operator !=](#) Re-define the operator "!=" to compare if the current project is differnt to the other [Project](#) *p*
Return TRUE if both projects are different, else FALSE.

Parameters

| | |
|----------|------------------------------------|
| <i>c</i> | Project to compare |
|----------|------------------------------------|

Returns

boolean

8.81.3.11 bool Models::Project::operator< (const [Project](#) & *p*) const

[Project::operator <](#) defines the operator "<" to compare two [Project](#) and to see if the first is anterior to the second.

Parameters

| | |
|----------|---|
| <i>b</i> | the Project to compare with the current Project |
|----------|---|

Returns

true if the [Project](#) are different else false

8.81.3.12 bool Models::Project::operator== (const [Project](#) & *p*)

[Project::operator ==](#) Re-define the operator "==" to compare if the current project is the same to the other [Project](#) *p*
Return TRUE if both projects are the same, else FALSE.

Parameters

| | |
|----------|------------------------------------|
| <i>c</i> | Project to compare |
|----------|------------------------------------|

Returns

boolean

8.81.3.13 void Models::Project::setBeginDate (QDate *beginDate*)

[Project::setBeginDate](#) Modify *beginDate* of a [Project](#)

Parameters

| | |
|------------------|---|
| <i>beginDate</i> | the new date of creation of the project |
|------------------|---|

8.81.3.14 void Models::Project::setCustomer (QSharedPointer< Customer > *customer*)

[Project::setCustomer](#) Modify the *customer* linked to this project.

Parameters

| | |
|-----------------|---|
| <i>customer</i> | New customer associated to this project |
|-----------------|---|

8.81.3.15 void Models::Project::setDailyRate (double *dailyRate*)

[Project::setDailyRate](#) Modify the daily rate *dailyRate* of the current project.

Parameters

| | |
|------------------|--|
| <i>dailyRate</i> | New daily rate associated to the current project |
|------------------|--|

8.81.3.16 void Models::Project::setDescription (const QString & *description*)

[Project::setDescription](#) Modify the project *description*

Parameters

| | |
|--------------------|-------------------------|
| <i>description</i> | New project description |
|--------------------|-------------------------|

8.81.3.17 void Models::Project::setEndDate (QDate *endDate*)

[Project::setEndDate](#) Modify *endDate* of [Project](#)

Parameters

| | |
|----------------|---------------------------------|
| <i>endDate</i> | the new end date of the project |
|----------------|---------------------------------|

8.81.3.18 void Models::Project::setName (const QString & *name*)

[Project::setName](#) Modify the project *name*

Parameters

| | |
|-------------|------------------------------|
| <i>name</i> | Project name |
|-------------|------------------------------|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/project.h
- /home/travis/build/FACT-Team/FactDev/src/models/project.cpp

8.82 Gui::Widgets::Delegates::ProjectComboDelegate Class Reference

The [ProjectComboDelegate](#) class.

```
#include <projectcombodelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::ProjectComboDelegate:

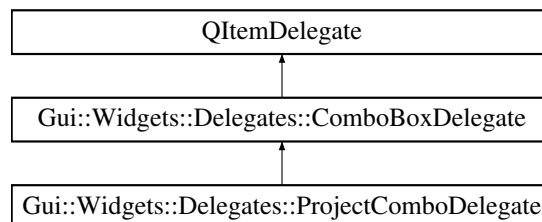

Public Member Functions

- [ProjectComboDelegate](#) (QSharedPointer< [Models::Customer](#) > c, QObject *parent=0)
[ProjectComboDelegate::ProjectComboDelegate](#).
- QWidget * [createEditor](#) (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
[ProjectComboDelegate::createEditor](#) Return a ComboBox specified by index item defined by the parent widget and style option which are used to control how the editor widgets appears.
- void [paint](#) (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const
[ProjectComboDelegate::paint](#) Renders the delegate using the given painter and style option for the item specified by index
- void [removeInCombo](#) (QList< int > &l)
[ProjectComboDelegate::removeInCombo](#) Remove the items contained in the list l into the current ComboBox.
- QMap< int, [Models::Project](#) > [getProjects](#) () const
[ProjectComboDelegate::getProjects](#) Return a list of projects linked to a Customer ID.
- bool [isLocked](#) () const
[ProjectComboDelegate::isLocked](#) Return TRUE if is locked else FALSE.
- void [setLocked](#) (bool locked)
[ProjectComboDelegate::setLocked](#) Change the state of the lock by a new value locked

8.82.1 Detailed Description

The [ProjectComboDelegate](#) class.

8.82.2 Constructor & Destructor Documentation

8.82.2.1 `Gui::Widgets::Delegates::ProjectComboDelegate::ProjectComboDelegate (QSharedPointer< Models::Customer > c, QObject * parent = 0)`

[ProjectComboDelegate::ProjectComboDelegate.](#)

Parameters

| | |
|---------------|--|
| <i>c</i> | |
| <i>parent</i> | |

8.82.3 Member Function Documentation

8.82.3.1 `QWidget * Gui::Widgets::Delegates::ProjectComboDelegate::createEditor (QWidget * parent, const QStyleOptionViewItem & option, const QModelIndex & index) const` [virtual]

[ProjectComboDelegate::createEditor](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Returns

ComboBox

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

8.82.3.2 `QMap< int, Models::Project > Gui::Widgets::Delegates::ProjectComboDelegate::getProjects () const`

[ProjectComboDelegate::getProjects](#) Return a list of projects linked to a Customer ID.

Returns

Projets of a Customer

8.82.3.3 `bool Gui::Widgets::Delegates::ProjectComboDelegate::isLocked () const`

[ProjectComboDelegate::isLocked](#) Return TRUE if is locked else FALSE.

Returns

boolean

8.82.3.4 `void Gui::Widgets::Delegates::ProjectComboDelegate::paint (QPainter * painter, const QStyleOptionViewItem & option, const QModelIndex & index) const` [virtual]

[ProjectComboDelegate::paint](#) Renders the delegate using the given *painter* and style *option* for the item specified by *index*

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |

| | |
|-----------------------|-------------------|
| index | Index for editing |
|-----------------------|-------------------|

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

8.82.3.5 void [Gui::Widgets::Delegates::ProjectComboDelegate::setLocked](#) (bool *locked*)

[ProjectComboDelegate::setLocked](#) Change the state of the lock by a new value *locked*

Parameters

| | |
|---------------|--|
| <i>locked</i> | |
|---------------|--|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/projectcombodelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/projectcombodelegate.cpp

8.83 Gui::Widgets::WdgModels::ProjectContributoriesTableModel Class Reference

The [ProjectContributoriesTableModel](#) class Table model of contributories linked to projects.

```
#include <projectcontributoriестablemodel.h>
```

Inheritance diagram for [Gui::Widgets::WdgModels::ProjectContributoriesTableModel](#):



Public Member Functions

- [ProjectContributoriesTableModel](#) (QObject *parent=0)
ProjectContributoriesTableModel::ProjectContributoriesTableModel Construct a [ProjectContributoriesTableModel](#).
- int [rowCount](#) (const QModelIndex &) const
ProjectContributoriesTableModel::rowCount Number of contributories row.
- int [columnCount](#) (const QModelIndex &) const
ProjectContributoriesTableModel::columnCount Number of column of a contributory.
- QVariant [data](#) (const QModelIndex &index, int role) const
ProjectContributoriesTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role) const
ProjectContributoriesTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
ProjectContributoriesTableModel::setData Change data of a cell.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
ProjectContributoriesTableModel::flags Differents table flags.
- void [append](#) (QPair< [Models::Project](#) *, [Models::Rate](#) > p)
ProjectContributoriesTableModel::append Add a new rate p to a Project.
- void [append](#) ()
ProjectContributoriesTableModel::append Add the current element to the list.
- bool [allProjectsChosen](#) ()
ProjectContributoriesTableModel::allProjectsChosen Return TRUE if all projects have been selected else FALSE.

- `QList< int > & getSelectedProjects ()`
ProjectContributoriesTableModel::getSelectedProjects Return the list of the Project id which are selected.
- `void remove (int index)`
ProjectContributoriesTableModel::remove Remove the element to the index
- `QPair< Models::Project *, Models::Rate > getProject (const int row)`
ProjectContributoriesTableModel::getProject Return the project and it rate linked which correspond to the row
- `QList< QPair< Models::Project *, Models::Rate > > getProjects (void)`
ProjectContributoriesTableModel::getProjects Return a list of the set of projects and their rates linked.

8.83.1 Detailed Description

The [ProjectContributoriesTableModel](#) class Table model of contributories linked to projects.

Author

Antoine de Roquemaurel

8.83.2 Constructor & Destructor Documentation

8.83.2.1 `Gui::Widgets::WdgModels::ProjectContributoriesTableModel (QObject * parent = 0)`

[ProjectContributoriesTableModel::ProjectContributoriesTableModel](#) Construct a [ProjectContributoriesTableModel](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Parent widget |
|---------------|---------------|

8.83.3 Member Function Documentation

8.83.3.1 `bool Gui::Widgets::WdgModels::ProjectContributoriesTableModel::allProjectsChosen ()`

[ProjectContributoriesTableModel::allProjectsChosen](#) Return TRUE if all projects have been selected else FALSE.

Returns

boolean All projects selected

8.83.3.2 `void Gui::Widgets::WdgModels::ProjectContributoriesTableModel::append (QPair< Models::Project *, Models::Rate > p)`

[ProjectContributoriesTableModel::append](#) Add a new rate *p* to a Project.

Parameters

| | |
|----------|--|
| <i>p</i> | |
|----------|--|

8.83.3.3 `int Gui::Widgets::WdgModels::ProjectContributoriesTableModel::columnCount (const QModelIndex &) const`

[ProjectContributoriesTableModel::columnCount](#) Number of column of a contributory.

Returns

The number of column

8.83.3.4 `QVariant Gui::Widgets::WdgModels::ProjectContributoriesTableModel::data (const QModelIndex & index, int role) const`

[ProjectContributoriesTableModel::data](#) Obtains data of a specify cell.

Parameters

| | |
|--------------|---------------------------|
| <i>index</i> | The cell who we want data |
| <i>role</i> | The role of set |

Returns

The data of cell

8.83.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::ProjectContributoriesTableModel::flags (const QModelIndex & index) const`

[ProjectContributoriesTableModel::flags](#) Differents table flags.

Parameters

| | |
|--------------|------------------------------------|
| <i>index</i> | The cell who we want to know flags |
|--------------|------------------------------------|

Returns

Flags

8.83.3.6 `QPair< Models::Project *, Models::Rate > Gui::Widgets::WdgModels::ProjectContributoriesTableModel::getProject (const int row)`

[ProjectContributoriesTableModel::getProject](#) Return the project and it rate linked which correspond to the *row*

Parameters

| | |
|------------|---------------------------|
| <i>row</i> | Row of the project to get |
|------------|---------------------------|

Returns

a Project and it rate

8.83.3.7 `QList< QPair< Models::Project *, Models::Rate > > Gui::Widgets::WdgModels::ProjectContributoriesTableModel::getProjects (void)`

[ProjectContributoriesTableModel::getProjects](#) Return a list of the set of projects and their rates linked.

Returns

List of Projects and Rates linked

8.83.3.8 `QList< int > & Gui::Widgets::WdgModels::ProjectContributoriesTableModel::getSelectedProjects ()`

[ProjectContributoriesTableModel::getSelectedProjects](#) Return the list of the Project id which are selected.

Returns

List of ID Project

8.83.3.9 `QVariant Gui::Widgets::WdgModels::ProjectContributoriesTableModel::headerData (int section, Qt::Orientation orientation, int role) const`

[ProjectContributoriesTableModel::headerData](#) Obtains header title of table.

Parameters

| | |
|--------------------|-----------------------|
| <i>section</i> | The number of column |
| <i>orientation</i> | The table orientation |
| <i>role</i> | |

Returns

The Title header of column

8.83.3.10 `void Gui::Widgets::WdgModels::ProjectContributoriesTableModel::remove (int index)`

[ProjectContributoriesTableModel::remove](#) Remove the element to the *index*

Parameters

| | |
|--------------|--------------------------------|
| <i>index</i> | Index of the element to remove |
|--------------|--------------------------------|

8.83.3.11 `int Gui::Widgets::WdgModels::ProjectContributoriesTableModel::rowCount (const QModelIndex &) const`

[ProjectContributoriesTableModel::rowCount](#) Number of contributories row.

Returns

The number of contributories

8.83.3.12 `bool Gui::Widgets::WdgModels::ProjectContributoriesTableModel::setData (const QModelIndex & index, const QVariant & value, int role = Qt::EditRole)`

[ProjectContributoriesTableModel::setData](#) Change data of a cell.

Parameters

| | |
|--------------|-------------------------|
| <i>index</i> | The cell to change data |
| <i>value</i> | The new value |
| <i>role</i> | The role of cell |

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectcontributoriestablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectcontributoriestablemodel.cpp

8.84 Databases::ProjectDatabase Class Reference

The [ProjectDatabase](#) class Project table database.

```
#include <projectdatabase.h>
```

Inheritance diagram for Databases::ProjectDatabase:



Public Member Functions

- [Models::Project](#) * [getProject](#) (const int pld)
ProjectDatabase::getProject Get informations about the project identified by 'pld'.
- [Models::Project](#) * [getProject](#) (QStringQuery &q)
ProjectDatabase::getProject.
- int [addProject](#) (const [Models::Project](#) &)
ProjectDatabase::addProject Add the project 'pProject' to the database.
- void [updateProject](#) (const [Models::Project](#) &)
ProjectDatabase::updateProject Update informations about the project.
- void [removeProject](#) (const int pld)
removeProject Remove the project with the id 'pld'
- int [getNbProjects](#) ()
ProjectDatabase::getNbProjects Return the number of projects existing.
- int [getNbProjects](#) (const int customerId)
Get the number of projects.
- QMap< int, [Models::Project](#) > [getProjectsOfCustomer](#) (QSharedPointer< [Models::Customer](#) > c, const bool projectLocked=true)
getProjectsOfCustomer Return all projects of a customer
- QList< [Models::Project](#) > [getProjects](#) (const int customerId)
getProjects Return all projects of a customer
- [WdgModels::ProjectsTableModel](#) * [getProjectsTable](#) (const int pld) throw (DbException*)
getProjectsTable Return all projects of a customer in QStandardItemModel
- QSharedPointer< [Project](#) > [updateProject](#) (QStringQuery &q)
getProject Obtain a project without new query
- QList< [Project](#) * > [getAllProjects](#) ()
Project::getAllProjects Return the list of projects.
- double [getCostProjects](#) (QList< [Project](#) * > projects)
ProjectDatabase::getCostProjects compute the cost of the project list given in parameter.

Static Public Member Functions

- static [ProjectDatabase](#) * [instance](#) () throw (DbException*)
ProjectDatabase::getInstance Return an instance of [ProjectDatabase](#).

Additional Inherited Members

8.84.1 Detailed Description

The [ProjectDatabase](#) class Project table database.

Author

Florent Berbie

See Also

[Database](#)
[Project](#)

8.84.2 Member Function Documentation

8.84.2.1 `int Databases::ProjectDatabase::addProject (const Models::Project & pProject)`

[ProjectDatabase::addProject](#) Add the project 'pProject' to the database.

Returns

project id

8.84.2.2 `QList< Project * > Databases::ProjectDatabase::getAllProjects ()`

[Project::getAllProjects](#) Return the list of projects.

Returns

Projects list

8.84.2.3 `double Databases::ProjectDatabase::getCostProjects (QList< Project * > projects)`

[ProjectDatabase::getCostProjects](#) compute the cost of the project list given in parameter.

Parameters

| | |
|-----------------|----------------------|
| <i>projects</i> | the list of projects |
|-----------------|----------------------|

Returns

the cost of the list given

8.84.2.4 `int Databases::ProjectDatabase::getNbProjects ()`

[ProjectDatabase::getNbProjects](#) Return the number of projects existing.

Returns

number of projects

8.84.2.5 `int Databases::ProjectDatabase::getNbProjects (const int customerId)`

Get the number of projects.

Parameters

| | |
|-------------------|--|
| <i>customerId</i> | If customerId isn't specified if it's not valid, get all projects else get the specified customer projects |
|-------------------|--|

Returns

Number of projects in the database for all or for a customer

8.84.2.6 Models::Project * Databases::ProjectDatabase::getProject (const int *pld*)

[ProjectDatabase::getProject](#) Get informations about the project identified by 'pld'.

Parameters

| | |
|------------|---------|
| <i>pld</i> | project |
|------------|---------|

Returns

the project

8.84.2.7 Models::Project * Databases::ProjectDatabase::getProject (QSqlQuery & *q*)

[ProjectDatabase::getProject](#).

Parameters

| | |
|----------|--|
| <i>q</i> | |
|----------|--|

Returns

8.84.2.8 QList< Project > Databases::ProjectDatabase::getProjects (const int *customerId*)

getProjects Return all projects of a customer

Parameters

| | |
|-------------------|-----------------|
| <i>customerId</i> | The customer id |
|-------------------|-----------------|

Returns

List with all projects of customer

8.84.2.9 QMap< int, Models::Project > Databases::ProjectDatabase::getProjectsOfCustomer (QSharedPointer< Models::Customer > *c*, const bool *projectLocked* = true)

getProjectsOfCustomer Return all projects of a customer

Parameters

| | |
|----------|--------------|
| <i>c</i> | The customer |
|----------|--------------|

Returns

All projects of *c* with *id* in key

8.84.2.10 WdgModels::ProjectsTableModel * Databases::ProjectDatabase::getProjectsTable (const int *pld*) throw DbException *)

getProjectsTable Return all projects of a customer in QStandardItemModel

Parameters

| | |
|---------------|---|
| <i>filter</i> | Select only projects who are specified by <i>filter</i> |
|---------------|---|

Returns

QStandardItemModel an item model for QTableView

8.84.2.11 ProjectDatabase * Databases::ProjectDatabase::instance () throw DbException *) [static]

ProjectDatabase::getInstance Return an instance of [ProjectDatabase](#).

Returns

Instance of [ProjectDatabase](#)

8.84.2.12 void Databases::ProjectDatabase::removeProject (const int *pld*)

removeProject Remove the project with the id '*pld*'

Parameters

| | |
|------------|------------|
| <i>pld</i> | project id |
|------------|------------|

8.84.2.13 QSharedPointer< Models::Project > Databases::ProjectDatabase::updateProject (QSqlQuery & *q*)

getProject Obtain a project without new query

Parameters

| | |
|----------|------------------|
| <i>q</i> | The query to use |
|----------|------------------|

Returns


The project linked to *q*

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/database/projectdatabase.h
- /home/travis/build/FACT-Team/FactDev/src/database/projectdatabase.cpp

8.85 ProjectDatabaseTest Class Reference

Inheritance diagram for ProjectDatabaseTest:




The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/database/projectdatabasetest.h
- /home/travis/build/FACT-Team/FactDev/tests/database/projectdatabasetest.cpp

8.86 ProjectModelTest Class Reference

Inheritance diagram for ProjectModelTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/models/projectmodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/projectmodeltest.cpp

8.87 Gui::Widgets::WdgModels::ProjectsTableModel Class Reference

The [ProjectsTableModel](#) class for a Project table.

```
#include <projectstablemodel.h>
```

Inheritance diagram for Gui::Widgets::WdgModels::ProjectsTableModel:



Public Member Functions

- [ProjectsTableModel](#) ()
ProjectsTableModel::ProjectsTableModel Construct a *ProjectsTableModel*.
- int [rowCount](#) (const QModelIndex &) const
ProjectsTableModel::rowCount Number of projects row.

- int [columnCount](#) (const QModelIndex &) const
ProjectsTableModel::columnCount Number of column of a Project.
- QVariant [data](#) (const QModelIndex &index, int role=Qt::DisplayRole) const
ProjectsTableModel::data Obtains data of a specify cell.
- QVariant [headerData](#) (int section, Qt::Orientation orientation, int role=Qt::DisplayRole) const
ProjectsTableModel::headerData Obtains header title of table.
- bool [setData](#) (const QModelIndex &index, const QVariant &value, int role=Qt::EditRole)
ProjectsTableModel::setData Change data of a cell.
- void [append](#) (const [Project](#) &project)
ProjectsTableModel::append Add a new line in table.
- void [remove](#) (const int i)
ProjectsTableModel::remove Remove a line.
- Qt::ItemFlags [flags](#) (const QModelIndex &index) const
ProjectsTableModel::flags Differents table flags.
- int [count](#) ()
ProjectsTableModel::count Number of projects in table.
- QList< [Project](#) > [getProjects](#) () const
ProjectsTableModel::getProjects Return the list of projects.

8.87.1 Detailed Description

The [ProjectsTableModel](#) class for a Project table.

Author

Florent Berbie

See Also

[Project](#)

8.87.2 Constructor & Destructor Documentation

8.87.2.1 Gui::Widgets::WdgModels::ProjectsTableModel::ProjectsTableModel ()

[ProjectsTableModel::ProjectsTableModel](#) Construct a [ProjectsTableModel](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Parent widget |
|---------------|---------------|

8.87.3 Member Function Documentation

8.87.3.1 void Gui::Widgets::WdgModels::ProjectsTableModel::append (const [Project](#) & *project*)

[ProjectsTableModel::append](#) Add a new line in table.

Parameters

| | |
|----------------|-----------------|
| <i>Project</i> | The new Project |
|----------------|-----------------|

8.87.3.2 `int Gui::Widgets::WdgModels::ProjectsTableModel::columnCount (const QModelIndex &) const`

[ProjectsTableModel::columnCount](#) Number of column of a Project.

Returns

The number of column

8.87.3.3 `int Gui::Widgets::WdgModels::ProjectsTableModel::count ()`

[ProjectsTableModel::count](#) Number of projects in table.

Returns

The number of projects

8.87.3.4 `QVariant Gui::Widgets::WdgModels::ProjectsTableModel::data (const QModelIndex & index, int role = Qt::DisplayRole) const`

[ProjectsTableModel::data](#) Obtains data of a specify cell.

Parameters

| | |
|--------------|---------------------------|
| <i>index</i> | The cell who we want data |
| <i>role</i> | The role of set |

Returns

The data of cell

8.87.3.5 `Qt::ItemFlags Gui::Widgets::WdgModels::ProjectsTableModel::flags (const QModelIndex & index) const`

[ProjectsTableModel::flags](#) Differents table flags.

Parameters

| | |
|--------------|------------------------------------|
| <i>index</i> | The cell who we want to know flags |
|--------------|------------------------------------|

Returns

Flags

8.87.3.6 `QList< Project > Gui::Widgets::WdgModels::ProjectsTableModel::getProjects (void) const`

[ProjectsTableModel::getProjects](#) Return the list of projects.

Returns

list of projects

8.87.3.7 `QVariant Gui::Widgets::WdgModels::ProjectsTableModel::headerData (int section, Qt::Orientation orientation, int role = Qt::DisplayRole) const`

[ProjectsTableModel::headerData](#) Obtains header title of table.

Parameters

| | |
|--------------------|-----------------------|
| <i>section</i> | The number of column |
| <i>orientation</i> | The table orientation |
| <i>role</i> | |

Returns

The Title header of column

8.87.3.8 void Gui::Widgets::WdgModels::ProjectsTableModel::remove (const int *i*)

[ProjectsTableModel::remove](#) Remove a line.

Parameters

| | |
|----------|------------------------------|
| <i>i</i> | The number of line to remove |
|----------|------------------------------|

8.87.3.9 int Gui::Widgets::WdgModels::ProjectsTableModel::rowCount (const QModelIndex &) const

[ProjectsTableModel::rowCount](#) Number of projects row.

Returns

The number of projects

8.87.3.10 bool Gui::Widgets::WdgModels::ProjectsTableModel::setData (const QModelIndex & *index*, const QVariant & *value*, int *role* = Qt::EditRole)

[ProjectsTableModel::setData](#) Change data of a cell.

Parameters

| | |
|--------------|-------------------------|
| <i>index</i> | The cell to change data |
| <i>value</i> | The new value |
| <i>role</i> | The role of cell |

Returns

True if we could edit

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectstablemodel.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/widgetmodels/projectstablemodel.cpp

8.88 Gui::Widgets::ProjectsWidget Class Reference

The [ProjectsWidget](#) class Actions on Project.

```
#include <projectswidget.h>
```

Inheritance diagram for Gui::Widgets::ProjectsWidget:



Public Slots

- void [newProject](#) ()
ProjectsWidget::addProject Event which sends a signal to add a new project.
- void [editSelectedProject](#) ()
ProjectsWidget::editSelectedProject Event which sends a signal to edit the project selected.
- void [removeSelectedProject](#) ()
ProjectsWidget::removeSelectedProject Event which sends a signal to remove the project selected.
- void [updateBtn](#) (bool b, bool remove=true, bool isLocked=false)
ProjectsWidget::updateBtn Update the toolbar in tblProjects.
- void [lockSelectedProject](#) ()
lockSelectedProject Event which sends a signal to lock the selected project.

Signals

- void [addProject](#) ()
ProjectsWidget::addProject Add a new project to the current Customer.
- void [editProject](#) ()
ProjectsWidget::editProject Edit the current Project selected.
- void [removeProject](#) ()
ProjectsWidget::removeProject Remove the current Project selected.
- void [lockProject](#) ()
lockProject Lock the current project.

Public Member Functions

- [ProjectsWidget](#) (QWidget *parent=0)
ProjectsWidget::ProjectsWidget Construct a [ProjectsWidget](#).

8.88.1 Detailed Description

The [ProjectsWidget](#) class Actions on Project.

Author

Florent Berbie

8.88.2 Constructor & Destructor Documentation

8.88.2.1 [Gui::Widgets::ProjectsWidget::ProjectsWidget](#) ([QWidget](#) * *parent* = 0) [explicit]

[ProjectsWidget::ProjectsWidget](#) Construct a [ProjectsWidget](#).

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.88.3 Member Function Documentation

8.88.3.1 void Gui::Widgets::ProjectsWidget::updateBtn (bool *b*, bool *remove* = true, bool *isLocked* = false) [slot]

[ProjectsWidget::updateBtn](#) Update the toolbar in tblProjects.

Parameters

| | |
|----------------|----------------------|
| <i>boolean</i> | if a row is selected |
|----------------|----------------------|


The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/projectswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/projectswidget.cpp

8.89 Mustache::QtVariantContext Class Reference

```
#include <mustache.h>
```

Inheritance diagram for Mustache::QtVariantContext:

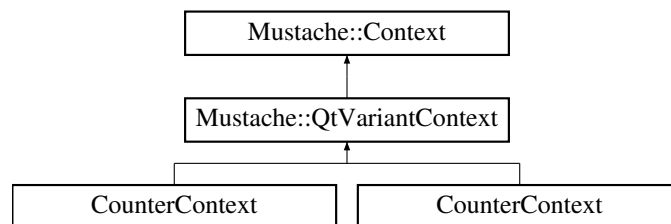

Public Types

- typedef QString(* [fn_t](#))(const QString &, [Mustache::Renderer](#) *, [Mustache::Context](#) *)

Public Member Functions

- [QtVariantContext](#) (const QVariant &root, [PartialResolver](#) *resolver=0)
- virtual QString [stringValue](#) (const QString &key) const
- virtual bool [isFalse](#) (const QString &key) const
- virtual int [listCount](#) (const QString &key) const
- virtual void [push](#) (const QString &key, int index=-1)
- virtual void [pop](#) ()
- virtual bool [canEval](#) (const QString &key) const
- virtual QString [eval](#) (const QString &key, const QString &_template, [Mustache::Renderer](#) *renderer)

8.89.1 Detailed Description

A context implementation which wraps a QVariantHash or QVariantMap.

8.89.2 Member Typedef Documentation

8.89.2.1 `typedef QString(* Mustache::QtVariantContext::fn_t)(const QString &, Mustache::Renderer *, Mustache::Context *)`

Construct a [QtVariantContext](#) which wraps a dictionary in a [QVariantHash](#) or a [QVariantMap](#).

8.89.3 Member Function Documentation

8.89.3.1 `bool QtVariantContext::canEval (const QString & key) const [virtual]`

Returns true if [eval\(\)](#) should be used to render section tags using `key`. If [canEval\(\)](#) returns true for a key, the renderer will pass the literal, unrendered block of text for the section to [eval\(\)](#) and replace the section with the result.

[canEval\(\)](#) and [eval\(\)](#) are equivalents for callable objects (eg. lambdas) in other Mustache implementations.

The default implementation always returns false.

Reimplemented from [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

8.89.3.2 `QString QtVariantContext::eval (const QString & key, const QString & _template, Mustache::Renderer * renderer) [virtual]`

Callback used to render a template section with the given `key`. `renderer` will substitute the original section tag with the result of [eval\(\)](#).

The default implementation returns an empty string.

Reimplemented from [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

8.89.3.3 `bool QtVariantContext::isFalse (const QString & key) const [virtual]`

Returns true if the value for `key` is 'false' or an empty list. 'False' values typically include empty strings, the boolean value false etc.

When processing a section Mustache tag, the section is not rendered if the key is false, or for an inverted section tag, the section is only rendered if the key is false.

Implements [Mustache::Context](#).

8.89.3.4 `int QtVariantContext::listCount (const QString & key) const [virtual]`

Returns the number of items in the list value for `key` or 0 if the value for `key` is not a list.

Implements [Mustache::Context](#).

8.89.3.5 `void QtVariantContext::pop () [virtual]`

Exit the current context.

Implements [Mustache::Context](#).

8.89.3.6 void QtVariantContext::push (const QString & key, int index = -1) [virtual]

Set the current context to the value for `key`. If `index` is ≥ 0 , set the current context to the `index`'th value in the list value for `key`.

Implements [Mustache::Context](#).

8.89.3.7 QString QtVariantContext::stringValue (const QString & key) const [virtual]

Returns a string representation of the value for `key` in the current context. This is used to replace a Mustache value tag.

Implements [Mustache::Context](#).

Reimplemented in [CounterContext](#), and [CounterContext](#).

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

8.90 Models::Rate Class Reference

The [Rate](#) class [Rate](#) of a prestation.

```
#include <rate.h>
```

Public Member Functions

- [Rate](#) ()
[Rate::Rate](#) Construct a [Rate](#).
- [Rate](#) (double hourly)
[Rate::Rate](#) Construct a [Rate](#) with an hourly rate.
- [Rate](#) (int idBilling, int idProject)
[Rate::Rate](#) Construct a [Rate](#) for the [Billing](#) with idBilling as identify and from the project identified by idProject
- void [setDailyRate](#) (const double &)
[Rate::setDailyRate](#) Modify the daily rate with the new value.
- void [setHourlyRate](#) (const double &)
[Rate::setHourlyRate](#) Modify the hourly rate with the new value.
- double [getDailyRate](#) () const
[Rate::getDailyRate](#) Return the daily rate.
- double [getHourlyRate](#) () const
[Rate::getHourlyRate](#) Return the hourly rate.
- int [getNbDailyHours](#) () const
[Rate::getNbDailyHours](#) Return the number of daily hours.
- double [getLegalRate](#) () const
[Rate::getLegalRate](#) Return the legal rate.

8.90.1 Detailed Description

The [Rate](#) class [Rate](#) of a prestation.

Author

Antoine de Roquemaurel

8.90.2 Constructor & Destructor Documentation

8.90.2.1 Models::Rate::Rate (double *hourly*)

[Rate::Rate](#) Construct a [Rate](#) with an hourly rate.

Parameters

| | |
|---------------|-------------|
| <i>hourly</i> | Hourly rate |
|---------------|-------------|

8.90.2.2 Models::Rate::Rate (int *idBilling*, int *idProject*)

[Rate::Rate](#) Construct a [Rate](#) for the [Billing](#) with *idBilling* as identify and from the project identified by *idProject*

Parameters

| | |
|------------------|----------------------------------|
| <i>idBilling</i> | Billing identify |
| <i>idProject</i> | Project identify |

8.90.3 Member Function Documentation

8.90.3.1 double Models::Rate::getDailyRate () const

[Rate::getDailyRate](#) Return the daily rate.

Returns

8.90.3.2 double Models::Rate::getHourlyRate () const

[Rate::getHourlyRate](#) Return the hourly rate.

Returns

8.90.3.3 double Models::Rate::getLegalRate () const

[Rate::getLegalRate](#) Return the legal rate.

Returns

8.90.3.4 int Models::Rate::getNbDailyHours () const

[Rate::getNbDailyHours](#) Return the number of daily hours.

Returns

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/rate.h
- /home/travis/build/FACT-Team/FactDev/src/models/rate.cpp

8.91 Databases::RateDatabase Class Reference

Inheritance diagram for Databases::RateDatabase:



Public Member Functions

- void [addRateProject](#) (int idProject, int idBilling, double hourlyRate)
RateDatabase::addRateProject Add a new rate *hourlyRate* to the Project identified by *idProject* of the Billing with *idBilling* as identify.
- double [getRate](#) (const int idBilling, const int idProject) const
RateDatabase::getRate Return the rate of the Project identified by *idProject* of the Billing with *idBilling* as identify.
- void [updateRateProject](#) (int idProject, int idBilling, double hourlyRate)
RateDatabase::updateRateProject Update the current rate by the new *hourlyRate* of the Project identified by *idProject* of the Billing with *idBilling* as identify.

Static Public Member Functions

- static [RateDatabase](#) * [instance](#) () throw (DbException*)
RateDatabase::getInstance Return an instance of [RateDatabase](#).

Additional Inherited Members

8.91.1 Member Function Documentation

8.91.1.1 void Databases::RateDatabase::addRateProject (int *idProject*, int *idBilling*, double *hourlyRate*)

[RateDatabase::addRateProject](#) Add a new rate *hourlyRate* to the Project identified by *idProject* of the Billing with *idBilling* as identify.

Parameters

| | |
|-------------------|------------------|
| <i>idProject</i> | Project identify |
| <i>idBilling</i> | Billing identify |
| <i>hourlyRate</i> | New hourly rate |

8.91.1.2 double Databases::RateDatabase::getRate (const int *idBilling*, const int *idProject*) const

[RateDatabase::getRate](#) Return the rate of the Project identified by *idProject* of the Billing with *idBilling* as identify.

Parameters

| | |
|------------------|------------------|
| <i>idBilling</i> | Billing identify |
| <i>idProject</i> | Project identify |

Returns

Rate of the Project of a Billing

8.91.1.3 `RateDatabase * Databases::RateDatabase::instance () throw DbException *` `[static]`

`RateDatabase::getInstance` Return an instance of [RateDatabase](#).

Returns

Instance of [RateDatabase](#)

8.91.1.4 `void Databases::RateDatabase::updateRateProject (int idProject, int idBilling, double hourlyRate)`

[RateDatabase::updateRateProject](#) Update the current rate by the new *hourlyRate* of the Project identified by *id-Project* of the Billing with *idBilling* as identify.

Parameters

| | |
|-------------------|------------------|
| <i>idProject</i> | Project identify |
| <i>idBilling</i> | Billing identify |
| <i>hourlyRate</i> | New hourly rate |

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/database/ratedatabase.h`
- `/home/travis/build/FACT-Team/FactDev/src/database/ratedatabase.cpp`

8.92 RateModelTest Class Reference

Inheritance diagram for `RateModelTest`:



The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/tests/models/ratemodeltest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/models/ratemodeltest.cpp`

8.93 Gui::Widgets::RateWidget Class Reference

Class for display Rate.

```
#include <ratewidget.h>
```

Inheritance diagram for `Gui::Widgets::RateWidget`:



Public Slots

- void [setDailyRate](#) ()
setDailyRate Set a new value for the daily rate
- void [setHourlyRate](#) ()
setHourlyRate Set a new value for the hourly rate

Public Member Functions

- [RateWidget](#) (QWidget *parent=0)
RateWidget::RateWidget Construct a rate widget.
- void [initRate](#) ()
RateWidget::initRate Initialize the rate.
- void [setWidgetDailyRateValue](#) (double value)
RateWidget::setWidgetDailyRateValue Modify the value of the daily rate spin box component.
- double [getDailyRate](#) ()
RateWidget::getDailyRate Get the daily rate.
- double [getHourlyRate](#) ()
RateWidget::getHourlyRate Get the hourly rate.
- void [setWidgetHourlyRateValue](#) (double value)
RateWidget::setWidgetHourlyRateValue Modify the value of the hourly rate spin box component.
- void [updateConversionRate](#) ()
updateConversionRate Update daily rate or hourly rate

8.93.1 Detailed Description

Class for display Rate.

Author

Florent Berbie

8.93.2 Constructor & Destructor Documentation

8.93.2.1 [Gui::Widgets::RateWidget::RateWidget \(QWidget * parent = 0 \)](#) `[explicit]`

[RateWidget::RateWidget](#) Construct a rate widget.

Parameters

| | |
|---------------|--------------------|
| <i>parent</i> | The QWidget parent |
|---------------|--------------------|

8.93.3 Member Function Documentation

8.93.3.1 [double Gui::Widgets::RateWidget::getDailyRate \(\)](#)

[RateWidget::getDailyRate](#) Get the daily rate.

Returns

The daily rate

8.93.3.2 `double Gui::Widgets::RateWidget::getHourlyRate ()`

[RateWidget::getHourlyRate](#) Get the hourly rate.

Returns

The hourly rate

8.93.3.3 `void Gui::Widgets::RateWidget::setDailyRate () [slot]`

`setDailyRate` Set a new value for the daily rate

Parameters

| | |
|------------------|--------------------|
| <i>dailyRate</i> | The new daily rate |
|------------------|--------------------|

8.93.3.4 `void Gui::Widgets::RateWidget::setHourlyRate () [slot]`

`setHourlyRate` Set a new value for the hourly rate

Parameters

| | |
|-------------------|---------------------|
| <i>hourlyRate</i> | The new hourly rate |
|-------------------|---------------------|

8.93.3.5 `void Gui::Widgets::RateWidget::setWidgetDailyRateValue (double value)`

[RateWidget::setWidgetDailyRateValue](#) Modify the *value* of the daily rate spin box component.

Parameters

| | |
|--------------|-----------|
| <i>value</i> | New Value |
|--------------|-----------|

8.93.3.6 `void Gui::Widgets::RateWidget::setWidgetHourlyRateValue (double value)`

[RateWidget::setWidgetHourlyRateValue](#) Modify the *value* of the hourly rate spin box component.

Parameters

| | |
|--------------|-----------|
| <i>value</i> | New value |
|--------------|-----------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/ratewidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/ratewidget.cpp

8.94 Mustache::Renderer Class Reference

```
#include <mustache.h>
```

Public Member Functions

- QString [render](#) (const QString &_template, [Context](#) *context)
- QString [error](#) () const
- int [errorPos](#) () const

- QString [errorPartial](#) () const
- void [setTagMarkers](#) (const QString &startMarker, const QString &endMarker)

8.94.1 Detailed Description

Renders Mustache templates, replacing mustache tags with values from a provided context.

8.94.2 Member Function Documentation

8.94.2.1 QString [Renderer::error](#) () const

Returns a message describing the last error encountered by the previous [render\(\)](#) call.

8.94.2.2 QString [Renderer::errorPartial](#) () const

Returns the name of the partial where the error occurred, or an empty string if the error occurred in the main template.

8.94.2.3 int [Renderer::errorPos](#) () const

Returns the position in the template where the last error occurred when rendering the template or -1 if no error occurred.

If the error occurred in a partial template, the returned position is the offset in the partial template.

8.94.2.4 QString [Renderer::render](#) (const QString &_template, Context * context)

Render a Mustache template, using `context` to fetch the values used to replace Mustache tags.

8.94.2.5 void [Renderer::setTagMarkers](#) (const QString &startMarker, const QString &endMarker)

Sets the default tag start and end markers. This can be overridden within a template.

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.cpp

8.95 Models::Search Class Reference

The [Search](#) class.

```
#include <search.h>
```

Public Member Functions

- [Search](#) ()
[Search::Search](#) Construct a search.
- [~Search](#) ()
[Search::Search](#) Destruct a search.
- QString [getFilter](#) ()

- Search::getFilter* Return the search filter.
- void [filterOnVarcharElements](#) (QString &filter, const QStringList list, QString element)
 - Search::filterOnVarcharElements* Search, for each word of the list from the filter, if it corresponds to the element in the database.
 - void [filterOnNumberElements](#) (QString &filter, const QStringList list, QString element)
 - Search::filterOnNumberElements* Search, for each number of the list from the filter, if it corresponds to the element in the database.
 - void [filterOnCompany](#) (QString &filter, const QStringList list)
 - Search::filterOnCompany* Search all companies contained in the list of the filter
 - void [filterOnReferentLastname](#) (QString &filter, const QStringList list)
 - Search::filterOnReferentLastname* Search all referents last name contained in the list of the filter
 - void [filterOnProjects](#) (QString &filter, const QStringList list)
 - Search::filterOnProjects* Search all projects contained in the list of the filter
 - void [filterOnContributories](#) (QString &filter, const QStringList list)
 - Search::filterOnContributories* Search all contributories contained in the list of the filter
 - void [filterOnBillsOrQuotes](#) (QString &filter, const QStringList list)
 - Search::filterOnBillsOrQuotes* Search all bills or quotes which are contained in the list of the filter
 - void [filterOnCustomersWithoutProject](#) (QString &filter, const QStringList list)
 - Search::filterOnCustomersWithoutProject* Search all customers which are contained in the list of the filter
 - bool [getSearchInCompanies](#) () const
 - Search::getSearchInCompanies* Return if we search a company.
 - void [setSearchInCompanies](#) (bool searchInCompanies)
 - Search::setSearchInCompanies* Modify the filter of companies search.
 - bool [getSearchInReferentLastname](#) () const
 - Search::getSearchInReferentLastname* Return if we search a Last name referent.
 - void [setSearchInReferentLastname](#) (bool searchInReferentLastname)
 - Search::setSearchInReferentLastname* Modify the filter of referents last name search.
 - bool [getSearchInProjects](#) () const
 - Search::getSearchInProjects* Return TRUE if it exists one or more projets in database.
 - void [setSearchInProjects](#) (bool searchInProjects)
 - Search::setSearchInProjects* Modify the filter of projects search.
 - bool [searchInContributories](#) () const
 - Search::getSearchInContributories* Return TRUE if it exists one or more projets in database.
 - void [setSearchInContributories](#) (bool [searchInContributories](#))
 - Search::setSearchInContributories* Modify the filter of contributories search.
 - bool [getSearchInBillsQuotes](#) () const
 - Search::searchInBillsQuotes* Return TRUE if it exists one or more bills or quotes in database.
 - void [setSearchInBillsQuotes](#) (bool [searchInBillsQuotes](#))
 - Search::setSearchInBillsQuotes* Modify the filter of bills and quotes search.
 - bool [getGroupFilter](#) () const
 - Search::getGroupFilter* Return if the filter is activated.
 - void [setGroupFilter](#) (bool [getGroupFilter](#))
 - Search::setGroupFilter* Modify if we active search filter.
 - QString [getText](#) () const
 - Search::getText* Return sql portion of filter.
 - void [setText](#) (const QString &[getText](#))
 - Search::setText* Modify sql portion.

8.95.1 Detailed Description

The [Search](#) class.

Author

Antoine de Roquemaurel
Florent Berbie

8.95.2 Member Function Documentation

8.95.2.1 void Models::Search::filterOnBillsOrQuotes (QString & *filter*, const QStringList *list*)

[Search::filterOnBillsOrQuotes](#) [Search](#) all bills or quotes which are contained in the *list* of the *filter*

Parameters

| | |
|---------------|---------------------------|
| <i>filter</i> | Text inputed in searchbar |
| <i>list</i> | List of bills or quotes |

8.95.2.2 void Models::Search::filterOnCompany (QString & *filter*, const QStringList *list*)

[Search::filterOnCompany](#) [Search](#) all companies contained in the *list* of the *filter*

Parameters

| | |
|---------------|---------------------------|
| <i>filter</i> | Text inputed in searchbar |
| <i>list</i> | List of companies |

8.95.2.3 void Models::Search::filterOnContributories (QString & *filter*, const QStringList *list*)

[Search::filterOnContributories](#) [Search](#) all contributories contained in the *list* of the *filter*

Parameters

| | |
|---------------|---------------------------|
| <i>filter</i> | Text inputed in searchbar |
| <i>list</i> | List of contributories |

8.95.2.4 void Models::Search::filterOnCustomersWithoutProject (QString & *filter*, const QStringList *list*)

[Search::filterOnCustomersWithoutProject](#) [Search](#) all customers which are contained in the *list* of the *filter*

Parameters

| | |
|---------------|---------------------------|
| <i>filter</i> | Text inputed in searchbar |
| <i>list</i> | List of bills or quotes |

8.95.2.5 void Models::Search::filterOnNumberElements (QString & *filter*, const QStringList *list*, QString *element*)

[Search::filterOnNumberElements](#) [Search](#), for each number of the *list* from the *filter*, if it corresponds to the *element* in the database.

Parameters

| | |
|----------------|--|
| <i>filter</i> | Text inputted in the searchbar |
| <i>list</i> | List of numbers from the <i>filter</i> |
| <i>element</i> | Attribute name into the database |

8.95.2.6 void Models::Search::filterOnProjects (QString & *filter*, const QStringList *list*)

[Search::filterOnProjects](#) Search all projects contained in the *list* of the *filter*

Parameters

| | |
|---------------|----------------------------|
| <i>filter</i> | Text inputted in searchbar |
| <i>list</i> | List of projects |

8.95.2.7 void Models::Search::filterOnReferentLastname (QString & *filter*, const QStringList *list*)

[Search::filterOnReferentLastname](#) Search all referents last name contained in the *list* of the *filter*

Parameters

| | |
|---------------|----------------------------|
| <i>filter</i> | Text inputted in searchbar |
| <i>list</i> | List of referent last name |

8.95.2.8 void Models::Search::filterOnVarcharElements (QString & *filter*, const QStringList *list*, QString *element*)

[Search::filterOnVarcharElements](#) Search, for each word of the *list* from the *filter*, if it corresponds to the *element* in the database.

Parameters

| | |
|----------------|--------------------------------------|
| <i>filter</i> | Text inputted in the searchbar |
| <i>list</i> | List of words from the <i>filter</i> |
| <i>element</i> | Attribute name into the database |

8.95.2.9 QString Models::Search::getFilter ()

[Search::getFilter](#) Return the search filter.

Returns

filter selected (sql portion)

8.95.2.10 bool Models::Search::getGroupFilter () const

[Search::getGroupFilter](#) Return if the filter is activated.

Returns

boolean if search filter is activated

8.95.2.11 bool Models::Search::getSearchInBillsQuotes () const

[Search::searchInBillsQuotes](#) Return TRUE if it exists one or more bills or quotes in database.

Returns

boolean if bills or quotes are existing

8.95.2.12 `bool Models::Search::getSearchInCompanies () const`

[Search::getSearchInCompanies](#) Return if we search a company.

Returns

boolean if we search a company

8.95.2.13 `bool Models::Search::getSearchInProjects () const`

[Search::getSearchInProjects](#) Return TRUE if it exists one or more projets in database.

Returns

boolean if project are existing

8.95.2.14 `bool Models::Search::getSearchInReferentLastname () const`

[Search::getSearchInReferentLastname](#) Return if we search a Last name referent.

Returns

boolean if search concerns the last name of referent

8.95.2.15 `QString Models::Search::getText () const`

[Search::getText](#) Return sql portion of filter.

Returns

QString the sql portion

8.95.2.16 `bool Models::Search::searchInContributories () const`

[Search::getSearchInContributories](#) Return TRUE if it exists one or more projets in database.

Returns

boolean if contributories are existing

8.95.2.17 `void Models::Search::setGroupFilter (bool getGroupFilter)`

[Search::setGroupFilter](#) Modify if we active search filter.

Parameters

| | |
|-----------------------|--------------------------|
| <i>getGroupFilter</i> | Get if filter is actived |
|-----------------------|--------------------------|

8.95.2.18 void Models::Search::setSearchInBillsQuotes (bool *searchInBillsQuotes*)

[Search::setSearchInBillsQuotes](#) Modify the filter of bills and quotes search.

Parameters

| | |
|-----------------------------|---|
| <i>searchInBills-Quotes</i> | Search in bills or quotes which are concerned |
|-----------------------------|---|

8.95.2.19 void Models::Search::setSearchInCompanies (bool *searchInCompanies*)

[Search::setSearchInCompanies](#) Modify the filter of companies search.

Parameters

| | |
|------------------------------|--|
| <i>getSearchIn-Companies</i> | Search in companies is concerned |
|------------------------------|--|

8.95.2.20 void Models::Search::setSearchInContributories (bool *searchInContributories*)

[Search::setSearchInContributories](#) Modify the filter of contributories search.

Parameters

| | |
|--------------------------------|--|
| <i>searchIn-Contributories</i> | Search in contributories which are concerned |
|--------------------------------|--|

8.95.2.21 void Models::Search::setSearchInProjects (bool *searchInProjects*)

[Search::setSearchInProjects](#) Modify the filter of projects search.

Parameters

| | |
|-------------------------|--|
| <i>searchInProjects</i> | Search in projects which are concerned |
|-------------------------|--|

8.95.2.22 void Models::Search::setSearchInReferentLastname (bool *searchInReferentLastname*)

[Search::setSearchInReferentLastname](#) Modify the filter of referents last name search.

Parameters

| | |
|-----------------------------------|---|
| <i>searchIn-Referent-Lastname</i> | Search in referents last name which are concerned |
|-----------------------------------|---|

8.95.2.23 void Models::Search::setText (const QString & *getText*)

[Search::setText](#) Modify sql portion.

Parameters

| | |
|----------------|-----------------|
| <i>getText</i> | Get sql portion |
|----------------|-----------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/models/search.h
- /home/travis/build/FACT-Team/FactDev/src/models/search.cpp

8.96 Gui::Docks::SearchDock Class Reference

The [SearchDock](#) class Dock which contains search bar.

```
#include <searchdock.h>
```

Inheritance diagram for Gui::Docks::SearchDock:



Public Slots

- void [search](#) (QString text)
[SearchDock::search](#) Search elements in database which correspond to the text

Signals

- void [textChanged](#) (QString text)
[SearchDock::textChanged](#) Current text changed by text

Public Member Functions

- [SearchDock](#) (QWidget *parent=0, Qt::WindowFlags flags=0)
[SearchDock::SearchDock](#) Construct a [SearchDock](#).
- QString [getText](#) () const
[SearchDock::getText](#) Get the current text searched.

8.96.1 Detailed Description

The [SearchDock](#) class Dock which contains search bar.

8.96.2 Constructor & Destructor Documentation

8.96.2.1 [Gui::Docks::SearchDock::SearchDock](#) (QWidget * *parent* = 0, Qt::WindowFlags *flags* = 0) [explicit]

[SearchDock::SearchDock](#) Construct a [SearchDock](#).

Parameters

| | |
|---------------|---------------|
| <i>parent</i> | Widget Parent |
| <i>flags</i> | Window flag |

8.96.3 Member Function Documentation

8.96.3.1 QString Gui::Docks::SearchDock::getText () const

[SearchDock::getText](#) Get the current text searched.

Returns

Text searched

8.96.3.2 void Gui::Docks::SearchDock::search (QString text) [slot]

[SearchDock::search](#) Search elements in database which correspond to the *text*

Parameters

| | |
|-------------|-------------------|
| <i>text</i> | Element to search |
|-------------|-------------------|

8.96.3.3 void Gui::Docks::SearchDock::textChanged (QString text) [signal]

[SearchDock::textChanged](#) Current text changed by *text*

Parameters


| | |
|-------------|----------|
| <i>text</i> | New text |
|-------------|----------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/docks/searchdock.h
- /home/travis/build/FACT-Team/FactDev/src/gui/docks/searchdock.cpp

8.97 searchTest Class Reference

Inheritance diagram for searchTest:



The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/tests/models/searchtest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/searchtest.cpp

8.98 Gui::Widgets::searchWidget Class Reference

Class for search in database.

```
#include <searchwidget.h>
```

Inheritance diagram for Gui::Widgets::searchWidget:



Public Slots

- void [search](#) (QString toSearch)
searchWidget::launch a search
- void [getCustomerData](#) ()
searchWidget::getCustomerData Return data on the customer selected in the QTableView and display this data (First-name, Lastname, Company)

Signals

- void [selectCustomer](#) ()
searchWidget::selectCustomer Signal that the Customer selected has changed

Public Member Functions

- [searchWidget](#) (QWidget *parent=0)
searchWidget::searchWidget Construct a search widget
- int [getCurrentCustomerId](#) ()
searchWidget::getCurrentCustomerId Return the id of the customer selected in the table
- bool [isCustomerSelected](#) () const
searchWidget::isCustomerSelected Return TRUE if a customer is selected, else FALSE
- void [selectCustomer](#) (int id)
searchWidget::selectCustomer Select the Customer with it id
- int [getCustomerId](#) () const
searchWidget::getCustomerId Return the Customer id of the Customer line selected
- void [setIdCustomer](#) (int idCustomer)
searchWidget::setIdCustomer Change the customer id by the new idCustomer

8.98.1 Detailed Description

Class for search in database.

Author

Antoine de Roquemaurel

8.98.2 Constructor & Destructor Documentation

8.98.2.1 `Gui::Widgets::searchWidget::searchWidget (QWidget * parent = 0)` `[explicit]`

[searchWidget::searchWidget](#) Construct a search widget

Parameters

| | |
|---------------|--------------------|
| <i>parent</i> | The QWidget parent |
|---------------|--------------------|

8.98.3 Member Function Documentation

8.98.3.1 `int Gui::Widgets::searchWidget::getCurrentCustomerId ()`

[searchWidget::getCurrentCustomerId](#) Return the id of the customer selected in the table

Returns

id of the current customer

8.98.3.2 `int Gui::Widgets::searchWidget::getIdCustomer () const`

[searchWidget::getIdCustomer](#) Return the Customer id of the Customer line selected

Returns

The Customer ID

8.98.3.3 `bool Gui::Widgets::searchWidget::isCustomerSelected () const`

[searchWidget::isCustomerSelected](#) Return TRUE if a customer is selected, else FALSE

Returns

boolean

8.98.3.4 `void Gui::Widgets::searchWidget::search (QString toSearch) [slot]`

`searchWidget::launch` a search

Parameters

| | |
|-----------------|---------------------|
| <i>toSearch</i> | The value to search |
|-----------------|---------------------|

8.98.3.5 `void Gui::Widgets::searchWidget::selectCustomer (int id)`

[searchWidget::selectCustomer](#) Select the Customer with it *id*

Parameters

| | |
|-----------|-------------|
| <i>id</i> | Customer ID |
|-----------|-------------|

8.98.3.6 `void Gui::Widgets::searchWidget::setIdCustomer (int idCustomer)`

[searchWidget::setIdCustomer](#) Change the customer id by the new *idCustomer*

Parameters

| | |
|-------------------|-------------|
| <i>idCustomer</i> | Customer id |
|-------------------|-------------|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/searchwidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/searchwidget.cpp

8.99 Gui::Dialogs::StartedWindowsDialog Class Reference

The [StartedWindowsDialog](#) class Construct a Windows for the first begin.

```
#include <startedwindowsdialog.h>
```

Inheritance diagram for Gui::Dialogs::StartedWindowsDialog:



Public Slots

- void [checkFields](#) ()
StartedWindowsDialog::checkFields Check all fields of dialog components.
- void [backToPage2](#) ()
StartedWindowsDialog::backToPage2 Return to the second page.
- void [nextToPage2](#) ()
StartedWindowsDialog::nextToPage2 Go to the second page.
- void [nextToPage3](#) ()
StartedWindowsDialog::nextToPage3 Go to the third page.
- void [databaseTypeChanged](#) (const int index)
StartedWindowsDialog::databaseTypeChanged Listener on the Database type combobox.
- void [databaseTypeChanged](#) (void)
StartedWindowsDialog::databaseTypeChanged Listener on the Database type combobox.
- void [updateNextButton](#) ()
StartedWindowsDialog::updateNextButton Check if the next button is enabled.
- void [accept](#) ()
StartedWindowsDialog::accept Valid data inputed by user and add these data in Database.

Public Member Functions

- [StartedWindowsDialog](#) (QWidget *parent=0)
StartedWindowsDialog::StartedWindowsDialog Construct a [StartedWindowsDialog](#).
- void [fillFields](#) ()
StartedWindowsDialog::fillFields Fill line edits with the data of the user.
- QPixmap [getImage](#) (QString path, int width=256, int height=256)
StartedWindowsDialog::getImage Return a scaled image from the icon specified by it path. The image returned has a resolution of width*height (default 256*256)
- bool [isDatabaseTypeValid](#) ()

[*StartedWindowsDialog::isDatabaseTypeValid*](#) Return *TRUE* if settings of database type is valid else return *FALSE*.

- bool [*isDatabaseCentralized*](#) ()

[*StartedWindowsDialog::isDatabaseCentralized*](#) Return *TRUE* if the current type of database is centralized else *FALSE*.

8.99.1 Detailed Description

The [StartedWindowsDialog](#) class Construct a Windows for the first begin.

Author

Florent Berbie

See Also

DatabaseSettingsWidget

8.99.2 Constructor & Destructor Documentation

8.99.2.1 [Gui::Dialogs::StartedWindowsDialog::StartedWindowsDialog \(QWidget * *parent* = 0 \)](#) [*explicit*]

[StartedWindowsDialog::StartedWindowsDialog](#) Construct a [StartedWindowsDialog](#).

Parameters

| | |
|---------------|----------------|
| <i>parent</i> | QWidget parent |
|---------------|----------------|

8.99.3 Member Function Documentation

8.99.3.1 void [Gui::Dialogs::StartedWindowsDialog::databaseTypeChanged \(const int *index* \)](#) [*slot*]

[StartedWindowsDialog::databaseTypeChanged](#) Listener on the Database type combobox.

Parameters

| | |
|--------------|------------------------|
| <i>index</i> | Current index selected |
|--------------|------------------------|

8.99.3.2 QPixmap [Gui::Dialogs::StartedWindowsDialog::getImage \(QString *path*, int *width* = 256, int *height* = 256 \)](#)

[StartedWindowsDialog::getImage](#) Return a scaled image from the icon specified by it *path*. The image returned has a resolution of *width*height* (default 256*256)

Parameters

| | |
|---------------|-------------|
| <i>path</i> | Icon path |
| <i>width</i> | Icon width |
| <i>height</i> | Icon height |

Returns

Scaled image

8.99.3.3 bool Gui::Dialogs::StartedWindowsDialog::isDatabaseCentralized ()

[StartedWindowsDialog::isDatabaseCentralized](#) Return TRUE if the current type of database is centralized else FALSE.

Returns

boolean

8.99.3.4 bool Gui::Dialogs::StartedWindowsDialog::isDatabaseTypeValid ()

[StartedWindowsDialog::isDatabaseTypeValid](#) Return TRUE if settings of database type is valid else return FALSE.

Returns


boolean on the database type validity

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/startedwindowsdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/startedwindowsdialog.cpp

8.100 StatisticModelTest Class Reference

Inheritance diagram for StatisticModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/statisticmodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/statisticmodeltest.cpp

8.101 Models::Statistics Class Reference

Static Public Member Functions

- static QPair< int, double > [getTurnoverBetweenDates](#) (QDate begin, QDate end)
getTurnoverBetweenDates Compute the turnover between 2 dates
- static double [getGlobalTurnover](#) ()
Get the global turnover.

8.101.1 Member Function Documentation

8.101.1.1 double Statistics::getGlobalTurnover () [static]

Get the global turnover.

Returns

The global turnover

8.101.1.2 `QPair< int, double > Statistics::getTurnoverBetweenDates (QDate begin, QDate end)` [static]

getTurnoverBetweenDates Compute the turnover between 2 dates

Parameters

| | |
|--------------|--------------------|
| <i>begin</i> | The beginning date |
| <i>end</i> | The ending date |

Returns

A Qpair who contains the number of billing and their costs

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/statistics.h
- /home/travis/build/FACT-Team/FactDev/src/models/statistics.cpp

8.102 Gui::Dialogs::StatisticsDialog Class Reference

The [StatisticsDialog](#) class window to have global informations or about a customer.

```
#include <statisticsdialog.h>
```

Inheritance diagram for Gui::Dialogs::StatisticsDialog:



Public Member Functions

- [StatisticsDialog](#) (bool global=true, int idCustomer=0, QWidget *parent=0)
Construct a windows [StatisticsDialog](#).
- void [updateUi](#) (int nbBills, int nbBillsPaid, int nbQuotes, int nbProjects)
Update interface (text)
- void [changeMainTitle](#) ()
Change the title of the windows if it's global stats or customer stats.
- QString [singularPlural](#) (int nb)
Get the correct terminaison.

8.102.1 Detailed Description

The [StatisticsDialog](#) class window to have global informations or about a customer.

8.102.2 Constructor & Destructor Documentation

8.102.2.1 `Gui::Dialogs::StatisticsDialog::StatisticsDialog (bool global = true, int idCustomer = 0, QWidget * parent = 0)`
[explicit]

Construct a windows [StatisticsDialog](#).

Parameters

| | |
|-------------------|--|
| <i>global</i> | if it's the global stats or customer stats |
| <i>idCustomer</i> | the id of the Customer |

8.102.3 Member Function Documentation

8.102.3.1 QString Gui::Dialogs::StatisticsDialog::singularPlural (int *nb*)

Get the correct terminaison.

Parameters

| | |
|-----------|--|
| <i>nb</i> | |
|-----------|--|

8.102.3.2 void Gui::Dialogs::StatisticsDialog::updateUi (int *nbBills*, int *nbBillsPaid*, int *nbQuotes*, int *nbProjects*)

Update interface (text)

Parameters

| | |
|--------------------|--|
| <i>nbBills</i> | |
| <i>nbBillsPaid</i> | |
| <i>nbQuotes</i> | |
| <i>nbProjects</i> | |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/statisticsdialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/statisticsdialog.cpp

8.103 Utils::String Class Reference

The Utils class.

```
#include <string.h>
```

Static Public Member Functions

- static QString [firstLetterToUpper](#) (QString s)
String::firstLetterToUpper Put the first letter of a string in capslock.
- static QString [getExtensionFile](#) (QString fileName)
String::getExtensionFile Get the extension file of the file named fileName

8.103.1 Detailed Description

The Utils class.

Author

Antoine de Roquemaurel

8.103.2 Member Function Documentation

8.103.2.1 `QString Utils::String::firstLetterToUpper (QString s)` `[static]`

[String::firstLetterToUpper](#) Put the first letter of a string in capslock.

Parameters

| | |
|----------|-----------------------|
| <i>s</i> | The string to display |
|----------|-----------------------|

Returns

The new string with caps

8.103.2.2 QString Utils::String::getExtensionFile (QString *fileName*) [static]

[String::getExtensionFile](#) Get the extension file of the file named *fileName*

Parameters

| | |
|-------------|-----------|
| <i>file</i> | File name |
|-------------|-----------|

Returns


extension of file

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/utils/string.h
- /home/travis/build/FACT-Team/FactDev/src/utils/string.cpp

8.104 StringTest Class Reference

Inheritance diagram for StringTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/utils/stringtest.h
- /home/travis/build/FACT-Team/FactDev/tests/utils/stringtest.cpp

8.105 Mustache::Tag Struct Reference

```
#include <mustache.h>
```

Public Types

- enum [Type](#) { **Null**, **Value**, [SectionStart](#), [InvertedSectionStart](#), [SectionEnd](#), [Partial](#), [Comment](#), [SetDelimiter](#) }
- enum **EscapeMode** { **Escape**, **Unescape**, **Raw** }

Public Attributes

- [Type](#) **type**
- QString **key**
- int **start**
- int **end**
- EscapeMode **escapeMode**

8.105.1 Detailed Description

Holds properties of a tag in a mustache template.

8.105.2 Member Enumeration Documentation

8.105.2.1 enum Mustache::Tag::Type

Enumerator

SectionStart A {{key}} or {{{key}}} tag.

InvertedSectionStart A {{#section}} tag.

SectionEnd An {{^inverted-section}} tag.

Partial A {{/section}} tag.

Comment A {{^partial}} tag.

SetDelimiter A {{! comment }} tag. A {{=<% %>=}} tag

The documentation for this struct was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/src/mustache.h

8.106 TestAdder< T > Class Template Reference

Public Member Functions

- **TestAdder** (const QString &name)

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/QStringRunner/testadder.cpp


8.107 testadder Class Reference

The documentation for this class was generated from the following file:

- /home/travis/build/FACT-Team/FactDev/tests/QStringRunner/testadder.h

8.108 TestMustache Class Reference

Inheritance diagram for TestMustache:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.h
- /home/travis/build/FACT-Team/FactDev/src/libs/qt-mustache/tests/test_mustache.cpp

8.109 TestRunner Class Reference

Public Member Functions

- `template<typename T >`
char **RegisterTest** (QString name)
- int **RunAll** ()

Static Public Member Functions

- static [TestRunner](#) & **Instance** ()

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/QTestRunner/testrunner.h
- /home/travis/build/FACT-Team/FactDev/tests/QTestRunner/testrunner.cpp

8.110 Generator::TexGenerator Class Reference

The [TexGenerator](#) class Generate a LaTeX file.

```
#include <texgenerator.h>
```

Public Member Functions

- [TexGenerator](#) (QString tpl)
[TexGenerator::TexGenerator](#) Construct a [TexGenerator](#).
- void [generate](#) (QVariantHash data, QString path)
[TexGenerator::generate](#) Generate a LaTeX file into a file specified by the path and which contains data

8.110.1 Detailed Description

The [TexGenerator](#) class Generate a LaTeX file.

8.110.2 Constructor & Destructor Documentation

8.110.2.1 Generator::TexGenerator::TexGenerator (QString *tpl*)

[TexGenerator::TexGenerator](#) Construct a [TexGenerator](#).

Parameters

| | |
|------------|-------------------------|
| <i>tpl</i> | Template LaTeX to apply |
|------------|-------------------------|

8.110.3 Member Function Documentation

8.110.3.1 void Generator::TexGenerator::generate (QVariantHash *data*, QString *path*)

[TexGenerator::generate](#) Generate a LaTeX file into a file specified by the *path* and which contains *data*

Parameters

| | |
|-------------|-------------------------------|
| <i>data</i> | Data to integrate in the file |
| <i>path</i> | Path of the out file |

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/generator/texgenerator.h
- /home/travis/build/FACT-Team/FactDev/src/generator/texgenerator.cpp

8.111 Gui::Widgets::Delegates::TextareaDelegate Class Reference

The [TextareaDelegate](#) class.

```
#include <textareadelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::TextareaDelegate:



Public Member Functions

- [TextareaDelegate](#) (QWidget *parent=0)
[TextareaDelegate::TextareaDelegate](#).
- void [setModelData](#) (QWidget *editor, QAbstractItemModel *model, const QModelIndex &index) const
[TextareaDelegate::setModelData](#) Sets the data model from content in editor.
- void [updateEditorGeometry](#) (QWidget *editor, const QStyleOptionViewItem &option, const QModelIndex &) const
[TextareaDelegate::updateEditorGeometry](#) Update the editor for the item specified by index according to the style option given.
- QWidget * [createEditor](#) (QWidget *parent, const QStyleOptionViewItem &, const QModelIndex &) const
[TextareaDelegate::createEditor](#) Return a QTextEdit specified by index item defined by the parent widget and style option which are used to control how the editor widgets appears.
- void [setEditorData](#) (QWidget *editor, const QModelIndex &index) const
[TextareaDelegate::setEditorData](#) Sets the data to be displayed and edited by the editor from the data model item specified by the model index

8.111.1 Detailed Description

The [TextareaDelegate](#) class.

Author

Antoine de Roquemaurel

8.111.2 Constructor & Destructor Documentation

8.111.2.1 Gui::Widgets::Delegates::TextareaDelegate::TextareaDelegate (QWidget * *parent* = 0)[TextareaDelegate::TextareaDelegate.](#)

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.111.3 Member Function Documentation

8.111.3.1 QWidget * Gui::Widgets::Delegates::TextareaDelegate::createEditor (QWidget * *parent*, const QStyleOptionViewItem & , const QModelIndex &) const

[TextareaDelegate::createEditor](#) Return a QTextEdit specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Returns

[TextareaDelegate](#)8.111.3.2 void Gui::Widgets::Delegates::TextareaDelegate::setEditorData (QWidget * *editor*, const QModelIndex & *index*) const

[TextareaDelegate::setEditorData](#) Sets the data to be displayed and edited by the *editor* from the data model item specified by the model *index*

Parameters

| | |
|---------------|----------------------------|
| <i>editor</i> | Data edited |
| <i>index</i> | Index of the model to edit |

8.111.3.3 void Gui::Widgets::Delegates::TextareaDelegate::setModelData (QWidget * *editor*, QAbstractItemModel * *model*, const QModelIndex & *index*) const

[TextareaDelegate::setModelData](#) Sets the data model from content in editor.

Parameters

| | |
|---------------|----------------------------|
| <i>editor</i> | Data edited |
| <i>index</i> | Index of the model to edit |

8.111.3.4 void Gui::Widgets::Delegates::TextareaDelegate::updateEditorGeometry (QWidget * *editor*, const QStyleOptionViewItem & *option*, const QModelIndex &) const

[TextareaDelegate::updateEditorGeometry](#) Update the *editor* for the item specified by *index* according to the style *option* given.

Parameters

| | |
|---------------|-------------------------|
| <i>editor</i> | Editor widget to update |
| <i>option</i> | Style option |
| <i>index</i> | Item index |

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/textareadelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/textareadelegate.cpp

8.112 Models::Unit Class Reference

The [Unit](#) class An unity for billing calculs.

```
#include <unit.h>
```

Public Member Functions

- [Unit](#) ([TypeUnit](#) type)
Unit Construct an unit with init type.
- [Unit](#) ()
Unit Construct an unit.
- [QString](#) [toString](#) (const bool plural=false)
toString Return String for unit type.
- [TypeUnit](#) [gettype](#) () const
gettype The unit Type
- void [setType](#) (const [TypeUnit](#) &type)
setType Change the unit Type
- bool [operator==](#) (const [Unit](#) &u)
operator == define the operator "==" to compare two [Unit](#)
- bool [operator!=](#) (const [Unit](#) &u)
operator != define the operator "!=" to compare two [Unit](#)

8.112.1 Detailed Description

The [Unit](#) class An unity for billing calculs.

8.112.2 Constructor & Destructor Documentation

8.112.2.1 Models::Unit::Unit ([TypeUnit](#) type)

[Unit](#) Construct an unit with init type.

Parameters

| | |
|-------------|----------------|
| <i>type</i> | The unit Type; |
|-------------|----------------|

8.112.3 Member Function Documentation

8.112.3.1 [TypeUnit](#) Models::Unit::gettype () const

gettype The unit Type

Returns

The unit Type

8.112.3.2 bool Models::Unit::operator!= (const Unit & *u*)

operator != define the operator "!=" to compare two [Unit](#)

Parameters

| | |
|----------|---|
| <i>c</i> | the Unit to compare with the current Contributory |
|----------|---|

Returns

true if the [Unit](#) are different else false

8.112.3.3 bool Models::Unit::operator== (const Unit & *u*)

operator == define the operator "==" to compare two [Unit](#)

Parameters

| | |
|----------|---|
| <i>c</i> | the Unit to compare with the current Contributory |
|----------|---|

Returns

true if the [Unit](#) are equals else false

8.112.3.4 void Models::Unit::setType (const TypeUnit & *type*)

setType Change the unit Type

Parameters

| | |
|-------------|--------------------|
| <i>type</i> | The new unit type. |
|-------------|--------------------|

8.112.3.5 QString Models::Unit::toString (const bool *plural* = false)

toString Return String for unit type.

Returns

The unit in String

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/unit.h
- /home/travis/build/FACT-Team/FactDev/src/models/unit.cpp

8.113 Gui::Widgets::Delegates::UnitComboDelegate Class Reference

The [UnitComboDelegate](#) class.

```
#include <unitcomodelegate.h>
```

Inheritance diagram for Gui::Widgets::Delegates::UnitComboDelegate:

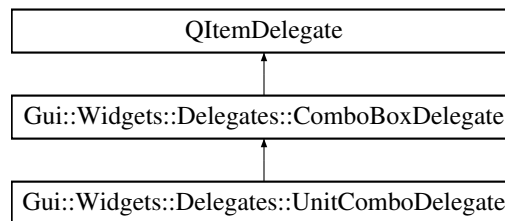

Public Member Functions

- [UnitComboDelegate](#) (QObject *parent=0)
[UnitComboDelegate::UnitComboDelegate](#).
- QWidget * [createEditor](#) (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
[UnitComboDelegate::createEditor](#) Return a ComboBox specified by index item defined by the parent widget and style option which are used to control how the editor widgets appears.
- void [paint](#) (QPainter *painter, const QStyleOptionViewItem &option, const QModelIndex &index) const
[UnitComboDelegate::paint](#) Renders the delegate using the given painter and style option for the item specified by index

8.113.1 Detailed Description

The [UnitComboDelegate](#) class.

8.113.2 Constructor & Destructor Documentation

8.113.2.1 [Gui::Widgets::Delegates::UnitComboDelegate::UnitComboDelegate](#) (QObject * *parent* = 0)

[UnitComboDelegate::UnitComboDelegate](#).

Parameters

| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

8.113.3 Member Function Documentation

8.113.3.1 QWidget * [Gui::Widgets::Delegates::UnitComboDelegate::createEditor](#) (QWidget * *parent*, const QStyleOptionViewItem & *option*, const QModelIndex & *index*) const [virtual]

[UnitComboDelegate::createEditor](#) Return a ComboBox specified by *index* item defined by the *parent* widget and style *option* which are used to control how the editor widgets appears.

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Returns

ComboBox

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

8.113.3.2 void Gui::Widgets::Delegates::UnitComboDelegate::paint (QPainter * *painter*, const QStyleOptionViewItem & *option*, const QModelIndex & *index*) const [virtual]

[UnitComboDelegate::paint](#) Renders the delegate using the given *painter* and style *option* for the item specified by *index*

Parameters

| | |
|---------------|-------------------|
| <i>parent</i> | Widget parent |
| <i>option</i> | Option style |
| <i>index</i> | Index for editing |

Implements [Gui::Widgets::Delegates::ComboBoxDelegate](#).

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/unitcombodelegate.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/delegates/unitcombodelegate.cpp

8.114 Models::User Class Reference

The [User](#) class [User](#) of it application.

```
#include <user.h>
```

Inheritance diagram for Models::User:



Public Member Functions

- [User](#) ()
User::User. Construct an [User](#).
- [User](#) (int id)
User::User. Construct a [User](#) with the identify *id*
- void [commit](#) ()
User::commit Update user data in [User](#) table on the database.
- void [hydrat](#) (int id=1)
User::hydrat Get data of the user who is specified by *id* from the database.
- void [remove](#) ()
remove Remove the current [User](#)
- QVariantHash [getDataMap](#) ()
getDataMap Get all data of model with a HashMap key/value
- void [updateFolders](#) (void)
MainWindow::updateFolders Make directories which contain quotes and billings. Directories are the same than theirs of the Tree organisation (without Projects).
- QString [getTitle](#) () const
User::getTitle Return a short description of [User](#) (company) activity.
- void [setTitle](#) (const QString &title)

- User::setTitle* Modify the user/company activities description
- QString **getNoSiret** () const
 - User::getNoSiret* Return the SIRET number (company registration number)
- void **setNoSiret** (const QString &noSiret)
 - User::setNoSiret* Modify the SIRET number (company registration number) noSiret
- QPixmap * **getImage** ()
 - User::getImage* Return the compagny image.
- void **setImage** (QPixmap *image)
 - User::setImage* Change the current image by the new image
- QString **getWorkspaceName** () const
 - User::getWorkspaceName* Return the name of the workspace user.
- void **setWorkspaceName** (const QString &workspaceName)
 - User::setWorkspaceName* Change the current workspace name by the new workspaceName
- QString **getWorkspacePath** () const
 - User::getWorkspacePath* Return the path of the workspace user.
- void **setWorkspacePath** (const QString &workspacePath)
 - User::setWorkspacePath* Change the current workspace path by the new workspacePath
- bool **operator==** (const **User** &u)
 - User::operator ==* Re-define the operator "==" to compare if the current **User** is the same to the other **User** c Return TRUE if both Users are the same, else FALSE.
- bool **operator!=** (const **User** &u)
 - User::operator !=* Re-define the operator "!=" to compare if the current **User** is differnt to the other **User** c Return TRUE if both Users are different, else FALSE.
- QString **getPdflatexPath** () const
 - getPdflatexPath* The path of pdflatex
- void **setPdflatexPath** (const QString &getPdflatexPath)
 - setPdflatexPath* Change the pdflatex command path.
- double **getNbHoursPerDay** () const
 - nbHoursPerDays* The number of hours per days who the user work.
- void **setNbHoursPerDay** (double value)
 - setNbHoursPerDay* Change the number of hours per day
- double **getNbDaysPerMonth** () const
 - getNbDaysPerMonths* The number of days per months who the user work.
- void **setNbDaysPerMonth** (double **getNbDaysPerMonth**)
 - setNbDaysPerMonth* Change the number of days per month
- double **getNbDaysPerWeek** () const
 - getNbDaysPerWeek* The number of days per week
- void **setNbDaysPerWeek** (double value)
 - setNbDaysPerWeek* Change the number of days per week
- double **getNbHoursPerWeek** () const
 - getNbHoursPerWeek* The number of hours per weeks.
- double **getNbHoursPerMonth** () const
 - getNbHoursPerMonth* The number of hours per months.

Additional Inherited Members

8.114.1 Detailed Description

The **User** class **User** of it application.

Author

Florent Berbie

8.114.2 Constructor & Destructor Documentation

8.114.2.1 Models::User::User (int *id*)

[User::User](#). Construct a [User](#) with the identify *id*

Parameters

| | |
|-----------|--------------------------------|
| <i>id</i> | User <i>id</i> |
|-----------|--------------------------------|

8.114.3 Member Function Documentation

8.114.3.1 QVariantHash Models::User::getDataMap () [virtual]

getDataMap Get all data of model with a HashMap key/value

Returns

Model's data

Implements [Models::IModel](#).

8.114.3.2 QPixmap * Models::User::getImage ()

[User::getImage](#) Return the compagny image.

Returns

compagny image

8.114.3.3 double Models::User::getNbDaysPerMonth () const

getNbDaysPerMonths The number of days per months who the user work.

Returns

The number of days per months

8.114.3.4 double Models::User::getNbDaysPerWeek () const

getNbDaysPerWeek The number of days per week

Returns

The new value

8.114.3.5 double Models::User::getNbHoursPerDay () const

nbHoursPerDays The number of hours per days who the user work.

Returns

The number of hours per days

8.114.3.6 `double Models::User::getNbHoursPerMonth () const`

`getNbHoursPerMonth` The number of hours per months.

Returns

The number of hours.

8.114.3.7 `double Models::User::getNbHoursPerWeek () const`

`getNbHoursPerWeek` The number of hours per weeks.

Returns

The number of hours

8.114.3.8 `QString Models::User::getNoSiret () const`

[User::getNoSiret](#) Return the SIRET number (company registration number)

Returns

SIRET number

8.114.3.9 `QString Models::User::getPdflatexPath () const`

`getPdflatexPath` The path of pdflatex

Returns

The pdflatex path

8.114.3.10 `QString Models::User::getTitle () const`

[User::getTitle](#) Return a short description of [User](#) (company) activity.

Returns

a short description of user (company) activity

8.114.3.11 `QString Models::User::getWorkspaceName () const`

[User::getWorkspaceName](#) Return the name of the workspace user.

Returns

workspace name

8.114.3.12 `QString Models::User::getWorkspacePath () const`

[User::getWorkspacePath](#) Return the path of the workspace user.

Returns

workspace path

8.114.3.13 void Models::User::hydrat (int *id* = 1) [virtual]

[User::hydrat](#) Get data of the user who is specified by *id* from the database.

Parameters

| | |
|-----------|-------------------------------|
| <i>id</i> | User identify |
|-----------|-------------------------------|

Implements [Models::IModel](#).

8.114.3.14 `bool Models::User::operator!= (const User & u)`

[User::operator !=](#) Re-define the operator "!=" to compare if the current [User](#) is differnt to the other [User](#) c Return TRUE if both Users are different, else FALSE.

Parameters

| | |
|----------|---------------------------------|
| <i>u</i> | User to compare |
|----------|---------------------------------|

Returns

boolean

8.114.3.15 `bool Models::User::operator== (const User & u)`

[User::operator ==](#) Re-define the operator "==" to compare if the current [User](#) is the same to the other [User](#) c Return TRUE if both Users are the same, else FALSE.

Parameters

| | |
|----------|---------------------------------|
| <i>u</i> | User to compare |
|----------|---------------------------------|

Returns

boolean

8.114.3.16 `void Models::User::setImage (QPixmap * image) [virtual]`

[User::setImage](#) Change the current image by the new *image*

Parameters

| | |
|--------------|-----------|
| <i>image</i> | New image |
|--------------|-----------|

Reimplemented from [Models::People](#).

8.114.3.17 `void Models::User::setNbDaysPerMonth (double getNbDaysPerMonth)`

setNbDaysPerMonth Change the number of days per month

Parameters

| | |
|--------------------------|---------------|
| <i>getNbDaysPerMonth</i> | The new value |
|--------------------------|---------------|

8.114.3.18 `void Models::User::setNbDaysPerWeek (double value)`

setNbDaysPerWeek Change the number of days per week

Parameters

| | |
|--------------|---------------|
| <i>value</i> | The new value |
|--------------|---------------|

8.114.3.19 void Models::User::setNbHoursPerDay (double *value*)

setNbHoursPerDay Change the number of hours per day

Parameters

| | |
|--------------|---------------|
| <i>value</i> | The new value |
|--------------|---------------|

8.114.3.20 void Models::User::setNoSiret (const QString & *noSiret*)

[User::setNoSiret](#) Modify the SIRET number (company registration number) *noSiret*

Parameters

| | |
|----------------|--------------|
| <i>noSiret</i> | SIRET number |
|----------------|--------------|

8.114.3.21 void Models::User::setPdflatexPath (const QString & *getPdflatexPath*)

setPdflatexPath Change the pdflatex command path.

Parameters

| | |
|------------------------|-----------------|
| <i>getPdflatexPath</i> | The new command |
|------------------------|-----------------|

8.114.3.22 void Models::User::setTitle (const QString & *title*)

[User::setTitle](#) Modify the user/company activities *description*

Parameters

| | |
|--------------|--|
| <i>title</i> | Short description on activity(ies) of User company |
|--------------|--|

8.114.3.23 void Models::User::setWorkspaceName (const QString & *workspaceName*)

[User::setWorkspaceName](#) Change the current workspace name by the new *workspaceName*

Parameters

| | |
|----------------------|--|
| <i>workspaceName</i> | |
|----------------------|--|

8.114.3.24 void Models::User::setWorkspacePath (const QString & *workspacePath*)

[User::setWorkspacePath](#) Change the current workspace path by the new *workspacePath*

Parameters

| | |
|----------------------|--|
| <i>workspacePath</i> | |
|----------------------|--|

8.114.3.25 void Models::User::updateFolders (void)

MainWindow::updateFolders Make directories which contain quotes and billings. Directories are the same than theirs of the Tree organisation (without Projects).

Organisation of folders are formed like this:

- COMPANY CustomerLastname CustomerFirstname/
 - Quotes/
 - * quote1 ...
 - Billings/
 - * billing1 ...

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/models/user.h
- /home/travis/build/FACT-Team/FactDev/src/models/user.cpp

8.115 Gui::Widgets::UserDailyHoursWidget Class Reference

The [UserDailyHoursWidget](#) class Define user quantity of work.

```
#include <userdailyhourswidget.h>
```

Inheritance diagram for Gui::Widgets::UserDailyHoursWidget:



Public Slots

- void [dailyHoursValueHasChanged](#) (const double value)
[UserDailyHoursWidget::dailyHoursValueHasChanged](#) Daily hours value has been changed.
- void [weeklyDaysValueHasChanged](#) (const double value)
[UserDailyHoursWidget::weeklyDaysValueHasChanged](#) Weekly days value has been changed.
- void [monthlyDaysValueHasChanged](#) (const double value)
[UserDailyHoursWidget::monthlyDaysValueHasChanged](#) monthly days value has been changed.
- double [getNbDaysPerWeek](#) () const
[getNbDaysPerWeek](#) The number of days per week
- double [getNbDaysPerMonth](#) () const
[getNbDaysPerMonths](#) The number of days per months who the user work.
- double [getNbHoursPerDay](#) () const
[nbHoursPerDays](#) The number of hours per days who the user work.
- void [setNbDaysPerWeek](#) (double value)
[setNbDaysPerWeek](#) Change the number of days per week
- void [setNbDaysPerMonth](#) (double [getNbDaysPerMonth](#))
[setNbDaysPerMonth](#) Change the number of days per month
- void [setNbHoursPerDay](#) (double value)
[setNbHoursPerDay](#) Change the number of hours per day

Public Member Functions

- [UserDailyHoursWidget](#) (QWidget *parent=0)
[UserDailyHoursWidget::UserDailyHoursWidget](#) Cosntruct an [UserDailyHoursWidget](#).
- void [setupUI](#) ()
[UserDailyHoursWidget::setupUI](#) Init the User Interface.

8.115.1 Detailed Description

The [UserDailyHoursWidget](#) class Define user quantity of work.

8.115.2 Constructor & Destructor Documentation

8.115.2.1 [Gui::Widgets::UserDailyHoursWidget::UserDailyHoursWidget \(QWidget * *parent* = 0 \)](#) [explicit]

[UserDailyHoursWidget::UserDailyHoursWidget](#) Cosntruct an [UserDailyHoursWidget](#).

Parameters

| | |
|---------------|----------------|
| <i>parent</i> | QWidget parent |
|---------------|----------------|

8.115.3 Member Function Documentation

8.115.3.1 void [Gui::Widgets::UserDailyHoursWidget::dailyHoursValueHasChanged \(const double *value* \)](#) [slot]

[UserDailyHoursWidget::dailyHoursValueHasChanged](#) Daily hours *value* has been changed.

Parameters

| | |
|--------------|-----------------------|
| <i>value</i> | New daily hours value |
|--------------|-----------------------|

8.115.3.2 double [Gui::Widgets::UserDailyHoursWidget::getNbDaysPerMonth \(\) const](#) [slot]

[getNbDaysPerMonths](#) The number of days per months who the user work.

Returns

The number of days per months

8.115.3.3 double [Gui::Widgets::UserDailyHoursWidget::getNbDaysPerWeek \(\) const](#) [slot]

[getNbDaysPerWeek](#) The number of days per week

Returns

The new value

8.115.3.4 double [Gui::Widgets::UserDailyHoursWidget::getNbHoursPerDay \(\) const](#) [slot]

[nbHoursPerDays](#) The number of hours per days who the user work.

Returns

The number of hours per days

8.115.3.5 void Gui::Widgets::UserDailyHoursWidget::monthlyDaysValueHasChanged (const double *value*) [slot]

[UserDailyHoursWidget::monthlyDaysValueHasChanged](#) monthly days *value* has been changed.

Parameters

| | |
|--------------|-------------------------|
| <i>value</i> | New monthly daysz value |
|--------------|-------------------------|

8.115.3.6 void Gui::Widgets::UserDailyHoursWidget::setNbDaysPerMonth (double *getNbDaysPerMonth*) [slot]

setNbDaysPerMonth Change the number of days per month

Parameters

| | |
|--------------------------|---------------|
| <i>getNbDaysPerMonth</i> | The new value |
|--------------------------|---------------|

8.115.3.7 void Gui::Widgets::UserDailyHoursWidget::setNbDaysPerWeek (double *value*) [slot]

setNbDaysPerWeek Change the number of days per week

Parameters

| | |
|--------------|---------------|
| <i>value</i> | The new value |
|--------------|---------------|

8.115.3.8 void Gui::Widgets::UserDailyHoursWidget::setNbHoursPerDay (double *value*) [slot]

setNbHoursPerDay Change the number of hours per day

Parameters

| | |
|--------------|---------------|
| <i>value</i> | The new value |
|--------------|---------------|

8.115.3.9 void Gui::Widgets::UserDailyHoursWidget::weeklyDaysValueHasChanged (const double *value*) [slot]

[UserDailyHoursWidget::weeklyDaysValueHasChanged](#) Weekly days *value* has been changed.

Parameters

| | |
|--------------|-----------------------|
| <i>value</i> | New Weekly days value |
|--------------|-----------------------|

The documentation for this class was generated from the following files:


- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/userdailyhourswidget.h
- /home/travis/build/FACT-Team/FactDev/src/gui/widgets/userdailyhourswidget.cpp

8.116 Databases::UserDatabase Class Reference

The [UserDatabase](#) class Access to User data in the the table User of the [Database](#)

```
#include <userdatabase.h>
```

Inheritance diagram for Databases::UserDatabase:



Public Member Functions

- [Models::User](#) * [getUser](#) (const int pld=1)
[UserDatabase::getUser](#) Get informations about the user (identified by 'pld')
- void [updateUser](#) (const [Models::User](#) &)
[UserDatabase::updateUser](#) Update informations about the user.
- QPixmap [getUserImage](#) (const int pld=1)
[UserDatabase::getUserImage](#) Return a User image.
- void [setUserImage](#) ([Models::User](#) &pUser)
[UserDatabase::setUserImage](#) Change the image of the customer pCustomer

Static Public Member Functions

- static [UserDatabase](#) * [instance](#) () throw (DbException*)
[UserDatabase::getInstance](#) Return an instance of [UserDatabase](#).

Additional Inherited Members

8.116.1 Detailed Description

The [UserDatabase](#) class Access to User data in the the table User of the [Database](#)

Author

Florent Berbie

See Also

[Database](#)
[User](#)

8.116.2 Member Function Documentation

8.116.2.1 [Models::User](#) * [Databases::UserDatabase::getUser](#) (const int *pld* = 1)

[UserDatabase::getUser](#) Get informations about the user (identified by 'pld')

Parameters

| | |
|------------|---------------------|
| <i>pld</i> | user id (1 default) |
|------------|---------------------|

Returns

the user

8.116.2.2 QPixmap [Databases::UserDatabase::getUserImage](#) (const int *pld* = 1)

[UserDatabase::getUserImage](#) Return a User image.

Parameters

| | |
|------------|-------------|
| <i>pId</i> | Customer id |
|------------|-------------|

Returns

User image

8.116.2.3 `UserDatabase * Databases::UserDatabase::instance () throw DbException *` `[static]`

`UserDatabase::getInstance` Return an instance of [UserDatabase](#).

Returns

Instance of [UserDatabase](#)

8.116.2.4 `void Databases::UserDatabase::setUserImage (Models::User & pUser)`

[UserDatabase::setUserImage](#) Change the image of the customer *pCustomer*

Parameters


| | |
|--------------|------|
| <i>pUser</i> | User |
|--------------|------|

The documentation for this class was generated from the following files:

- `/home/travis/build/FACT-Team/FactDev/src/database/userdatabase.h`
- `/home/travis/build/FACT-Team/FactDev/src/database/userdatabase.cpp`

8.117 UserDatabaseTest Class Reference

Inheritance diagram for `UserDatabaseTest`:



The documentation for this class was generated from the following files:


- `/home/travis/build/FACT-Team/FactDev/tests/database/userdatabasetest.h`
- `/home/travis/build/FACT-Team/FactDev/tests/database/userdatabasetest.cpp`

8.118 Gui::Dialogs::UserDataDialog Class Reference

The [UserDataDialog](#) class Window to fill user data.

```
#include <userdatadialog.h>
```

Inheritance diagram for `Gui::Dialogs::UserDataDialog`:



Public Slots

- void [checkFields](#) ()
[UserDataDialog::checkFields](#) Check all fields of dialog components.

Public Member Functions

- [UserDataDialog](#) (QWidget *parent=0)
[UserDataDialog::UserDataDialog](#) Construct a window with user data.
- void [fillFields](#) ()
[UserDataDialog::fillFields](#) Fill line edits with the data of the user.
- void [accept](#) ()
[UserDataDialog::accept](#) Valid data inputed by user and add these data in Database.
- void [reject](#) ()
[UserDataDialog::reject](#) Cancel the operation and close the windows.
- void [browseWorkspacePath](#) ()

8.118.1 Detailed Description

The [UserDataDialog](#) class Window to fill user data.

Author

Florent Berbie

See Also

[Project](#)

8.118.2 Constructor & Destructor Documentation

8.118.2.1 [Gui::Dialogs::UserDataDialog::UserDataDialog \(QWidget * *parent* = 0 \)](#) [explicit]

[UserDataDialog::UserDataDialog](#) Construct a window with user data.

Parameters


| | |
|---------------|--|
| <i>parent</i> | |
|---------------|--|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/userdatadialog.h
- /home/travis/build/FACT-Team/FactDev/src/gui/dialogs/userdatadialog.cpp

8.119 UserModelTest Class Reference

Inheritance diagram for UserModelTest:



The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/tests/models/usermodeltest.h
- /home/travis/build/FACT-Team/FactDev/tests/models/usermodeltest.cpp

8.120 Gui::Utils::WindowSettings Class Reference

The [WindowSettings](#) class Utils function on windows.

```
#include <windowsettings.h>
```

Static Public Member Functions

- static void [setMaximumSize](#) (QWidget &w)
[WindowSettings::setMaximumSize](#) Adapt the resolution of the window *w* to take all screen.
- static void [setPositionToCenter](#) (QWidget &w)
[WindowSettings::setPositionToCenter](#) Place the current window *w* to the center of the screen.

8.120.1 Detailed Description

The [WindowSettings](#) class Utils function on windows.

Author

Florent Berbie

8.120.2 Member Function Documentation

8.120.2.1 void Gui::Utils::WindowSettings::setMaximumSize (QWidget & *w*) [static]

[WindowSettings::setMaximumSize](#) Adapt the resolution of the window *w* to take all screen.

Parameters

| | |
|----------|----------------|
| <i>w</i> | Current Window |
|----------|----------------|

8.120.2.2 void Gui::Utils::WindowSettings::setPositionToCenter (QWidget & *w*) [static]

[WindowSettings::setPositionToCenter](#) Place the current window *w* to the center of the screen.

Parameters

| | |
|----------|----------------|
| <i>w</i> | Current Window |
|----------|----------------|

The documentation for this class was generated from the following files:

- /home/travis/build/FACT-Team/FactDev/src/gui/Utils/windowsettings.h
- /home/travis/build/FACT-Team/FactDev/src/gui/Utils/windowsettings.cpp

Index

- add
 - Gui::Widgets::ContributoriesWidget, 91
- addBill
 - Gui::MainWindow, 142
- addBilling
 - Databases::BillingDatabase, 33
- addBillingProject
 - Databases::BillingDatabase, 33
- addBillingToProject
 - Utils::HierarchicalSystem, 130
- addContributory
 - Databases::ContributoryDatabase, 98
 - Models::Billing, 27
 - Models::ContributoriesList, 81
- addCustomer
 - Databases::CustomerDatabase, 108
- addDoc
 - Gui::MainWindow, 142
- addProject
 - Databases::ProjectDatabase, 174
 - Gui::MainWindow, 142
 - Gui::Widgets::ContributoriesWidget, 91
 - Models::ContributoriesList, 81
- AddProjectDialog
 - Gui::Dialogs::AddProjectDialog, 22
- addProjectToCustomer
 - Utils::HierarchicalSystem, 131
- addQuote
 - Gui::MainWindow, 142
- AddQuoteDialog
 - Gui::Dialogs::AddQuoteDialog, 23
- addRateProject
 - Databases::RateDatabase, 186
- allProjectsChosen
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 170
- append
 - Gui::Widgets::WdgModels::BillingsTableModel, 41
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, 86
 - Gui::Widgets::WdgModels::CustomersTableModel, 114
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 170
 - Gui::Widgets::WdgModels::ProjectsTableModel, 178
- beginDateControl
 - Gui::Dialogs::ComputeTurnoverDialog, 77
- Billing
 - Models::Billing, 27
- BillingDatabaseTest, 39
- BillingModelTest, 39
- BillingsTableModel
 - Gui::Widgets::WdgModels::BillingsTableModel, 41
- BrowseImageWidget
 - Gui::Widgets::BrowseImageWidget, 44
- bytesToPixmap
 - Gui::Utils::Image, 133
- canEval
 - CounterContext, 102
 - Mustache::Context, 78
 - Mustache::QtVariantContext, 183
- changeDatabase
 - Databases::Database, 117
- check
 - Gui::Widgets::CheckFields::CheckEmail, 48
 - Gui::Widgets::CheckFields::CheckFieldsLetters, 50
 - Gui::Widgets::CheckFields::CheckFieldsNumbers, 53
 - Gui::Widgets::CheckFields::CheckIpAddress, 54
 - Gui::Widgets::CheckFields::CheckLogin, 55
 - Gui::Widgets::CheckFields::CheckPhone, 57
 - Gui::Widgets::CheckFields::CheckPortNumber, 59
 - Gui::Widgets::CheckFields::CheckPostalCode, 60
 - Gui::Widgets::CheckFields::CheckSiretNumber, 63
 - Gui::Widgets::CheckFields::CheckUntilField, 64
 - Gui::Widgets::CheckFields::CheckValidField, 65
 - Gui::Widgets::CheckFields::CheckWebsite, 66
 - Gui::Widgets::CheckFields::ICheckField, 132
- CheckCity
 - Gui::Widgets::CheckFields::CheckCity, 46
- CheckCountry
 - Gui::Widgets::CheckFields::CheckCountry, 47
- CheckEmail
 - Gui::Widgets::CheckFields::CheckEmail, 48
- CheckFieldsLetters
 - Gui::Widgets::CheckFields::CheckFieldsLetters, 49
- CheckFieldsNumbers
 - Gui::Widgets::CheckFields::CheckFieldsNumbers, 52
- CheckIpAddress
 - Gui::Widgets::CheckFields::CheckIpAddress, 54
- CheckLogin
 - Gui::Widgets::CheckFields::CheckLogin, 55
- CheckName
 - Gui::Widgets::CheckFields::CheckName, 56
- CheckPhone
 - Gui::Widgets::CheckFields::CheckPhone, 57

- CheckPortNumber
 - Gui::Widgets::CheckFields::CheckPortNumber, [59](#)
- CheckPostalCode
 - Gui::Widgets::CheckFields::CheckPostalCode, [60](#)
- CheckQLineEdit
 - Gui::Widgets::CheckFields::CheckQLineEdit, [61](#)
- CheckSiretNumber
 - Gui::Widgets::CheckFields::CheckSiretNumber, [63](#)
- CheckUntilField
 - Gui::Widgets::CheckFields::CheckUntilField, [64](#)
- CheckValidField
 - Gui::Widgets::CheckFields::CheckValidField, [65](#)
- CheckWebsite
 - Gui::Widgets::CheckFields::CheckWebsite, [66](#)
- ChoseDirectoryWidget
 - Gui::Widgets::Path::ChoseDirectoryWidget, [67](#)
- ChoseFileWidget
 - Gui::Widgets::Path::ChoseFileWidget, [68](#)
- ChosePathWidget
 - Gui::Widgets::Path::ChosePathWidget, [70](#)
- CoffeeEasterEggWidget
 - Gui::Widgets::CoffeeEasterEggWidget, [72](#)
- columnCount
 - Gui::Widgets::WdgModels::BillingsTableModel, [41](#)
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [86](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [114](#)
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [170](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [178](#)
- ComboBoxDelegate
 - Gui::Widgets::Delegates::ComboBoxDelegate, [73](#)
- ComboBoxModelWidget
 - Gui::Widgets::ComboBoxModelWidget, [76](#)
- Comment
 - Mustache::Tag, [209](#)
- commit
 - Models::Customer, [104](#)
- Context
 - Mustache::Context, [78](#)
- ContributoriesDatabaseTest, [79](#)
- ContributoriesTableModel
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [86](#)
- ContributoriesWidget
 - Gui::Widgets::ContributoriesWidget, [90](#)
- Contributory
 - Models::Contributory, [93](#)
- ContributoryListTest, [100](#)
- ContributoryModelTest, [101](#)
- count
 - Gui::Widgets::ContributoriesWidget, [91](#)
 - Gui::Widgets::WdgModels::BillingsTableModel, [41](#)
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [86](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [114](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [179](#)
- CounterContext, [101](#)
 - canEval, [102](#)
 - eval, [102](#)
 - stringValue, [102](#)
- createEditor
 - Gui::Widgets::Delegates::ComboBoxDelegate, [73](#)
 - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, [126](#)
 - Gui::Widgets::Delegates::ProjectComboDelegate, [168](#)
 - Gui::Widgets::Delegates::TextareaDelegate, [213](#)
 - Gui::Widgets::Delegates::UnitComboDelegate, [217](#)
- Customer
 - Models::Customer, [104](#)
- CustomerContextualMenu
 - Gui::Widgets::CustomerContextualMenu, [106](#)
- CustomerDataWidget
 - Gui::Widgets::CustomerDataWidget, [112](#)
- CustomerDatabaseTest, [111](#)
- CustomerModelTest, [112](#)
- CustomersTableModel
 - Gui::Widgets::WdgModels::CustomersTableModel, [113](#)
- DB_FILENAME
 - Parameters, [147](#)
- dailyHoursValueHasChanged
 - Gui::Widgets::UserDailyHoursWidget, [226](#)
- data
 - Gui::Widgets::WdgModels::BillingsTableModel, [41](#)
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [87](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [114](#)
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [171](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [179](#)
- DatabaseSettingsWidget
 - Gui::Widgets::DatabaseSettingsWidget, [120](#)
- databaseTypeChanged
 - Gui::Dialogs::StartedWindowsDialog, [202](#)
- Databases, [17](#)
- Databases::AccessDatabase, [21](#)
- Databases::BillingDatabase, [31](#)
 - addBilling, [33](#)
 - addBillingProject, [33](#)
 - getAllBillingsOfProject, [33](#)
 - getBilling, [33](#)
 - getBillingsTable, [35](#)
 - getBills, [35](#)
 - getBillsBetweenDates, [35](#)
 - getBillsPaid, [35](#)
 - getMaxBillingNumber, [36](#)
 - getMaxBillingNumberOfCustomer, [36](#)

- getMaxQuoteNumber, 36
- getMaxQuoteNumberOfCustomer, 36
- getNbBills, 36
- getNbBillsPaid, 37
- getNbDocs, 37
- getNbQuotes, 37
- instance, 37
- isBillingPaid, 37
- removeBilling, 39
- removeBillingProject, 39
- Databases::ContributoryDatabase, 97
 - addContributory, 98
 - getContributoriesByBilling, 98
 - getContributoriesByBillingAndProject, 98
 - getContributory, 98, 100
 - instance, 100
 - removeContributory, 100
- Databases::CustomerDatabase, 106
 - addCustomer, 108
 - getCustomer, 108
 - getCustomerImage, 108
 - getCustomers, 108
 - getCustomersTable, 109
 - getItemCustomer, 109
 - getItemProject, 109
 - getItemRoot, 109
 - getNbCustomers, 109
 - getTree, 110
 - instance, 110
 - removeCustomer, 110
 - setCustomerImage, 110
 - updateCustomer, 110
- Databases::Database, 116
 - changeDatabase, 117
 - executeFile, 117
 - instance, 117
 - lastError, 117
 - setDatabase, 119
 - value, 119
- Databases::ProjectDatabase, 173
 - addProject, 174
 - getAllProjects, 174
 - getCostProjects, 174
 - getNbProjects, 174
 - getProject, 175
 - getProjects, 175
 - getProjectsOfCustomer, 175
 - getProjectsTable, 176
 - instance, 176
 - removeProject, 176
 - updateProject, 176
- Databases::RateDatabase, 186
 - addRateProject, 186
 - getRate, 186
 - instance, 186
 - updateRateProject, 187
- Databases::UserDatabase, 228
 - getUser, 229
 - getUserImage, 229
 - instance, 230
 - setUserImage, 230
- DbException
 - Exceptions::DbException, 122
- deleteIfNotNull
 - Utils::pointers, 160
- DialogAddCustomer
 - Gui::Dialogs::DialogAddCustomer, 123
- DirectoriesTests, 124
- DoubleSpinBoxDelegate
 - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 126
- editUser
 - Gui::MainWindow, 143
- endDateControl
 - Gui::Dialogs::ComputeTurnoverDialog, 77
- error
 - Mustache::Renderer, 190
- errorPartial
 - Mustache::Renderer, 190
- errorPos
 - Mustache::Renderer, 190
- eval
 - CounterContext, 102
 - Mustache::Context, 78
 - Mustache::QtVariantContext, 183
- Exceptions::DbException, 121
 - DbException, 122
 - popupMessage, 122
- Exceptions::FileException, 128
 - FileException, 128
 - popupMessage, 128
- executeFile
 - Databases::Database, 117
- FileChoseWidget, 127
- FileException
 - Exceptions::FileException, 128
- fillLabels
 - Gui::Dialogs::ComputeTurnoverDialog, 77
- fillQuoteBilling
 - Gui::Dialogs::AddQuoteDialog, 24
- filterOnBillsOrQuotes
 - Models::Search, 192
- filterOnCompany
 - Models::Search, 192
- filterOnContributories
 - Models::Search, 192
- filterOnCustomersWithoutProject
 - Models::Search, 192
- filterOnNumberElements
 - Models::Search, 192
- filterOnProjects
 - Models::Search, 193
- filterOnReferentLastname
 - Models::Search, 193
- filterOnVarcharElements

- Models::Search, [193](#)
- firstLetterToUpper
 - Utils::String, [207](#)
- flags
 - Gui::Widgets::WdgModels::BillingsTableModel, [42](#)
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [87](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [114](#)
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [171](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [179](#)
- fn_t
 - Mustache::QtVariantContext, [183](#)
- generate
 - Generator::PdfGenerator, [150](#)
 - Generator::TexGenerator, [212](#)
- Generation, [128](#)
- Generator::PdfGenerator, [150](#)
 - generate, [150](#)
 - PdfGenerator, [150](#)
- Generator::TexGenerator, [210](#)
 - generate, [212](#)
 - TexGenerator, [211](#)
- getAddress
 - Models::People, [152](#)
- getAddressComplement
 - Models::People, [152](#)
- getAllBillingsOfProject
 - Databases::BillingDatabase, [33](#)
- getAllContributories
 - Models::ContributoriesList, [81](#)
- getAllProjects
 - Databases::ProjectDatabase, [174](#)
- getBeginDate
 - Models::Project, [163](#)
- getBilling
 - Databases::BillingDatabase, [33](#)
- getBillings
 - Gui::Widgets::WdgModels::BillingsTableModel, [42](#)
- getBillingsTable
 - Databases::BillingDatabase, [35](#)
- getBills
 - Databases::BillingDatabase, [35](#)
- getBillsBetweenDates
 - Databases::BillingDatabase, [35](#)
- getBillsPaid
 - Databases::BillingDatabase, [35](#)
- getBtnValid
 - Gui::Widgets::CheckFields::CheckQLineEdit, [62](#)
- getCity
 - Models::People, [153](#)
- getCompany
 - Models::People, [153](#)
- getContributories
 - Gui::Widgets::ContributoriesWidget, [91](#)
- Gui::Widgets::WdgModels::ContributoriesTable-Model, [87](#)
- Models::Billing, [27](#)
- Models::ContributoriesList, [81](#)
- getContributoriesByBilling
 - Databases::ContributoryDatabase, [98](#)
- getContributoriesByBillingAndProject
 - Databases::ContributoryDatabase, [98](#)
- getContributory
 - Databases::ContributoryDatabase, [98](#), [100](#)
- getCopy
 - Gui::Dialogs::AddQuoteDialog, [24](#)
- getCost
 - Models::Project, [163](#)
- getCostProjects
 - Databases::ProjectDatabase, [174](#)
- getCountry
 - Gui::Widgets::CheckFields::CheckPhone, [57](#)
 - Gui::Widgets::CheckFields::CheckPostalCode, [60](#)
 - Models::People, [153](#)
- getCurrentCustomerId
 - Gui::MainWindow, [143](#)
 - Gui::Widgets::searchWidget, [200](#)
- getCurrentCustomerName
 - Gui::MainWindow, [143](#)
- getCurrentProjectId
 - Gui::MainWindow, [143](#)
- getCurrentProjectName
 - Gui::MainWindow, [143](#)
- getCurrentQuoteId
 - Gui::MainWindow, [143](#)
- getCustomer
 - Databases::CustomerDatabase, [108](#)
 - Models::ContributoriesList, [82](#)
 - Models::Project, [163](#)
- getCustomerImage
 - Databases::CustomerDatabase, [108](#)
- getCustomers
 - Databases::CustomerDatabase, [108](#)
 - Gui::Widgets::WdgModels::CustomersTableModel, [114](#)
 - Utils::HierarchicalSystem, [131](#)
- getCustomersTable
 - Databases::CustomerDatabase, [109](#)
- getDailyRate
 - Gui::Widgets::RateWidget, [188](#)
 - Models::Project, [163](#)
 - Models::Rate, [185](#)
- getDataMap
 - Models::Billing, [27](#)
 - Models::ContributoriesList, [82](#)
 - Models::Contributory, [93](#)
 - Models::Customer, [104](#)
 - Models::IModel, [135](#)
 - Models::Project, [163](#)
 - Models::User, [220](#)
- getDatabaseName
 - Gui::Widgets::DatabaseSettingsWidget, [120](#)

- getDate
 - Models::Billing, 27
- getDefaultLocation
 - Gui::Widgets::Path::ChosePathWidget, 70
- getDescription
 - Models::Billing, 27
 - Models::Contributory, 93
 - Models::Project, 163
- getDomainNameOrIP
 - Gui::Widgets::DatabaseSettingsWidget, 120
- getEmail
 - Models::People, 153
- getEndDate
 - Models::Project, 163
- getExtension
 - Gui::Widgets::BrowseImageWidget, 44
- getExtensionFile
 - Utils::String, 208
- getExtensionImage
 - Models::People, 153
- getFax
 - Models::People, 153
- getField
 - Gui::Widgets::Path::ChosePathWidget, 70
- getFilename
 - Models::Billing, 28
- getFilter
 - Models::Search, 193
- getFirstname
 - Models::People, 153
- getFolder
 - Models::Billing, 28
- getGlobalTurnover
 - Models::Statistics, 203
- getGroupFilter
 - Models::Search, 193
- getHourlyRate
 - Gui::Widgets::RateWidget, 188
 - Models::Contributory, 93
 - Models::Rate, 185
- getId
 - Models::IModel, 135
- getIdBilling
 - Models::ContributoriesList, 82
- getIdCustomer
 - Gui::Dialogs::AddQuoteDialog, 24
 - Gui::Widgets::searchWidget, 200
- getImage
 - Gui::Dialogs::StartedWindowsDialog, 202
 - Gui::Utils::Image, 133
 - Gui::Widgets::BrowseImageWidget, 44
 - Models::Customer, 104
 - Models::People, 154
 - Models::User, 220
- getItem
 - Models::Billing, 28
- getItemCustomer
 - Databases::CustomerDatabase, 109
- getItemProject
 - Databases::CustomerDatabase, 109
- getItemRoot
 - Databases::CustomerDatabase, 109
- getLastname
 - Models::People, 154
- getLegalRate
 - Models::Rate, 185
- getLogin
 - Gui::Widgets::DatabaseSettingsWidget, 121
- getLongDescription
 - Models::Contributory, 93
- getMaxBillingNumber
 - Databases::BillingDatabase, 36
- getMaxBillingNumberOfCustomer
 - Databases::BillingDatabase, 36
- getMaxQuoteNumber
 - Databases::BillingDatabase, 36
- getMaxQuoteNumberOfCustomer
 - Databases::BillingDatabase, 36
- getMobilePhone
 - Models::People, 154
- getModel
 - Utils::ItemType, 137
- getName
 - Models::Project, 164
 - Utils::ItemType, 137
- getNameFolder
 - Models::Customer, 104
- getNbBills
 - Databases::BillingDatabase, 36
- getNbBillsPaid
 - Databases::BillingDatabase, 37
- getNbCustomers
 - Databases::CustomerDatabase, 109
- getNbDailyHours
 - Models::Rate, 185
- getNbDaysPerMonth
 - Gui::Widgets::UserDailyHoursWidget, 226
 - Models::User, 220
- getNbDaysPerWeek
 - Gui::Widgets::UserDailyHoursWidget, 226
 - Models::User, 220
- getNbDocs
 - Databases::BillingDatabase, 37
- getNbHoursPerDay
 - Gui::Widgets::UserDailyHoursWidget, 226
 - Models::User, 220
- getNbHoursPerMonth
 - Models::User, 220
- getNbHoursPerWeek
 - Models::User, 221
- getNbProjects
 - Databases::ProjectDatabase, 174
 - Models::ContributoriesList, 82
- getNbQuotes
 - Databases::BillingDatabase, 37
- getNoSiret

- Models::User, [221](#)
- getNumber
 - Gui::Dialogs::AddQuoteDialog, [24](#)
 - Models::Billing, [28](#)
- getPartial
 - Mustache::PartialFileLoader, [148](#)
 - Mustache::PartialMap, [149](#)
 - Mustache::PartialResolver, [149](#)
- getPassword
 - Gui::Widgets::DatabaseSettingsWidget, [121](#)
- getPath
 - Models::Billing, [28](#)
 - Models::Customer, [104](#)
- getPdflatexPath
 - Models::User, [221](#)
- getPhone
 - Models::People, [154](#)
- getPort
 - Gui::Widgets::DatabaseSettingsWidget, [121](#)
- getPostalCode
 - Models::People, [154](#)
- getPrice
 - Models::Billing, [28](#)
 - Models::Calculable, [45](#)
 - Models::ContributoriesList, [82](#)
 - Models::Contributory, [94](#)
- getProject
 - Databases::ProjectDatabase, [175](#)
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [171](#)
 - Models::Contributory, [94](#)
- getProjects
 - Databases::ProjectDatabase, [175](#)
 - Gui::Widgets::Delegates::ProjectComboDelegate, [168](#)
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [171](#)
 - Gui::Widgets::WdgModels::ProjectsTableModel, [179](#)
 - Models::ContributoriesList, [83](#)
 - Utils::HierarchicalSystem, [131](#)
- getProjectsOfCustomer
 - Databases::ProjectDatabase, [175](#)
- getProjectsTable
 - Databases::ProjectDatabase, [176](#)
- getQuantity
 - Models::Contributory, [94](#)
- getRate
 - Databases::RateDatabase, [186](#)
 - Models::ContributoriesList, [83](#)
- getSearchInBillsQuotes
 - Models::Search, [193](#)
- getSearchInCompanies
 - Models::Search, [194](#)
- getSearchInProjects
 - Models::Search, [194](#)
- getSearchInReferentLastname
 - Models::Search, [194](#)
- getSelectedProjects
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, [171](#)
- getSumQuantity
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, [87](#)
 - Models::Billing, [29](#)
 - Models::Calculable, [45](#)
 - Models::ContributoriesList, [83](#)
 - Models::Contributory, [94](#)
- getText
 - Gui::Docks::SearchDock, [197](#)
 - Models::Search, [194](#)
- getTitle
 - Models::Billing, [29](#)
 - Models::User, [221](#)
- getTree
 - Databases::CustomerDatabase, [110](#)
- getTurnover
 - Models::Customer, [105](#)
- getTurnoverBetweenDates
 - Models::Statistics, [204](#)
- getType
 - Utils::ItemType, [137](#)
- getUnit
 - Models::Contributory, [94](#)
- getUser
 - Databases::UserDatabase, [229](#)
- getUserImage
 - Databases::UserDatabase, [229](#)
- getWebsite
 - Models::People, [154](#)
- getWorkspaceName
 - Models::User, [221](#)
- getWorkspacePath
 - Models::User, [221](#)
- getype
 - Models::Unit, [215](#)
- getypeFiles
 - Gui::Widgets::Path::ChoseFileWidget, [69](#)
- Gui, [17](#)
- Gui::Dialogs::AddProjectDialog, [21](#)
 - AddProjectDialog, [22](#)
- Gui::Dialogs::AddQuoteDialog, [22](#)
 - AddQuoteDialog, [23](#)
 - fillQuoteBilling, [24](#)
 - getCopy, [24](#)
 - getIldCustomer, [24](#)
 - getNumber, [24](#)
 - setCopy, [24](#)
 - setQuoteldNumber, [25](#)
- Gui::Dialogs::ComputeTurnoverDialog, [76](#)
 - beginDateControl, [77](#)
 - endDateControl, [77](#)
 - fillLabels, [77](#)
- Gui::Dialogs::DialogAddCustomer, [123](#)
 - DialogAddCustomer, [123](#)
- Gui::Dialogs::MessageBox, [145](#)

- MessageBox, 146
 - setImage, 146
 - setText, 147
- Gui::Dialogs::StartedWindowsDialog, 201
 - databaseTypeChanged, 202
 - getImage, 202
 - isDatabaseCentralized, 202
 - isDatabaseTypeValid, 203
 - StartedWindowsDialog, 202
- Gui::Dialogs::StatisticsDialog, 204
 - singularPlural, 206
 - StatisticsDialog, 205
 - updateUi, 206
- Gui::Dialogs::UserDataDialog, 230
 - UserDataDialog, 231
- Gui::Docks::SearchDock, 196
 - getText, 197
 - search, 197
 - SearchDock, 196
 - textChanged, 197
- Gui::MainWindow, 140
 - addBill, 142
 - addDoc, 142
 - addProject, 142
 - addQuote, 142
 - editUser, 143
 - getCurrentCustomerId, 143
 - getCurrentCustomerName, 143
 - getCurrentProjectId, 143
 - getCurrentProjectName, 143
 - getCurrentQuoteId, 143
 - isEasterEgg, 143
 - MainWindow, 142
 - resizeEvent, 145
 - rootTree, 145
 - search, 145
 - treeLevel, 145
- Gui::Utils::Image, 132
 - bytesToPixmap, 133
 - getImage, 133
 - imageToBytes, 133
 - pixmapToBytes, 134
 - pixmapToImage, 134
- Gui::Utils::WindowSettings, 232
 - setMaximumSize, 232
 - setPositionToCenter, 232
- Gui::Widgets, 18
- Gui::Widgets::BrowseImageWidget, 43
 - BrowseImageWidget, 44
 - getExtension, 44
 - getImage, 44
 - setImage, 44
 - setImageScaled, 44
- Gui::Widgets::CheckFields::CheckCity, 46
 - CheckCity, 46
- Gui::Widgets::CheckFields::CheckCountry, 47
 - CheckCountry, 47
- Gui::Widgets::CheckFields::CheckEmail, 47
 - check, 48
 - CheckEmail, 48
- Gui::Widgets::CheckFields::CheckFieldsLetters, 49
 - check, 50
 - CheckFieldsLetters, 49
- Gui::Widgets::CheckFields::CheckFieldsNumbers, 51
 - check, 53
 - CheckFieldsNumbers, 52
- Gui::Widgets::CheckFields::CheckIpAddress, 53
 - check, 54
 - CheckIpAddress, 54
- Gui::Widgets::CheckFields::CheckLogin, 54
 - check, 55
 - CheckLogin, 55
- Gui::Widgets::CheckFields::CheckName, 56
 - CheckName, 56
- Gui::Widgets::CheckFields::CheckPhone, 56
 - check, 57
 - CheckPhone, 57
 - getCountry, 57
 - setCountry, 58
- Gui::Widgets::CheckFields::CheckPortNumber, 58
 - check, 59
 - CheckPortNumber, 59
- Gui::Widgets::CheckFields::CheckPostalCode, 59
 - check, 60
 - CheckPostalCode, 60
 - getCountry, 60
 - setCountry, 60
- Gui::Widgets::CheckFields::CheckQLineEdit, 61
 - CheckQLineEdit, 61
 - getBtnValid, 62
 - isValid, 62
 - setBtnValid, 62
- Gui::Widgets::CheckFields::CheckSiretNumber, 62
 - check, 63
 - CheckSiretNumber, 63
- Gui::Widgets::CheckFields::CheckUntilField, 63
 - check, 64
 - CheckUntilField, 64
- Gui::Widgets::CheckFields::CheckValidField, 64
 - check, 65
 - CheckValidField, 65
- Gui::Widgets::CheckFields::CheckWebsite, 66
 - check, 66
 - CheckWebsite, 66
- Gui::Widgets::CheckFields::ICheckField, 132
 - check, 132
- Gui::Widgets::CoffeeEasterEggWidget, 71
 - CoffeeEasterEggWidget, 72
 - isDrunked, 72
- Gui::Widgets::ComboBoxModelWidget, 75
 - ComboBoxModelWidget, 76
- Gui::Widgets::ContributoriesWidget, 88
 - add, 91
 - addProject, 91
 - ContributoriesWidget, 90
 - count, 91

- getContributories, 91
- Gui::Widgets::CustomerContextualMenu, 106
 - CustomerContextualMenu, 106
- Gui::Widgets::CustomerDataWidget, 111
 - CustomerDataWidget, 112
 - printInformations, 112
- Gui::Widgets::DatabaseSettingsWidget, 119
 - DatabaseSettingsWidget, 120
 - getDatabaseName, 120
 - getDomainNameOrIP, 120
 - getLogin, 121
 - getPassword, 121
 - getPort, 121
 - isValid, 121
- Gui::Widgets::Delegates::ComboBoxDelegate, 72
 - ComboBoxDelegate, 73
 - createEditor, 73
 - paint, 73
 - setEditorData, 75
 - setModelData, 75
 - updateEditorGeometry, 75
- Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 125
 - createEditor, 126
 - DoubleSpinBoxDelegate, 126
 - setEditorData, 126
 - setModelData, 127
 - updateEditorGeometry, 127
- Gui::Widgets::Delegates::ProjectComboDelegate, 166
 - createEditor, 168
 - getProjects, 168
 - isLocked, 168
 - paint, 168
 - ProjectComboDelegate, 167
 - setLocked, 169
- Gui::Widgets::Delegates::TextareaDelegate, 212
 - createEditor, 213
 - setEditorData, 213
 - setModelData, 213
 - TextareaDelegate, 213
 - updateEditorGeometry, 213
- Gui::Widgets::Delegates::UnitComboDelegate, 216
 - createEditor, 217
 - paint, 217
 - UnitComboDelegate, 217
- Gui::Widgets::Path::ChoseDirectoryWidget, 67
 - ChoseDirectoryWidget, 67
- Gui::Widgets::Path::ChoseFileWidget, 68
 - ChoseFileWidget, 68
 - gettypeFiles, 69
 - setTypeFiles, 69
- Gui::Widgets::Path::ChosePathWidget, 69
 - ChosePathWidget, 70
 - getDefaultLocation, 70
 - getField, 70
 - setField, 70
- Gui::Widgets::Popup, 160
- Gui::Widgets::ProjectsWidget, 180
 - ProjectsWidget, 181
 - updateBtn, 182
- Gui::Widgets::RateWidget, 187
 - getDailyRate, 188
 - getHourlyRate, 188
 - RateWidget, 188
 - setDailyRate, 189
 - setHourlyRate, 189
 - setWidgetDailyRateValue, 189
 - setWidgetHourlyRateValue, 189
- Gui::Widgets::UserDailyHoursWidget, 225
 - dailyHoursValueHasChanged, 226
 - getNbDaysPerMonth, 226
 - getNbDaysPerWeek, 226
 - getNbHoursPerDay, 226
 - monthlyDaysValueHasChanged, 226
 - setNbDaysPerMonth, 228
 - setNbDaysPerWeek, 228
 - setNbHoursPerDay, 228
 - UserDailyHoursWidget, 226
 - weeklyDaysValueHasChanged, 228
- Gui::Widgets::WdgModels::BillingsTableModel, 40
 - append, 41
 - BillingsTableModel, 41
 - columnCount, 41
 - count, 41
 - data, 41
 - flags, 42
 - getBillings, 42
 - headerData, 42
 - remove, 42
 - rowCount, 42
 - setData, 43
- Gui::Widgets::WdgModels::ContributoriesTableModel, 85
 - append, 86
 - columnCount, 86
 - ContributoriesTableModel, 86
 - count, 86
 - data, 87
 - flags, 87
 - getContributories, 87
 - getSumQuantity, 87
 - headerData, 87
 - remove, 88
 - rowCount, 88
 - setData, 88
- Gui::Widgets::WdgModels::CustomersTableModel, 112
 - append, 114
 - columnCount, 114
 - count, 114
 - CustomersTableModel, 113
 - data, 114
 - flags, 114
 - getCustomers, 114
 - headerData, 115
 - remove, 115
 - rowCount, 115
 - setData, 115

- Gui::Widgets::WdgModels::ProjectContributoriesTable-Model, 169
 - allProjectsChosen, 170
 - append, 170
 - columnCount, 170
 - data, 171
 - flags, 171
 - getProject, 171
 - getProjects, 171
 - getSelectedProjects, 171
 - headerData, 172
 - ProjectContributoriesTableModel, 170
 - remove, 172
 - rowCount, 172
 - setData, 172
- Gui::Widgets::WdgModels::ProjectsTableModel, 177
 - append, 178
 - columnCount, 178
 - count, 179
 - data, 179
 - flags, 179
 - getProjects, 179
 - headerData, 179
 - ProjectsTableModel, 178
 - remove, 180
 - rowCount, 180
 - setData, 180
- Gui::Widgets::searchWidget, 198
 - getCurrentCustomerId, 200
 - getCustomerId, 200
 - isCustomerSelected, 200
 - search, 200
 - searchWidget, 199
 - selectCustomer, 200
 - setCustomerId, 200
- headerData
 - Gui::Widgets::WdgModels::BillingsTableModel, 42
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, 87
 - Gui::Widgets::WdgModels::CustomersTableModel, 115
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 172
 - Gui::Widgets::WdgModels::ProjectsTableModel, 179
- HierarchicalSystemTest, 131
- hydrat
 - Models::Billing, 29
 - Models::Contributory, 94
 - Models::Customer, 105
 - Models::IModel, 135
 - Models::Project, 164
 - Models::User, 221
- imageToBytes
 - Gui::Utils::Image, 133
- instance
 - Databases::BillingDatabase, 37
 - Databases::ContributoryDatabase, 100
 - Databases::CustomerDatabase, 110
 - Databases::Database, 117
 - Databases::ProjectDatabase, 176
 - Databases::RateDatabase, 186
 - Databases::UserDatabase, 230
 - Utils::Log, 139
- InvertedSectionStart
 - Mustache::Tag, 209
- isArchived
 - Models::Customer, 105
- isBilling
 - Models::Billing, 29
- isBillingPaid
 - Databases::BillingDatabase, 37
- isCustomerSelected
 - Gui::Widgets::searchWidget, 200
- isDatabaseCentralized
 - Gui::Dialogs::StartedWindowsDialog, 202
- isDatabaseTypeValid
 - Gui::Dialogs::StartedWindowsDialog, 203
- isDrinked
 - Gui::Widgets::CoffeeEasterEggWidget, 72
- isEasterEgg
 - Gui::MainWindow, 143
- isFalse
 - Mustache::Context, 78
 - Mustache::QtVariantContext, 183
- isInsert
 - Models::ContributoriesList, 83
- isLocked
 - Gui::Widgets::Delegates::ProjectComboDelegate, 168
- isPaid
 - Models::Billing, 29
- isToRemoved
 - Models::IModel, 136
- isValid
 - Gui::Widgets::CheckFields::CheckQLineEdit, 62
 - Gui::Widgets::DatabaseSettingsWidget, 121
- ItemType
 - Utils::ItemType, 137
- ItemTypeTest, 138
- lastError
 - Databases::Database, 117
- listCount
 - Mustache::Context, 79
 - Mustache::QtVariantContext, 183
- MainWindow
 - Gui::MainWindow, 142
- makeDirectory
 - Utils::Directories, 124
- MessageBox
 - Gui::Dialogs::MessageBox, 146
- Models, 19
 - Models::Billing, 25
 - addContributory, 27

- Billing, 27
- getContributories, 27
- getDataMap, 27
- getDate, 27
- getDescription, 27
- getFilename, 28
- getFolder, 28
- getItem, 28
- getNumber, 28
- getPath, 28
- getPrice, 28
- getSumQuantity, 29
- getTitle, 29
- hydrat, 29
- isBilling, 29
- isPaid, 29
- operator<, 30
- operator==, 30
- setDate, 30
- setDescription, 30
- setIsBilling, 30
- setIsPaid, 31
- setNumber, 31
- setTitle, 31
- Models::Calculable, 45
 - getPrice, 45
 - getSumQuantity, 45
- Models::ContributoriesList, 80
 - addContributory, 81
 - addProject, 81
 - getAllContributories, 81
 - getContributories, 81
 - getCustomer, 82
 - getDataMap, 82
 - getIldBilling, 82
 - getNbProjects, 82
 - getPrice, 82
 - getProjects, 83
 - getRate, 83
 - getSumQuantity, 83
 - isInsert, 83
 - setAllIldContributories, 83
 - setIldBilling, 85
 - setInsert, 85
- Models::Contributory, 91
 - Contributory, 93
 - getDataMap, 93
 - getDescription, 93
 - getHourlyRate, 93
 - getLongDescription, 93
 - getPrice, 94
 - getProject, 94
 - getQuantity, 94
 - getSumQuantity, 94
 - getUnit, 94
 - hydrat, 94
 - operator==, 95
 - setDescription, 95
 - setHourlyRate, 95
 - setLongDescription, 95
 - setProject, 95
 - setQuantity, 97
 - setUnit, 97
- Models::Customer, 103
 - commit, 104
 - Customer, 104
 - getDataMap, 104
 - getImage, 104
 - getNameFolder, 104
 - getPath, 104
 - getTurnover, 105
 - hydrat, 105
 - isArchived, 105
 - setImage, 105
 - setIsArchived, 105
- Models::IModel, 134
 - getDataMap, 135
 - getId, 135
 - hydrat, 135
 - isToRemoved, 136
 - setId, 136
 - setToRemoved, 136
- Models::People, 150
 - getAddress, 152
 - getAddressComplement, 152
 - getCity, 153
 - getCompany, 153
 - getCountry, 153
 - getEmail, 153
 - getExtensionImage, 153
 - getFax, 153
 - getFirstname, 153
 - getImage, 154
 - getLastname, 154
 - getMobilePhone, 154
 - getPhone, 154
 - getPostalCode, 154
 - getWebsite, 154
 - operator==, 156
 - setAddress, 156
 - setAddressComplement, 156
 - setCity, 156
 - setCompany, 156
 - setCountry, 157
 - setEmail, 157
 - setExtensionImage, 157
 - setFax, 157
 - setFirstname, 157
 - setImage, 157
 - setLastname, 157
 - setMobilePhone, 159
 - setPhone, 159
 - setPostalCode, 159
 - setWebsite, 159
- Models::Project, 161
 - getBeginDate, 163

- getCost, 163
- getCustomer, 163
- getDailyRate, 163
- getDataMap, 163
- getDescription, 163
- getEndDate, 163
- getName, 164
- hydrat, 164
- operator<, 164
- operator==, 164
- Project, 162
- setBeginDate, 165
- setCustomer, 165
- setDailyRate, 165
- setDescription, 165
- setEndDate, 165
- setName, 165
- Models::Rate, 184
 - getDailyRate, 185
 - getHourlyRate, 185
 - getLegalRate, 185
 - getNbDailyHours, 185
 - Rate, 185
- Models::Search, 190
 - filterOnBillsOrQuotes, 192
 - filterOnCompany, 192
 - filterOnContributories, 192
 - filterOnCustomersWithoutProject, 192
 - filterOnNumberElements, 192
 - filterOnProjects, 193
 - filterOnReferentLastname, 193
 - filterOnVarcharElements, 193
 - getFilter, 193
 - getGroupFilter, 193
 - getSearchInBillsQuotes, 193
 - getSearchInCompanies, 194
 - getSearchInProjects, 194
 - getSearchInReferentLastname, 194
 - getText, 194
 - searchInContributories, 194
 - setGroupFilter, 194
 - setSearchInBillsQuotes, 195
 - setSearchInCompanies, 195
 - setSearchInContributories, 195
 - setSearchInProjects, 195
 - setSearchInReferentLastname, 195
 - setText, 195
- Models::Statistics, 203
 - getGlobalTurnover, 203
 - getTurnoverBetweenDates, 204
- Models::Unit, 215
 - gettype, 215
 - operator==, 216
 - setType, 216
 - toString, 216
 - Unit, 215
- Models::User, 218
 - getDataMap, 220
 - getImage, 220
 - getNbDaysPerMonth, 220
 - getNbDaysPerWeek, 220
 - getNbHoursPerDay, 220
 - getNbHoursPerMonth, 220
 - getNbHoursPerWeek, 221
 - getNoSiret, 221
 - getPdflatexPath, 221
 - getTitle, 221
 - getWorkspaceName, 221
 - getWorkspacePath, 221
 - hydrat, 221
 - operator==, 223
 - setImage, 223
 - setNbDaysPerMonth, 223
 - setNbDaysPerWeek, 223
 - setNbHoursPerDay, 224
 - setNoSiret, 224
 - setPdflatexPath, 224
 - setTitle, 224
 - setWorkspaceName, 224
 - setWorkspacePath, 224
 - updateFolders, 224
 - User, 220
- monthlyDaysValueHasChanged
 - Gui::Widgets::UserDailyHoursWidget, 226
- Mustache::Tag
 - Comment, 209
 - InvertedSectionStart, 209
 - Partial, 209
 - SectionEnd, 209
 - SectionStart, 209
 - SetDelimiter, 209
- Mustache::Context, 77
 - canEval, 78
 - Context, 78
 - eval, 78
 - isFalse, 78
 - listCount, 79
 - partialResolver, 79
 - partialValue, 79
 - pop, 79
 - push, 79
 - stringValue, 79
- Mustache::PartialFileLoader, 148
 - getPartial, 148
- Mustache::PartialMap, 148
 - getPartial, 149
- Mustache::PartialResolver, 149
 - getPartial, 149
- Mustache::QtVariantContext, 182
 - canEval, 183
 - eval, 183
 - fn_t, 183
 - isFalse, 183
 - listCount, 183
 - pop, 183
 - push, 183

- stringValue, 184
- Mustache::Renderer, 189
 - error, 190
 - errorPartial, 190
 - errorPos, 190
 - render, 190
 - setTagMarkers, 190
- Mustache::Tag, 208
 - Type, 209
- operator<
 - Models::Billing, 30
 - Models::Project, 164
- operator<<
 - Utils::Log, 139
- operator==
 - Models::Billing, 30
 - Models::Contributory, 95
 - Models::People, 156
 - Models::Project, 164
 - Models::Unit, 216
 - Models::User, 223
- paint
 - Gui::Widgets::Delegates::ComboBoxDelegate, 73
 - Gui::Widgets::Delegates::ProjectComboDelegate, 168
 - Gui::Widgets::Delegates::UnitComboDelegate, 217
- Parameters, 147
 - DB_FILENAME, 147
 - VERSION, 147
- Partial
 - Mustache::Tag, 209
- partialResolver
 - Mustache::Context, 79
- partialValue
 - Mustache::Context, 79
- PdfGenerator
 - Generator::PdfGenerator, 150
- pixmapToBytes
 - Gui::Utils::Image, 134
- pixmapToImage
 - Gui::Utils::Image, 134
- PointersTest, 160
- pop
 - Mustache::Context, 79
 - Mustache::QtVariantContext, 183
- popupMessage
 - Exceptions::DbException, 122
 - Exceptions::FileException, 128
- printInformations
 - Gui::Widgets::CustomerDataWidget, 112
- Project
 - Models::Project, 162
- ProjectComboDelegate
 - Gui::Widgets::Delegates::ProjectComboDelegate, 167
- ProjectContributoriesTableModel
 - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 170
- ProjectDatabaseTest, 177
- ProjectModelTest, 177
- ProjectsTableModel
 - Gui::Widgets::WdgModels::ProjectsTableModel, 178
- ProjectsWidget
 - Gui::Widgets::ProjectsWidget, 181
- push
 - Mustache::Context, 79
 - Mustache::QtVariantContext, 183
- Rate
 - Models::Rate, 185
- RateModelTest, 187
- RateWidget
 - Gui::Widgets::RateWidget, 188
- remove
 - Gui::Widgets::WdgModels::BillingsTableModel, 42
 - Gui::Widgets::WdgModels::ContributoriesTableModel, 88
 - Gui::Widgets::WdgModels::CustomersTableModel, 115
 - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 172
 - Gui::Widgets::WdgModels::ProjectsTableModel, 180
- removeBilling
 - Databases::BillingDatabase, 39
- removeBillingProject
 - Databases::BillingDatabase, 39
- removeContributory
 - Databases::ContributoryDatabase, 100
- removeCustomer
 - Databases::CustomerDatabase, 110
- removeProject
 - Databases::ProjectDatabase, 176
- render
 - Mustache::Renderer, 190
- resizeEvent
 - Gui::MainWindow, 145
- rootTree
 - Gui::MainWindow, 145
- round
 - Utils::Double, 125
- rowCount
 - Gui::Widgets::WdgModels::BillingsTableModel, 42
 - Gui::Widgets::WdgModels::ContributoriesTableModel, 88
 - Gui::Widgets::WdgModels::CustomersTableModel, 115
 - Gui::Widgets::WdgModels::ProjectContributoriesTableModel, 172
 - Gui::Widgets::WdgModels::ProjectsTableModel, 180
- search
 - Gui::Docks::SearchDock, 197

- Gui::MainWindow, 145
- Gui::Widgets::searchWidget, 200
- SearchDock
 - Gui::Docks::SearchDock, 196
- searchInContributories
 - Models::Search, 194
- searchTest, 197
- searchWidget
 - Gui::Widgets::searchWidget, 199
- SectionEnd
 - Mustache::Tag, 209
- SectionStart
 - Mustache::Tag, 209
- selectCustomer
 - Gui::Widgets::searchWidget, 200
- SetDelimiter
 - Mustache::Tag, 209
- setAddress
 - Models::People, 156
- setAddressComplement
 - Models::People, 156
- setAllIdContributories
 - Models::ContributoriesList, 83
- setBeginDate
 - Models::Project, 165
- setBtnValid
 - Gui::Widgets::CheckFields::CheckQLineEdit, 62
- setCity
 - Models::People, 156
- setCompany
 - Models::People, 156
- setCopy
 - Gui::Dialogs::AddQuoteDialog, 24
- setCountry
 - Gui::Widgets::CheckFields::CheckPhone, 58
 - Gui::Widgets::CheckFields::CheckPostalCode, 60
 - Models::People, 157
- setCustomer
 - Models::Project, 165
- setCustomerImage
 - Databases::CustomerDatabase, 110
- setDailyRate
 - Gui::Widgets::RateWidget, 189
 - Models::Project, 165
- setData
 - Gui::Widgets::WdgModels::BillingsTableModel, 43
 - Gui::Widgets::WdgModels::ContributoriesTable-Model, 88
 - Gui::Widgets::WdgModels::CustomersTableModel, 115
 - Gui::Widgets::WdgModels::ProjectContributories-TableModel, 172
 - Gui::Widgets::WdgModels::ProjectsTableModel, 180
- setDatabase
 - Databases::Database, 119
- setDate
 - Models::Billing, 30
- setDescription
 - Models::Billing, 30
 - Models::Contributory, 95
 - Models::Project, 165
- setEditorData
 - Gui::Widgets::Delegates::ComboBoxDelegate, 75
 - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, 126
 - Gui::Widgets::Delegates::TextareaDelegate, 213
- setEmail
 - Models::People, 157
- setEndDate
 - Models::Project, 165
- setExtensionImage
 - Models::People, 157
- setFax
 - Models::People, 157
- setField
 - Gui::Widgets::Path::ChosePathWidget, 70
- setFirstname
 - Models::People, 157
- setGroupFilter
 - Models::Search, 194
- setHourlyRate
 - Gui::Widgets::RateWidget, 189
 - Models::Contributory, 95
- setId
 - Models::IModel, 136
- setIdBilling
 - Models::ContributoriesList, 85
- setIdCustomer
 - Gui::Widgets::searchWidget, 200
- setImage
 - Gui::Dialogs::MessageBox, 146
 - Gui::Widgets::BrowseImageWidget, 44
 - Models::Customer, 105
 - Models::People, 157
 - Models::User, 223
- setImageScaled
 - Gui::Widgets::BrowseImageWidget, 44
- setInsert
 - Models::ContributoriesList, 85
- setIsArchived
 - Models::Customer, 105
- setIsBilling
 - Models::Billing, 30
- setIsPaid
 - Models::Billing, 31
- setLastname
 - Models::People, 157
- setLocked
 - Gui::Widgets::Delegates::ProjectComboDelegate, 169
- setLongDescription
 - Models::Contributory, 95
- setMaximumSize
 - Gui::Utils::WindowSettings, 232
- setMobilePhone

- Models::People, [159](#)
- setModelData
 - Gui::Widgets::Delegates::ComboBoxDelegate, [75](#)
 - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, [127](#)
 - Gui::Widgets::Delegates::TextareaDelegate, [213](#)
- setName
 - Models::Project, [165](#)
 - Utils::ItemType, [138](#)
- setNbDaysPerMonth
 - Gui::Widgets::UserDailyHoursWidget, [228](#)
 - Models::User, [223](#)
- setNbDaysPerWeek
 - Gui::Widgets::UserDailyHoursWidget, [228](#)
 - Models::User, [223](#)
- setNbHoursPerDay
 - Gui::Widgets::UserDailyHoursWidget, [228](#)
 - Models::User, [224](#)
- setNoSiret
 - Models::User, [224](#)
- setNumber
 - Models::Billing, [31](#)
- setPdflatexPath
 - Models::User, [224](#)
- setPhone
 - Models::People, [159](#)
- setPositionToCenter
 - Gui::Utils::WindowSettings, [232](#)
- setPostalCode
 - Models::People, [159](#)
- setProject
 - Models::Contributory, [95](#)
- setQuantity
 - Models::Contributory, [97](#)
- setQuoteIdNumber
 - Gui::Dialogs::AddQuoteDialog, [25](#)
- setSearchInBillsQuotes
 - Models::Search, [195](#)
- setSearchInCompanies
 - Models::Search, [195](#)
- setSearchInContributories
 - Models::Search, [195](#)
- setSearchInProjects
 - Models::Search, [195](#)
- setSearchInReferentLastname
 - Models::Search, [195](#)
- setTagMarkers
 - Mustache::Renderer, [190](#)
- setText
 - Gui::Dialogs::MessageBox, [147](#)
 - Models::Search, [195](#)
- setTitle
 - Models::Billing, [31](#)
 - Models::User, [224](#)
- setToRemoved
 - Models::IModel, [136](#)
- setType
 - Models::Unit, [216](#)
 - Utils::ItemType, [138](#)
- setTypeFiles
 - Gui::Widgets::Path::ChoseFileWidget, [69](#)
- setUnit
 - Models::Contributory, [97](#)
- setUserImage
 - Databases::UserDatabase, [230](#)
- setWebsite
 - Models::People, [159](#)
- setWidgetDailyRateValue
 - Gui::Widgets::RateWidget, [189](#)
- setWidgetHourlyRateValue
 - Gui::Widgets::RateWidget, [189](#)
- setWorkspaceName
 - Models::User, [224](#)
- setWorkspacePath
 - Models::User, [224](#)
- singularPlural
 - Gui::Dialogs::StatisticsDialog, [206](#)
- StartedWindowsDialog
 - Gui::Dialogs::StartedWindowsDialog, [202](#)
- StatisticModelTest, [203](#)
- StatisticsDialog
 - Gui::Dialogs::StatisticsDialog, [205](#)
- StringTest, [208](#)
- stringValue
 - CounterContext, [102](#)
 - Mustache::Context, [79](#)
 - Mustache::QtVariantContext, [184](#)
- TestAdder< T >, [209](#)
- TestMustache, [210](#)
- TestRunner, [210](#)
- testadder, [209](#)
- TexGenerator
 - Generator::TexGenerator, [211](#)
- textChanged
 - Gui::Docks::SearchDock, [197](#)
- TextareaDelegate
 - Gui::Widgets::Delegates::TextareaDelegate, [213](#)
- toString
 - Models::Unit, [216](#)
- treeLevel
 - Gui::MainWindow, [145](#)
- Type
 - Mustache::Tag, [209](#)
- Unit
 - Models::Unit, [215](#)
- UnitComboDelegate
 - Gui::Widgets::Delegates::UnitComboDelegate, [217](#)
- updateBtn
 - Gui::Widgets::ProjectsWidget, [182](#)
- updateCustomer
 - Databases::CustomerDatabase, [110](#)
- updateEditorGeometry
 - Gui::Widgets::Delegates::ComboBoxDelegate, [75](#)
 - Gui::Widgets::Delegates::DoubleSpinBoxDelegate, [127](#)

- Gui::Widgets::Delegates::TextareaDelegate, 213
- updateFolders
 - Models::User, 224
- updateProject
 - Databases::ProjectDatabase, 176
- updateRateProject
 - Databases::RateDatabase, 187
- updateUi
 - Gui::Dialogs::StatisticsDialog, 206
- User
 - Models::User, 220
- UserDailyHoursWidget
 - Gui::Widgets::UserDailyHoursWidget, 226
- UserDataDialog
 - Gui::Dialogs::UserDataDialog, 231
- UserDatabaseTest, 230
- UserModelTest, 231
- Utils::Directories, 124
 - makeDirectory, 124
- Utils::Double, 124
 - round, 125
- Utils::HierarchicalSystem, 129
 - addBillingToProject, 130
 - addProjectToCustomer, 131
 - getCustomers, 131
 - getProjects, 131
- Utils::ItemType, 136
 - getModel, 137
 - getName, 137
 - getType, 137
 - ItemType, 137
 - setName, 138
 - setType, 138
- Utils::Log, 138
 - instance, 139
 - operator<<, 139
 - write, 139
- Utils::String, 206
 - firstLetterToUpper, 207
 - getExtensionFile, 208
- Utils::pointers, 159
 - deleteIfNotNull, 160
- VERSION
 - Parameters, 147
- value
 - Databases::Database, 119
- weeklyDaysValueHasChanged
 - Gui::Widgets::UserDailyHoursWidget, 228
- write
 - Utils::Log, 139