

nyaml: Format Converter for the NeXus Data Model

Rubel Mozumder ¹, Lukas Pielsticker ^{1,2}, Markus Kühbach ¹, Andrea Albino ¹, Florian Dobener ¹, Sherjeel Shabih ¹, José A. Márquez Prieto ¹, Sandor Brockhauser ¹, Claudia Draxl ¹, Christoph Koch ¹, and Heiko B. Weber ³

¹ Physics Department and CSMB, Humboldt-Universität zu Berlin, Zum Großen Windkanal 2, D-12489 Berlin, Germany ² Department Heterogeneous Reactions, Max Planck Institute for Chemical Energy Conversion, Stiftstraße 34-36, D-45470 Mülheim an der Ruhr, Germany ³ Lehrstuhl für Angewandte Physik, Friedrich-Alexander-Universität Erlangen-Nürnberg, Staudtstraße 7, D-91058 Erlangen, Germany

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright

and release the work under a

Creative Commons Attribution 4.0

International License ([CC BY 4.0](#))

Research Impact Statement

The NeXus scientific data format standard ([Klosowski et al., 1997](#); [Könnecke, 2006](#); [Könnecke et al., 2015](#)), which was originally introduced for neutron, X-ray, and muon science, has in recent years seen a significant enhancement across diverse scientific domains such as materials science. NeXus definitions—comprising application definitions and base classes—describe the hierarchical structure and semantics of valid NeXus files. They are written in XML ([Bray et al., 2008](#)) using the NeXus Definition Language (NXDL), which is itself defined in XSD (XML Schema Definition) ([Thompson et al., 2004](#)).

nyaml is a Python-based tool with both a command-line interface and an application programming interface (API) that facilitates the conversion between NXDL XML and a simplified YAML ([Ben-Kiki et al., 2005](#)) representation. YAML's indentation-based syntax enhances human readability and simplifies manual editing. By providing a reliable, lossless round-trip conversion between XML and YAML, nyaml enables developers to edit NeXus definitions efficiently without sacrificing structural or semantic fidelity. With nyaml, scientists who develop and maintain scientific data models in the NeXus framework can achieve a 2-3-fold improvement in efficiency compared to direct XML editing by leveraging the tool's warnings and error messages to avoid common mistakes.

Statement of need

As the NeXus standard and its community of definition developers continue to grow, it is increasingly important to ensure that the development process remains both user-friendly and resilient to errors. The existing representation of NeXus definitions in XML offers structural rigor through the NeXus Definition Language (NXDL) and a well-defined hierarchy for metadata and data types. However, it is verbose and can be difficult to edit by hand. Writing and maintaining NXDL files often involves dealing with deeply nested elements and strict syntax, which can be error-prone and time-consuming, especially for users who are not familiar with XML development. nyaml addresses these challenges by enabling the development of NeXus definitions in a simpler, YAML-based format while preserving the full structure, semantics, and developer comments of the original XML. As a successful stress test, the tool has been used for developing extensions of the NeXus definitions for different microscopy and spectroscopy methods to integrate the definitions into the research data management system NOMAD ([Scheidgen, M. et al., 2023](#)).

41 Software design

42 nyaml is a Python package developed for converting NeXus definitions from YAML format
43 (files with a .yaml extension) into the XML format (files with a .nxd.xml extension) and vice
44 versa. The package is published on PyPI and therefore can be installed using Python package
45 managers (e.g., pip ([The Python Packaging Authority, 2025](#))). The nyaml package introduces
46 a set of keywords and syntactic rules (see [documentation](#)) that are specific to NXDL (NeXus
47 Definition Language) in YAML. The keywords and syntactic rules imply a relationship between
48 YAML and XML (XML tags and attributes) structures, enabling seamless conversion for new
49 and existing definitions. Existing definitions can be modified using the following workflow:
50 **XML → YAML → modification of YAML → XML**. New definitions can be designed in
51 YAML and converted to XML directly

52 The tool can be used as a command-line utility or imported as a Python module for programmatic
53 use. The converter command is invoked using `nyaml2nxd`, which determines the conversion
54 direction based on the input file (either from YAML to XML or XML to YAML) and delegates
55 the task to the appropriate converter. The converter then executes the corresponding data
56 workflow pipeline (see [Figure 1](#)). These workflows, YAML to XML and XML to YAML, are
57 designed to ensure that the conversion process is efficient, reliable, reproducible, and preserves
58 the integrity of the original NeXus data structure and semantics.

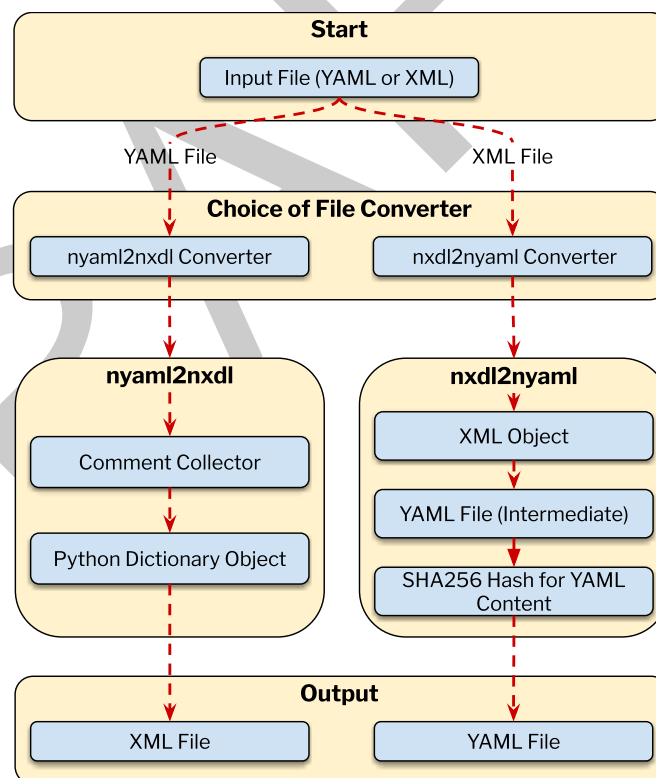


Figure 1: Converter workflow for nyaml from XML to YAML and vice-versa.

59 Conversion from **YAML to XML** follows specific workflow steps (depicted in [Figure 1](#)). Given
60 an input YAML file (see [Figure 1](#)), the `nyaml2nxd` converter reads the .yaml file, collects
61 and tracks the locations of comments, and then constructs a nested Python hash-mapped
62 object representing the YAML content using PyYAML ([YAML and Python communities, 2024](#)).
63 In the final stage, the converter generates an XML file conforming to the NXDL grammar and
64 syntax, including the collected comments. In the **YAML to XML** conversion, the algorithm
65 interprets the keywords and syntactic rules specific to the YAML format (see [documentation](#))

to transcode the NXDL content from YAML into XML. Leveraging the NXDL rules, the conversion process detects possible inconsistencies in the YAML content and raises errors or warnings if the rules are not properly followed.

In the reverse direction — **XML to YAML** conversion (see [Figure 1](#)) — the `nxdl2nyaml` converter takes the input `.nxdl.xml` file and transforms it into an XML tree structure using the `lxml` library ([Behnel, S. et al., 2025](#)). This XML tree is then transcoded into a YAML file that adheres to the NXDL rules and syntax specific to the YAML format. The converter then computes a SHA256 hash from the generated YAML content and appends the hash to the end of the YAML file, followed by the original XML content. By attaching both the hash and the original XML content to the YAML output (`.yaml` file), the tool enables lossless round-trip conversions: if the YAML is not modified, then the original commented XML content will be restored in the output XML file without modification when converting from YAML to XML. However, if the YAML content is changed, the XML tree will be reconstructed from the modified YAML and written to the XML file, resulting in differences from the original XML content included as comments. This caching approach streamlines the XML → YAML → XML workflow and facilitates straightforward comparisons of XML files in version control systems such as Git.

Evaluation from NIAC

The NeXus International Advisory Committee (NIAC) is the governing body responsible for overseeing the development and maintenance of the NeXus data standard. A core responsibility of the NIAC is the stewardship of the NeXus Definition Language (NXDL), the XML-based schemata that define the hierarchical structure and semantics of NeXus data files [[Könnecke:2015](#)]. As part of its mission to standardize NeXus definitions in NXDL, the NIAC recently reviewed and formally accepted the `nyaml` tool. Following a successful evaluation, the NIAC endorsed `nyaml` as the recommended tool for preparing NeXus definition proposals. In support of this decision, the official NeXus definition repository ([NIAC and NeXus Definition Developer, 2024](#)) was updated to integrate `nyaml` into its workflow through the addition of two makefile targets: `'make nyaml'` ([Dobener, F. et al., 2024](#)), which converts existing definitions from the canonical `nxdl.xml` format into `.yaml`, and `'make nxdl'`, which converts modified or newly added `.yaml` files back into valid `nxdl.xml` for submission and version control. This integration ensures that contributions made in `.yaml` are compatible with the existing XML-based infrastructure. The adoption of `nyaml` by NIAC reflects an ongoing commitment to fostering community engagement and modernizing the technical tools underpinning the NeXus standard ([NeXus International Advisory Committee, 2025](#)).

AI usage disclosure

The development of `nyaml` software was initiated in 2023 ([Dobener, F., 2023](#)) by FAIRmat as part of its efforts to enhance the data modeling capabilities for materials science within the NeXus framework. The project has grown organically in response to NeXus evolution needs and has since received contributions from a few NeXus community members and developers from FAIRmat. Subsequently, the tool has been used in developing several data models for different techniques in experimental materials science, including Electron Microscopy (EM) ([Kühbach, M and Pielsticker, Lukas et al., 2025](#)), Multi-dimensional Photoemission Spectroscopy (MPES) ([Dobener, F. and Pielsticker, Lukas et al., 2025](#)), Optical Spectroscopy ([Pielsticker, L. and Hildebrandt, Ron et al., 2025](#)), and Atomic Probe Microscopy ([Kühbach, M. and Pielsticker, Lukas et al., 2025](#)). The `nyaml` project is open source and hosted on GitHub ([Mozumder, R. et al., 2023](#)), where users and developers can contribute to its ongoing development, report issues, and suggest enhancements. Comprehensive documentation, including installation instructions, usage guidelines, and examples, is available online at [<https://fairmat-nfdi.github.io/nyaml>], facilitating adoption by the broader NeXus community.

Acknowledgements

The `nyaml` software is developed by FAIRmat. FAIRmat is funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) – project 460197019.

References

- Behnel, S. et al. (2025). *Lxml* (latest). <https://github.com/lxml/lxml>
- Ben-Kiki, O., Evans, C., & Ingerson, B. (2005). *YAML ain't markup language (YAML) (tm) version 1.1*. YAML.org. <https://yaml.org/spec/1.1/>
- Bray, T., Paoli, J., Sperberg-McQueen, C. M., Maler, E., & Yergeau, F. (2008). *Extensible markup language (XML) 1.0 (fifth edition)*. <https://www.w3.org/TR/2008/REC-xml-20081126/>.
- Dobener, F. (2023). *GitHub commit: Initial commit of nyaml repository*. <https://github.com/FAIRmat-NFDI/nyaml/tree/ebc14182aa02fab6dcb862ae844cbf622730c049>
- Dobener, F. and Pielsticker, Lukas et al. (2025). *Fairmat 2024: Proposal on photoemission spectroscopy (MPES)*. <https://github.com/nexusformat/definitions/pull/1424>
- Dobener, F. et al. (2024). *GitHub PR: Adds makefile refinements and nyaml as dependency*. <https://github.com/nexusformat/definitions/pull/1336>
- Klosowski, P., Könnecke, M., Tischler, J. Z., & Osborn, R. (1997). NeXus: A common format for the exchange of neutron and synchrotron data. *Physica B: Condensed Matter*, 241-243, 151–153. [https://doi.org/10.1016/S0921-4526\(97\)00865-X](https://doi.org/10.1016/S0921-4526(97)00865-X)
- Könnecke, M. (2006). The state of the NeXus data format. *Physica B: Condensed Matter*, 385-386, 1343–1345. <https://doi.org/10.1016/j.physb.2006.06.106>
- Könnecke, M., Akeroyd, F. A., Bernstein, H. J., Brewster, A. S., Campbell, S. I., Clausen, B., Cottrell, S., Hoffmann, J. U., Jemian, P. R., Männicke, D., Osborn, R., Peterson, P. F., Richter, T., Suzuki, J., Watts, B., Wintersberger, E., & Wuttke, J. (2015). The NeXus data format. *Journal of Applied Crystallography*, 48(1), 301–305. <https://doi.org/10.1107/S1600576714027575>
- Kühbach, M and Pielsticker, Lukas et al. (2025). *Fairmat 2024: Proposal on electron microscopy (EM)*. <https://github.com/nexusformat/definitions/pull/1423>
- Kühbach, M. and Pielsticker, Lukas et al. (2025). *Fairmat 2024: Proposal on atom probe microscopy (APM) apm proposal*. <https://github.com/nexusformat/definitions/pull/1422>
- Mozumder, R. et al. (2023). *Nyaml GitHub repository*. <https://github.com/FAIRmat-NFDI/nyaml>
- NeXus International Advisory Committee. (2025). *NIAC and NeXus documentation*. <https://www.nexusformat.org>
- NIAC and NeXus Definition Developer. (2024). *NeXus definition GitHub repository*. <https://github.com/nexusformat/definition>
- Pielsticker, L. and Hildebrandt, Ron et al. (2025). *Fairmat 2024: Proposal on optical spectroscopy*. <https://github.com/nexusformat/definitions/pull/1425>
- Scheidgen, M. et al. (2023). NOMAD: A distributed web-based platform for managing materials science research data. *Journal of Open Source Software*, 8(90), 5388. <https://doi.org/10.21105/joss.05388>
- The Python Packaging Authority. (2025). *Pip: The python package installer*. <https://pip.pypa.io/>.

- 158 Thompson, H. S., Beech, D., Maloney, M., & Mendelsohn, N. (2004). *XML Schema Part 1:*
159 *Structures Second Edition*. World Wide Web Consortium (W3C); [https://www.w3.org/](https://www.w3.org/TR/xmlschema-1/)
160 [TR/xmlschema-1/](https://www.w3.org/TR/xmlschema-1/).
- 161 YAML and Python communities. (2024). *PyYAML* (latest). <https://github.com/yaml/pyyaml>

DRAFT