

A Novel Approach for Bankruptcy Detection using Convolutional Neural Network Compared with K Nearest Neighbour


INTRODUCTION

- Bankruptcy is a financial crisis where a company/firm couldn't return or pay back the debt , in others words during Bankruptcy an entire company will be at Stake with no hope of surviving in the market due to the amount of loans the company has borrowed .
- The aim of this study is to identify the Bankruptcy to predict the accuracy using machine learning algorithms, thereby facilitating improvised performance of a firm and changing the financial policies to protect from future financial losses.
- This research holds importance not only for identifying Bankruptcy but also it navigates the ideology to maintain and protect a company/firm from uncertain monetary problems .
- The earlier intervention of Bankruptcy detection using machine learning algorithms helps in identifying the Bankruptcy threat and helps the company to grow sustainably while knowing it's financial status.
- The Bankruptcy data set for the study is collected form Kaggle datasets that has with several training sets of financial and monetary data required to calculate the financial stress parameters.



Bankruptcy detection via Machine Learning Algorithms

MATERIALS AND METHODS

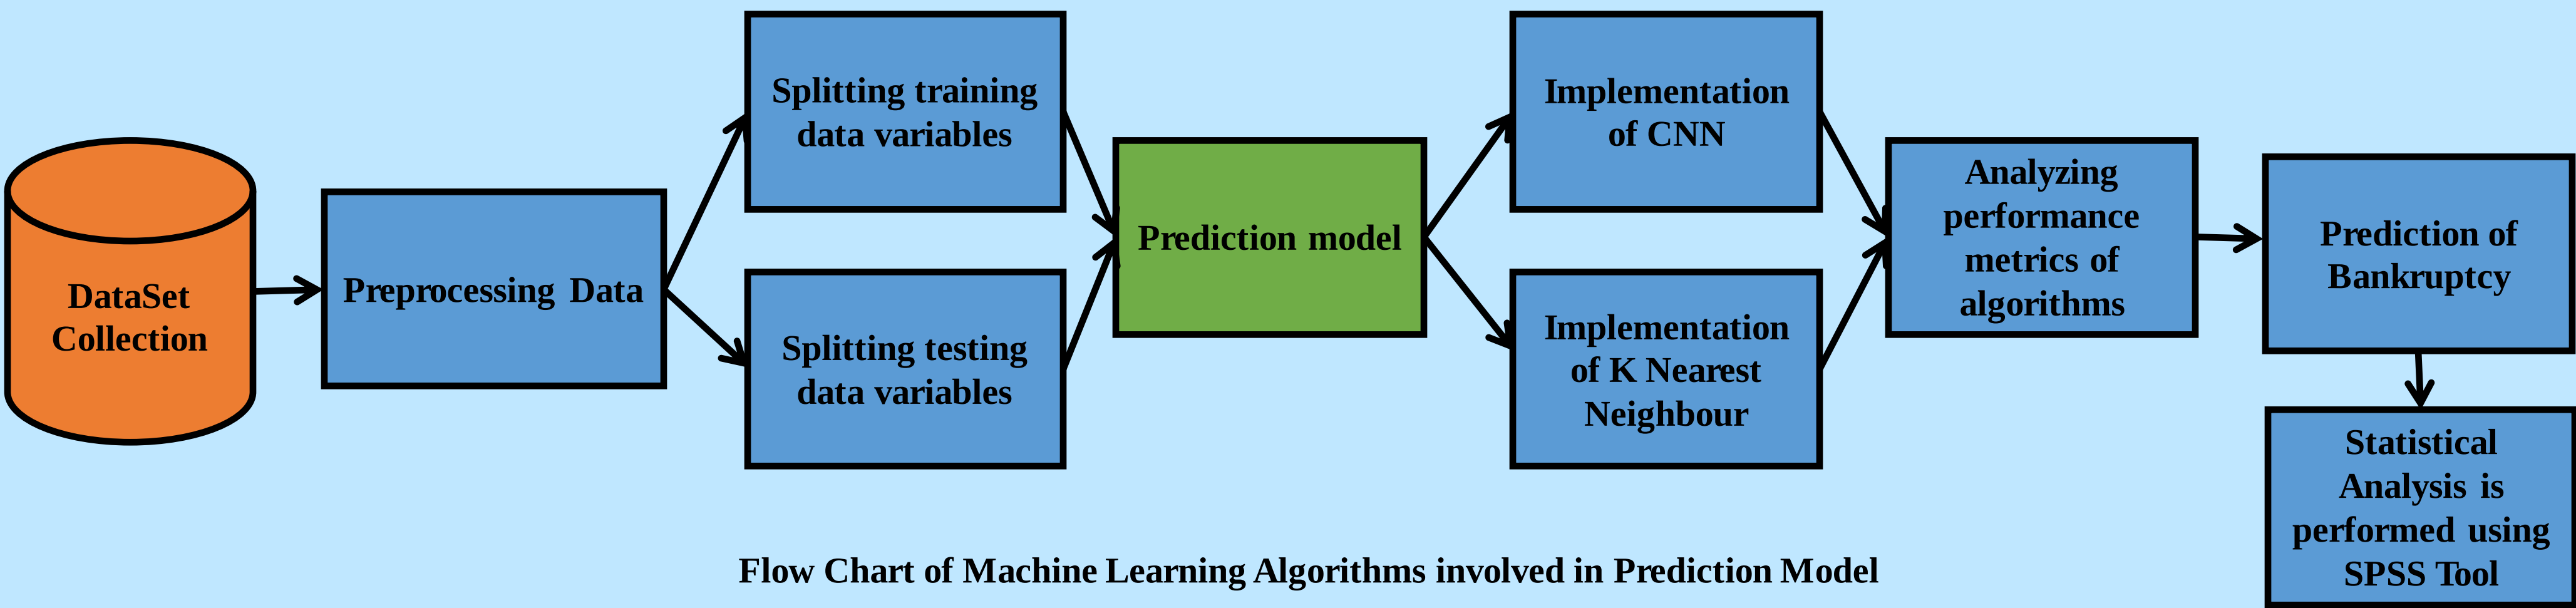


Flow Chart of Machine Learning Algorithms involved in Prediction Model

RESULTS

	GROUP	N	MEAN	Std. Deviation	Std. Error Mean
ACCURACY	CNN	10	80.4000	1.66332	0.84833
	KNN	10	78.6000	0.95436	0.51339

Statistical Calculation of CNN and KNN

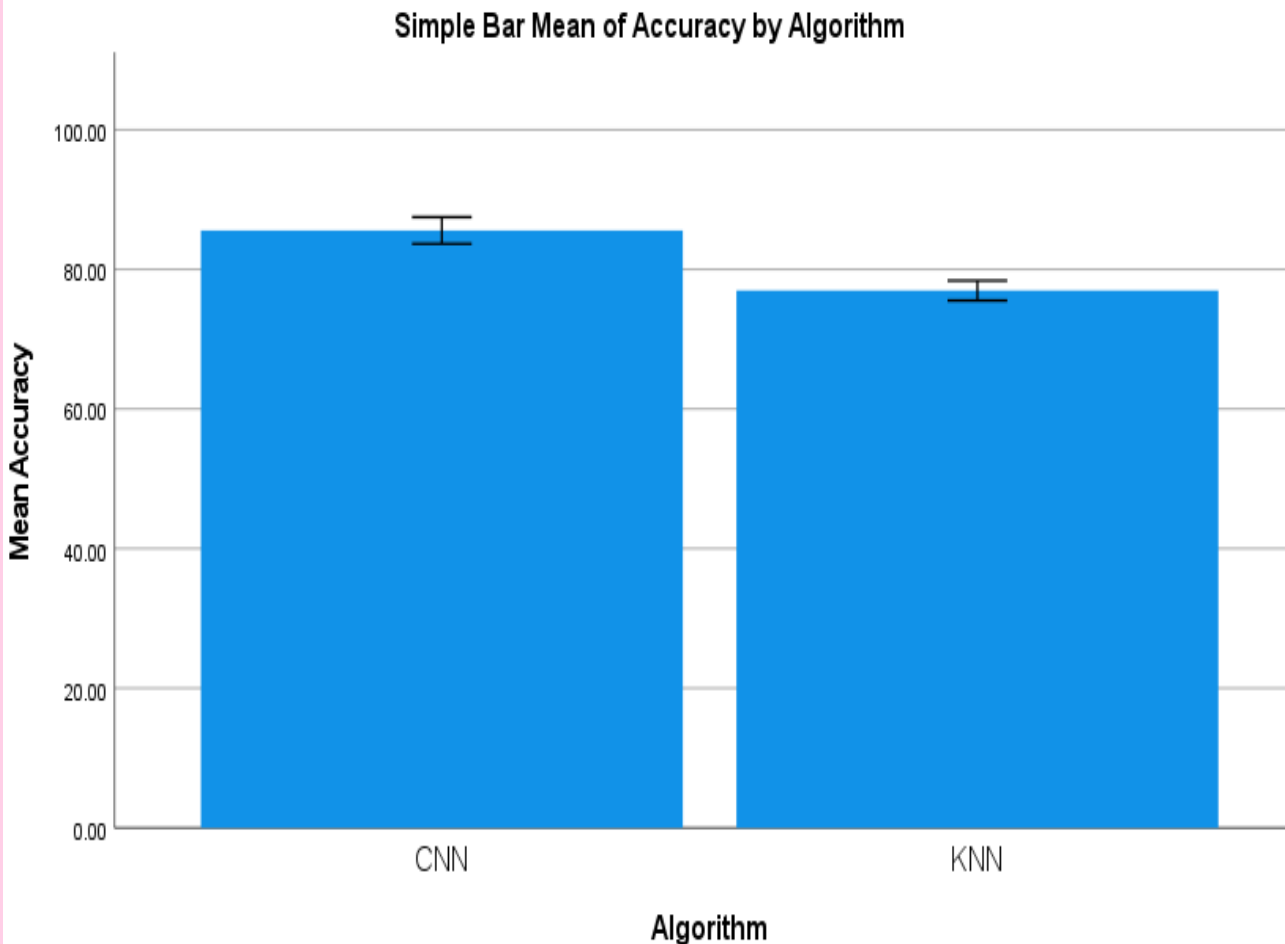

CNN vs K Nearest Neighbour

Algorithm	Accuracy
CNN	87.20%
KNN	74.10%

Average Accuracy values

DISCUSSION AND CONCLUSION

- Based on t-test Statistical analysis, the significance value of $p=0.001$ (independent sample t - test $p<0.05$) is obtained and shows that there is a statistical significant difference between the CNN and K Nearest Neighbour.
- The CNN algorithm has Mean accuracy of 80.4000% with a low standard deviation of 1.67332 and standard mean error of 0.74833 where as K Nearest Neighbour algorithm achieved Mean accuracy of 78.6000% with a standard deviation of 2.31368 and standard mean error of 1.41339.
- The research findings show a significant difference in migraine prediction accuracy between the Convolutional Neural Network (CNN) and K Nearest Neighbour (KNN) algorithms, Where CNN algorithm has higher accuracy rates in terms of prediction model.
- The model's capabilities can be enhanced through the incorporation of Machine learning algorithms, facilitating real-time monitoring and predictions with greater accuracy and efficiency.
- Furthermore , the impact of this model changes the strategy of a company and their future criteria by providing them insights about the future crisis.

BIBLIOGRAPHY

- ,Máté, D., Raza, H., & Ahmad, I. (2023). Comparative Analysis of Machine Learning Models for Bankruptcy Prediction in the Context of Pakistani Companies. *Risks*, 11, 176
- Zahiri, P., Doulabi, H. H., Kazemi Zanjani, M., & Lahmiri, S. (2022). Bankruptcy Prediction by Deep Learning and Machine Learning Methods. Master's Thesis, Concordia University.
- Kasgari, M., Salehnezhad, S., & Ebadi, H. (2013). A novel approach for bankruptcy prediction using artificial neural network and K Nearest Neighbour models. *Journal of Applied Finance and Banking*, 4(4), 1-14.
- Hájek, M., & Olej, P. (2015). Word Categorization of Corporate Annual Reports for Bankruptcy Prediction by Machine Learning. In *Proceedings of the International Conference on Intelligent Systems and Knowledge Engineering (ISKE)*, 2015, pp. 1-6.
- Kim, J., & Ahn, J. (2015). A Hybrid Under-sampling Approach for Better Bankruptcy Prediction. In *Proceedings of the International Conference on Intelligent Information Systems and Technologies (ICIITS)*, 2015, pp. 1-6.
- Slavici, L., Maris, O., & Pirtea, C. (2016). Usage of artificial neural networks for optimal bankruptcy forecasting. Case study: Eastern European small manufacturing enterprises. In *Proceedings of the International Conference on Computational Intelligence and Applications (ICCIA)*, 2016, pp. 1-6