
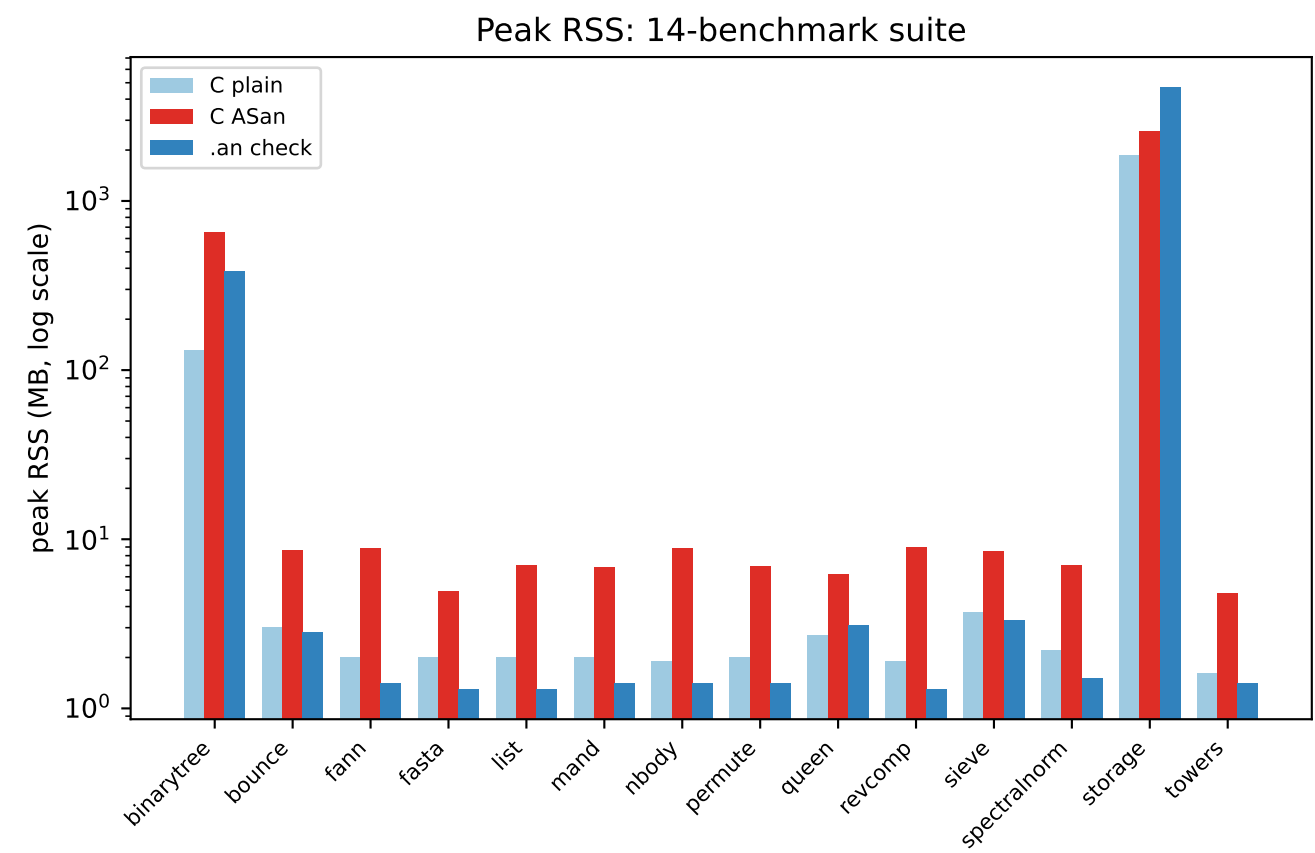


ASan cross-compare: C plain vs C ASan vs .an check (fat pointers)
geometric means (14 benchmarks): (i) C ASan/C plain 1.59x | (ii) C ASan/.an check 0.73x | (iii) .an check/C plain 2.19x

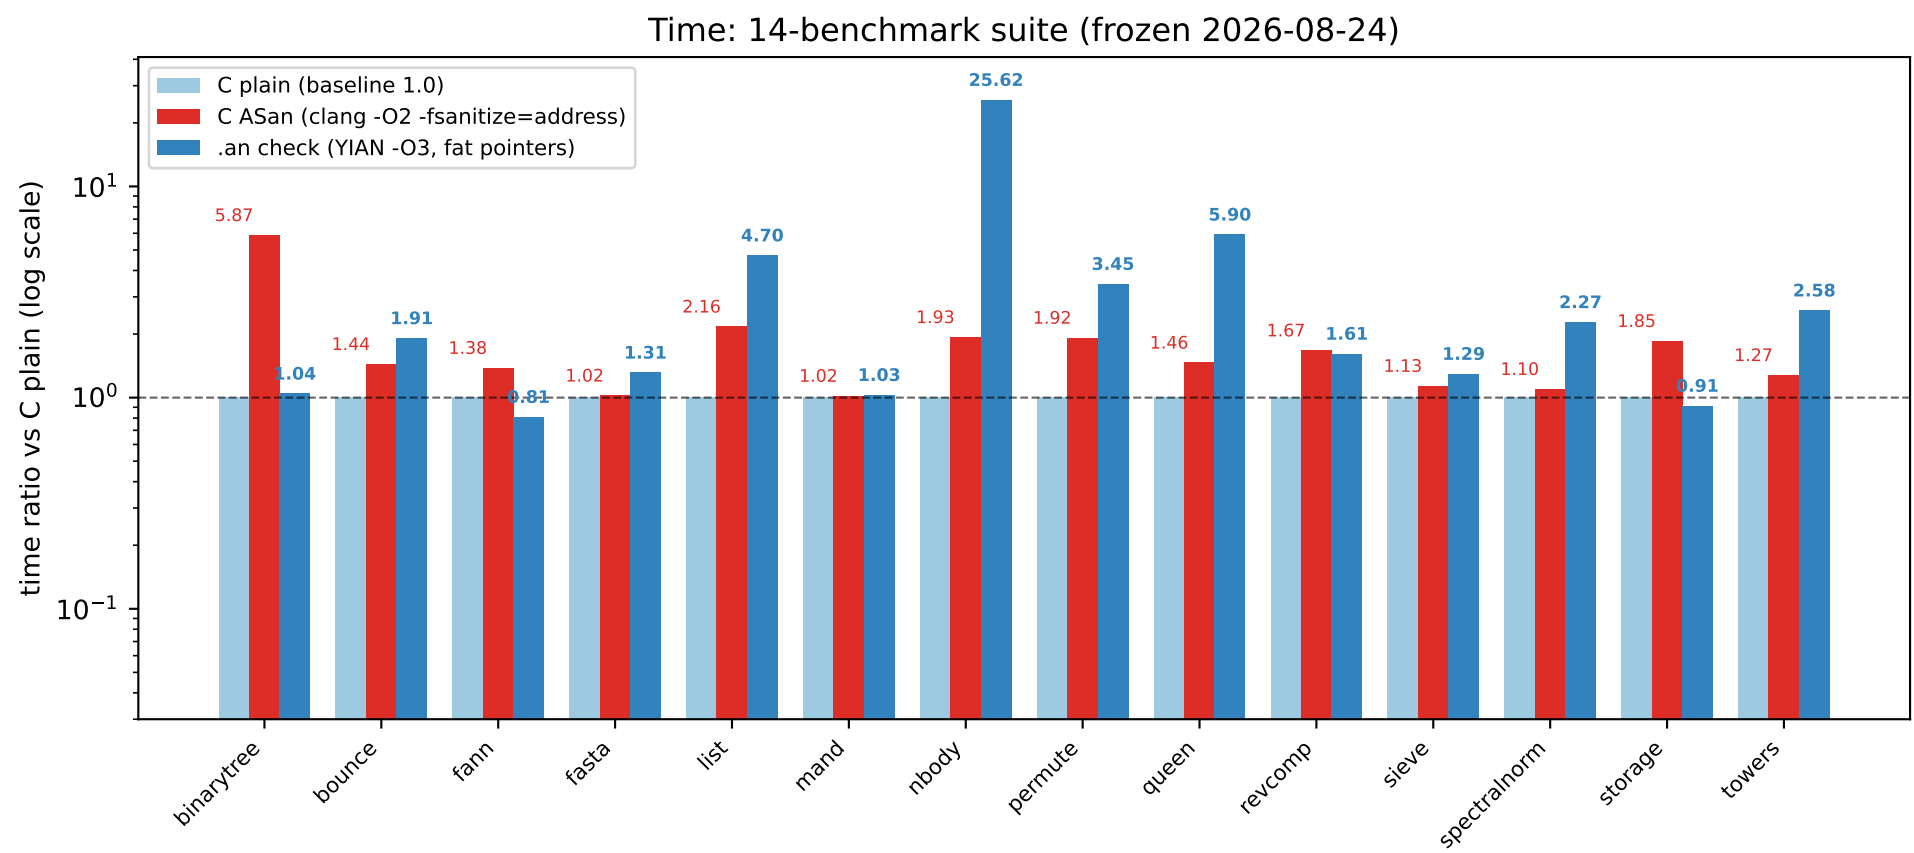

Data: paper/data/asan-results.md (frozen 2026-08-24; source build/bench/asan-results.md; 5 runs/leg, taskset -c 4)
Compile: C plain/ASan `clang -O2 [-fsanitize=address] -lm`; .an check `python3 -m compiler.main -O3 lib`; -O asymmetry C -O2 vs YIAN -O3.
ASAN_OPTIONS main: detect_leaks=0 (quarantine default on); binarytree sensitivity (quarantine_size_mb=0); RSS 650.0 -> 168.9 MB (-74.0%).
Coverage differs: ASan detection is execution- and quarantine-sensitive; SecL check enforces the language rules described in the paper.