



Payeer for CMS Opencart 3.0.2.0


Using FTP client, copy the folders admin and catalog to your website root.
If you need to replacement file, you need to agree.



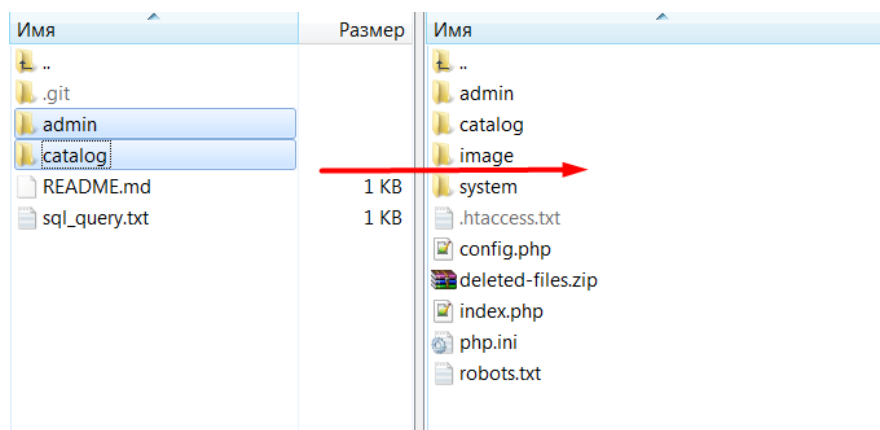


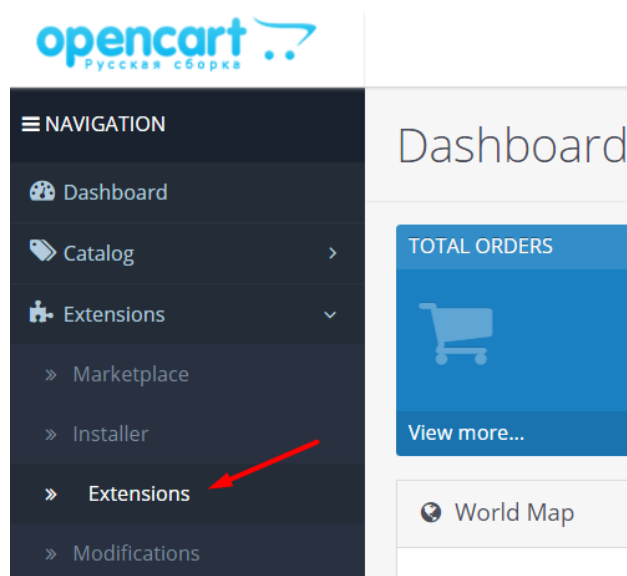



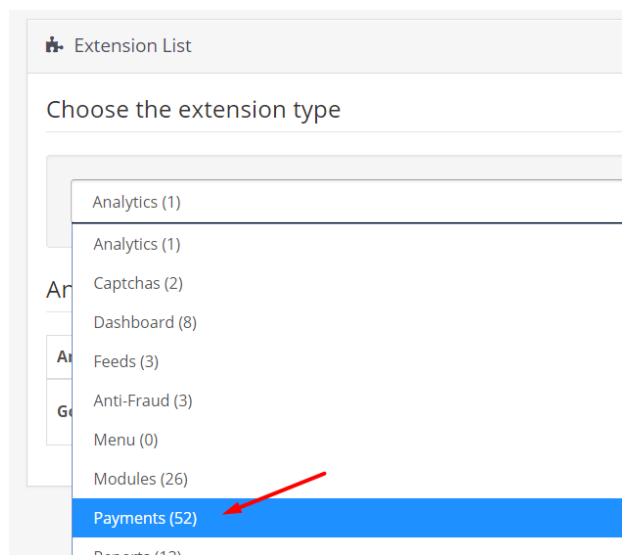




Go to the admin panel of your website. Go to menu “Extensions -> Extensions”.















From the list, select the extension type “Payments”.















Module Payeer should appear in the list of payment systems.

LIQPAY		Disabled	 
NOCHEX		Disabled	 
Payeer		Disabled	 
Paymate		Disabled	 

Opposite payment system Payeer click on the icon “Install”.

LIQPAY		Disabled	 
NOCHEX		Disabled	 
Payeer		Disabled	 
Paymate		Disabled	 

After installation, click on “Edit”.

LIQPAY		Disabled	 
NOCHEX		Disabled	 
Payeer		Disabled	 
Paymate		Disabled	 

You entered the settings for the payment module Payeer. Fill in all required fields:

Payeer

Home > Payment > Payeer

Payeer module change

* URL merchant ?

https://payeer.com/merchant/

* ID shop ?

01234567

* Secret key ?

1234567

The path to the transaction log ?

/payeer_orders.log

IP Filter incoming requests ?

123.456.*.*

E-mail alert for Error ?

info@payeer.com

Status of waiting for payment

Pending

Status successful payment

Complete

Status fail payment

Failed

Geo zone

All Zones

Sorting order

1

URL merchant: link to payment system Payeer in (default <https://payeer.com/merchant/>);

ID shop: ID of your store in the system Payeer (can be found in the personal cabinet);

Secret key: the secret key of your store, you can also find in the personal cabinet;

The path to the transaction log: the path to the file intended to record the history of payment transactions in the payment system Payeer;

IP filter incoming requests: IP filter incoming requestsYou can specify the list of all trusted ip addresses of servers, separated by commas. You can also specify a mask instead of the ip address. If the field is empty, checking for trusted ip addresses is not performed.

For example:

192.168.71.87, 192.165.83.17, 192.178.34.15

Or 192.*.71.87, 192.165.83.*, 192.*.34.*

Or *.*.*.* - all available ip addresses;

E-mail alert for Error: email will be sent notifying you in case of an error of payment. The letter will state the reason and basic information about the payment;
Specify the status of orders payment

- 1) **Status of waiting for payment** (default, Pending);
- 2) **Status of successful payment** (default, Complete);
- 3) **Status of failure of payment** (default, Failed);

Geo zone: geographic area where affordable payment method;

Sort order: the order in the list of available payment methods.

Save the changes.

Open the file `sql_query.txt` from the archive and copy the contents.

Run the SQL query to the database where you installed OpenCart CMS.

The request may be performed using a SQL client or phpMyAdmin (to paste the copied text from the file `sql_query.txt`).

If the database has a prefix, then append it to the word `setting` (for example, `oc_setting`) and confirm the request. The second value in the VALUES – this is the id of your shop in the admin panel. If the shop first, then the value is 0 by default.

After each change module settings in the admin panel Payeer, you need to run the above query to the database to activate the module.

Run SQL query/queries on server "localhost":

```
1 INSERT INTO `oc_setting` (`setting_id`, `store_id`, `code`, `key`, `value`, `serialized`) VALUES
2 ('', 0, 'payeer', 'payment_payeer_status', 1, 0)
```

This is the id of your shop in the admin panel

Clear Format Get auto-saved query

☐ Bind parameters

[Delimiter ;] ☒ Show this query here again ☐ Retain query box ☐ Rollback when finished ☒ Enable foreign key checks

Go

Enter the URL address in the “Dashboard → Merchant Settings → Settings”:

Secret key:	Who pays commission:
<input type="text" value="*****"/>	<input type="text" value="Client/Merchant"/>
Key for encryption additional parameters:	
<input type="text" value="*****"/>	
Domain:	
<input type="text" value="payeer.com"/>	
Success URL:	
<input type="text" value="https://payeer.com/?route=extension/payment/payeer/success"/>	
Fail URL:	
<input type="text" value="https://payeer.com/?route=extension/payment/payeer/fail"/>	
Status URL:	
<input type="text" value="https://payeer.com/?route=extension/payment/payeer/status"/>	
<input type="button" value="CONFIRM CHANGES →"/>	
CANCEL	

Success URL:

http:// *****/?route=extension/payment/payeer/success

Fail URL:

http:// *****/?route=extension/payment/payeer/fail

Status URL:

http:// *****/?route=extension/payment/payeer/status

Where ***** is your domain.

Confirm changes.

Payeer module for CMS Opencart 3.0.2.0 configured.