







Plavist

Legend



Privacyist: No



Privacyist: Noode*



Playvist: Song Entry



size_

head

tsini

OROV.



size

stack memory

Heap memory

playivist • obdient



std::string




































































































































































_id

-1

_name

HEAD

_next




n u i p t r



Now, let's insert some data:

```
playlist.insert_at_cursor(Playlist::SongEntry(10, "A"));
```

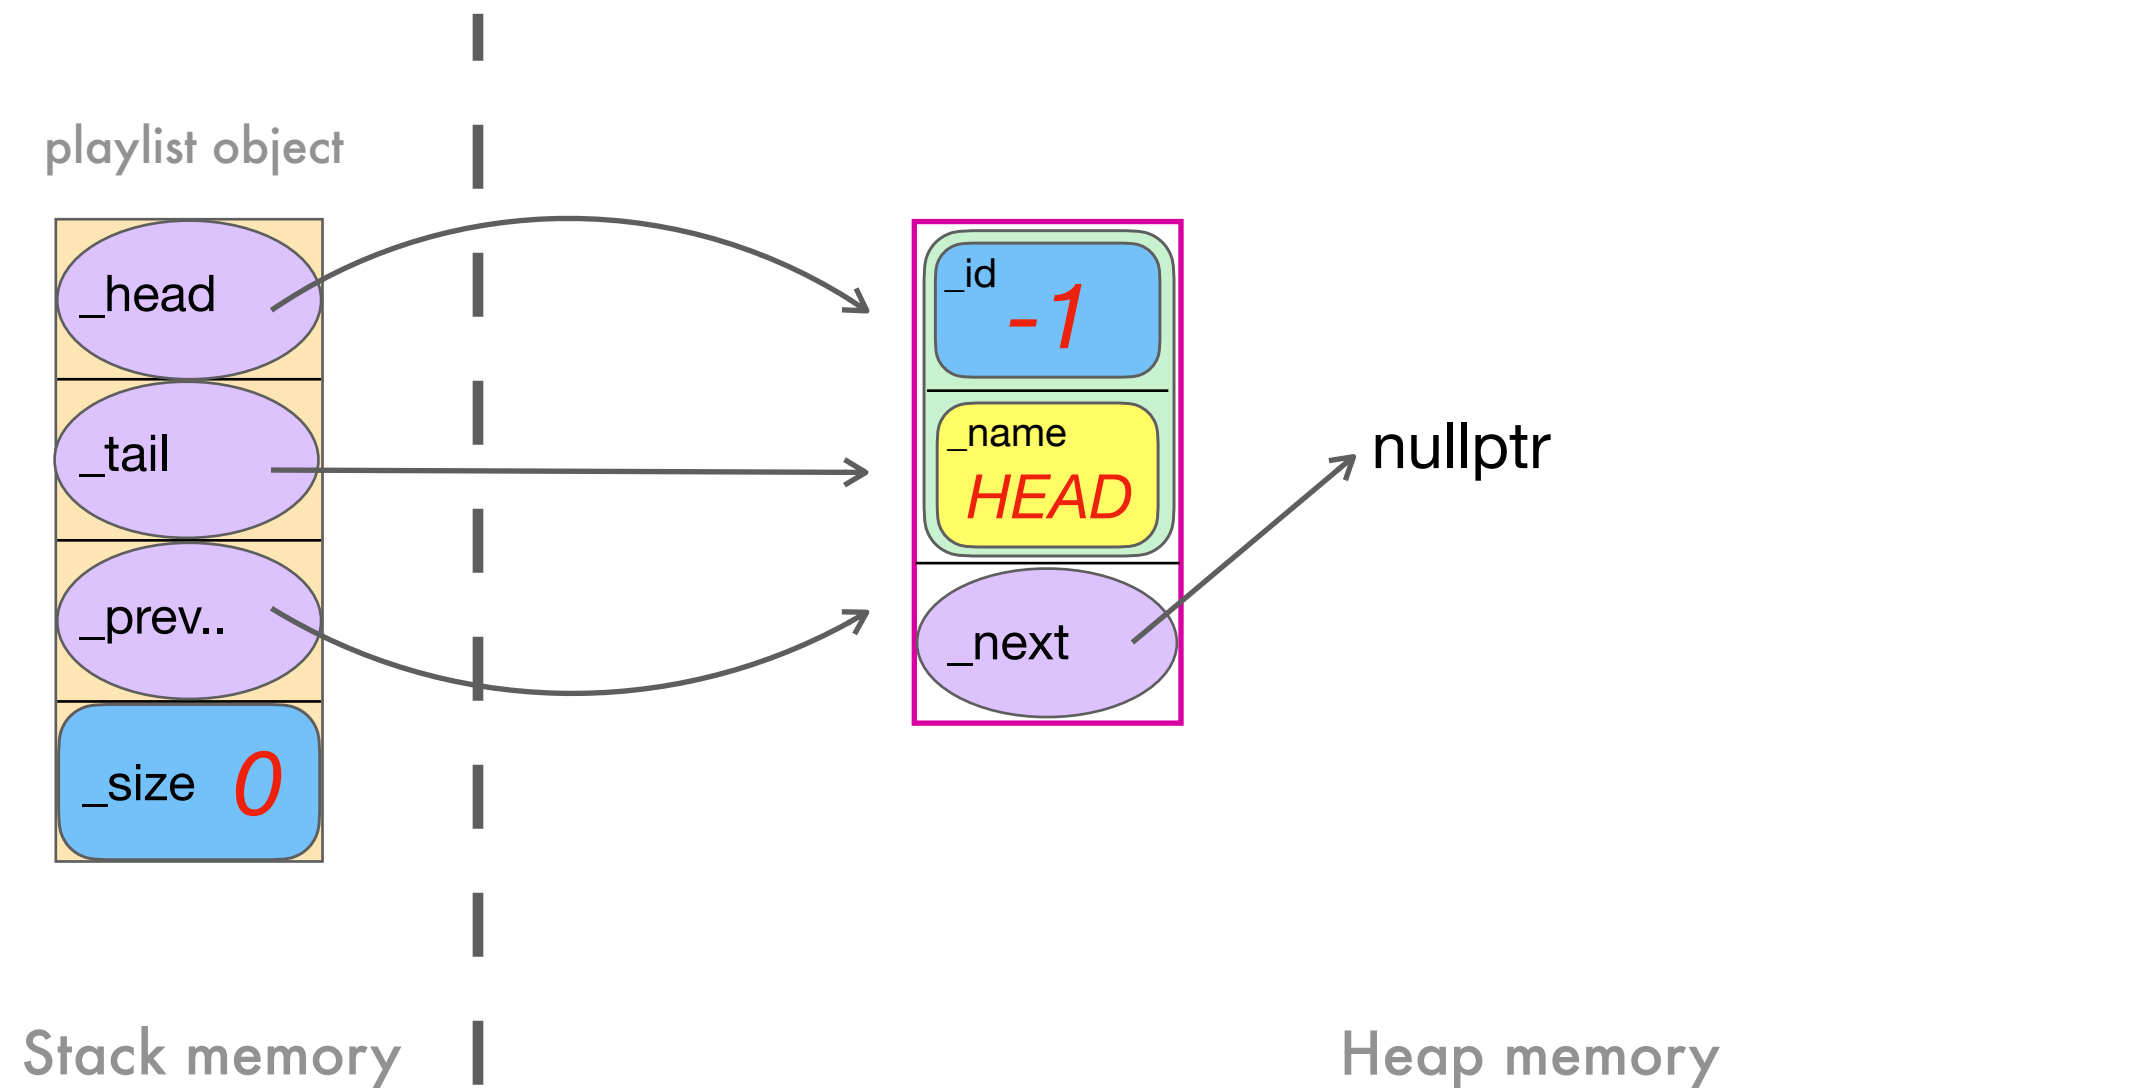

Playlist




Playlist::Node

Playlist::Node*


Playlist::SongEntry

size_t

std::string



Legend

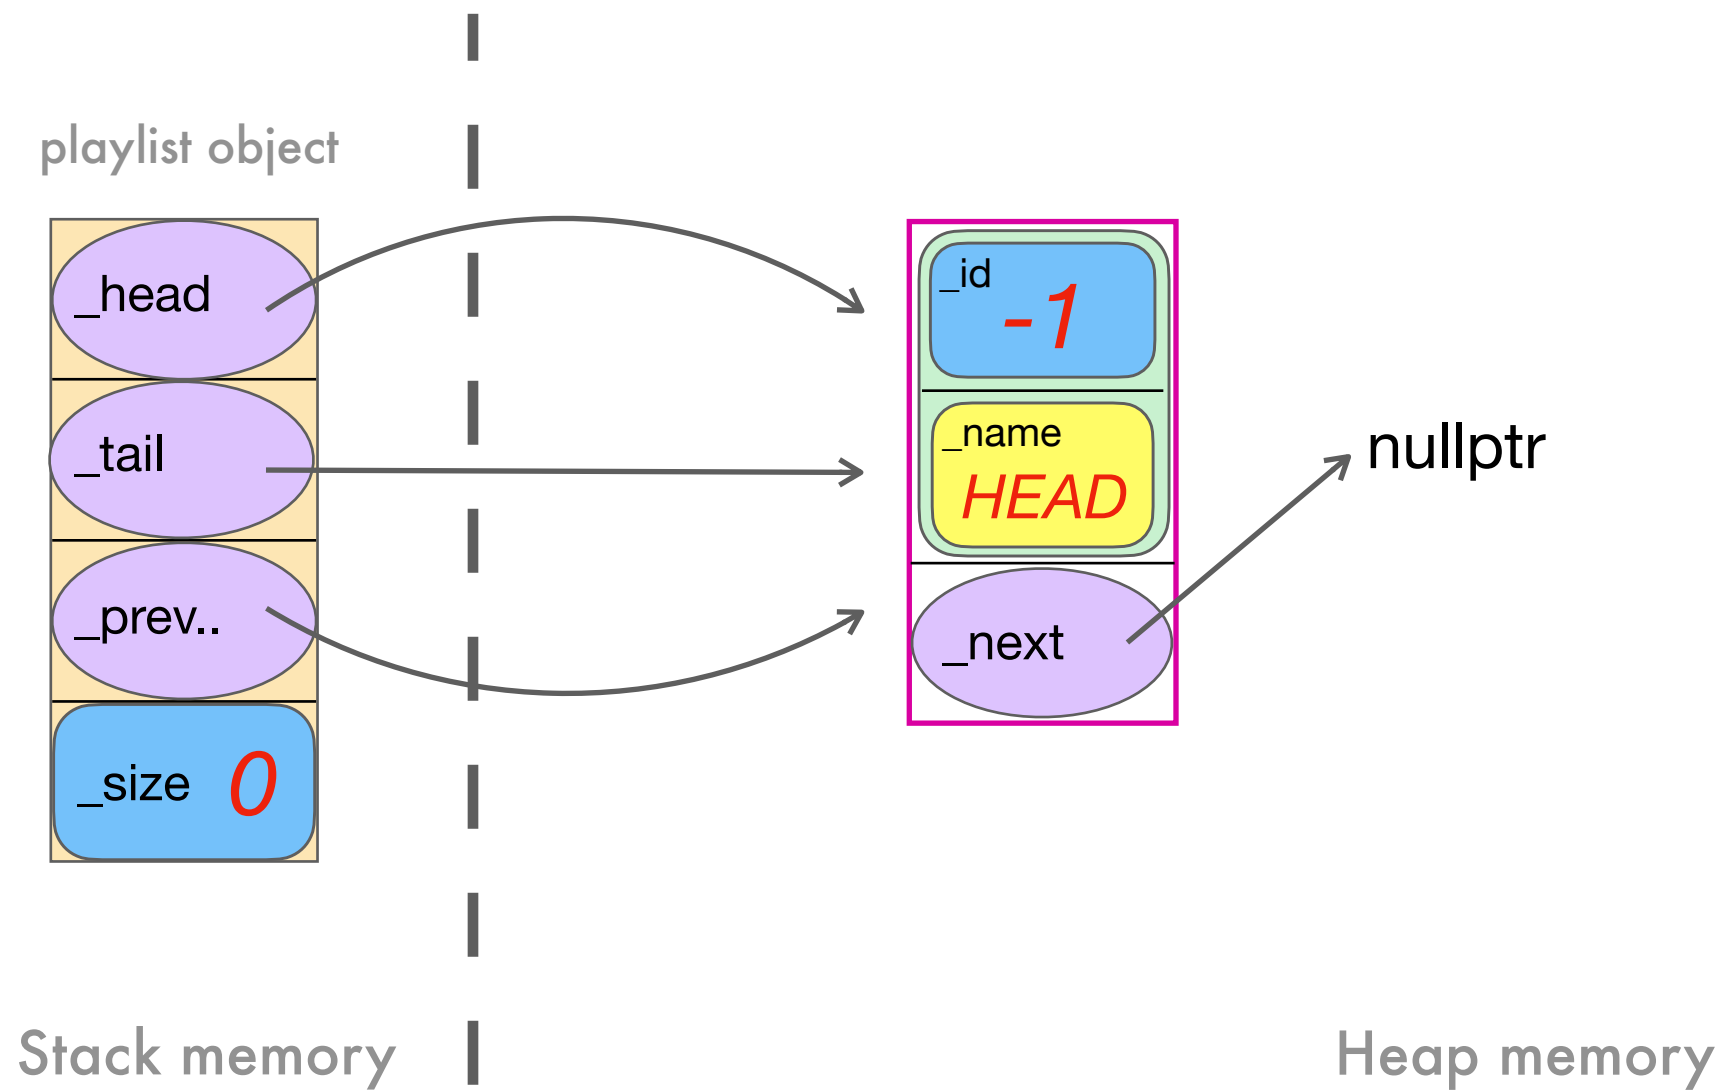

Playlist





Playlist::Node

Playlist::Node*

Playlist::SongEntry

size_t

std::string



Legend