

Autodesk® Scaleform®

Scaleform 3Di

Scaleform 3.2

3D

Mustafa Thamer
2.03
2012 5 9

Copyright Notice

Autodesk® Scaleform® 4.2

© 2012 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AUGI, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo) Built with ObjectARX (design/logo), Burn, Buzzsaw, CAiCE, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, DesignServer, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWFx, DXF, Ecotect, Evolver, Exposure, Extending the Design Team, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, Freewheel, GDX Driver, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, RiverCAD, Robot, Scaleform, Scaleform Gfx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, Tinkerbox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF

MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform


	Scaleform 3Di
	Scaleform Corporation
	6305 Ivy Lane, Suite 310
	Greenbelt, MD 20770, USA
	www.scaleform.com
Email	info@scaleform.com
	+1 (301) 446-3200
Fax	+1 (301) 446-3199

目次

1		1
2	Flash 10	2
2.1		2
2.2		2
3	3D Flash	3
3.1		3
3.2	3Di	3
4	3Di API	4
4.1	ActionScript 2 API	4
4.2	C++ 3Di	6
4.2.1	Matrix4x4	6
4.2.2	Direct Access	6
4.2.3	Render::TreeNode	7
4.2.4	Direct Access API FOV	7
5		8
5.1	AS3	10
6	3D での立体画像.....	11
6.1	NVIDIA 3D Vision.....	11

6.1.1	3D Vision	11
6.1.2		11
6.1.3		11
6.2	Scaleform API	13
6.2.1	Scaleform Stereo	13
7		14

1 概要

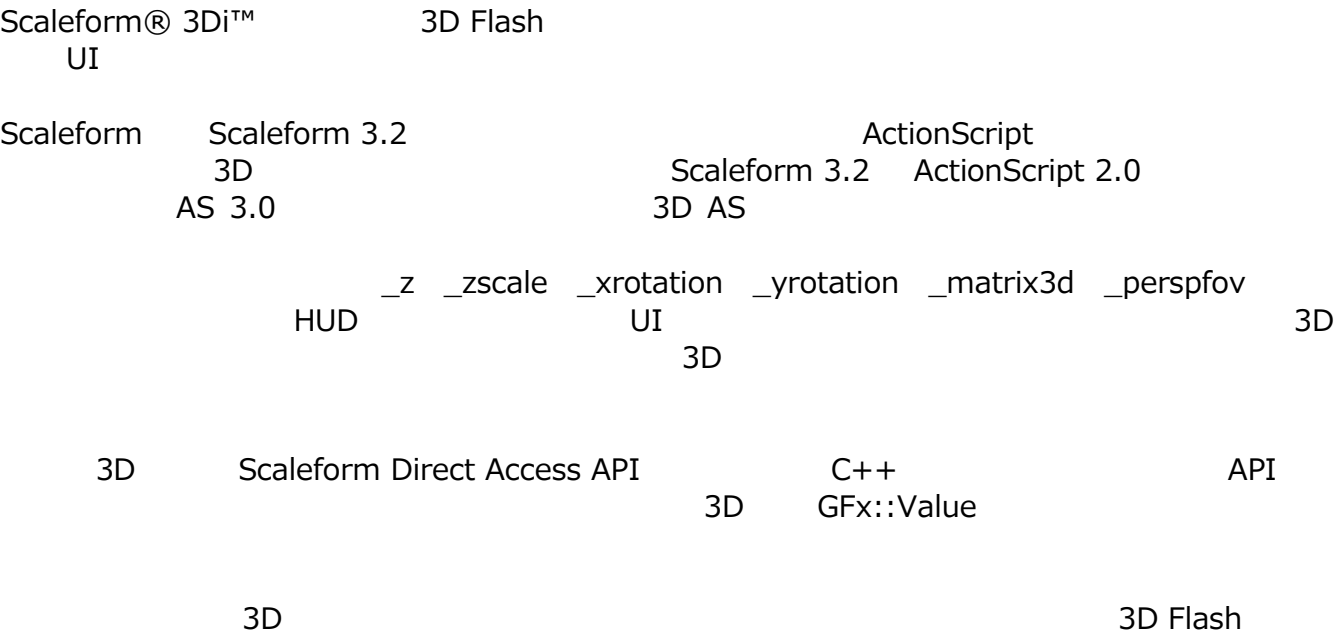

2 Flash 10 との類似性

Scaleform 3Di Flash 10 3D
3Di Scaleform AS2

2.1 制約事項

Flash 10 3D 3Di

- 1.
- 2.

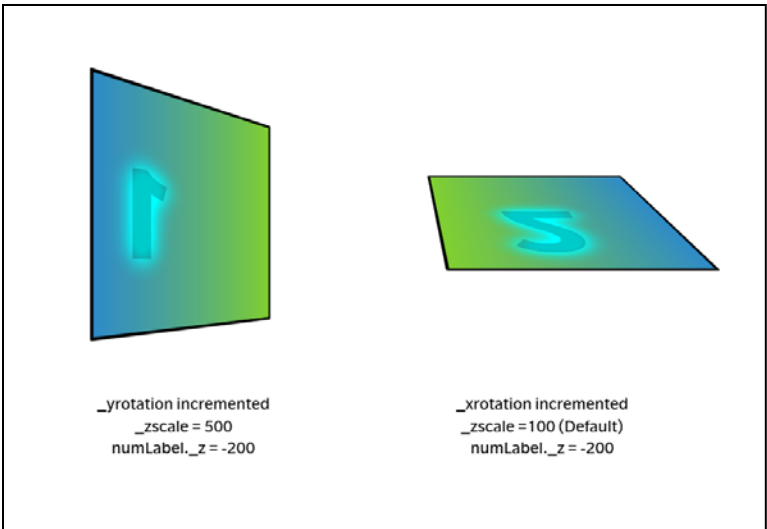


図 1: カリングされずにオブジェクトの後ろ側で描画される裏向き数字の例

2.2 実装

Scaleform 3Di
Flash 10 3D


2D 3D

2D
3D
Flash 10


3 3D での Flash の表示

Scaleform 3.2 Flash 3D 2

3.1 レンダーからテクスチャへの変換

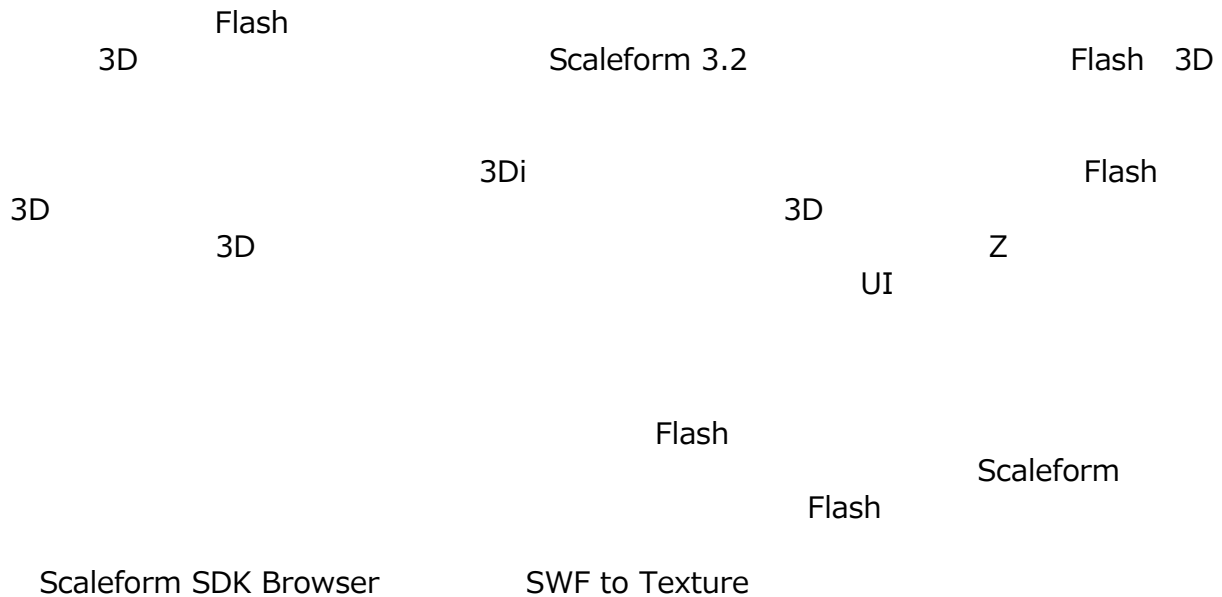

3.2 3Di

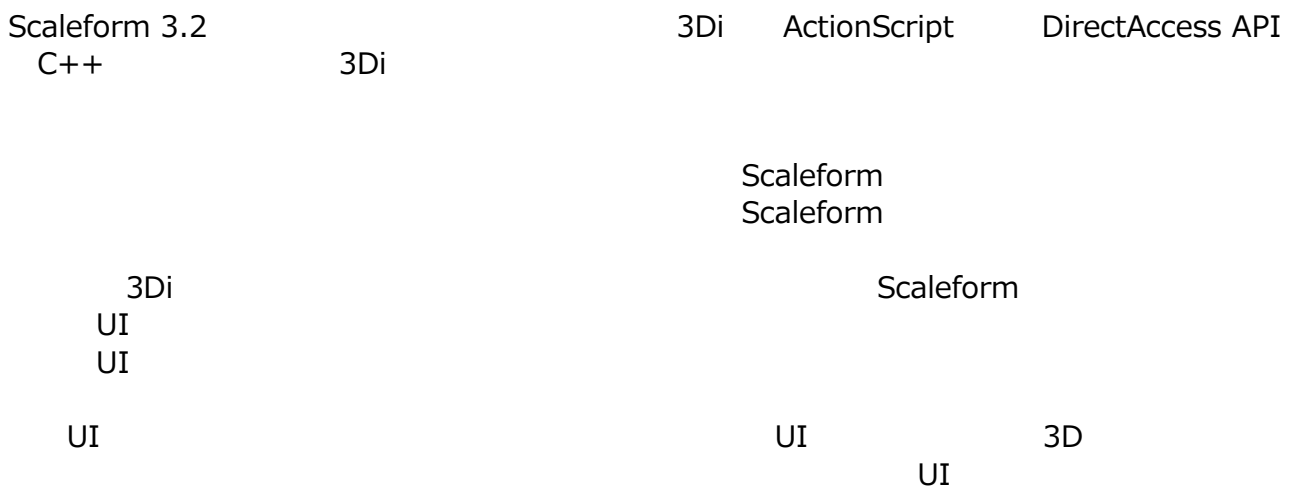

4 3Di API

4.1 ActionScript 2 API

3Di Flash 3

2 3D x y z 3D null 3D

3D 3D 2D

ActionScript z foo._matrix3d = null 3D

2D z 3 3D _zscale ActionScript x y

3D Scaleform Flash 10 FOV

+X +Y +Z 55°

3D Flash

- Movie clips
- Text fields
- Buttons

3Di ActionScript

- **_z** - Z 0
- **_zscale** - Z 100
- **_xrotation** - X 0
- **_yrotation** - Y 0
- **_matrix3d** - 16 4x4 3D NULL 3D
- **_perspfov** - 2D Field Of View 0 180 -1 55°

FOV

```
gfxExtensions    true
```

3Di

Y 45

$$X \qquad \qquad \qquad Z$$

例 3

```

        return matrixC;
    }

    this._matrix3d = TranslationMatrix(PixelsToTwips(100),PixelsToTwips(100),0);

```

4.2 C++から 3Di を利用する

4.2.1 Matrix4x4

4x4 row major Matrix4x4

3D
Render_Matrix4x4.h

4.2.2 Direct Access

3Di Gfx::Value Direct Access 3Di

API 3D

ActionScript

Gfx_Player.h [Gfx::Value::DisplayInfo](#)

```

void    SetZ(Double z)
void    SetXRotation(Double degrees)
void    SetYRotation(Double degrees)
void    SetZScale(Double zscale)
void    SetFOV(Double fov)
void    SetProjectionMatrix3D(const Matrix4F *pmat)
void    SetViewMatrix3D(const Matrix3F *pmat)
bool    SetMatrix3D(const Render::Matrix3F& mat)

```

```

Double  GetZ() const
Double  GetXRotation() const
Double  GetYRotation() const
Double  GetZScale() const
Double  GetFOV() const
const Matrix4F* GetProjectionMatrix3D() const
const Matrix3F* GetViewMatrix3D() const
bool    GetMatrix3D(Render::Matrix3F* pmat) const

```

4.2.3 Render::TreeNode

3D

Render::TreeNode

Gfx_Player.h

```
void    SetProjectionMatrix3D(const Matrix4F& m)
void    SetViewMatrix3D(const Matrix3F& m);
```

4.2.4例 : Direct Access API を使ったパースペクティブ FOV の変更

```
Ptr<Gfx::Movie> pMovie = ...;
Gfx::Value tmpVal;
bool bOK = pMovie->GetVariable(&tmpVal, "_root.Window");
if (bOK)
{
    Gfx::Value::DisplayInfo dinfo;
    bOK = tmpVal.GetDisplayInfo(&dinfo);
    if (bOK)
    {
        // set perspectiveFOV to 150 degrees
        Double oldPersp = dinfo.GetFOV();
        dinfo.SetFOV(150);
        tmpVal.SetDisplayInfo(dinfo);
    }
}
```

5 パースペクティブ

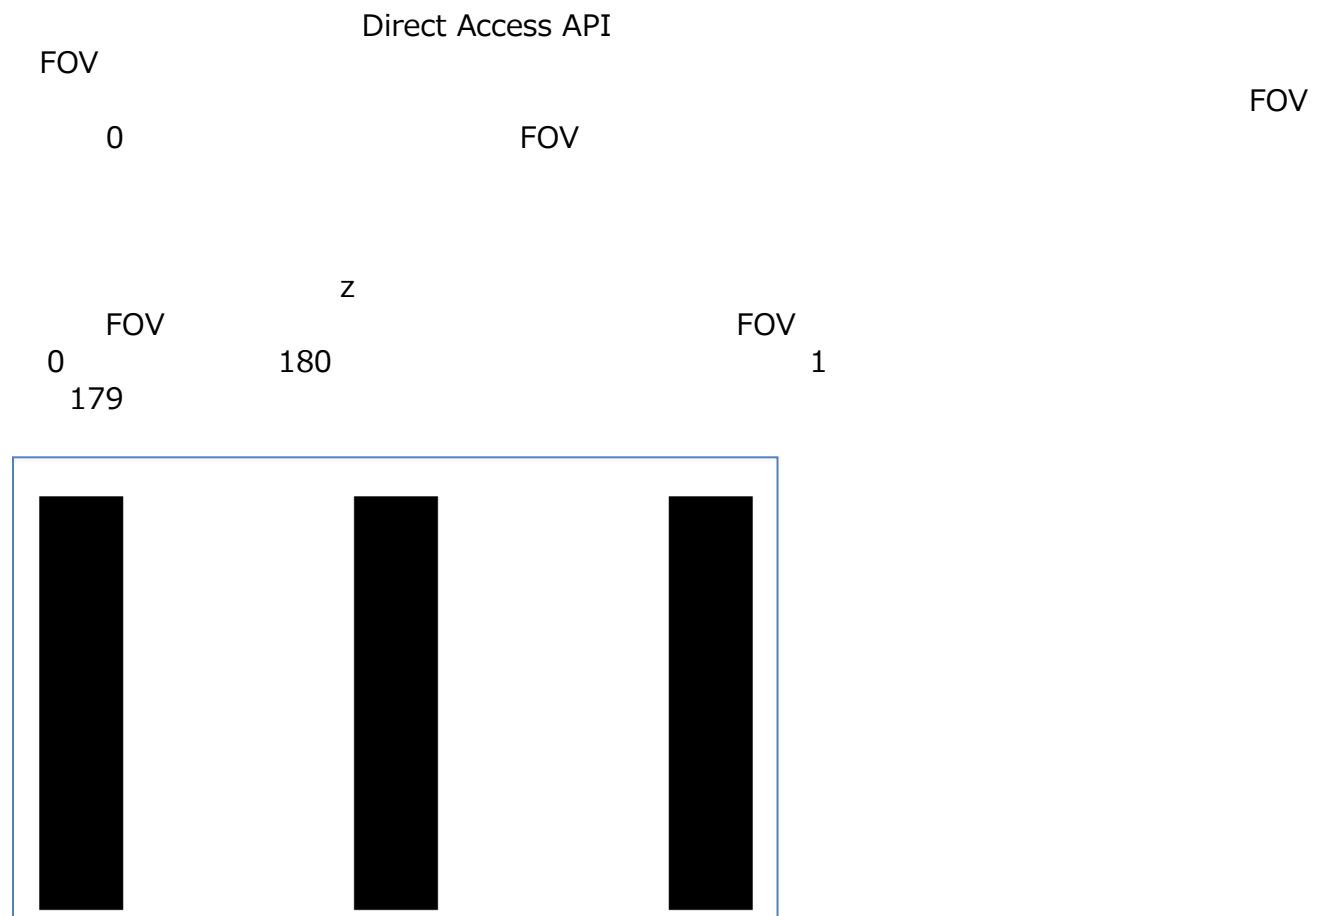


図 2: オリジナルの（回転していない）Flash イメージ

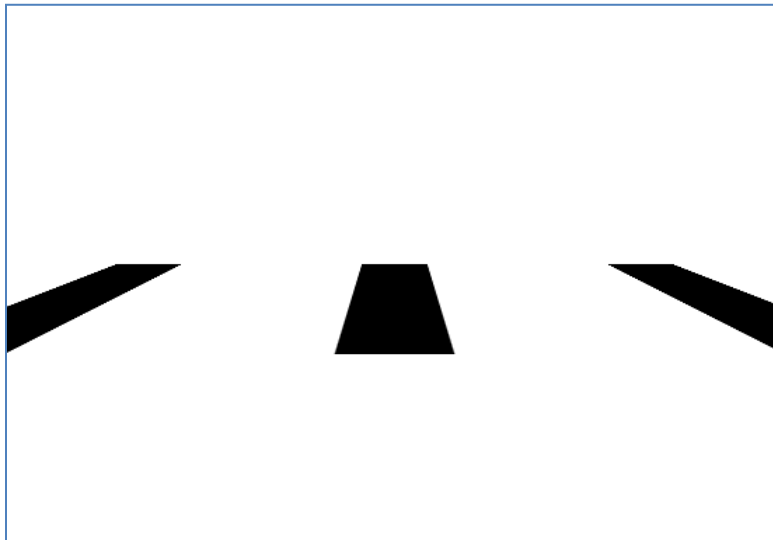


図 3: X 方向に-80 の回転を与え、パースペクティブはデフォルト（55°）

		orthographic projection	
		ActionScript	property _perspfov -1
C++	Direct Access API		

// 1. Perspective FOV -1

```

GFx::Value tmpVal;
bool bOK = pMovie->GetVariable(&tmpVal, "root"); //"_root" for AS2
if (bOK)
{
    GFx::Value::DisplayInfo dinfo;
    bOK = tmpVal.GetDisplayInfo(&dinfo);
    if (bOK)
    {
        dinfo.SetPerspFOV(-1);
        tmpVal.SetDisplayInfo(dinfo);
    }
}

```

// 2.
void MakeOrthogProj(const RectF &visFrameRectInTwips, Matrix4F *matPersp)

```

{
    const float nearZ = 1;
    const float farZ = 100000;
    float DisplayHeight = fabsf(visFrameRectInTwips.Height());
    float DisplayWidth = fabsf(visFrameRectInTwips.Width());
    matPersp->OrthoRH(DisplayWidth, DisplayHeight, nearZ, farZ);
}
GFx::Value tmpVal;
bool bOK = pMovie->GetVariable(&tmpVal, "root.mc");
if (bOK)
{
    GFx::Value::DisplayInfo dinfo;
    bOK = tmpVal.GetDisplayInfo(&dinfo);
    if (bOK)
    {
        Matrix4F perspMat;
        MakeOrthogProj(PixelsToTwips (pMovie->GetVisibleFrameRect()), &perspMat);
        dinfo.SetProjectionMatrix3D(&perspMat);
        tmpVal.SetDisplayInfo(dinfo);
    }
}
}

```

Projection

Ptr<Movie> pMovie = ...

```
// compute ortho matrix
Render::Matrix4F ortho;
const RectF &visFrameRectInTwips = PixelsToTwips(pMovie->GetVisibleFrameRect());
const float nearZ = 1;
const float farZ = 100000;
ortho.OrthoRH(fabs(visFrameRectInTwips.Width()), fabs(visFrameRectInTwips.Height()),
nearZ, farZ);
pMovie->SetProjectionMatrix3D(ortho);
```

5.1 AS3 でのパースペクティブの設定

ActionScript 3 PerspectiveProjection

Example:

```
import flash.display.Sprite;

var par:Sprite = new Sprite();
par.graphics.beginFill(0xFFCC00);
par.graphics.drawRect(0, 0, 100, 100);
par.x = 100;
par.y = 100;
par.rotationX = 20;


addChild(par);

var chRed:Sprite = new Sprite();
chRed.graphics.beginFill(0xFF0000);
chRed.graphics.drawRect(0, 0, 100, 100);
chRed.x = 50;
chRed.y = 50;
chRed.z = 0;

par.addChild(chRed);

var pp3:PerspectiveProjection=new PerspectiveProjection();
pp3.fieldOfView=120;
par.transform.perspectiveProjection = pp3;
```

6 3D

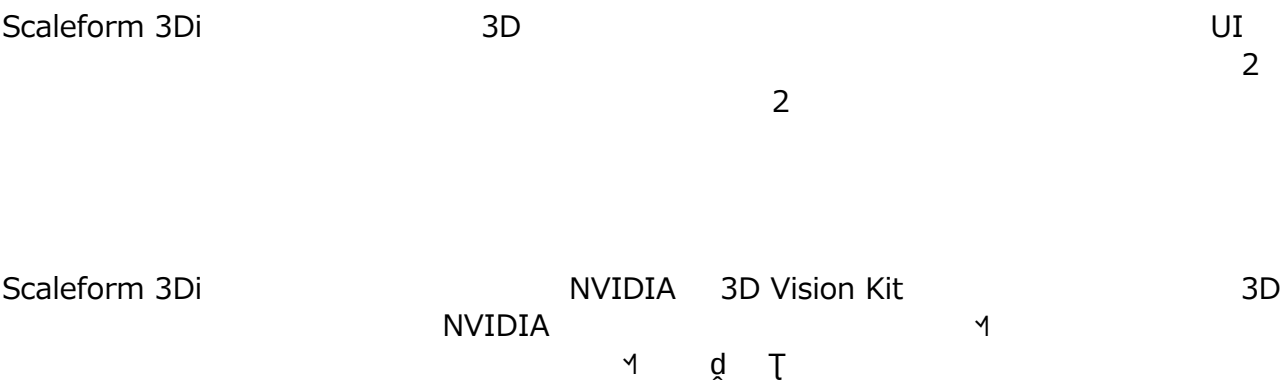

3D Vision

3D Vision
CTRL F4

IR

CTRL F3

Scaleform Player

CTRL F5 CTRL F6

*Set up stereoscopic 3D
advanced in-game settings*

NVIDIA
Set Keyboard Shortcuts

Stereoscopic 3D
Enable the
CTRL F5 CTRL F6
CTRL F7

CTRL F5

15

10

CTRL F5 CTRL F6

CTRL F7

NVIDIA

3D
3D

API

API

<http://developer.nvidia.com/object/nvapi.html>.

http://developer.download.nvidia.com/presentations/2009/SIGGRAPH/3DVision_Develop_Design_Play_in_3D_Stereo.pdf.

6.2 Scaleform ステレオ API

API Scaleform 4.1 3D Render::HAL
API 3D HDMI 1.4

6.2.1

Scaleform

Scaleform 4

Render::Viewport::SetStereoViewport

SF4

```
//  
  
View_Stereo_SplitV      = 0x40,  
View_Stereo_SplitH      = 0x80,  
View_Stereo_AnySplit    = 0xc0,  
  
void SetStereoViewport(unsigned display);
```

6.2.1 Scaleform Stereo 初期化

```
Render::StereoParams s3DInfo;  
s3DInfo.DisplayDiagInches = 46;           // 46 inch TV  
s3DInfo.DisplayAspectRatio = 16.f / 9.f;  
s3DInfo.Distortion = .75;                 // 0 to 1  
s3DInfo.EyeSeparationCm = 6.4;           // this will default 6.4cm  
pRenderHAL->SetStereoParams(s3DInfo);
```

2 Display 1
 Scaleform

```
pMovie->Advance(delta);  
  
pRenderer->GetHAL()->SetStereoDisplay(Render::StereoLeft);  
pMovie->Display();  
  
pRenderer->GetHAL()->SetStereoDisplay(Render::StereoRight);  
pMovie->Display();
```

7 サンプルファイル

3Di
FLA

Scaleform SDK

3D

Flash

SWF

C:\Program Files (x86)\Scaleform\GFx SDK 4.2\Bin\Data\AS2or AS3\Samples



図 4: 3DGenerator

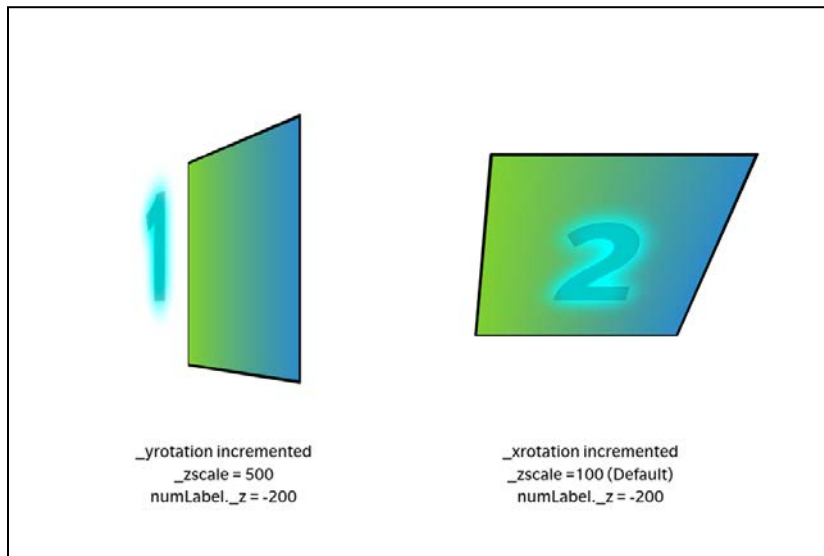


図 5: 3D スクエア



図 6: 3D ウィンドウ