

Autodesk® Scaleform®

Scaleform 4.2 AS2 Extensions Reference

Scaleform 4.2

ActionScript 2.0

: Artem Bolgar, Prasad Silva
: 4.03
: 2012 9 17

Copyright Notice

Autodesk® Scaleform® 4.2

© 2012 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AUGI, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo) Built with ObjectARX (design/logo), Burn, Buzzsaw, CAiCE, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, DesignServer, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWFx, DXF, Ecotect, Evolver, Exposure, Extending the Design Team, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, Freewheel, GDX Driver, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, RiverCAD, Robot, Scaleform, Scaleform GFX, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, Tinkerbox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform :

ActionScript Extensions Reference (ActionScript
)

Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

<http://www.scaleform.com/>

info@scaleform.com

(301) 446-3200

Fax (301) 446-3199

1		1
2	Mouse	2
2.1		2
2.2	Button	2
2.3	Mouse	4
2.4		6
2.5	Mouse ActionScript	8
3	Button	11
4	MovieClip	13
5	NetStream	17
6	Selection	20
7	TextField	28
7.1		28
7.2		36
7.3		42
7.4	HTML	45
7.5		46
7.6		50
7.7	IME	53
8	TextFormat	56
9	Stage	57
10	Array	59
11	String	60
12	Video	61
13	3Di	62
14		63
15		66

1

Autodesk Scaleform SDK™
PC
Scaleform Adobe Flash Studio

Flash®

Flash Web

IME

Scaleform ActionScript

Scaleform Player

`_global.gfxExtensions`

`true`

`_global.gfxExtensions = true;`

FLA
Scaleform Player

Flash

Flash® Player

Scaleform

Scaleform
SDK
Player

Scaleform Player
Scaleform

Scaleform

API

Scaleform

API

2 Mouse

Mouse
 (16)
 Mouse
 Mouse
 Scaleform
 Scaleform
 Flash
 Mouse

2.1

Wii
 Scaleform 4.0 4
 GfX::Movie::SetMouseCursorCount(unsigned n)
 GfX::MouseEvent GfX::Movie::HandleEvent
 Scaleform GfX::MouseEvent
 GfX::MouseEvent

2.2 Button

onRollOver onRollOut onDragOver onDragOut onPress onRelease onReleaseOutside
 Button Scaleform 1 2

onPress 1
 1 : 1

```

mc.onPress = function(mouseIdx:Number)
{
    if (mouseIndex == 0)
        . . .
    else if (mouseIndex == 1)
        . . .
    . . .
}
  
```

onPress onRelease 2
 NUMERIC -1 0

```

mc.onPress = function(mouseIdx:Number, keyboardOrMouse:Number)
  
```

```

{
    if (keyboardOrMouse == 0)
        . . .
    else
        . . .
    . . .
}

2          onRollOver/Out          onDragOver/Out          onRollOver/onRollOut
          rollover/dragover          onRollOver/onDragOver
          onDragOver/onDragOut          onRollOut/onDragOut

2
onRollOver/onRollOut          onDragOver/onDragOut          (
    )
    onRollOver/onDragOver          2          0          2          2
2          2          onRollOver/onRollOut          1          1          2
          onRollOut/onDragOut          1
2          2          onRollOut/onDragOut          0

2          2          onRollOver/onRollOut          2
onDragOver/onDragOut

mc.onRollOver = function(mouseIdx:Number, nestingIdx:Number)
{
    // nestingIdx == 0 の時だけロールオーバー アニメーションを行う
    if (nestingIdx == 0)
        doOverAnimation();
    . . .
}
mc.onRollOut = function(mouseIdx:Number, nestingIdx:Number)
{
    // nestingIdx == 0 の時だけロールアウト アニメーションを行う
    if (nestingIdx == 0)
        doOutAnimation();
    . . .
}

on(rollOver) on(rollOut)

```

onPress onRelease

Button Events

- onPressAux
- onReleaseAux
- onReleaseOutsideAux
- onDragOver
- onDragOut

index != 0

0

```
mc.onPressAux = function(mouseIdx:Number, keyboardOrMouse:Number, buttonIdx:Number)
{
    if (buttonIdx == 1) // Right mouse button
        . . . .
    . . . .
}
```

2.3 Mouse

ActionScript

Flash

Mouse.addListener
:

- onMouseMove = function() { }
- onMouseDown = function() { }
- onMouseUp = function() { }
- onMouseWheel = function(delta : Number, targetPath : String) { }

Flash

onMouseDown

onMouseUp

(
 _global.gfxExtensions true) Scaleform

:

- onMouseDown = function(button : Number, [targetPath : String],
[mouseIdx : Number], [x : Number], [y : Number] ,
[dbClick : Boolean]) { }
- onMouseUp = function(button : Number, [targetPath : String],
[mouseIdx : Number], [x : Number], [y : Number]) { }

1

Scaleform

1

2

3

16

Flash

:

```
var mouseListener:Object = new Object;
```

```
mouseListener.onMouseDown = function(button, target)
```

```
{
```

```
    trace("mouseDown - button '" + button +  
          "' target = '" + target + "'");
```

```
}
```

```
mouseListener.onMouseUp = function(button, target)
```

```
{
```

```
    trace("mouseUp - button '" + button +  
          "' target = '" + target + "'");
```

```
}
```

```
Mouse.addListener(mouseListener);
```

mouseDown/Up

button

target

2

button

Mouse["LEFT"]

Mouse["RIGHT"]

Mouse["MIDDLE"]

button

(Mouse["LEFT"]

ActionScript 2.0

(

)

Mouse.LEFT

) 2

target

'undefined'

Flash

'undefined'

'undefined'

Flash Player

- onMouseMove = function([mouseIdx : Number],
[x : Number],[y : Number]) { }
- onMouseDown = function(button : Number, [targetPath : String],

```

        [mouseIdx : Number], [x : Number], [y : Number] ,
        [dbClick : Boolean]) { }
    ▪ onMouseUp = function(button : Number, [targetPath : String],
        [mouseIdx : Number], [x : Number], [y : Number]) { }
    ▪ onMouseWheel = function(delta : Number, targetPath : String,
        [mouseIdx : Number], [x : Number], [y : Number]) { }

```

mouseIdx

```

x    y    (_root    )
onMouseDown    dbClick
                'true'

```

2.4

Flash :

- -
- - useHandCursor true
- I -

Flash Scaleform

C++ API ActionScript Mouse
C++ Gfx::StateBag::SetUserEventHandler

FxPlayer.cpp

ActionScript

SDK

Mouse.fla/swf

Mouse

'Cursor_M'

"hand"

"arrow" "ibeam"

1

_x _y

Mouse

Scaleform

Mouse.setCursorType
cursorType mouseIndex
 cursorType

Mouse

```
(Mouse["ARROW"] Mouse["HAND"] Mouse["IBEAM"])
```

Mouse

```
_global.gfxExtensions = 1;
//
Mouse.hide();

var mouseListener:Object = new Object;
mouseListener.onMouseMove = function(mouseIdx, x,y)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
        if (x == undefined)
        {
            x = _xmouse;
            y = _ymouse;
        }
        var cmc = eval("_root.Cursor_M"+(mouseIdx+1));

        cmc._x = x;
        cmc._y = y;
    }
Mouse.addListener(mouseListener);

Mouse["setCursorType"] = function(cursorType, mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    switch(cursorType)
    {
        case Mouse["HAND"]:
            cmc.Cursor.gotoAndPlay("hand");
            break;
        case Mouse["ARROW"]:
            cmc.Cursor.gotoAndPlay("arrow");
            break;
        case Mouse["IBEAM"]:
            cmc.Cursor.gotoAndPlay("ibeam");
            break;
        default: return;
    }
}
```

```

// Mouse.show と Mouse.hide
//
ASSetPropFlags(Mouse, "show,hide", 0, 7);

Mouse.show = function(mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    cmc._visible = true;
}
Mouse.hide = function(mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    cmc._visible = false;
}

```

2.5 Mouse ActionScript

Mouse ActionScript		Scaleform
ActionScript 1.0	Mouse.setCursorType(...)	
	ActionScript 2.0	
	ActionScript 2.0	
Mouse["setCursorType"](..)		

getButtonsState()

```
public function getButtonsState(mouseIndex : Number) : Number
```

Scaleform : 2.2

パラメータ

 mouseIndex : Number -

getTopMostEntity()

```

public function getTopMostEntity([mouseIndex : Number]) : Object
public function getTopMostEntity(testAll : Boolean,
                                [mouseIndex : Number]) : Object
public function getTopMostEntity(x : Number, y : Number) : Object
public function getTopMostEntity(x : Number, y : Number, testAll: Boolean) : Object

```

Scaleform :1.2.34

2.2

(onPress onMouseDown onRollOver)

MovieClip.hitTest

```

hitTest x y
getTopMostEntity x y
Mouse.getTopMostEntity(x, y).hitTest(x, y,

```

true) == true

パラメータ

```

mouseIndex : Number -
testAll : Boolean -
                (true)

```

(false)

```

getTopMostEntity 'true'
x : Number, y :Number -

```

例:

```

var listenerObj = new Object;

listenerObj.onMouseMove = function()
{
    var target = Mouse["getTopMostEntity"]();
    trace("Mouse moved, target = "+target);
}

Mouse.addListener(listenerObj);

var target = Mouse["getTopMostEntity"](480, 10);
trace("The character at the (480, 10) is " + target);

```

getPosition

```

public function getPosition(mouseIndex : Number) : flash.geom.Point

```

Scaleform : 2.2

flash.geom.Point

_root

パラメータ

mouseIndex : Number -

setCursorType()

public function setCursorType(cursorType : Number, [mouseIndex : Number]) : void

Scaleform : 1.2.32

cursorType

パラメータ

cursorType :Number - Mouse.ARROW Mouse.HAND Mouse.IBEAM

mouseIndex :Number -

3 Button

hitTestDisable

hitTestDisable:Boolean [read-write]

Scaleform : 2.1.51

true MovieClip.hitTest

false

:
TextField.hitTestDisable
MovieClip.hitTestDisable

topmostLevel

topmostLevel:Boolean [read-write]

Scaleform : 2.1.50

true

false

"topmostLevel"

- Scaleform3.0.71 "topmostLevel"
true topmost

- Scaleform3.0.72 ;
A topmost B topmost

"topmostLevel" true A B

"topmostLevel" SwapDepth

ActionScript

:
TextField.topmostLevel
MovieClip.topmostLevel

focusGroupMask

focusGroupMask : Number

Scaleform : 3.3.84

setControllerFocusGroup

	button1	0	movieclip2
0	1		

```
Selection.setControllerFocusGroup(0, 0);  
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0  
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

focusGroupMask

4 MovieClip

hitTest ()

```
public hitTest(x:Number, y:Number, [shapeFlag:Boolean],
               [ignoreInvisibleChildren:Boolean]):Boolean
```

Scaleform : 2.1.51

3 hitTest 1 x, y

Flash

hitTest

“true” (_visible false)

_alpha

パラメータ

ignoreInvisibleChildren:Boolean - true

hitTestDisable

```
hitTestDisable:Boolean [read-write]
```

Scaleform : 1.2.32

true MovieClip.hitTest

false

:

TextField.hitTestDisable

Button.hitTestDisable

noAdvance

```
noAdvance : Boolean
```

Scaleform : 2.1.52

true

Flash

ActionScript

Flash

Scaleform

“true”

(

)

:

`_global.noInvisibleAdvance`

topmostLevel

`topmostLevel:Boolean` [read-write]

Scaleform : 2.1.50

true

false

"topmostLevel"

- Scaleform3.0.71 "topmostLevel"
true topmost

- Scaleform3.0.72 ;
A topmost B topmost
A B

"topmostLevel" true

"topmostLevel"

SwapDepth

ActionScript

:

TextField.topmostLevel

Button.topmostLevel

rendererString

`rendererString:String` [read-write]

Scaleform : 2.2.55

MovieClip

ActionScript

例:

`myMovieInstance.rendererString = "SHADER_Blur"`

rendererFloat

rendererFloat:Number [read-write]

Scaleform : 2.2.55

MovieClip
ActionScript

例:

```
myMovieInstance.rendererFloat = 4; // 例えば、C++では列挙値です
```

disableBatching

disableBatching:Boolean

Scaleform : 4.0.17

focusGroupMask

focusGroupMask : Number

Scaleform version: 3.3.84

setControllerFocusGroup

	button1			movieclip2
0	1	0		

```
Selection.setControllerFocusGroup(0, 0);  
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0  
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

focusGroupMask

5 NetStream

Scaleform
NetStream

onMetaData

```
onMetaData = function(info:Object) { }
```

Scaleform : 3.0.63

Scaleform 2

onMetaData 2

1. audioTracks –

```
audioTracks :  
  channelsNumber – (1- 2-  
    6 – 5.1 )  
  totalSamples –  
  trackIndex –  
  NetStream.audioTrack (  
    )  
  sampleRate –
```

2. subtitleTracksNumber –

audioTrack

audioTrack:Number [read-write]

Scaleform : 3.0.63

/

例:

```
var ns:NetStream = new NetStream(nc);  
var audioTracks;  
  
ns.onMetaData = function(info:Object)  
{
```

```

audioTracks = info.audioTracks;
}

if (audioTracks != undefined && audioTracks.length > 0)
ns.audioTrack = audioTracks[0].trackIndex;

```

subtitleTrack

subtitleTrack: Number [read-write]

Scaleform : 3.0.63

0

onSubtitle

onSubtitle = function(msg:String) {}

Scaleform : 3.0.63

例:

```

var ns:NetStream = new NetStream(nc);
var subtitlesNumber = 0;

ns.onMetaData = function(info:Object)
{
    subtitlesNumber = info.subtitleTracksNumber;
}

ns.onSubtitle = function(msg:String)
{
    sbTextField.text = msg;
}
if (subtitlesNumber > 0)
    ns.subtitleTrack = 1;

```

setNumberOfFramePools

public function setNumberOfFramePools(pools : Number) : Void

Scaleform : 3.0.68

“frame pools”

CPU

1

NetStream.play()call

setReloadThresholdTime

```
public function setReloadThresholdTime(reloadTime : Number) : Void
```

Scaleform : 3.0.68

Scaleform

0.8

NetStream

NetStream.setBufferTime()

2

1

1

/

NetStream.play()

6 Selection

Selection

Scaleform	Selection	Flash	ActionScript 1.0
Selection.captureFocus()	Selection		
ActionScript 2.0			
ActionScript 2.0			
	: Selection["captureFocus"]()		

alwaysEnableArrowKeys

alwaysEnableArrowKeys : Boolean

Scaleform : 1.2.34

	"_focusrect"	false	
	(		)
"_focusrect = false;"			Flash
			alwaysEnableArrowKeys
"true"			

例:

```
Selection["alwaysEnableArrowKeys"] = true;
```

alwaysEnableKeyPress

alwaysEnableKeyPress : Boolean

Scaleform : 3.0.63

	"_focusrect"	false	
Enter	onPress / onRelease		(
)	"_focusrect = false;"		
Flash			
alwaysEnableKeyPress	"true"		

例:

```
Selection["alwaysEnableKeyPress"] = true;
```


captureFocus()

public function captureFocus([doCapture:Boolean, controllerIdx:Number]) : void

Scaleform : 1.2.34

doCapture true () captureFocus
Tab

doCapture false captureFocus

パラメータ

doCapture:Boolean -

、 captureFocus

true

controllerIdx:Number -

0

例:

```
Selection["captureFocus"](); // "true"を渡すのと同じです  
Selection["captureFocus"](false);
```

disableFocusAutoRelease

disableFocusAutoRelease : Boolean

Scaleform : 1.2.34

) (Flash
()
true

例:

```
Selection["disableFocusAutoRelease"] = true;
```

disableFocusKeys

disableFocusKeys : Boolean

Scaleform : 2.2.58

(Tab Shift-Tab)

例:

```
Selection["disableFocusKeys"] = true;

:
moveFocus()
```

disableFocusRolloverEvent

disableFocusRolloverEvent : Boolean

Scaleform : 2.0.37

rollover/out

rollover/rollout true

例:

```
Selection["disableFocusRolloverEvent "] = true;
```

modalClip

modalClip : MovieClip

Scaleform : 2.2.58

(Tab Shift-Tab
Tab)

例:

```
Selection["modalClip"] = _root.mc;
...
Selection["modalClip"] = undefined;

:
disableFocusKeys
moveFocus()
```

moveFocus()

```
public function moveFocus(keyToSimulate : String [, startFromMovie:Object,  
    includeFocusEnabledChars : Boolean = False, controllerIdx :  
    Number]) : Object
```

Scaleform : 2.2.58

```
(Tab Shift-Tab ) disableFocusKeys  
modalClip
```

パラメータ

keyToSimulate:String – “up” “down” “left” “right” “tab” “shifftab”

startFromMovie:Object – moveFocus
null

3

includeFocusEnabledChars:Boolean – moveFocus focusEnabled
tabEnabled / tabIndex

tabEnabled / tabIndex false

controllerIdx:Number – 0

例:

```
Selection["moveFocus"]("up");  
Selection["moveFocus"]("tab", _root.mc);  
Selection["moveFocus"]("tab", _root.mc, true);  
Selection["moveFocus"]("tab", null, true);
```

戻り値

undefined

```
:  
disableFocusKeys  
modalClip
```

```
public function findFocus(keyToSimulate : String [, parentMovie:Object, loop :
    Boolean, startFromMovie:Object, includeFocusEnabledChars : Boolean,
    controllerIndex : Number]) : Object
```

TAB Shift TAB

<code>disableFocusKeys</code>	<code>setModalClip/getModalClip</code>
-------------------------------	--

```
var a = Selection["findFocus"]("up");
```

null

disableFocusKeys
setModalClip
getModalClip

setModalClip()

public function setModalClip(modalClip : Object, controllerIndex : Number)

Scaleform : 3.3.84

TAB Shift TAB

modalClip	-
controllerIndex	-

getModalClip()

public function getModalClip(controllerIndex : Number) : Object

Scaleform : 3.3.84

controllerIndex	-
-----------------	---

setControllerFocusGroup()

public function setControllerFocusGroup (controllerIndex : Number, focusGroupId :
Number) : Boolean

Scaleform : 3.3.84

controllerIndex	0
-----------------	---

2

	setControllerFocusGroup (1,1)	1
	setControllerFocusGroup (1,0)	
0	1	
controllerIndex	-	
focusGroupId	-	
Selection["setControllerFocusGroup"](0,0); Selection["setControllerFocusGroup"](1,1); Selection["setControllerFocusGroup"](2,1);		
true		

getControllerFocusGroup()

public function getControllerFocusGroup (controllerIndex : Number) : Number

Scaleform : 3.3.84

controllerIndex	-
-----------------	---

getFocusArray()

public function getFocusArray(mc : Object) : Array

Scaleform : 3.3.84

mc	-
----	---

getFocusBitmask()

public function getFocusBitmask(mc : Object) : Number

Scaleform : 3.3.84

mc -

getControllerMaskByFocusGroup()

public function getControllerMaskByFocusGroup (focusGroupIdx : Number) : Number

Scaleform : 3.3.84

focusGroupIdx -

numFocusGroups

numFocusGroups : Number

Scaleform : 3.3.84

setControllerFocusGroup 0 3 numFocusGroups 2

7 TextField

```
Scaleform                                TextField                                Flash 8
TextField
Flash 9  TextField
        IME
        )
```

7.1

autoFit

```
autoFit:Boolean [read-write]
```

```
Scaleform : 2.0.39
```

```
/
```

```
false
```

appendText ()

```
public function appendText(newText:String):void
```

```
Scaleform : 2.0.37
```

```
newText
```

```
(+)= ( 、 my_txt.text +=
```

```
appendingText)
```

パラメータ

```
newText:String -
```

```
:
```

```
appendHtml()
```


appendHtml ()

```
public function appendHtml(newHtml:String):void
```

Scaleform : 2.0.37

```

newHtml      HTML
      htmlText      (+=)      (txt.htmlText += moreHtml      )
      htmlText      +=      HTML
HTML      HTML      HTML      HTML
      newHtml      HTML      (newHtml      )      HTML
      +=

```

```
パラメータ
newHtml:String - HTML
:
appendText()
```

caretIndex

caretIndex: Number [read-only]

Scaleform : 2.0.37

```

        (
            (
                0
                caretIndex
            )
        )
    Selection.getCaretIndex()
    Selection.getCaretIndex()
    -1
    (
        0
    )
    :
    Selection.getCaretIndex()

```

getCharBoundaries ()

```
public function getCharBoundaries(charIndex:Number): flash.geom.Rectangle
```

Scaleform : 2.0.37

(
 'a' 'w' 'k'
):



Baywio/ks

パラメータ

charIndex:Number – (0
1)

戻り値

flash.geom.Rectangle –
x y
(0,0)

:
getExactCharBoundaries()

getExactCharBoundaries ()

```
public function getExactCharBoundaries(charIndex:Number): flash.geom.Rectangle
```

Scaleform : 2.0.37

(
 getCharBoundaries('a' 'w' 'k')
):



Baywio/ks

パラメータ

```
charIndex:Number – ( 0
1 )
```

戻り値

```
flash.geom.Rectangle – x y
(0,0)
```

```
:
getCharBoundaries()
```

getCharIndexAtPoint ()

```
public function getCharIndexAtPoint(x:Number, y:Number): Number
```

Scaleform : 2.0.37

```
x y
```

パラメータ

```
x:Number – その文字の x 座標
y:Number – その文字の y 座標
```

戻り値

```
Number – ( 0 1
-1 )
```

getFirstCharInParagraph ()

```
public function getFirstCharInParagraph(charIndex:Number): Number
```

Scaleform : 2.0.37

```
charIndex
```

パラメータ

```
charIndex:Number – ( 0
1 )
```

戻り値

```
Number –
```

getLineIndexAtPoint ()

public function getLineIndexAtPoint(x:Number, y:Number): Number

Scaleform : 2.0.37

x y

パラメータ

x:Number – その行の x 座標

y:Number – その行の y 座標

戻り値

Number – (0 1) -1

getLineLength()

public function getLineLength(lineIndex:Number): Number

Scaleform : 2.0.37

パラメータ

lineIndex:Number – (0 1)

戻り値

Number –

getLineMetrics()

public function getLineMetrics(lineIndex:Number): Object

Scaleform : 2.0.43

:

ascent : Number


descent : Number

height : Number ()

leading : Number

width : Number ()

x : Number
x

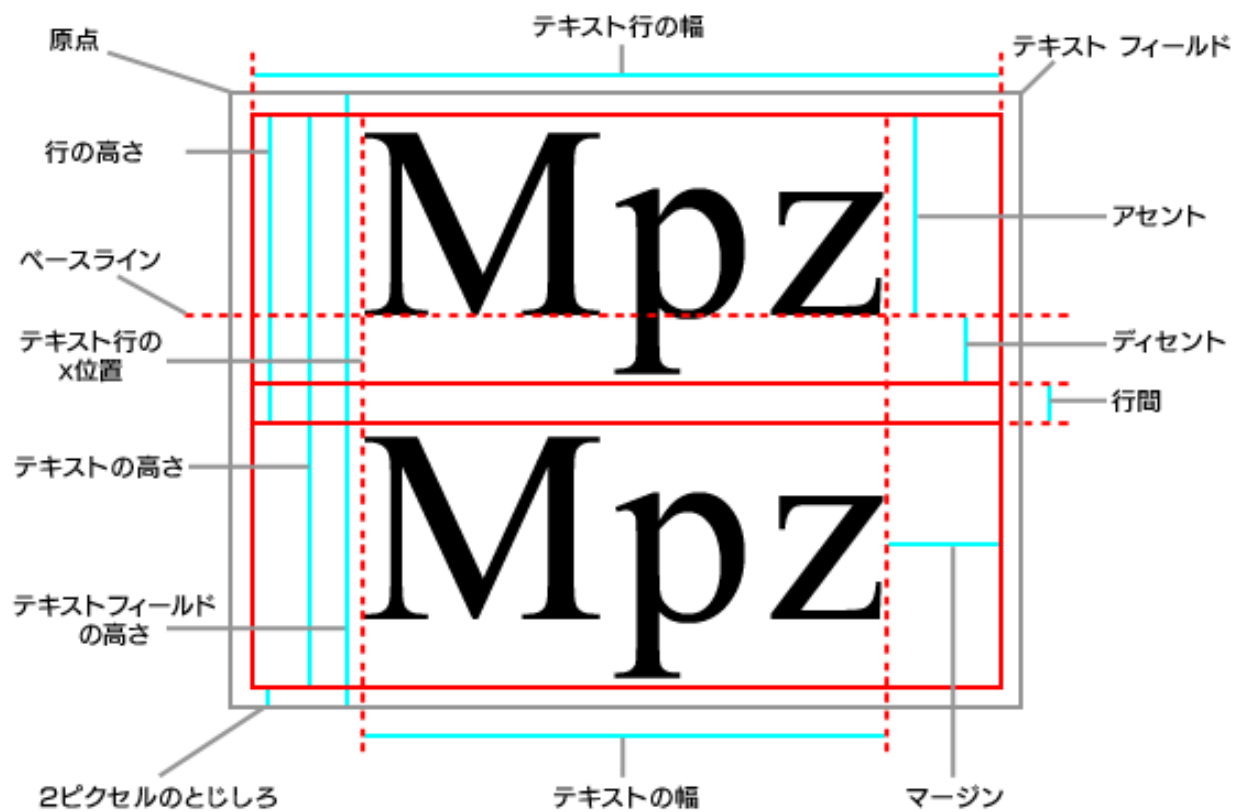

パラメータ
lineIndex: Number - (0
1)

戻り値
Number -

getLineOffset ()

public function getLineOffset(lineIndex:Number): Number

Scaleform : 2.0.37

lineIndex

パラメータ

lineIndex:Number – (0
1)

戻り値

Number –

getLineText ()

public function getLineText(lineIndex:Number): String

Scaleform : 2.0.43

lineIndex

パラメータ

lineIndex:Number – (0
1)

戻り値

String –

hitTestDisable

hitTestDisable:Boolean [read-write]

Scaleform : 1.2.32

true MovieClip.hitTest

false

noTranslate

noTranslate:Boolean [read-write]

Scaleform : 1.2.34

true 、 GfxTranslator::Translate

false 。

numLines

numLines:Number [read-only]

Scaleform : 2.0.43

true

wordWrap

topmostLevel

topmostLevel:Boolean [read-write]

Scaleform : 2.1.50

true

false

"topmostLevel"

- Scaleform3.0.71 "topmostLevel"
true

topmost

- Scaleform3.0.72 ;
topmost

A

B

topmost

"topmostLevel"

true

A

B

"topmostLevel"

SwapDepth

ActionScript

:

```
MovieClip.topmostLevel
Button.topmostLevel
```

focusGroupMask

focusGroupMask : Number

Scaleform : 3.3.84

setControllerFocusGroup

```
0      button1      0      movieclip2
      1
```

```
Selection.setControllerFocusGroup(0, 0);
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

focusGroupMask

7.2

alwaysShowSelection

alwaysShowSelection:Boolean [read-write]

Scaleform : 2.1.45

```
Scaleform      true      Scaleform
      (
      )
      false
```



```

:
selectionBkgColor
selectionTextColor
inactiveSelectionBkgColor
inactiveSelectionTextColor

```

copyToClipboard ()

```

public function copyToClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endTime:Number]):void

```

Scaleform : 2.1.45

パラメータ

```

richTextClipboard:Boolean - true
                                useRichTextClipboard

startIndex:Number -
                                selectionBeginIndex
endTime:Number -
                                selectionEndIndex

:
useRichTextClipboard
selectionBeginIndex
selectionEndIndex
cutToClipboard()
pasteFromClipboard()

```

cutToClipboard ()

```

public function cutToClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endTime:Number]):void

```

Scaleform : 2.1.45

パラメータ

```

richTextClipboard:Boolean - true
                                useRichTextClipboard

```

startIndex: Number –

selectionBeginIndex

endIndex: Number –

selectionEndIndex

:
useRichTextClipboard
selectionBeginIndex
selectionEndIndex
copyToClipboard()
pasteFromClipboard()

inactiveSelectionBkgColor

inactiveSelectionBkgColor: Number [read-write]

Scaleform : 2.1.45

true
alwaysShowSelection
0xAARRGGBB
16 [0...255] RR
16 [0...255]
AA
16 [0...255] BB
GG 16 [0...255]
"0"
"0"
Flash
0xFFFF0000 (0xFF(255))
"backgroundColor "
0xFF0000
。

関連項目:

alwaysShowSelection
inactiveSelectionTextColor
selectionBkgColor
selectionTextColor

inactiveSelectionTextColor

inactiveSelectionTextColor: Number [read-write]

Scaleform : 2.1.45

true
alwaysShowSelection
0xAARRGGBB
16 [0..255] RR
AA

```

GG          16      16      [0..255] BB          16      [0..255]
          [0..255]
          "0"
          "0"
Flash
          0xFFFF0000 (          0xFF(255)
)          "textColor"          0xFF0000

:
alwaysShowSelection
inactiveSelectionBkgColor
selectionBkgColor
selectionTextColor

```

noAutoSelection

noAutoSelection:Boolean [read-write]

Scaleform : 2.1.45

true

false

pasteFromClipboard ()

```

public function pasteFromClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endIndex:Number]):void

```

Scaleform : 2.1.45

パラメータ

richTextClipboard:Boolean – true

useRichTextClipboard

startIndex:Number –

selectionBeginIndex

endIndex:Number –

selectionEndIndex

```

:
useRichTextClipboard
selectionBeginIndex
selectionEndIndex
copyToClipboard()
cutToClipboard()

```

selectionBeginIndex

selectionBeginIndex: Number [read-only]

Scaleform : 2.1.45

```

                                caretIndex
Selection.getBeginIndex()
selectionBeginIndex
Selection.getBeginIndex()      -1

:
caretIndex
selectionEndIndex
Selection.getBeginIndex()

```

selectionEndIndex

selectionEndIndex: Number [read-only]

Scaleform : 2.1.45

```

                                caretIndex
Selection.getEndIndex()
selectionEndIndex
Selection.getEndIndex()      -1

:
caretIndex
selectionBeginIndex
Selection.getEndIndex()

```

selectionBkgColor

selectionBkgColor: Number [read-write]

Scaleform : 2.1.45

0xAARRGGBB
16 16 [0..255] RR [0..255] GG
AA BB
16 16
"0"
"0"
Flash
0xFFFF0000 (0xFF(255))
"backgroundColor"
0xFF0000
:
inactiveSelectionTextColor
inactiveSelectionBkgColor
selectionTextColor

selectionTextColor

selectionTextColor: Number [read-write]

Scaleform : 2.1.45

0xAARRGGBB
16 16 [0..255] RR [0..255]
AA BB
16 16
GG
"0"
"0"
Flash
0xFFFF0000 (0xFF(255) 0xFF0000)
"textColor"
:
inactiveSelectionBkgColor
inactiveSelectionBkgColor
selectionBkgColor

useRichTextClipboard

useRichTextClipboard:Boolean [read-write]

Scaleform : 2.1.45

```
Scaleform & true
) (
, useRichTextClipboard true
false
```

7.3

```
( ) Scaleform
```

fontScaleFactor

fontScaleFactor:Number [read-write]

Scaleform : 2.0.43

fontScaleFactor

1.0

textAutoSize

textAutoSize:String [read-write]

Scaleform : 2.0.43

textAutoSize ("shrink" "fit")

(5 pt)

textAutoSize "fit"

"shrink"

"none"





verticalAlign

verticalAlign:String [read-write]

Scaleform : 2.0.43

"none" ("top" "none") "bottom" "center" "bottom" "center"
()

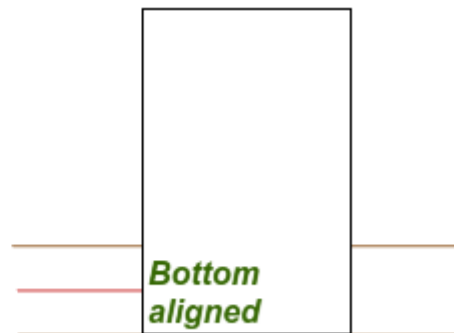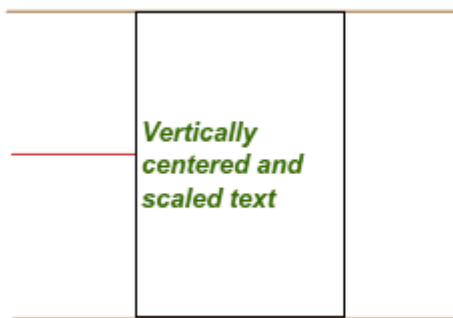

"none"

:
verticalAutoSize
TextField.align

verticalAutoSize

verticalAutoSize:String [read-write]

Scaleform : 2.0.43

```

) "top" "bottom" "center" verticalAutoSize "none" (
)

verticalAutoSize "top" wordWrap true
(
TextField.autoSize

verticalAutoSize "center"



( 1

)

verticalAutoSize "bottom"

( 2
)

```

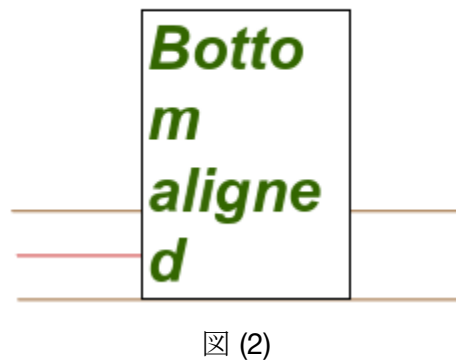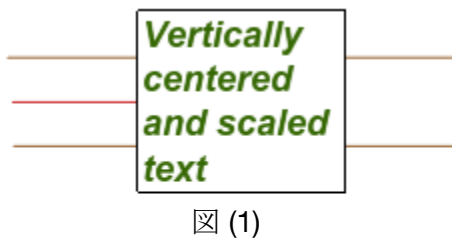

```

        "none"
        :
verticalAlign
TextField.autoSize

```


7.4 HTML

```
Scaleform HTML

<FONT>      ALPHA
ALPHA="#xx"
          00 FF (0 255)
ALPHA      255 HTML
          COLOR 0

<IMG>
Scaleform  <IMG>
          Scaleform
          Web
("http://" "file://" )
          5.6
          "myImage"
          <IMG> HTML :

t.htmlText = "<p align='right'>abra<img src='myImage' width='20' height='30'
align='baseline' vspace='-10'>bed232</p>";

IMG :

src -

JPEG GIF PNG SWF
ID img://
Scaleform::ImageCreator:: LoadImage

width -

height -

align -
"baseline"

vspace - "baseline"

:
```

id – (Flash Player SWF)

align –

hspace -

SWF
Flash
Flash
IMG
SWF
IMG
Flash
SWF

7.5

()

blurX blurY

blurX:Number [read-write]

blurY:Number [read-write]

Scaleform : 2.0.41

() 0 15.9 ()

0

:
blurStrength

blurStrength

blurStrength:Number [read-write]

Scaleform : 2.0.41

0 15.9 ()

0

:
blurX
blurY

shadowAlpha

shadowAlpha:Number [read-write]

Scaleform : 2.0.41

0.00 1.00 25

25%

:
shadowColor

shadowAngle

shadowAngle:Number [read-write]

Scaleform : 2.0.41

) DropShadowFilter 0 360° (45

:
DropShadowFilter

shadowBlurX

shadowBlurY

:Number [read-write]

shadowBlurY:Number [read-write]

Scaleform : 2.0.41

() 0 15.9 ()

0

:

shadowStrength

shadowColor

shadowColor: Number [read-write]

Scaleform : 1.1.31

(shadowStyle)
0xRRGGBB RR 16
[0..255] BB 16
[0..255] GG 16
:
shadowStyle

shadowDistance

shadowDistance: Number [read-write]

Scaleform : 2.0.41

DropShadowFilter

:
DropShadowFilter

shadowHideObject

shadowHideObject: Boolean [read-write]

Scaleform : 2.0.41

true
false ()

shadowKnockOut

shadowKnockOut: Boolean [read-write]

Scaleform : 2.0.41

(true)
false ()

shadowQuality

shadowQuality:Number [read-write]

Scaleform : 2.0.41

1

2

Flash

1 2

shadowStrength

shadowStrength:Number [read-write]

Scaleform : 2.0.41

0 15.9 ()

0

:

shadowBlurX

shadowBlurY

shadowStyle

shadowStyle:String [read-write]

Scaleform : 1.1.31

shadowColor
shadowStyle

:

field.shadowStyle = "s{0, -1.5}{-1.4,1.2}{1.4,1.2}t{0,0}";

field.shadowColor = 0xff0000;

"s" shadowColor
"t" TextField.textColor
"s" "t"

1

"t"
"t{0,0}"

```

:
shadowColor
TextField.textColor

```

7.6

setImageSubstitutions ()

```

public setImageSubstitutions(substInfoArr:Array) : void
public setImageSubstitutions(substInfo:Object) : void
public setImageSubstitutions(null) : void

```

Scaleform : 2.0.38

SWF

SWF

:

- 1.
2. (Windows) control-
- (Macintosh) []
3. [ActionScript] []
- (myImage) []
4. [OK]

BitmapData

ActionScript :

```

import flash.display.BitmapData;
var imageBmp:BitmapData = BitmapData.loadBitmap("myImage");

: (import flash.display.BitmapData;
flash.display.BitmapData)
"undefined" !

```

ID

Object :

subString:String

15

image : BitmapData

width : Number

()

height : Number

()

baseLineY : Number

Y ()

id : String

"updateImageSubstitution"

ID

"substInfoArr"

"substInfo"

setImageSubstitutions(substInfo:Object)

setImageSubstitutions(substInfoArr:Array)

setImageSubstitutions

setImageSubstitutions(null)

setImageSubstitutions

ActionScript

ActionScript

パラメータ

substInfoArr:Array -

()

substInfo:Object -

()

null -

```

        :
        updateImageSubstitution()

```

例:

```

var b1 = BitmapData.loadBitmap("smile1");
var b2 = BitmapData.loadBitmap("smile2");
var b3 = BitmapData.loadBitmap("smile3");
var a = new Array;
a[0] = { subString:"="), image:b1, baseLineY:35, width:20, height:20, id:"sm=)"};
a[1] = { subString:":-)", image:b2, baseLineY:20, id:"sm:-)"};
a[2] = { subString:"-\\", image:b3, baseLineY:35, height:100 };
a[3] = { subString:"-\\", image:b1 };
t.setImageSubstitutions(a);

```

```

        "smile1"
        "=-)"

```

updateImageSubstitution ()

```

public updateImageSubstitution(id:String, image:BitmapData) : void

```

Scaleform : 2.0.38

setImageSubstitutions

パラメータ

id:String -	ID	setImageSubstitutions
		id
image:BitmapData -		null

```

        : setImageSubstitutions()

```

例:

```

t.updateImageSubstitution("sm=)", b3);

```

```

        onEnterFrame
setImageInterval         。 updateImageSubstitution

```

```

var phase = 0;
var b1a = BitmapData.loadBitmap("smile1a");

```



```

var b2a = BitmapData.loadBitmap("smile2a");

onEnterFrame = function()
{
    if (phase % 10 == 0)
    {
        if (phase % 20 == 0)
        {
            _root.t.updateImageSubstitution("sm=", b1);
            _root.t.updateImageSubstitution("sm:-)", b2);
        }
        else
        {
            _root.t.updateImageSubstitution("sm=", b1a);
            _root.t.updateImageSubstitution("sm:-)", b2a);
        }
    }
    ++phase;
}

```

7.7 IME

IME

disableIME

disableIME:Boolean [read-write]

Scaleform のバージョン: 2.1.50 以降

true IME

false

getIMECompositionStringStyle ()

public function getIMECompositionStringStyle(categoryName:String): Object

Scaleform : 2.1.50

IME

categoryName setIMECompositionStringStyle

パラメータ

categoryName:String – IME (setIMECompositionStringStyle
)

戻り値

Object – (setIMECompositionStringStyle
)

:

setIMECompositionStringStyle

disableIME

setIMECompositionStringStyle ()

public function setIMECompositionStringStyle(categoryName:String,
styleDescriptor:Object): Number

Scaleform : 2.1.50

IME

categoryName

:

"compositionSegment" –

"clauseSegment" –

"convertedSegment" –

"phraseLengthAdj" –

"lowConfSegment" –

styleDescriptor Object :

textColor : Number

backgroundColor : Number

underlineColor : Number

underlineStyle : String

:

"single"

"thick"

"dotted"

"ditheredSingle"

"ditheredThick"

16 0xRRGGBB
[0..255] BB
16 [0..255]

16 RR
[0..255] GG

パラメータ

categoryName:String – IME

(

)

styleDescriptor:Object –

(

)

:

getIMECompositionStringStyle

disableIME

8 **TextFormat**

TextFormat

alpha

alpha:Number [read-write]

Scaleform : 2.0.41

0 100 (%)

Flash TextFormat.color

:

TextFormat

HTML

9 Stage

Stage

Scaleform

```
"visibleRect" "safeRect" "originalRect"  
              "onResize"
```

```
ActionScript 1.0      Stage.visibleRect  
    ActionScript 2.0  
2.0  
Stage["visibleRect"]..
```

ActionScript
:

visibleRect

visibleRect:flash.geom.Rectangle [read-only]

Scaleform : 2.2.56

topLeft

```
:  
safeRect  
originalRect
```

safeRect

safeRect:flash.geom.Rectangle [read-only]

Scaleform : 2.2.56

```
GFX::Movie::SetSafeRect  
"visibleRect"
```

```
:  
visibleRect  
originalRect
```

originalRect

originalRect:flash.geom.Rectangle [read-only]

Scaleform : 2.2.56

```
Flash Studio [ SWF (600px×400px) ]
               { 0, 0, {600, 400} }
:
visibleRect
safeRect
```

onResize

onResize = function([visibleRect:flash.geom.Rectangle]) {}

Scaleform : 2.2.56

```
onResize
                                     Stage.visibleRect
:
visibleRect
```

translateToScreen()

public function translateToScreen(pt:Object): Point

Scaleform n: 3.3.84

```
Stage
:
pt:Object - X Y
Object      flash.geom.Point
```

10 Array

Flash

Array.sort

Array.sortOn

Unicode

Unicode

(

'z'

['á',

'z', 'a']

'á']

['a', 'z',

['a', 'á', 'z']

Flash

Scaleform

Array.sort/sortOn

1

Array.LOCALE

:

var arr = ['á', 'z', 'a'];

var newArr1 = arr.sort(); // returns ['a', 'z', 'á']

var newArrLoc = arr.sort(Array.LOCALE); // returns ['a', 'á', 'z']

var newArrRev = arr.sort(Array.LOCALE | Array.DESCEENDING); // ['z', 'á', 'a']

:

var arr = ['Á', 'z', 'a'];

var a = arr.sort(Array.LOCALE | Array.CASEINSENSITIVE); // returns ['a', 'Á', 'z']

Array.LOCALE

Unicode

Scaleform

: 3.0.65

String.localeCompare

11 String

localeCompare()

2

0

Array

Unicode

```
public localeCompare(other:String [, caseInsensitive:Boolean]) : Number
```

Scaleform : 3.0.65

パラメータ

other:String –
caseInsensitive:Boolean –

Array.sort

12 Video

Flash

Video

NetStream

Scaleform

Video

NetStream

clipRect

clipRect: flash.geom.Rectangle [read-write]

Scaleform : 3.0.70

例:

```
video.clipRect = new flash.geom.Rectangle(10, 20, 100, 100);
```


14

noInvisibleAdvance

noInvisibleAdvance : Boolean

Scaleform : 2.1.52

true

```
Flash
    ActionScript
    Scaleform Flash
        :
        MovieClip.noAdvance
        SWF
        (
        "true"
```

imecommand

imecommand(command:String, parameters:String) : Void

Scaleform : 2.1.50

```
fscommand
Scaleform IME
Scaleform
```

getIMECandidateListStyle ()

public function getIMECompositionStringStyle(categoryName:String): Object

Scaleform : 2.1.50

IME

setIMECandidateListStyle

戻り値

Object – 候補リストのカラー設定記述子

関連項目:

setIMECandidateListStyle
TextField.disableIME

```
public function setIMECandidateListStyle(styleDescriptor:Object)
```

```
styleDescriptor                                     Object      :
```

textColor : Number

fontSize : Number

```
seletedTextBackgroundColor : Number
```

selectedIndexBackgroundColor : Number

64

readingWindowBackgroundColor : Number

readingWindowFontSize : Number

	0xRRGGBB		RR
16	[0..255] BB	16	[0..255] GG
16	[0..255]		

:
getIMECandidateListStyle
TextField.disableIME

15

Key

```
Key.getCode(controllerIdx:Number)
Key.getAscii(controllerIdx:Number)
Key.isDown(controllerIdx:Number)
Key.isToggled(controllerIdx:Number)
```

		Key
controllerIdx	0	

```
Key.onKeyDown(controllerIdx:Number)
```

onKeyDown	Key
-----------	-----

Selection

```
Selection.setFocus(ch:Object, controllerIdx:Number)
Selection.setFocus(controllerIdx:Number)
Selection.getBeginIndex(controllerIdx:Number)
Selection.getEndIndex(controllerIdx:Number)
Selection.setSelection(start:Number, end:Number, controllerIdx:Number)
Selection.getCaretIndex(controllerIdx:Number)
```

		Selection
controllerIdx	0	

```
Selection.onSetFocus(old:Object, new:Object, controllerIdx:Number)
```

onSetFocus	Selection
------------	-----------

MovieClip/Button/TextField

```
MovieClip.onSetFocus(old:Object, controllerIdx:Number)
MovieClip.onKillFocus(new:Object, controllerIdx:Number)
Button.onSetFocus(old:Object, controllerIdx:Number)
Button.onKillFocus(new:Object, controllerIdx:Number)
TextField.onSetFocus(old:Object, controllerIdx:Number)
TextField.onKillFocus(new:Object, controllerIdx:Number)
TextField.onChangeed(controllerIdx:Number)
```

MovieClip/Button/TextField

System.capabilities

System.capabilities.numControllers -