

Autodesk® Scaleform®

Scaleform 4.2 AS3

Scaleform 4.2

ActionScript 3.0

Artem Bolgar Prasad Silva

1.04

2012 9 17

著作権に関する情報

Autodesk® Scaleform® 4.2

© 2012 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AUGI, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo) Built with ObjectARX (design/logo), Burn, Buzzsaw, CAiCE, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, DesignServer, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWFx, DXF, Ecotect, Evolver, Exposure, Extending the Design Team, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, Freewheel, GDX Driver, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-omatic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, Tinkerbox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS

OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform

	AS3 Extensions Reference
	Autodesk Scaleform Corporation
	6305 Ivy Lane, Suite 310
	Greenbelt, MD 20770, USA
Website	www.scaleform.com
Email	info@scaleform.com
	+1 (301) 446-3200
	+1 (301) 446-3199

目次

1	はじめに.....	1
2	エクステンション.....	2
3	DisplayObjectEx エクステンション.....	6
4	FocusEventEx エクステンション.....	8
5	FocusManager エクステンション.....	9
6	GamePad エクステンション.....	15
7	GamePadAnalogEvent エクステンション.....	16
8	InteractiveObjectEx エクステンション.....	18
9	KeyboardEventEx エクステンション.....	20
10	MouseCursorEvent エクステンション.....	21
11	MouseEventEx エクステンション.....	23
12	TextEventEx エクステンション.....	26
13	System エクステンション.....	28
14	TextFieldEx エクステンション.....	29

1 はじめに

Autodesk Scaleform® SDK™
Adobe® Flash® PC
Autodesk Scaleform Adobe Creative Suite®

Flash
IME
Autodesk Scaleform ActionScript
Scaleform Player
scaleform.gfx.Extensions.enabled true
scaleform.gfx.Extensions.enabled = true;

```
import scaleform.gfx.*;  
Extensions.enabled = true;
```

Flash Source path GFXSDK/Resources/AS3/CLIK ActionScript 3.0
Flash Studio
[Edit] → [Preferences] → [ActionScript] → [ActionScript 3.0 Settings...] → [Source
path] FLA
Flash Scaleform Player
Flash Player Scaleform
Scaleform SDK
Scaleform Player
Autodesk API
Scaleform API

2 エクステンション

イネーブルされているスタティックなプロパティ

`enabled:Boolean [read-write]`

Scaleform 4.0.12

noInvisibleAdvance スタティック プロパティ

`noInvisibleAdvance:Boolean [read-write]`

Scaleform 4.0.12

true

Flash

SWF

ActionScript

true

Scaleform

Flash

getTopMostEntity()スタティックの方法

```
public function getTopMostEntity(x :Number, y :Number, testAll:Boolean) :  
DisplayObject
```

Scaleform 4.0.13

x, y

DisplayObject

CLICK, MOUSE_DOWN ROLL_OVER

hitTest x y

getTopMostEntity

x y

MovieClip.hitTest

`Extensions.getTopMostEntity(x, y).hitTest(x, y, true) == true`

パラメーター

testAll :Boolean	–	false
true		getTopMostEntity
true		
x :Number, y :Number	–	

参照 :

[getMouseTopMostEntity](#)

getMouseTopMostEntity()スタティックの方法

```
public function getTopMostEntity([testAll :Boolean],
    [mouseIndex :uint]) :DisplayObject
```

Scaleform 4.0.13

DisplayObject

getTopMostEntity

パラメーター

testAll :Boolean	–	false
true		getTopMostEntity
true		
mouseIndex :Number	–	

参照 :

[getTopMostEntity](#)

getMouseCursorType()スタティックの方法

```
public function getMouseCursorType([mouseIndex :uint]) :String
```

Scaleform 4.0.13

flash.ui.Mouse.cursor

MouseEvent.CURSOR_CHANGE

パラメーター

mouseIndex :Number – Zero-based mouse index (zero by default).

戻り値

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW :String = "arrow"
- flash.ui.MouseCursor.BUTTON :String = "button"
- flash.ui.MouseCursor.HAND :String = "hand"
- flash.ui.MouseCursor.IBEAM :String = "ibeam"

参照 :

[setMouseCursorType](#)
[MouseEvent](#)

setMouseCursorType()スタティックの方法

```
public function setMouseCursorType(cursor :String, [mouseIndex :uint]) : void
```

Scaleform 4.0.13

cursor

flash.ui.Mouse.cursor

MouseEvent.CURSOR_CHANGE

パラメーター

cursor :uint –

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW :String = "arrow"
- flash.ui.MouseCursor.BUTTON :String = "button"
- flash.ui.MouseCursor.HAND :String = "hand"
- flash.ui.MouseCursor.IBEAM :String = "ibeam"

mouseIndex :Number –

参照 :

[getMouseCursorType](#)
[MouseEvent](#)

numControllers スタティック プロパティ

```
numControllers:uint [read]
```

Scaleform 4.0.12

setEdgeAAMode()スタティックの方法

```
public function setEdgeAAMode(dispObj:DisplayObject, mode:uint):void
```

Scaleform 4.0.12

EdgeAA

- scaleform.gfx.Extensions.EDGEAA_INHERIT = 0; EdgeAA
- scaleform.gfx.Extensions.EDGEAA_ON = 1; EdgeAA
- scaleform.gfx.Extensions.EDGEAA_DISABLE = 2; EdgeAA
- scaleform.gfx.Extensions.EDGEAA_OFF = 2; EdgeAA
- scaleform.gfx.Extensions.EDGEAA_DISABLE = 3; EdgeAA
- scaleform.gfx.Extensions.EDGEAA_ON = 3; EdgeAA

パラメーター

dispObj :DisplayObject – EdgeAA

mode :uint – EdgeAA

参照 :

[getEdgeAAMode](#)

getEdgeAAMode()スタティックの方法

```
static public function getEdgeAAMode(dispObj:DisplayObject): uint
```

Scaleform 4.0.12

EdgeAA

パラメーター

dispObj :DisplayObject – EdgeAA

参照

[setEdgeAAMode](#)

3 DisplayObjectEx エクステンション

setRendererString スタティックの方法

```
static public function setRendererString(o:DisplayObject, s:String)
```

Scaleform : 4.0.17

MovieClip
ActionScript

:

```
import scaleform.gfx.*;  
// m is a MovieClip on stage.  
DisplayObjectEx.setRendererString(m, "Abc");  
trace(DisplayObjectEx.getRendererString(m));
```

setRendererFloat スタティックの方法

```
static public function setRendererFloat(o:DisplayObject, f:Number)
```

Scaleform : 4.0.17

MovieClip
ActionScript

Example:

```
import scaleform.gfx.*;

// m is a MovieClip on stage.

DisplayObjectEx.setRendererFloat(m, 17.1717);

trace(DisplayObjectEx.getRendererFloat(m));
```

disableBatching スタティックの方法

```
static public function disableBatching(o:DisplayObject, b:Boolean)
```

Scaleform : 4.0.17

Example

```
import scaleform.gfx.*;

// m is a MovieClip on stage.

DisplayObjectEx.disableBatching(batchDisable, true);

trace(DisplayObjectEx.isBatchingDisabled(batchDisable));
```

4 FocusEventEx エクステンション

```
package scaleform.gfx
{
    import flash.events.FocusEvent;

    public final class FocusEventEx extends FocusEvent
    {
        public var controllerIdx : uint = 0;

        public function FocusEventEx(type:String) { super(type); }
    }
}
```

```

                                flash.events.FocusEvent
                                controllerIdx
Extensions.enabled              true              Scaleform              FocusEvent
                                FocusEventEx      FocusEventEx
```

```
import scaleform.gfx.*;
import flash.events.FocusEvent;

Extensions.enabled = true;

function ev(e:FocusEvent)
{
    if (e is FocusEventEx)
    {
        var ee:FocusEventEx = e as FocusEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}
stage.addEventListener(FocusEvent.MOUSE_FOCUS_CHANGE, ev);
```

controllerIdx プロパティ

```
controllerIdx :uint    [read]
```

```
Scaleform              4.0.12
```

/

5 FocusManager エクステンション

alwaysEnableArrowKeys スタティックプロパティ

alwaysEnableArrowKeys:Boolean [read-write]

Scaleform 4.0.12

_focusrect false

Flash _focusrect = false

alwaysEnableArrowKeys true

disableFocusKeys スタティックプロパティ

disableFocusKeys:Boolean [read-write]

Scaleform 4.0.12

moveFocus()スタティックの方法

```
static public function moveFocus(keyToSimulate :String,  
                                startFromMovie:InteractiveObject = null,  
                                includeFocusEnabledChars :Boolean = false,  
                                controllerIdx : uint = 0) :InteractiveObject
```

Scaleform 4.0.12

4 1

disableFocusKeys modalClip

パラメーター

keyToSimulate :String - up down left
right tab shifttab
startFromMovie:InteractiveObject -
moveFocus

3

includeFocusEnabledChars :Boolean - moveFocus focusEnabled
tabEnabled / tabIndex

false

tabEnabled / tabIndex

controllerIdx : uint -

0

controller 0

戻り値

null

参照 :

[findFocus](#)

[disableFocusKeys](#)

[setModalClip](#)

[getModalClip](#)

findFocus()スタティックの方法

```
static public function findFocus(keyToSimulate :String,  
                                parentMovie:DisplayObjectContainer = null,  
                                loop :Boolean = false,  
                                startFromMovie:InteractiveObject = null,  
                                includeFocusEnabledChars :Boolean = false,  
                                controllerIdx : uint = 0) :InteractiveObject
```

Scaleform

4.0.12

1

disableFocusKeys setModalClip/getModalClip

パラメーター

keyToSimulate :String - up down left
right tab shifttab

parentMovie:DisplayObjectContainer -

loop :Boolean -

findFocus

false

true

startFromMovie:InteractiveObject -
findFocus

includeFocusEnabledChars :Boolean - moveFocus focusEnabled
tabEnabled / tabIndex
false
tabEnabled / tabIndex
controllerIdx : uint -

戻り値

null

参照 :

[moveFocus](#)
[disableFocusKeys](#)
[setModalClip](#)
[getModalClip](#)

setFocus()スタティックの方法

static public function setFocus(obj:InteractiveObject, controllerIdx:uint = 0) : void

Scaleform 4.0.12

パラメーター

obj:InteractiveObject -
controllerIdx : uint - /

getFocus()スタティックの方法

static public function getFocus(controllerIdx:uint = 0) :InteractiveObject

Scaleform 4.0.12

パラメーター

```
controllerIdx : uint -
```

戻り値

numFocusGroups スタティックプロパティ

```
numFocusGroups() :uint [read]
```

Scaleform 4.0.12

```
setControllerFocusGroup  
0 3 numFocusGroups 2
```

setFocusGroupMask()スタティックの方法

```
public function setFocusGroupMask(obj:InteractiveObject, mask:uint) : void
```

Scaleform 4.0.12

全て

```
setControllerFocusGroup
```

```
0 1 button1 0 movieclip2
```

```
FocusManager.setControllerFocusGroup(0, 0);  
FocusManager.setControllerFocusGroup(1, 1);
```

```
FocusManager.setFocusGroupMask(button1, 0x1); // bit 0 - focus group 0  
FocusManager.setFocusGroupMask(movieclip2, 0x1 | 0x2); // bits 0 and 1 - focus  
// groups 0 and 1
```

focusGroupMask

パラメーター

```
obj:InteractiveObject -  
mask:uint -
```


参照 :

[setControllerFocusGroup](#)
[getFocusGroupMask](#)

getFocusGroupMask()スタティックの方法

```
static public function getFocusGroupMask(obj:InteractiveObject) : uint
```

Scaleform 4.0.12

setFocusGroupMask

パラメーター

obj:InteractiveObject -

戻り値

参照 :

[setControllerFocusGroup](#)
[setFocusGroupMask](#)

setControllerFocusGroup()スタティックの方法

```
static public function setControllerFocusGroup(controllerIdx:uint,  
                                              focusGroupId:uint) : Boolean
```

Scaleform 4.0.12

controllerIndex

0

2

setControllerFocusGroup(1,1)
setControllerFocusGroup(1,0)

1

0 1

パラメーター

controllerIdx:uint -
focusGroupId:uint -

戻り値

true

getControllerFocusGroup()スタティックの方法

```
static public function getControllerFocusGroup(controllerIdx:uint) : uint
```

Scaleform 4.0.12

パラメーター

controllerIndex -

戻り値

setModalClip()スタティックの方法

```
static public function setModalClip(mc:Sprite, controllerIdx:uint = 0) : void
```

Scaleform 4.0.12

tabable

パラメーター

controllerIdx:uint -

mc:Sprite -

getModalClip()スタティックの方法

```
static public function getModalClip(controllerIdx:uint = 0) :Sprite
```

Scaleform 4.0.12

パラメーター

controllerIdx -

戻り値

6 GamePad エクステンション

コントロール定数

	SF_KeyCodes.h		Scaleform
		SWF	
Scaleform	FxPlayer		
		AS3	
GFx::Movie::HandleEvent			
Scaleform	FxPlayer		
	GamePadAnalogEvents		GamePad

supportsAnalogEvents()スタティックの方法

```
public static function supportsAnalogEvents() :Boolean
```

Scaleform	4.0.13
-----------	--------

	Scaleform
	true
GamePadAnalogEvents	

参照

[GamePadAnalogEvent](#)

7 GamePadAnalogEvent エクステンション


```
package scaleform.gfx
{
    import flash.events.Event;

    public final class GamePadAnalogEvent extends Event
    {
        public static const CHANGE:String = "gamePadAnalogChange";

        public var code : uint = 0; // See scaleform.gfx.GamePad for
                                    // valid pad codes

        public var controllerIdx : uint = 0;
        public var xvalue :Number = 0; // Normalized [-1, 1]
        public var yvalue :Number = 0; // Normalized [-1, 1]

        public function GamePadAnalogEvent(bubbles:Boolean, cancelable:Boolean,
                                            code:uint, controllerIdx:uint = 0,
                                            xvalue:Number = 0, yvalue:Number = 0)
        {
            super(GamePadAnalogEvent.CHANGE, bubbles, cancelable);
            this.code = code;
            this.controllerIdx = controllerIdx;
            this.xvalue = xvalue;
            this.yvalue = yvalue;
        }
    }
}
```

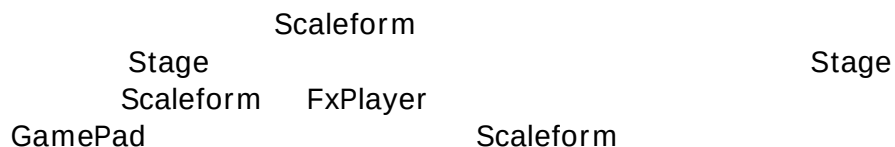

```
import scaleform.gfx.*;

trace("GamePadAnalogEvents supported?" + GamePad.supportsAnalogEvents());

function ev(e:GamePadAnalogEvent)
{
    trace("code = " + ev.code);
}
```

```

        trace("controllerIdx = " + ev.controllerIdx);
        trace("xvalue = " + ev.xvalue);
        trace("yvalue = " + ev.yvalue);
    }
    stage.addEventListener(GamePadAnalogEvent.CHANGE, ev);

```

code プロパティ

code :uint

Scaleform 4.0.13

/ [GamePad](#) Scaleform
 FxPlayer

controllerIdx プロパティ

controllerIdx :uint

Scaleform 4.0.13

/

xvalue プロパティ

xvalue :Number

Scaleform 4.0.13

x -1 1

yvalue プロパティ

yvalue :Number

Scaleform 4.0.13

y -1 1

8 InteractiveObjectEx エクステンション

getHitTestDisable()スタティックの方法

```
public function getHitTestDisable(o:InteractiveObject) :Boolean
```

Scaleform 4.0.13

hitTestDisable true
MovieClip.hitTest

false

パラメーター

o - An interactive object.

戻り値

hitTestDisable

参照 :

[InteractiveObjectEx.setHitTestDisable](#)

setHitTestDisable()スタティックの方法

```
public function setHitTestDisable(o:InteractiveObject, f:Boolean) : void
```

Scaleform 4.0.13

hitTestDisable true
MovieClip.hitTest
false

パラメーター

o - An interactive object.

f - hitTestDisable

参照

[InteractiveObjectEx.getHitTestDisable](#)

getTopmostLevel()スタティックの方法

```
public function getTopmostLevel (o:InteractiveObject) :Boolean
```

Scaleform 4.0.13

topmostLevel true

パラメーター

o - An interactive object.

戻り値

topmostLevel

参照

[InteractiveObjectEx.setTopmostLevel](#)

setTopmostLevel ()スタティックの方法

```
public function setTopmostLevel(o:InteractiveObject, f:Boolean) : void
```

Scaleform 4.0.13

topmostLevel true

false

topmostLevel

A

B

topmost

topmost

A

B

topmostLevel

true

topmostLevel

swapDepth ActionScript

false

パラメーター

o - An interactive object.

f - topmostLevel

参照

[InteractiveObjectEx.getTopmostLevel](#)

9 KeyboardEventEx エクステンション

```
package scaleform.gfx
{
    import flash.events.KeyboardEvent;

    public final class KeyboardEventEx extends KeyboardEvent
    {
        public var controllerIdx : uint = 0;

        public function KeyboardEventEx(type:String) { super(type); }
    }
}
```

	flash.events.KeyboardEvent	
		controllerIdx
Extensions.enabled	true	Scaleform
KeyboardEvent	KeyboardEventEx	
KeyboardEventEx		

```
import scaleform.gfx.*;
import flash.events.KeyboardEvent;

Extensions.enabled = true;

function ev(e:KeyboardEvent)
{
    if (e is KeyboardEventEx)
    {
        var ee:KeyboardEventEx = e as KeyboardEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}

stage.addEventListener(KeyboardEvent.KEY_DOWN, ev);
stage.addEventListener(KeyboardEvent.KEY_UP, ev);
```

controllerIdx プロパティ

controllerIdx :uint [read]

Scaleform 4.0.12

/

10 MouseEvent エクステンション

```
package scaleform.gfx
{
    import flash.events.Event;

    public final class MouseEvent extends Event
    {
        public var cursor :String = "auto";
        public var mouseIdx : uint = 0;

        static public const CURSOR_CHANGE :String = "mouseCursorChange";

        public function MouseEvent()
        {
            super("MouseEvent", false, true);
        }
    }
}

bubbles – false
cancellable – true

preventDefault()

— Scaleform

flash.ui.Mouse.cursor
Extensions.enabled true

ステージ用に

Extensions.enabled = true;

function e(e:MouseEvent)
{
    trace(e.type + " " + e.mouseIdx + " " + e.cursor);
    e.preventDefault();
}
stage.addEventListener(MouseEvent.CURSOR_CHANGE, e);
```

cursor プロパティ

cursor :String [read]

Scaleform 4.0.13

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW :String = "arrow"
- flash.ui.MouseCursor.BUTTON :String = "button"
- flash.ui.MouseCursor.HAND :String = "hand"
- flash.ui.MouseCursor.IBEAM :String = "ibeam"

mouseIdx プロパティ

mouseIdx :uint [read]

Scaleform 4.0.13

/

11 MouseEventEx エクステンション

```
package scaleform.gfx
{
    import flash.events.MouseEvent;

    public final class MouseEventEx extends MouseEvent
    {
        public var mouseIdx : uint = 0;
        public var nestingIdx : uint = 0;
        public var buttonIdx : uint = 0; // LEFT_BUTTON, RIGHT_BUTTON, ...

        public static const LEFT_BUTTON : uint = 0;
        public static const RIGHT_BUTTON : uint = 1;
        public static const MIDDLE_BUTTON : uint = 2;

        public function MouseEventEx(type:String) { super(type); }
    }
}

/
true                                flash.events.MouseEvent
                                Scaleform
                                MouseEventEx
                                Extensions.enabled
                                MouseEvent
                                MouseEventEx
```

```
import scaleform.gfx.*;
Extensions.enabled = true;

stage.doubleClickEnabled = true;

function ev(e:MouseEvent):void
{
    trace("!!!!EVENT." + cnt++);
    trace("    eventType      = "+e.type);
    trace("    bubbles          = "+e.bubbles);
    trace("    eventPhase          = "+e.eventPhase);
    trace("    target              = "+e.target.name);
    trace("    currentTarget       = "+e.currentTarget.name);
    if (e is MouseEventEx)
    {
        var ee:MouseEventEx = e as MouseEventEx;
        trace("    mouseIdx            = "+ee.mouseIdx);
    }
}
```

```

        trace("    nestingIdx    = "+ee.nestingIdx);
        trace("    buttonIdx     = "+ee.buttonIdx);
    }
    trace(e);
}
stage.addEventListener(MouseEvent.CLICK, ev);
stage.addEventListener(MouseEvent.CLICK, ev);
stage.addEventListener(MouseEvent.CLICK, ev);
stage.addEventListener(MouseEvent.CLICK, ev);

```

buttonIdx

buttonIdx プロパティ

buttonIdx :uint [read]

Scaleform 4.0.13

- MouseEventEx.LEFT_BUTTON : uint = 0 -
- MouseEventEx.RIGHT_BUTTON : uint = 1 -
- MouseEventEx.MIDDLE_BUTTON : uint = 2 -
- 4 2

mouseIdx プロパティ

mouseIdx :uint [read]

Scaleform 4.0.13

/

nestingIdx プロパティ

nestingIdx :uint [read]

Scaleform 4.0.13

rollOver/Out mouseOver/Out dragOver/Out

rollOver/rollOut mouseOver/Out dragOver/dragOut

	0	
2	rollOver/rollOut	
	rollOut/mouseOut/dragOut	1
rollOut/mouseOut/dragOut	0	

12 TextEventEx エクステンション

```
package scaleform.gfx
{
    import flash.events.TextEvent;

    public final class TextEventEx extends TextEvent
    {
        public var controllerIdx : uint = 0;

        public function TextEventEx(type:String) { super(type); }
    }
}
```

	flash.events.TextEvent			
		controllerIdx		
Extensions.enabled	true		Scaleform	TexEvent
TexEventEx			TexEventEx	

```
import scaleform.gfx.*;
import flash.events.TextEvent;

Extensions.enabled = true;

function ev(e:TextEvent)
{
    if (e is TextEventEx)
    {
        var ee:TextEventEx = e as TextEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}

txf.addEventListener(TextEvent.TEXT_INPUT, ev);
```

controllerIdx プロパティ

controllerIdx :uint [read]

Scaleform 4.0.12

/

LINK_MOUSE_OVER/LINK_MOUSE_OUT イベント

```
public static const LINK_MOUSE_OVER:String = "linkMouseOver";  
public static const LINK_MOUSE_OUT:String = "linkMouse";
```

Scaleform 4.0.14

	over/out	TextField	HTML
TextFieldEx.LINK_MOUSE_OVER		TextFieldEx.LINK_MOUSE_OUT	
		AS3	addEventListener

13 System エクステンション

actionVerbose スタティックプロパティ

actionVerbose:Boolean [read-write]

Scaleform 4.0.12

opcode /

getStackTrace()スタティックの方法

public function getStackTrace() :String

Scaleform 4.0.12

getCodeFileName()スタティックの方法

public function getCodeFileName() :String

Scaleform 4.0.12

14 TextFieldEx エクステンション

appendHtml()スタティックの方法

```
public function appendHtml(textField:TextField, newHtml:String) : void
```

Scaleform 4.0.12

```
newHtml HTML
htmlText
+= moreHtml htmlText += HTML txt.htmlText
HTML HTML
HTML newHtml +=
newHtml HTML
```

パラメーター

textField:TextField – HTML

newHtml:String – HTML

setIMEEnabled()スタティックの方法

```
static public function setIMEEnabled(textField:TextField, isEnabled:Boolean): void
```

Scaleform 4.0.12

```
IME / isEnabled false
IME
IME
```

パラメーター


textField :TextField –

isEnabled :Boolean – If true – IME

setVerticalAlign()スタティックの方法

```
public function setVerticalAlign(textField:TextField, valign:String) : void
```

```
TextFieldEx  
public static const VALIGN_TOP:String      = "top";  
public static const VALIGN_CENTER:String   = "center";  
public static const VALIGN_BOTTOM:String   = "bottom";
```

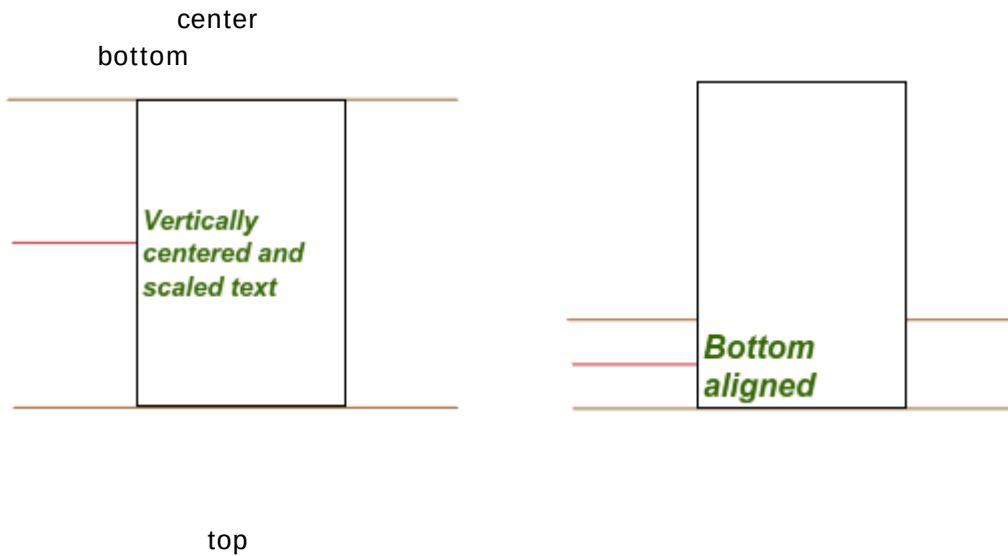

パラメーター

textField:TextField -

valign:String - ("top" "center" "bottom")