

Autodesk® Scaleform®

Scaleform 4.2 AS3

Scaleform 4.2

ActionScript 3.0

: Artem Bolgar, Prasad Silva

: 1.04

: 2012 9 17

저작권 정보

Autodesk® Scaleform® 4.2

© 2012 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AUGI, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo) Built with ObjectARX (design/logo), Burn, Buzzsaw, CAICE, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, DesignServer, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWFx, DXF, Ecotect, Evolver, Exposure, Extending the Design Team, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, Freewheel, GDX Driver, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, Tinkerbox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR

IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform

AS3

Autodesk Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

www.scaleform.com

info@scaleform.com

(301) 446-3200

(301) 446-3199

목차

1	소개	1
2	익스텐션	3
3	DisplayObjectEx 익스텐션	8
4	FocusEventEx 익스텐션	10
5	FocusManager 익스텐션.....	11
6	GamePad 익스텐션	19
7	GamePadAnalogEvent 익스텐션.....	20
8	InteractiveObjectEx 익스텐션.....	23
9	KeyboardEventEx 익스텐션	26
10	MouseEventEx 익스텐션	28
11	MouseEventEx 익스텐션.....	30
12	TextEventEx 익스텐션.....	33
13	시스템 익스텐션	35
14	TextFieldEx 익스텐션	36

1 소개

Autodesk Scaleform® SDK™

/PC

Adobe® Flash®

. Autodesk Scaleform

Adobe Creative Suite®

,

.

Flash

focus

,

,

IME

.

Autodesk Scaleform ActionScript

"

"

. Scaleform Player

scaleform.gfx.Extensions.enabled

true

.

scaleform.gfx.Extensions.enabled = true;

import scaleform.gfx.*;

Extensions.enabled = true;

ActionScript 3.0

Flash

"

"

GFXSDK/Resources/AS3/CLIK

.

Flash Studio

'Edit' ->

'Preferences' -> 'ActionScript' -> 'ActionScript 3.0 Settings...' -> 'Source path'

.

FLA

.

Scaleform Player Flash

.

Scaleform

Flash Player

SDK

Scaleform

.

Scaleform Player

.

Autodesk

API

,

Scaleform API

API

.

.

2 익스텐션

enabled 정적 속성

`enabled:Boolean [read-write]`

Scaleform : 4.0.12

noInvisibleAdvance 정적 속성

`noInvisibleAdvance:Boolean [read-write]`

Scaleform : 4.0.12

```

    true
    Advance
    SWF
    , Flash
    Advance
    AcitionScript
    true
    Scaleform
    Flash
```

getTopMostEntity() 정적 메서드

```
public function getTopMostEntity(x : Number, y : Number, testAll: Boolean) :
DisplayObject
```

Scaleform : 4.0.13

```
(x, y) (
)
DisplayObject
( : CLICK, MOUSE_DOWN, ROLL_OVER )
```

```
Extensions.getTopMostEntity(x, y).hitTest(x, y, true) == true
```

```
testAll : Boolean -> false , true  
    .  
        getTopMostEntity      true  
    .  
  
x : Number, y : Number -
```

getMouseTopMostEntity

Scaleform : 4.0.13

getTopMostEntity

```
testAll : Boolean - false , true  
      .  
      .  
mouseIndex : Number - 0
```

getTopMostEntity

getMouseCursorType() 정적 메서드

```
public function getMouseCursorType([mouseIndex : uint]) : String
```

Scaleform : 4.0.13

flash.ui.Mouse.cursor

MouseEvent.CURSOR_CHANGE

매개변수

mouseIndex : Number – 0

반환 값

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW : String = "arrow"
- flash.ui.MouseCursor.BUTTON : String = "button"
- flash.ui.MouseCursor.HAND : String = "hand"
- flash.ui.MouseCursor.IBEAM : String = "ibeam"

참조:

[setMouseCursorType](#)
[MouseEvent](#)

setMouseCursorType() 정적 메서드

```
public function setMouseCursorType(cursor : String, [mouseIndex : uint]) : void
```

Scaleform : 4.0.13

cursor : String
flash.ui.Mouse.cursor

MouseEvent.CURSOR_CHANGE

매개변수

cursor : uint – flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW : String = "arrow"
- flash.ui.MouseCursor.BUTTON : String = "button"
- flash.ui.MouseCursor.HAND : String = "hand"
- flash.ui.MouseCursor.IBEAM : String = "ibeam"

mouseIndex : Number – 0

참조:

[getMouseEventType](#)
[MouseEvent](#)

numControllers 정적 속성

numControllers:uint [read]

Scaleform : 4.0.12

setEdgeAAMode() 정적 메서드

public function setEdgeAAMode(dispatchObj:DisplayObject, mode:uint):void

Scaleform : 4.0.12

EdgeAA

- scaleform.gfx.Extensions.EDGEAA_INHERIT = 0; EdgeAA
- on
- scaleform.gfx.Extensions.EDGEAA_ON = 1; EdgeAA
- (EDGEAA_DISABLE).

- scaleform.gfx.Extensions.EDGEAA_OFF = 2; EdgeAA

- scaleform.gfx.Extensions.EDGEAA_DISABLE = 3;
EDGEAA_ON EdgeAA

매개변수

dispObj : DisplayObject – EdgeAA

mode : uint – EdgeAA

참조:

[getEdgeAAMode](#)

getEdgeAAMode() 정적 메서드

static public function getEdgeAAMode(dispObj:DisplayObject): uint

Scaleform : 4.0.12

EdgeAA

매개변수

dispObj : DisplayObject – EdgeAA

참조:

[setEdgeAAMode](#)

3 DisplayObjectEx 익스텐션

setRendererString 정적 메서드

```
static public function setRendererString(o:DisplayObject, s:String)
```

Scaleform version: 4.0.17

MovieClip

예:

```
import scaleform.gfx.*;

// m is a MovieClip on stage.

DisplayObjectEx.setRendererString(m, "Abc");
trace(DisplayObjectEx.getRendererString(m));
```

setRendererFloat 정적 메서드

```
static public function setRendererFloat(o:DisplayObject, f:Number)
```

Scaleform version: 4.0.17

MovieClip

Float

예:

```
import scaleform.gfx.*;
```

```
// m is a MovieClip on stage.  
  
DisplayObjectEx.setRendererFloat(m, 17.1717);  
trace(DisplayObjectEx.getRendererFloat(m));
```

disableBatching 정적 메서드

```
static public function disableBatching(o:DisplayObject, b:Boolean)
```

Scaleform version: 4.0.17

예:

```
import scaleform.gfx.*;  
  
// m is a MovieClip on stage.  
  
DisplayObjectEx.disableBatching(batchDisable, true);  
trace(DisplayObjectEx.isBatchingDisabled(batchDisable));
```

4 FocusEventEx 익스텐션

```
package scaleform.gfx
{
    import flash.events.FocusEvent;

    public final class FocusEventEx extends FocusEvent
    {
        public var controllerIdx : uint = 0;

        public function FocusEventEx(type:String) { super(type); }
    }
}

flash.events.FocusEvent
    .controllerIdx
    . Extensions.enabled
    true

Scaleform
    FocusEvent
    FocusEventEx
    .
FocusEventEx
    ,
    :

import scaleform.gfx.*;
import flash.events.FocusEvent;

Extensions.enabled = true;

function ev(e: FocusEvent)
{
    if (e is FocusEventEx)
    {
        var ee: FocusEventEx = e as FocusEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}
stage.addEventListener(FocusEvent.MOUSE_FOCUS_CHANGE, ev);
```

controllerIdx 속성

controllerIdx : uint [read]

Scaleform : 4.0.12

```
(0) / .
```

5 FocusManager 익스텐션

alwaysEnableArrowKeys 정적 속성

```
alwaysEnableArrowKeys:Boolean [read-write]
```

Scaleform : 4.0.12

```
        _focusrect      false      (
        .                  _focusrect = false
Flash
        alwaysEnableArrowKeys      true      .
```

disableFocusKeys 정적 속성

```
disableFocusKeys:Boolean [read-write]
```

Scaleform : 4.0.12

```
(TAB, Shift-TAB )
```

moveFocus() 정적 메서드

```
static public function moveFocus(keyToSimulate : String,
                                startFromMovie:InteractiveObject = null,
                                includeFocusEnabledChars : Boolean = false,
                                controllerIdx : uint = 0) : InteractiveObject
```

Scaleform : 4.0.12

TAB, Shift-TAB

. disableFocusKeys , modalClip

.

매개변수

keyToSimulate : String - : “up”, “down”, “left”, “right”, “tab”,
“shifftab”.

startFromMovie:InteractiveObject - moveFocus

.

null undefined .

.

includeFocusEnabledChars : Boolean – moveFocus focusEnabled

tabEnabled / tabIndex

.

false tabEnabled / tabIndex

.

controllerIdx : uint -

.

0 .

반환 값

.

null

.

참조:

[findFocus](#)

[disableFocusKeys](#)

[setModalClip](#)

```
includeFocusEnabledChars : Boolean = false,
controllerIdx : uint = 0) : InteractiveObject
```

Scaleform : 4.0.12

TAB, Shift-TAB

```
. disableFocusKeys , setModalClip/getModalClip
```

```
.
```

매개변수

keyToSimulate : String - : “up”, “down”, “left”, “right”, “tab”, “shifftab”.

parentMovie:DisplayObjectContainer - .

```
. null .
```

```
loop : Boolean - . ,
    "down" , findFocus "null"( "false" )
    ( "true" ) .
```

startFromMovie:InteractiveObject - findFocus

```
.
```

```
null undefined .
```

includeFocusEnabledChars : Boolean – moveFocus focusEnabled

```
tabEnabled / tabIndex .
```

```
false tabEnabled / tabIndex
```

```
.
```

```
controllerIdx : uint - 0 .
```

```
.
```

반환 값

```
. null .
```

참조:

[moveFocus](#)

[disableFocusKeys](#)

[setModalClip](#)

[getModalClip](#)

setFocus() 정적 메서드

static public function setFocus(obj:InteractiveObject, controllerIdx:uint = 0) : void

Scaleform : 4.0.12

stage.focus

매개변수

obj:InteractiveObject -

controllerIdx : uint - (0) /

getFocus() 정적 메서드

static public function getFocus(controllerIdx:uint = 0) : InteractiveObject

Scaleform : 4.0.12

stage.focus

매개변수

controllerIdx : uint - (0) /

반환 값

numFocusGroups 정적 속성

numFocusGroups() : uint [read]

Scaleform : 4.0.12

setControllerFocusGroup

0 3

numFocusGroups 2

setFocusGroupMask() 정적 메서드

public function setFocusGroupMask(obj:InteractiveObject, mask:uint) : void

Scaleform : 4.0.12

모든

. setController FocusGroup

"button1" 0

"movieclip2" 0

1

```
FocusManager.setControllerFocusGroup(0, 0);  
FocusManager.setControllerFocusGroup(1, 1);
```

```
FocusManager.setFocusGroupMask(button1, 0x1); // bit 0 - 0
```

```
FocusManager.setFocusGroupMask(movieclip2, 0x1 | 0x2); // bits 0 and 1 -
```

```
// 0 1
```

“focusGroupMask”

매개변수

obj:InteractiveObject -

mask:uint -

참조:

[setControllerFocusGroup](#)

[getFocusGroupMask](#)

getFocusGroupMask() 정적 메서드

```
static public function getFocusGroupMask(obj:InteractiveObject) : uint
```

Scaleform : 4.0.12

(setFocusGroupMask)

매개변수

obj:InteractiveObject -

반환 값

참조:

[setControllerFocusGroup](#)

[setFocusGroupMask](#)

setControllerFocusGroup() 정적 메서드

```
static public function setControllerFocusGroup(controllerIdx:uint,  
                                              focusGroupId:uint) : Boolean
```

Scaleform : 4.0.12

controllerIndex

0

setControllerFocusGroup (1,1) 1

setControllerFocusGroup (1,0) 0 1

매개변수

controllerIdx:uint - 0

focusGroupId:uint - 0

반환 값

true .

getControllerFocusGroup() 정적 메서드

```
static public function getControllerFocusGroup(controllerIdx:uint) : uint
```

Scaleform : 4.0.12

매개변수

controllerIndex - 0 .

반환 값

0 .

setModalClip() 정적 메서드

```
static public function setModalClip(mc:Sprite, controllerIdx:uint = 0) : void
```

Scaleform : 4.0.12

" " . TAB Shift-
TAB, " "

매개변수

controllerIdx:uint - 0 .

mc:Sprite - .

6 GamePad 익스텐션

컨트롤 상수

```
import flash.events.*;
import flash.media.*;
import flash.net.*;
import flash.skins.*;
import flash.system.*;
import flash.text.*;
import flash.utils.*;
import SF_KeyCodes.h;
import Scaleform;
import SWF;
import Scaleform.FxPlayer;
import AS3;
import Gfx::Movie::HandleEvent;
import Scaleform.FxPlayer;
import GamePadAnalogEvent;
import GamePad;
```

supportsAnalogEvents() 정적 메서드

```
public static function supportsAnalogEvents() : Boolean
```

Scaleform : 4.0.13

```
Scaleform
true GamePadAnalogEvent
```

참조:

[GamePadAnalogEvent](#)

7 GamePadAnalogEvent 익스텐션

```
package scaleform.gfx
{
    import flash.events.Event;

    public final class GamePadAnalogEvent extends Event
    {
        public static const CHANGE:String = "gamePadAnalogChange";

        public var code : uint = 0; //
                                     // scaleform.gfx.GamePad

        public var controllerIdx : uint = 0;
        public var xvalue : Number = 0; // [-1, 1]
        public var yvalue : Number = 0; // [-1, 1]

        public function GamePadAnalogEvent(bubbles:Boolean, cancelable:Boolean,
                                           code:uint, controllerIdx:uint = 0,
                                           xvalue:Number = 0, yvalue:Number = 0)
        {
            super(GamePadAnalogEvent.CHANGE, bubbles, cancelable);
            this.code = code;
            this.controllerIdx = controllerIdx;
            this.xvalue = xvalue;
            this.yvalue = yvalue;
        }
    }
}
```

```
Scaleform
    Stage
    dispatch
    . Scaleform

FxPlayer    'code'    GamePad    Scaleform
    :
    :
```

```
import scaleform.gfx.*;

trace("GamePadAnalogEvents supported? " + GamePad.supportsAnalogEvents());
```

```
function ev(e: GamePadAnalogEvent)
{
    trace("code = " + ev.code);
    trace("controllerIdx = " + ev.controllerIdx);
    trace("xvalue = " + ev.xvalue);
    trace("yvalue = " + ev.yvalue);
}
stage.addEventListener(GamePadAnalogEvent.CHANGE, ev);
```

코드 속성

code : uint

Scaleform : 4.0.13

[Scaleform FxPlayer](#)
[GamePad](#)

controllerIdx 속성

controllerIdx : uint

Scaleform : 4.0.13

(0) / .

xvalue 속성

xvalue : Number

Scaleform : 4.0.13

x . -1 1 (-1 1) .

yvalue 속성

yvalue : Number

Scaleform : 4.0.13

y . -1 1 (-1 1) .

8 InteractiveObjectEx 익스텐션

getHitTestDisable() 정적 메서드

```
public function getHitTestDisable(o:InteractiveObject) : Boolean
```

Scaleform : 4.0.13

```
'hitTestDisable' : true MovieClip.hitTest
.
.
false .
```

매개변수

o - .

반환 값

'hitTestDisable' Boolean .

참조:

[InteractiveObjectEx.setHitTestDisable](#)

setHitTestDisable() 정적 메서드

```
public function setHitTestDisable(o:InteractiveObject, f:Boolean) : void
```

Scaleform : 4.0.13

```
'hitTestDisable' : true MovieClip.hitTest
.
false .
```

매개변수

o -
f - 'hitTestDisable' Boolean

참조:

[InteractiveObjectEx.getHitTestDisable](#)

getTopmostLevel() 정적 메서드

```
public function getTopmostLevel (o:InteractiveObject) : Boolean
```

Scaleform : 4.0.13

'topmostLevel' . true

매개변수

o -

반환 값

'topmostLevel' Boolean

참조:

[InteractiveObjectEx.setTopmostLevel](#)

setTopmostLevel () 정적 메서드

```
public function setTopmostLevel(o:InteractiveObject, f:Boolean) : void
```

Scaleform : 4.0.13

'topmostLevel' . true

.
false .

"topmostLevel"

A B A "topmostLevel" true A
B

: "topmostLevel" swapDepth ActionScript

false .

매개변수

o -

f - 'topmostLevel' Boolean .

참조:

[InteractiveObjectEx.getTopmostLevel](#)

9 KeyboardEventEx 익스텐션

```
package scaleform.gfx
{
    import flash.events.KeyboardEvent;

    public final class KeyboardEventEx extends KeyboardEvent
    {
        public var controllerIdx : uint = 0;

        public function KeyboardEventEx(type:String) { super(type); }
    }
}

flash.events.KeyboardEvent
    .
    0

    'controllerIdx'
    . Extensions.enabled

true    Scaleform    KeyboardEvent    KeyboardEventEx
    KeyboardEventEx
    ,
    :
```

```
import scaleform.gfx.*;
import flash.events.KeyboardEvent;

Extensions.enabled = true;

function ev(e: KeyboardEvent)
{
    if (e is KeyboardEventEx)
    {
        var ee: KeyboardEventEx = e as KeyboardEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}

stage.addEventListener(KeyboardEvent.KEY_DOWN, ev);
stage.addEventListener(KeyboardEvent.KEY_UP, ev);
```

controllerIdx 속성

controllerIdx : uint [read]

Scaleform : 4.0.12

10 MouseCursorEvent 익스텐션

```

package scaleform.gfx
{
    import flash.events.Event;

    public final class MouseCursorEvent extends Event
    {
        public var cursor : String = "auto";
        public var mouseIdx : uint = 0;

        static public const CURSOR_CHANGE : String = "mouseCursorChange";

        public function MouseCursorEvent()
        {
            super("MouseCursorEvent", false, true);
        }
    }
}

/

Event
bubbles – false,
cancellable – true, preventDefault()

Scaleform

(
flash.ui.Mouse.cursor ) 해당 스테이지에서만(Extensions.enabled true
)

Extensions.enabled = true;

function e(e:MouseCursorEvent)
{
    trace(e.type + " " + e.mouseIdx + " " + e.cursor);
    e.preventDefault();
}
stage.addEventListener(MouseCursorEvent.CURSOR_CHANGE, e);

:

```

커서 속성

cursor : String [read]

Scaleform : 4.0.13

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW : String = "arrow"
- flash.ui.MouseCursor.BUTTON : String = "button"
- flash.ui.MouseCursor.HAND : String = "hand"
- flash.ui.MouseCursor.IBEAM : String = "ibeam"

mouseIdx 속성

mouseIdx : uint [read]

Scaleform : 4.0.13

/ (0)

11 MouseEventEx 익스텐션

```
package scaleform.gfx
{
    import flash.events.MouseEvent;

    public final class MouseEventEx extends MouseEvent
    {
        public var mouseIdx : uint = 0;
        public var nestingIdx : uint = 0;
        public var buttonIdx : uint = 0; // LEFT_BUTTON, RIGHT_BUTTON, ...

        public static const LEFT_BUTTON : uint = 0;
        public static const RIGHT_BUTTON : uint = 1;
        public static const MIDDLE_BUTTON : uint = 2;

        public function MouseEventEx(type:String) { super(type); }
    }
}

flash.events.MouseEvent
    . Extensions.enabled
    true
    Scaleform

MouseEvent
    MouseEventEx
    MouseEventEx
```

```
import scaleform.gfx.*;
Extensions.enabled = true;

stage.doubleClickEnabled = true;

function ev(e:MouseEvent):void
{
    trace("!!!! EVENT. " + cnt++);
    trace("    eventType    = "+e.type);
    trace("    bubbles        = "+e.bubbles);
    trace("    eventPhase       = "+e.eventPhase);
    trace("    target            = "+e.target.name);
    trace("    currentTarget    = "+e.currentTarget.name);
    if (e is MouseEventEx)
    {
        var ee:MouseEventEx = e as MouseEventEx;
```

```

        trace("    mouseIdx      = "+ee.mouseIdx);
        trace("    nestingIdx   = "+ee.nestingIdx);
        trace("    buttonIdx    = "+ee.buttonIdx);
    }
    trace(e);
}
stage.addEventListener(MouseEvent.CLICK, ev);
stage.addEventListener(MouseEvent.DBL_CLICK, ev);
stage.addEventListener(MouseEvent.DOUBLE_CLICK, ev);

```

```

:
,
,
buttonIdx

```

buttonIdx 속성

buttonIdx : uint [read]

Scaleform : 4.0.13

(0) .

- MouseEventEx.LEFT_BUTTON : uint = 0 -
- MouseEventEx.RIGHT_BUTTON : uint = 1 -
- MouseEventEx.MIDDLE_BUTTON : uint = 2 -
- 2 .

mouseIdx 속성

mouseIdx : uint [read]

Scaleform : 4.0.13

/ (0) .

nestingIdx 속성

nestingIdx : uint [read]

Scaleform : 4.0.13

rollOver/Out	mouseover/Out, dragOver/Out	.
	rollover/dragover	.
rollOver/rollOut	mouseover/Out, dragOver/dragOut	.
	0	.
0	1	rollOver/rollOut
.		1
rollOut/mouseOut/dragOut	0	rollOut/mouseOut/dragOut
.		.

12 TextEventEx 익스텐션

```
package scaleform.gfx
{
    import flash.events.TextEvent;

    public final class TextEventEx extends TextEvent
    {
        public var controllerIdx : uint = 0;

        public function TextEventEx(type:String) { super(type); }
    }
}
```

```
flash.events.TextEvent
    controllerIdx : uint = 0
    Extensions.enabled : true

Scaleform
    TextEvent
    TextEventEx
    TextEventEx
```

```
import scaleform.gfx.*;
import flash.events.TextEvent;

Extensions.enabled = true;

function ev(e: TextEvent)
{
    if (e is TextEventEx)
    {
        var ee: TextEventEx = e as TextEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}

txf.addEventListener(TextEvent.TEXT_INPUT, ev);
```

controllerIdx 속성

```
controllerIdx : uint [read]
```

Scaleform : 4.0.12

```
(0 ) / .
```

LINK_MOUSE_OVER/LINK_MOUSE_OUT 이벤트

```
public static const LINK_MOUSE_OVER:String = "linkMouseOver";  
public static const LINK_MOUSE_OUT:String = "linkMouse";
```

Scaleform : 4.0.14

TextFieldEx.LINK_MOUSE_OVER TextFieldEx.LINK_MOUSE_OUT

TextField (HTML) mouse over mouse out
AS3 addEventListener

13 시스템 익스텐션

actionVerbose 정적 속성

`actionVerbose:Boolean` [read-write]

Scaleform : 4.0.12

getStackTrace() 정적 메서드

`public function getStackTrace() : String`

Scaleform : 4.0.12

Trace .

getCodeFileName() 정적 메서드

`public function getCodeFileName() : String`

Scaleform : 4.0.12

14 TextFieldEx 익스텐션

appendHtml() 정적 메서드

```
public function appendHtml(textField:TextField, newHtml:String) : void
```

Scaleform : 4.0.12

```
newHtml HTML  
txt.htmlText += moreHtml htmlText (+=) . htmlText  
+= HTML HTML  
HTML . HTML ( : newHtml  
HTML ) . newHtml HTML  
+=  
:  
:
```

매개변수

```
textField:TextField - HTML textfield  
newHtml:String - HTML
```

setIMEEnabled() 정적 메서드

```
static public function setIMEEnabled(textField:TextField, isEnabled:Boolean): void
```

Scaleform : 4.0.12

```
textfield IME . isEnabled false  
IME . IME
```

매개변수

textField : TextField – textField .

isEnabled : Boolean – true IME .


setVerticalAlign() 정적 메서드

public function setVerticalAlign(textField:TextField, valign:String) : void

Scaleform : 4.0.12

TextFieldEx

```
public static const VALIGN_TOP:String = "top";
public static const VALIGN_CENTER:String = "center";
public static const VALIGN_BOTTOM:String = "bottom";
```

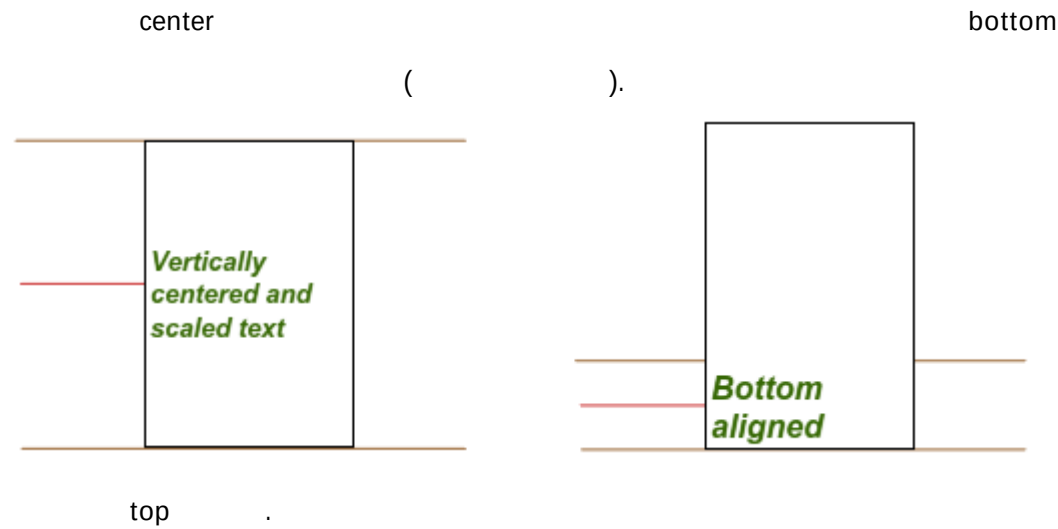

매개변수

textField:TextField - textField .

valign:String - ("top", "center", "bottom").