

Autodesk® **Scaleform**®

Scaleform CLIK AS3 User Guide

Copyright Notice

Autodesk® Scaleform® 4.2

© 2012 Autodesk, Inc. All rights reserved.

Disclaimer

How to Contact Autodesk Scaleform:

Document	CLIK AS3 User Guide
Address	Autodesk Scaleform Corporation 6305 Ivy Lane, Suite 310 Greenbelt, MD 20770, USA
Website	www.scaleform.com
Email	info@scaleform.com
Direct	(301) 446-3200
Fax	(301) 446-3199

Table of contents

1		1
		1
		1
		2
		3
		4
		5
		5
1.4.2	Focus	6
2	(Prebuilt Components)	7
		7
		9
2.1.2	CheckBox.....	15
2.1.3	Label.....	21
2.1.4	TextInput	24
2.1.5	TextArea	30
		34
		35
2.2.2	ButtonGroup.....	41
2.2.3	ButtonBar	43
		47
		47
2.3.2	ScrollBar.....	51
2.3.3	Slider	54
		58
		60
2.4.2	OptionStepper	63
2.4.3	ListItemRenderer	67

2.4.4 ScrollingList.....73

2.4.5 TileList80

2.4.6 DropdownMenu.....87

.....95

.....95

.....97

2.6.1 Window98

3 **101**

..... 101

..... 101

..... 102

..... 103

..... 103

..... 103

..... 103

..... 104

..... 104

..... 106

..... 107

..... 109

..... 110

..... 110

..... 110

..... 111

4 **112**

..... 112

..... 113

..... 114

..... 114

		116
		116
		116
		117
		117
		119
		119
		120
		121
		121
		121
		124
		125
		125
		126
		127
		127
		128
		129
		130
		130
		132
4.11.2	LayoutData.....	133
		135
		135
		136
		136
5		138

		138
		138
		140
6		142
7		144

1

1.1.1 CLIK

Button	Slider
ButtonBar	StatusIndicator
CheckBox	TileList
RadioButton	Label
TextInput	ScrollingList
TextArea	DropDownMenu
ScrollIndicator	NumericStepper
ScrollBar	

Classes: Core system APIs


InputManager	UIComponent
FocusManager	Tween
DragManager	DataProvider
PopUpManager	IDataProvider
IUIComponent	IList
Constraints	IListItemRenderer

Documentation and Example Files:

Getting Started with CLIK
Getting Started with CLIK Buttons
CLIK AS3 API Reference
CLIK AS3 User Guide
CLIK Flash Samples
CLIK Video Tutorials



1.3.1

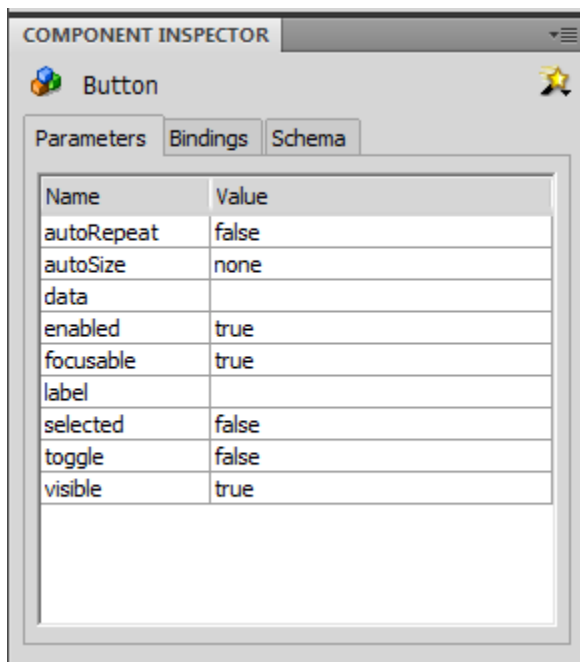

1.4.1

-
-
-
-
-
-




1.4.2 Focus

-
-
-
-
-
-




1: Main Menu Button

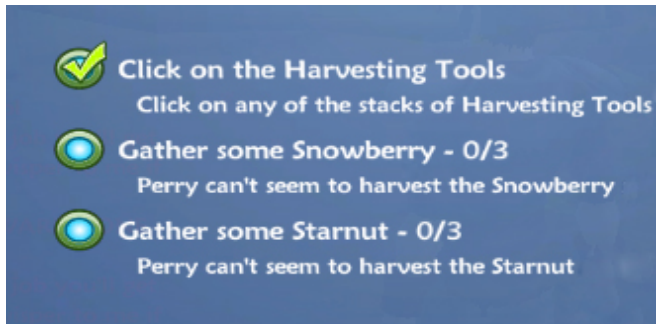


2: CheckBox



3: Label

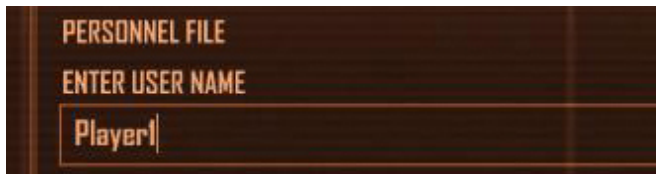


4: TextInput

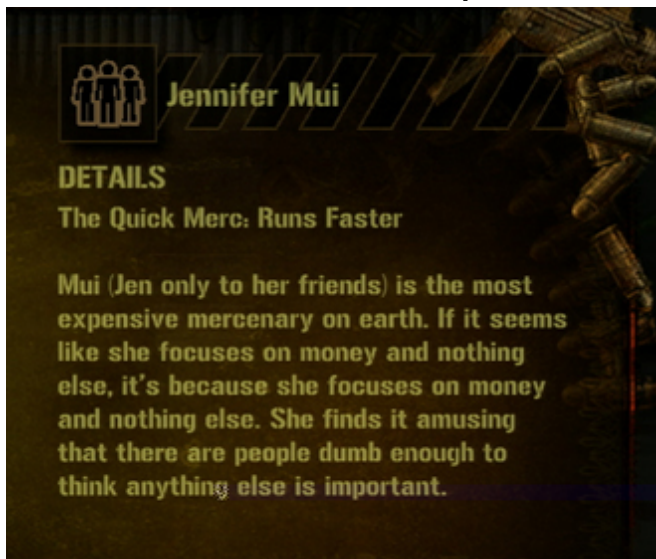

2.1.1 Button



6:

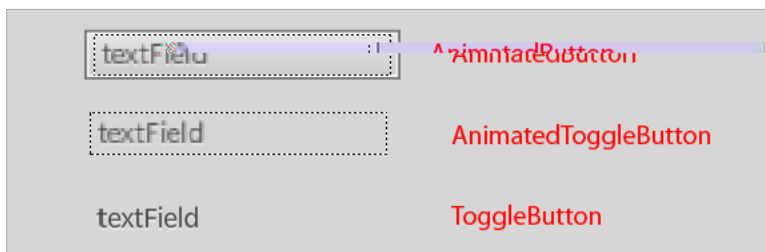


7: AnimatedButton, AnimatedToggleButton, ToggleButton

-
-


2.1.1.3

-
-
-
-

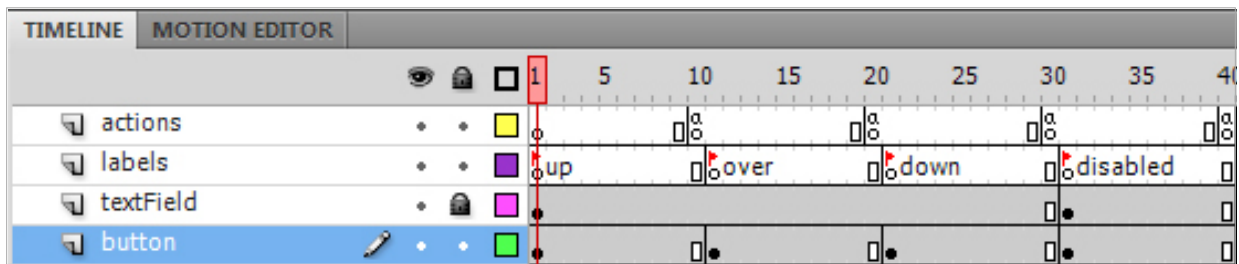

8: Button

2.1.1.4

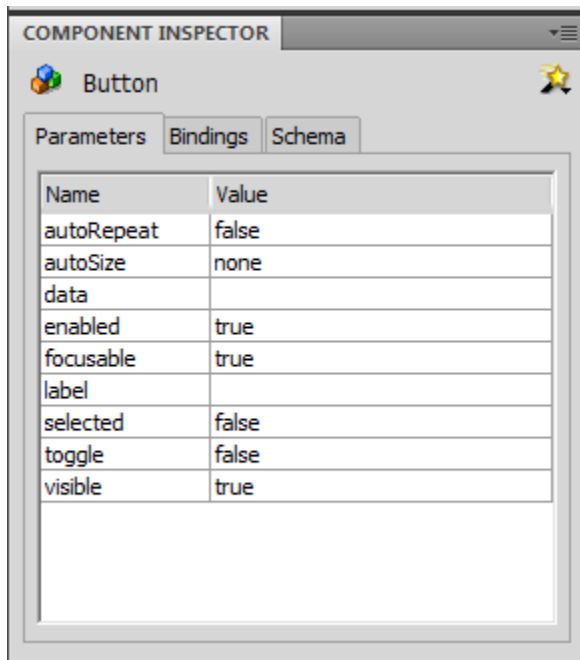

9: CS4 component inspector Button

autoRepeat

autoSize

data

enabled

focusable

label
selected
Toggle
Visible

- **type**: The type of event.
- **target**: The event target.
- **currentTarget**: The object that is actively processing the Event object with an event listener.
- **eventPhase**: The current phase in the event flow. (EventPhase.CAPTURING_PHASE, EventPhase.AT_TARGET, EventPhase.BUBBLING_PHASE).
- **bubbles**: Indicates whether an event is a bubbling event.
- **cancelable**: Indicates whether the behavior associated with the event can be prevented.

ComponentEvent.SHOW
ComponentEvent.HIDE
ComponentEvent.STATE_CHANGE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
Event.SELECT
MouseEvent.ROLL_OVER

MouseEvent.ROLL_OUT

ButtonEvent.PRESS

MouseEvent.DOUBLE_CLICK

ButtonEvent.CLICK

ButtonEvent.DRAG_OVER

ButtonEvent.DRAG_OUT

ButtonEvent.RELEASE_OUTSIDE

```
myButton.addEventListener( ButtonEvent.PRESS, onButtonPress );
function onButtonPress( e:ButtonEvent ):void {
    // Do something
}
```

2.1.2 CheckBox



10: **CheckBox**

-
-

-
-
-
-
-
-
-
-
-


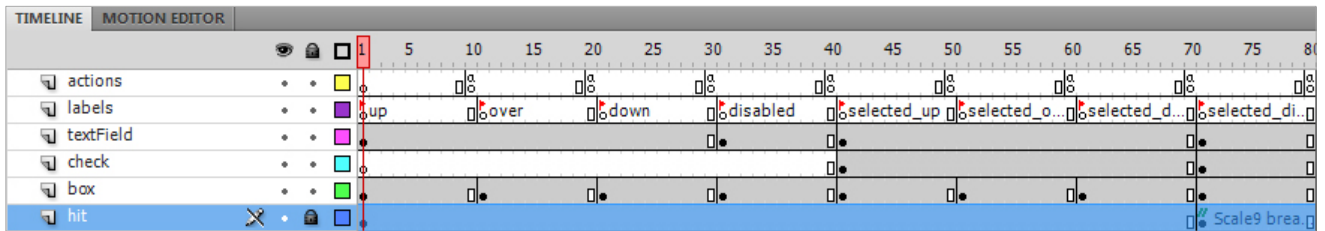


Figure 11: CheckBox timeline.

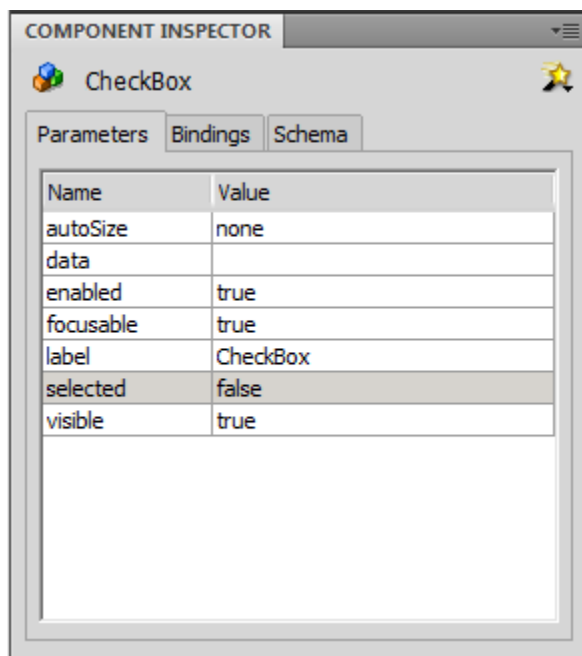

autoSize

Data

Enabled

focusable

Label

selected

Visible

-
-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
Event.SELECT

ComponentEvent.STATE_CHANGE

MouseEvent.ROLL_OVER

MouseEvent.ROLL_OUT

ButtonEvent.PRESS

MouseEvent.DOUBLE_CLICK

ButtonEvent.CLICK

ButtonEvent.DRAG_OVER

ButtonEvent.DRAG_OUT

ButtonEvent.RELEASE_OUTSIDE

```
myCheckBox.addEventListener(Event.SELECT, onCheckBoxToggle);  
function onCheckBoxToggle(e:Event):void {  
    // Do something  
}
```

2.1.3 Label



Figure 12: Unskinned Label.

•

•

•


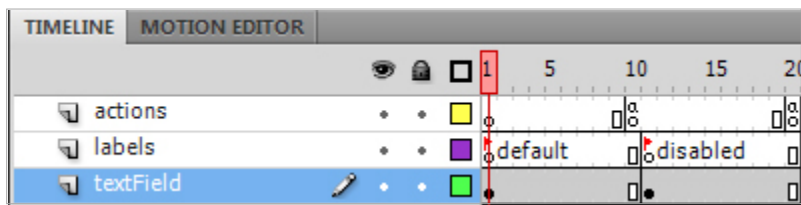


Figure 13: Label timeline.

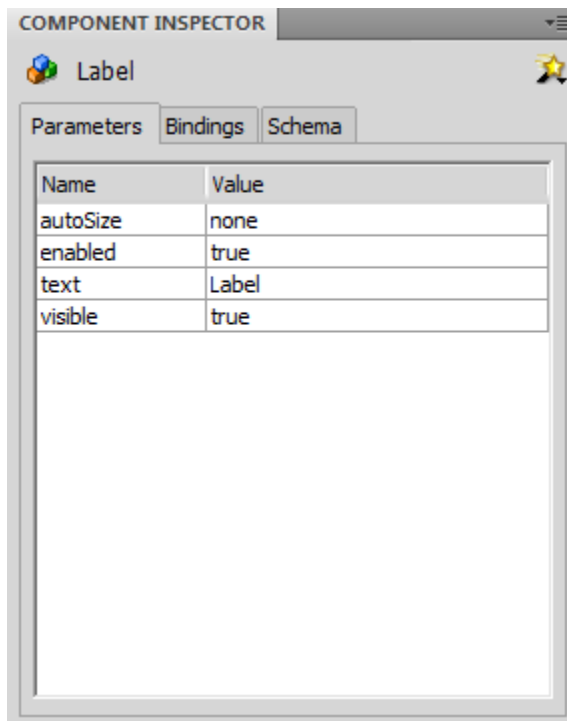

Text
Visible
enabled
autoSize

•

-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
ComponentEvent.STATE_CHANGE

2.1.4 TextInput

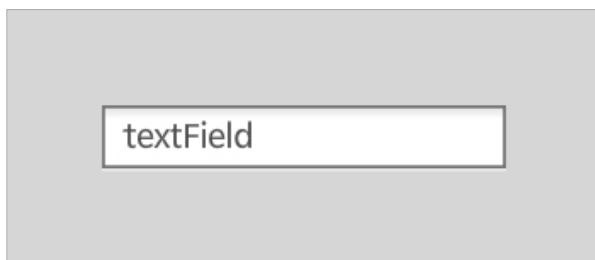


Figure 14: Unskinned TextInput.

•

•

•

•


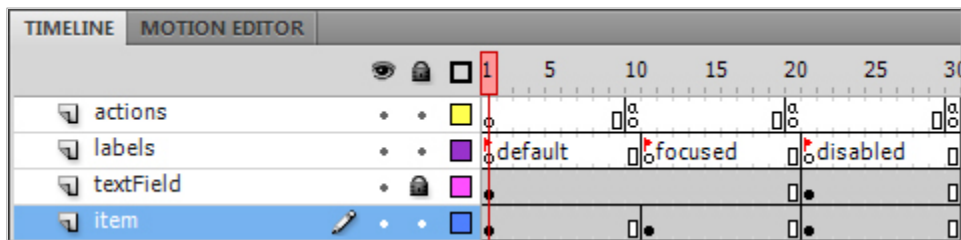


Figure 15: TextInput timeline.

2.1.4.4 *Inspectable properties*

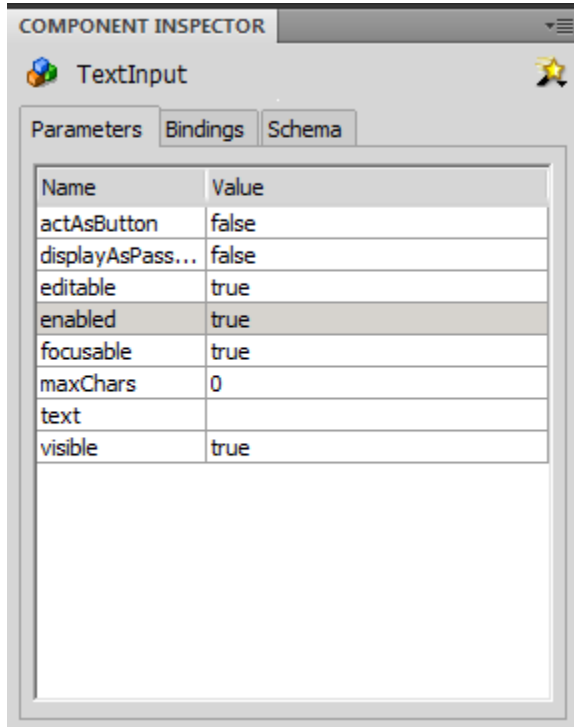

actAsButton

displayAsPassword

Editable

enabled

focusable

maxChars
Text
Visible

2.1.4.5

-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
Event.CHANGE
ComponentEvent.STATE_CHANGE
MouseEvent.ROLL_OVER

MouseEvent.ROLL_OUT

```
myTextInput.addEventListener(Event.CHANGE, onTextChange);  
function onTextChange(e:Event):void {  
    trace("Latest text: " + e.target.text);  
}
```

2.1.5 TextArea

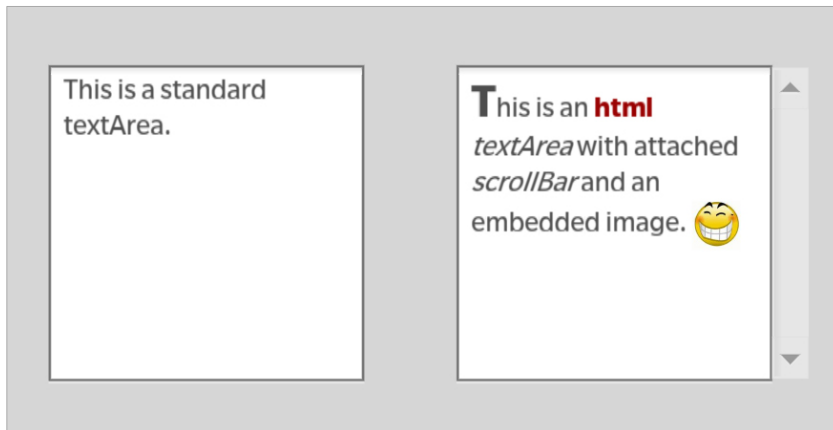



Figure 16: Unskinned TextArea.

actAsButton
displayAsPassword
editable
enabled
focusable
maxChars
scrollBar
scrollPolicy
Text
Visible

-
-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
Event.CHANGE
Event.SCROLL
ComponentEvent.STATE_CHANGE
MouseEvent.ROLL_OVER
MouseEvent.ROLL_OUT

```
myTextArea.addEventListener(Event.SCROLL, onTextScroll);
function onTextScroll(e:Event):void {
    // Do something
}
```

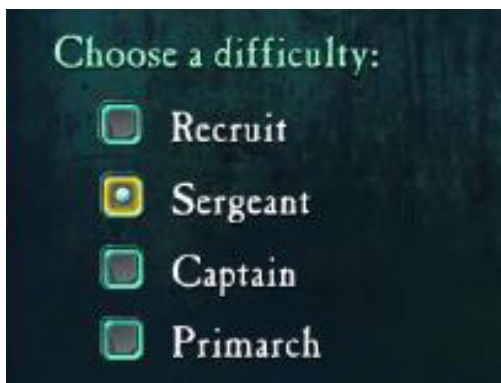

18: Radio ButtonGroup

2.2.1 RadioButton



19:

RadioButton

•

•

•

•

•


•

•

•


•

•

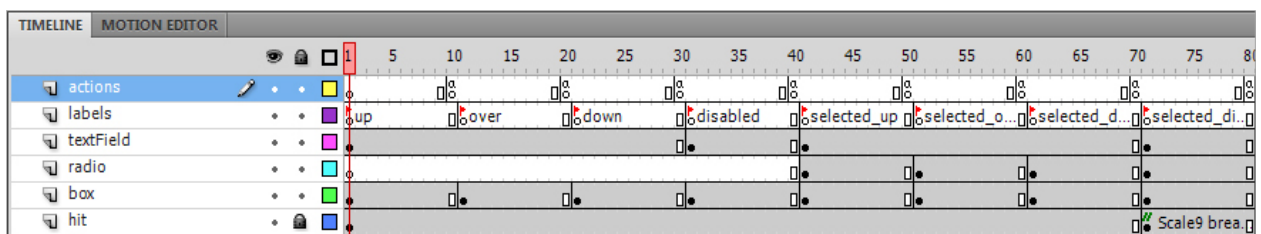

20: RadioButton

•

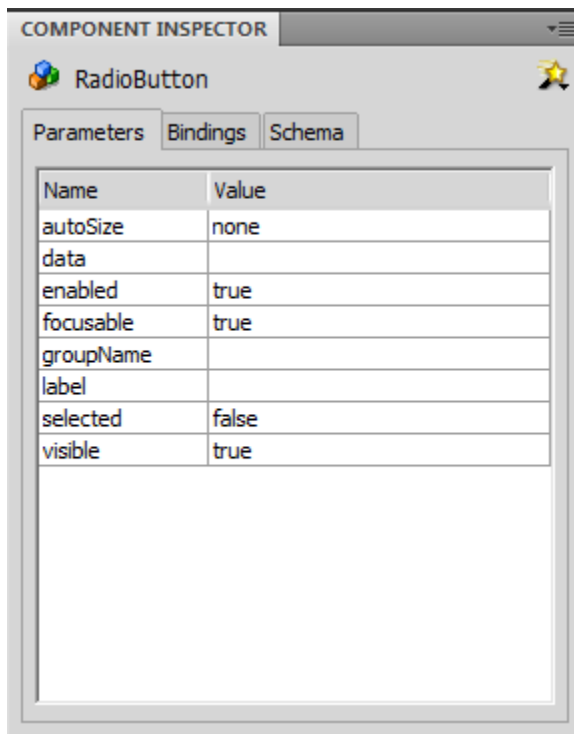

autoSize

Data

enabled

focusable

groupName

Label

selected

•

•

•

•

•

•

ComponentEvent.SHOW

ComponentEvent.HIDE

FocusHandlerEvent.FOCUS_IN

FocusHandlerEvent.FOCUS_OUT

Event.SELECT

ComponentEvent.STATE_CHANGE

MouseEvent.ROLL_OVER

MouseEvent.ROLL_OUT

ButtonEvent.PRESS

MouseEvent.DOUBLE_CLICK

ButtonEvent.CLICK

ButtonEvent.DRAG_OVER

ButtonEvent.DRAG_OUT

ButtonEvent.RELEASE_OUTSIDE

```
myRadio.addEventListener(Event.SELECT, onRadioToggle);  
function onRadioToggle(e:Event):void {  
    // Do something  
}
```

2.2.2 ButtonGroup

Set 1	Set 2 (controls Set 1)
☒ Radio1	☐ Radio4
☐ Radio2	☐ Radio5
☐ Radio3	☐ Radio6

21: **ButtonGroup.**

-
-
-
-
-
-

Event.CHANGE

ButtonEvent.CLICK

target:

```
myGroup.addEventListener(Event.CHANGE, onNewSelection);  
function onNewSelection(e:Event):void {  
    if (e.item == myRadio) {  
        // Do something  
    }  
}
```

2.2.3 ButtonBar


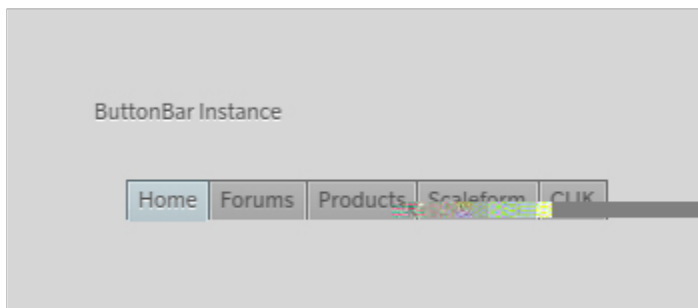


Figure 22: Unskinned ButtonBar.

```
buttonBar.dataProvider = new DataProvider(["item1", "item2",  
"item3", "item4", "item5"]);
```

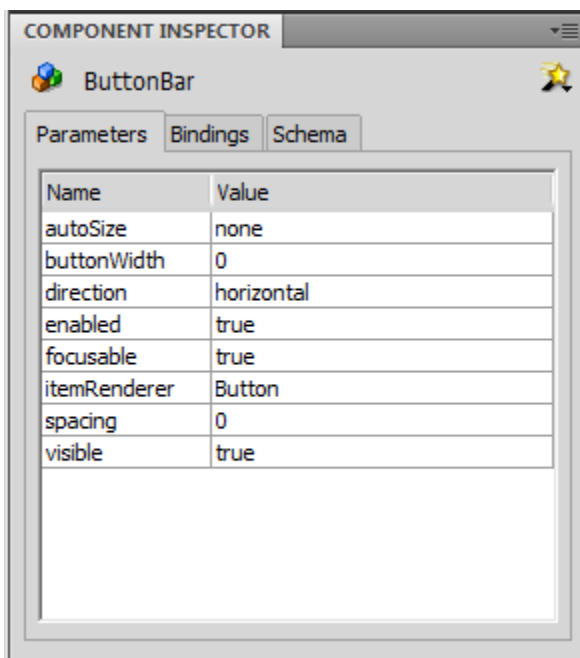

autoSize

Direction

buttonWidth

enabled
focusable
itemRenderer
spacing
Visible

-
-
-
-
-
-


ComponentEvent.SHOW
ComponentEvent.HIDE
FocusHandlerEvent.FOCUS_IN

FocusHandlerEvent.FOCUS_OUT

IndexEvent.INDEX_CHANGE


ButtonBarEvent.BUTTON_SELECT

```
myBar.addEventListener(ButtonBarEvent.BUTTON_SELECT, onItemClick);  
function onItemClick(e:ButtonBarEvent) {  
    processData(e.renderer.data);  
    // Do something  
}
```

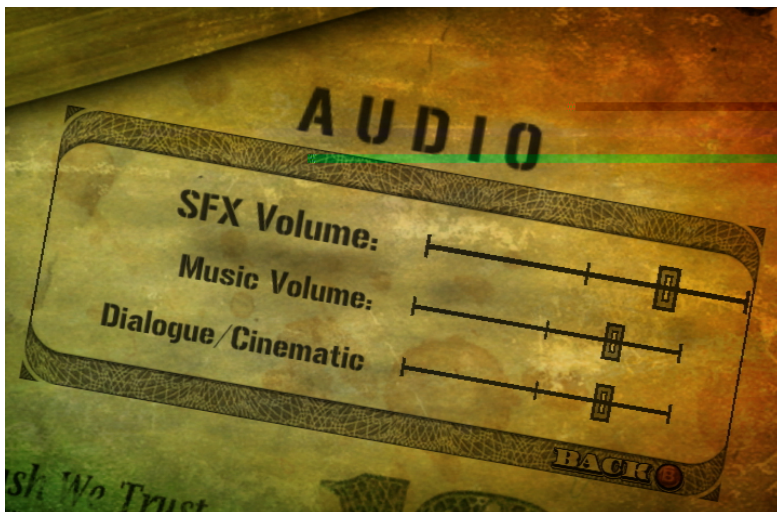


23: Slider

2.3.1 ScrollIndicator

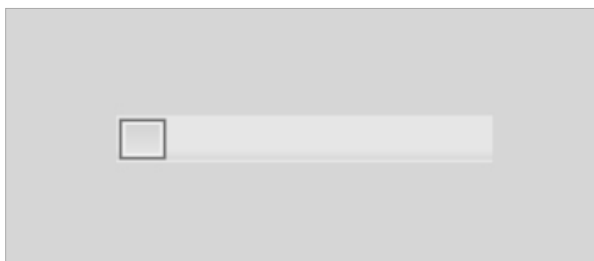


24: ScrollIndicator.

-
-

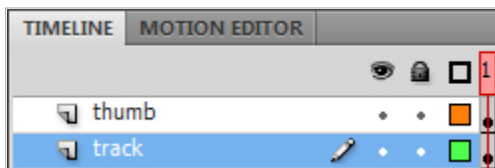

25: ScrollIndicator

.

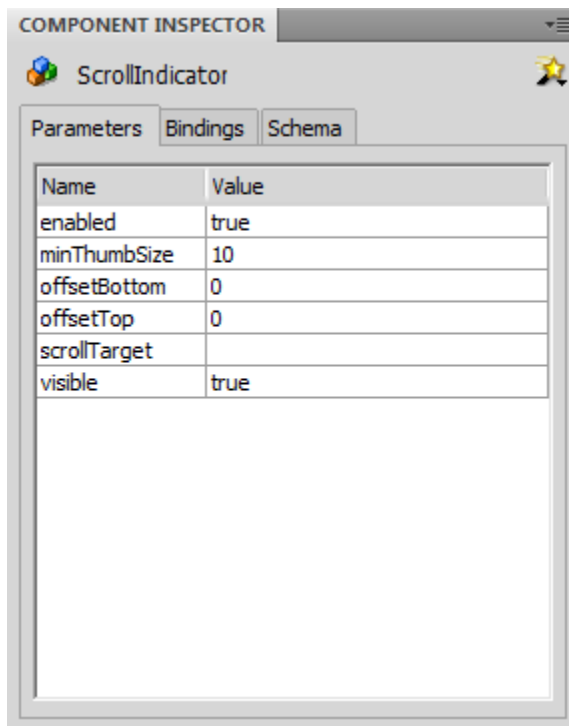

enabled

offsetTop

offsetBottom

scrollTarget

Visible

-
-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
Event.SCROLL


```
mySI.addListener(Event.SCROLL, onTextScroll);
function onTextScroll(e:Event) {
    trace("mySI.position: " + e.target.position);
    // Do something
}
```

2.3.2 ScrollBar




26: ScrollBar.

-
-
-
-

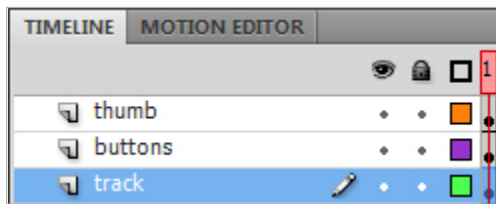

27: ScrollBar timeline./ ScrollBar

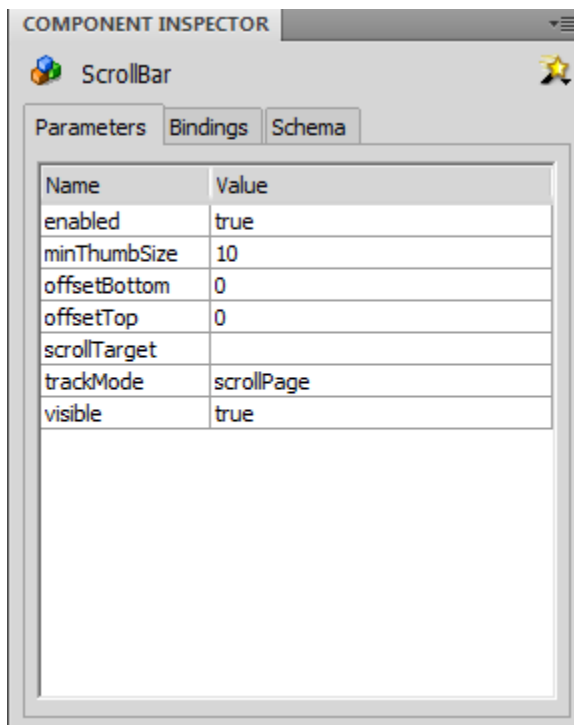

, trackMode:

enabled

offsetTop

offsetBottom

scrollTarget

trackMode

Visible

-
-
-
-
-
-

ComponentEvent.SHOW

ComponentEvent.HIDE

Event.SCROLL

```
mySB.addEventListener(Event.SCROLL, onTextScroll);  
function onTextScroll(e:Event) {  
    trace("mySB.position: " + e.target.position);  
    // Do something  
}
```

2.3.3 Slider



28: Slider.

-
-


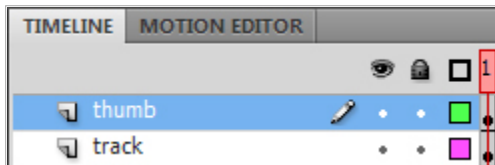


그림 29: Slider

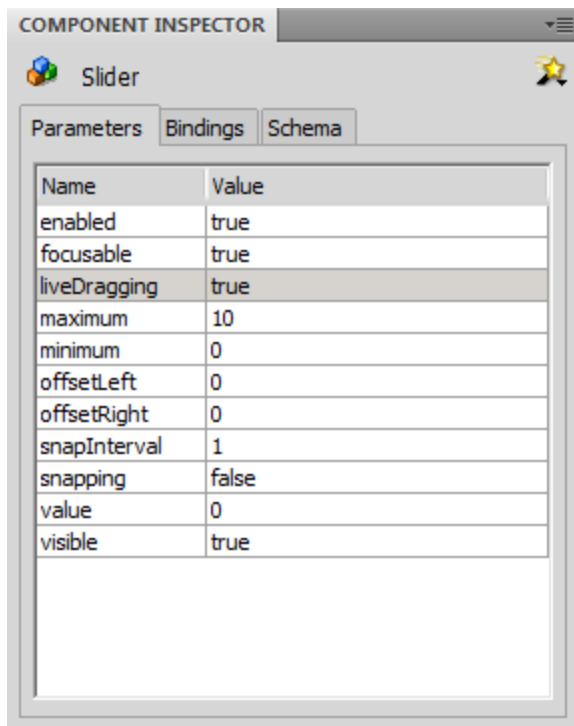

Enabled

Focusable

Value

minimum

maximum

snapping

snapInterval

liveDragging

offsetLeft
offsetRight
Visible


-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
ComponentEvent.STATE_CHANGE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
SliderEvent.VALUE_CHANGE


```
mySlider.addEventListener(SliderEvent.VALUE_CHANGE,  
onValueChange);  
function onValueChange(e:SliderEvent) {  
    trace("mySlider.value: " + e.target.value);  
    // Do something  
}
```



30: ScrollIndicator ScrollingList

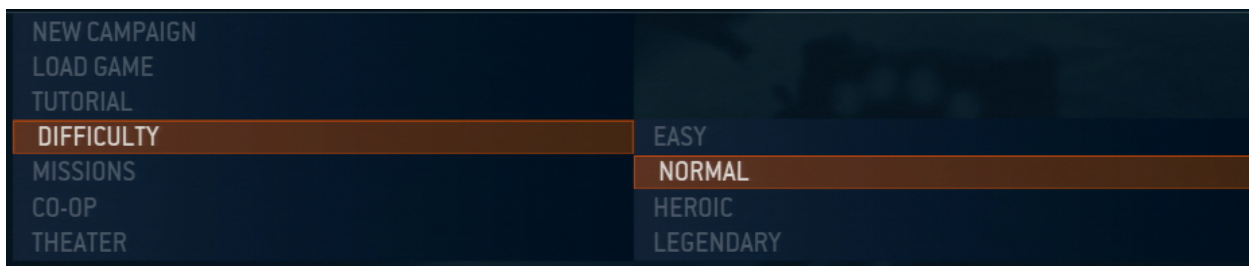

31: ' DropdownMenu

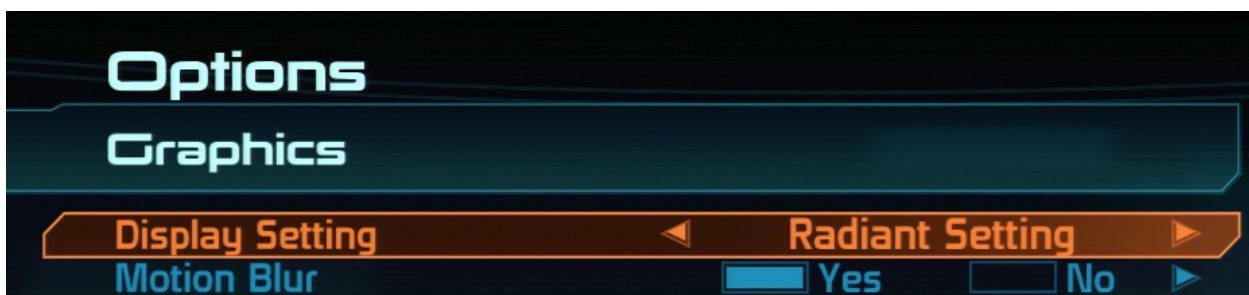

32: from ' OptionStepper


2.4.1 NumericStepper




33: Numeric Stepper.

-
-
-

-
-

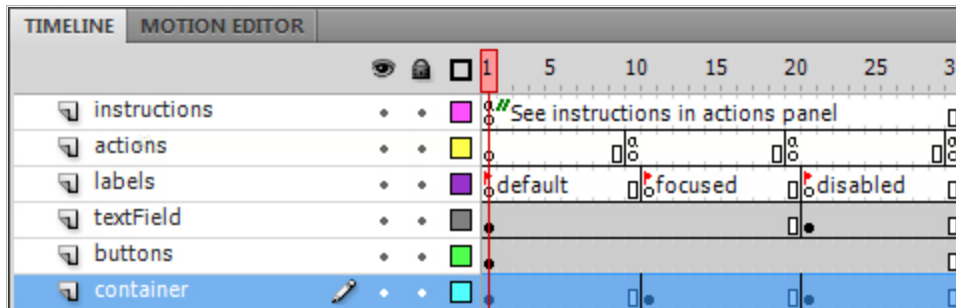

34: NumericStepper

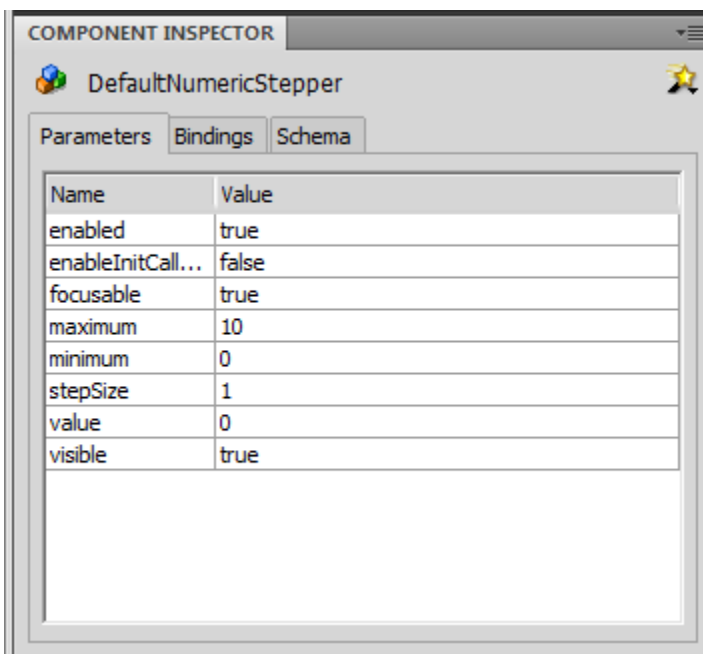

Enabled

Focusable

minimum

maximum

stepSize

Value
Visible

-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
ComponentEvent.STATE_CHANGE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
ComponentEvent.STATE_CHANGE
IndexEvent.INDEX_CHANGE

```
myNS.addEventListener(IndexEvent.INDEX_CHANGE, onValueChange);  
function onValueChange(e:IndexEvent) {  
    trace("myNS.value: " + e.target.value);  
    // Do something  
}
```

2.4.2 OptionStepper



35: OptionStepper.

```
optionStepper.dataProvider = new DataProvider(["item1", "item2",  
"item3", "item4"]);
```


•

•


•

•

•

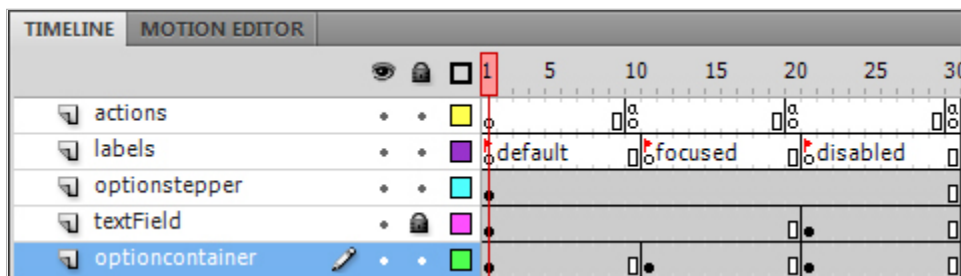

36: OptionStepper

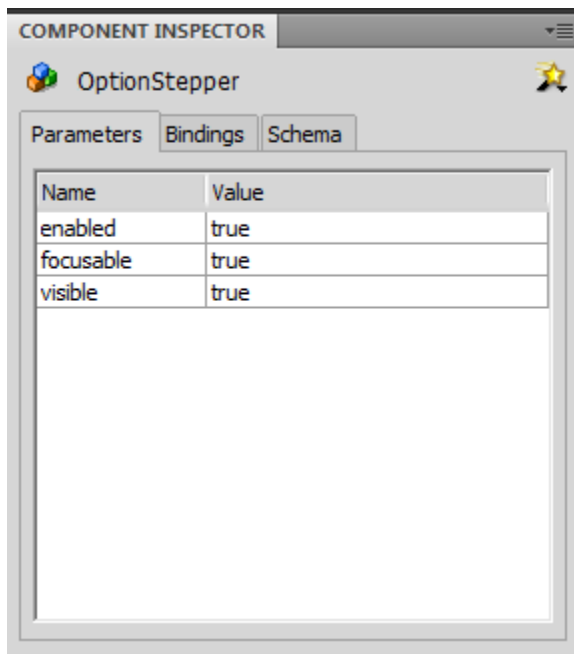

Enabled

Focusable

Visible

-
-
-

-
-
-

ComponentEvent.SHOW

ComponentEvent.HIDE

ComponentEvent.STATE_CHANGE

FocusHandlerEvent.FOCUS_IN

FocusHandlerEvent.FOCUS_OUT

IndexEvent.INDEX_CHANGE

```
myOS.addListener(IndexEvent.INDEX_CHANGE, onValueChange);  
function onValueChange(e:IndexEvent) {  
    trace("myOS.selectedItem: " + e.target.selectedItem);  
    // Do something  
}
```


2.4.3 ListItemRenderer



37: **ListItemRenderer.**


-
-

-
-
-
-
-
-
-
-

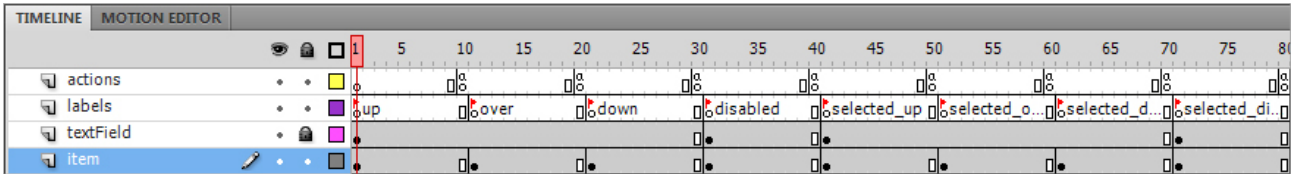

38: ListItemRenderer

.

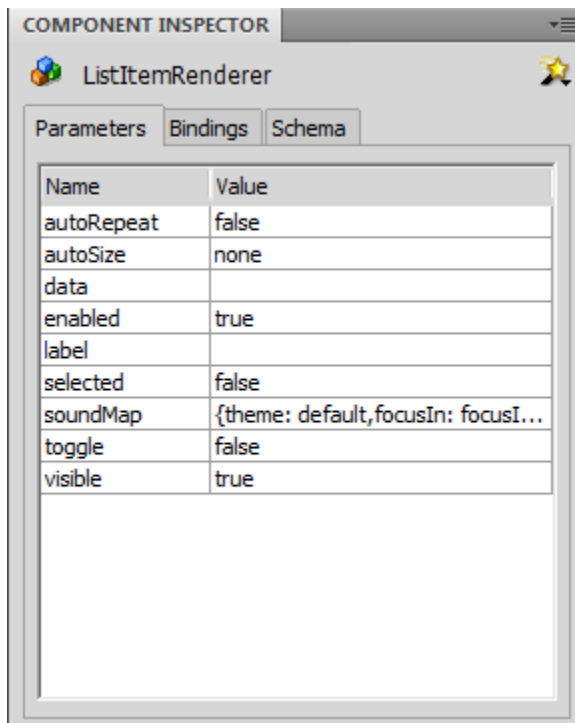

autoRepeat

autoSize

Data

enabled

Label

Selected

Toggle

Visible

-
-
-
-
-
-

ComponentEvent.SHOW

ComponentEvent.HIDE

ComponentEvent.STATE_CHANGE

FocusHandlerEvent.FOCUS_IN

FocusHandlerEvent.FOCUS_OUT

Event.SELECT

MouseEvent.ROLL_OVER

MouseEvent.ROLL_OUT

ButtonEvent.PRESS

MouseEvent.DOUBLE_CLICK


ButtonEvent.CLICK

ButtonEvent.DRAG_OVER

ButtonEvent.DRAG_OUT

ButtonEvent.RELEASE_OUTSIDE

2.4.4 ScrollingList

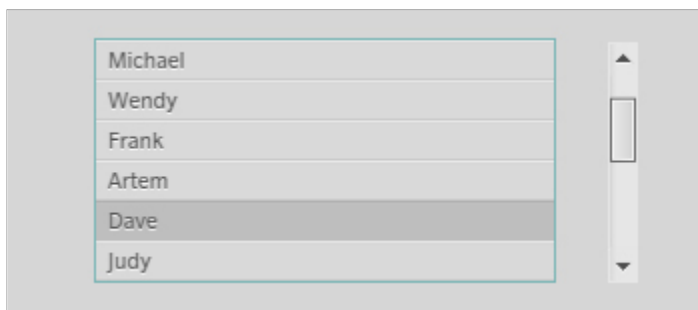


39: ScrollingList.


```
scrollingList.dataProvider = new DataProvider(["item1", "item2",  
"item3", "item4"]);
```

-
-

•

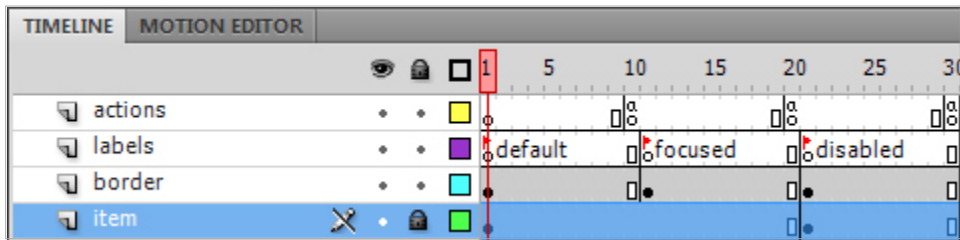

40: ScrollingList

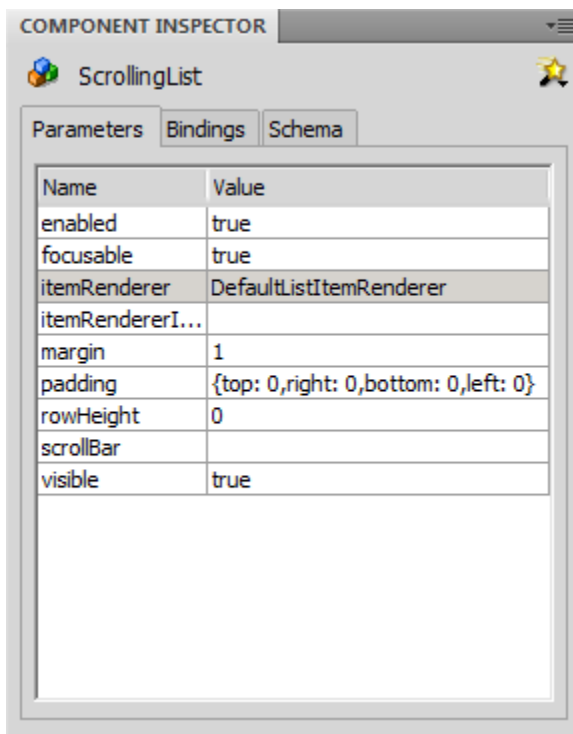

Enabled

Focusable

itemRenderer

itemRendererInstanceName

Margin

padding

rowHeight

Visible

-

-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE
ComponentEvent.STATE_CHANGE
FocusHandlerEvent.FOCUS_IN
FocusHandlerEvent.FOCUS_OUT
ListEvent.INDEX_CHANGE • • • •
ListEvent.ITEM_PRESS

-

-

-

-

ListEvent.ITEM_CLICK

-

-

-

-

ListEvent.ITEM_DOUBLE_CLICK

-

-

-

-

ListEvent.ITEM_ROLL_OVER

-

-

-

ListEvent.ITEM_ROLL_OUT

The mouse cursor has rolled out of a list item.

-

-

-


•

```
myList.addEventListener(ListEvent.ITEM_CLICK, onItemClick);  
function onItemClick(e:ListEvent) {  
    trace("ListItemRenderer Clicked: " + e.itemRenderer);  
    // Do something  
}
```


2.4.5 TileList

```
tileList.dataProvider = new DataProvider(["item1", "item2",  
"item3", "item4", "item5"]);
```

-
-
-

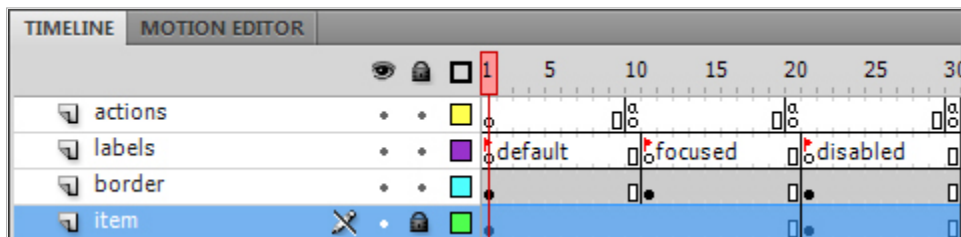

41: TileList

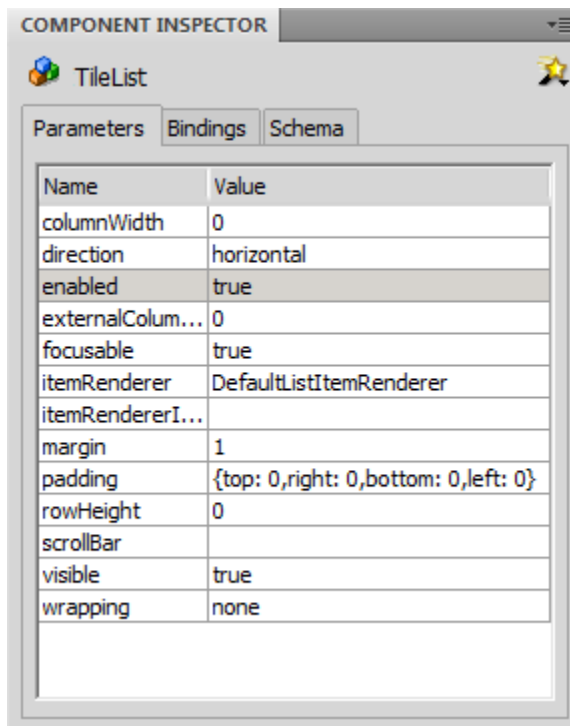

columnWidth

Direction

enabled

Disables the component if set to false. Disabled components will no longer receive user input.

externalColumnCount

focusable

Enable/disable focus management for the component. Setting the focusable property to false will remove support for tab key, direction key and mouse based focus changes.

itemRenderer

itemRendererInstanceName

Margin

Padding

rowHeight

Visible

•

-
-
-
-
-

ComponentEvent.SHOW	
ComponentEvent.HIDE	
ComponentEvent.STATE_CHANGE	
FocusHandlerEvent.FOCUS_IN	
FocusHandlerEvent.FOCUS_OUT	The component has lost focus.
ListEvent.INDEX_CHANGE	
• • • •	

ListEvent.ITEM_PRESS

-

-

-

-

ListEvent.ITEM_CLICK

-

-

-

-

- ¼ Õ

-

-

-

ListEvent.ITEM_ROLL_OVER

-

-

-

-

ListEvent.ITEM_ROLL_OUT

-


-

•

•

```
myList.addEventListener(FocusHandlerEvent.FOCUS_IN,  
onListFocused);  
function onListFocused(e:FocusHandlerEvent) {  
    trace("myList is now focused!");  
    // Do something  
}
```

2.4.6 DropdownMenu

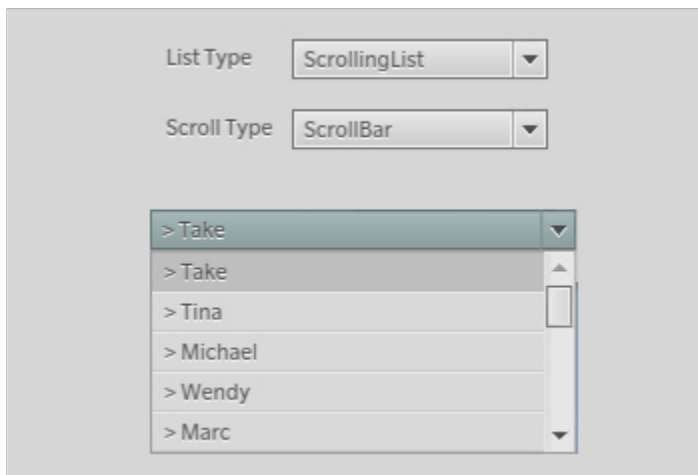


42: **DropdownMenu.**


```
dropdownMenu.dataProvider = new DataProvider(["item1", "item2",  
"item3", "item4"]);
```

-
-

-
-
-
-
-
-
-
-

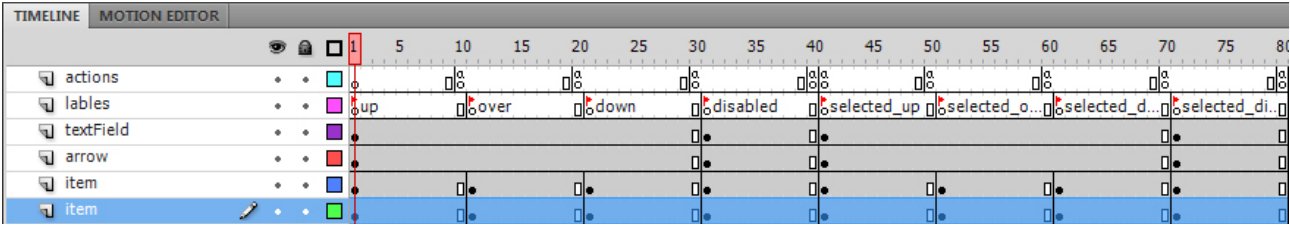

43: DropdownMenu

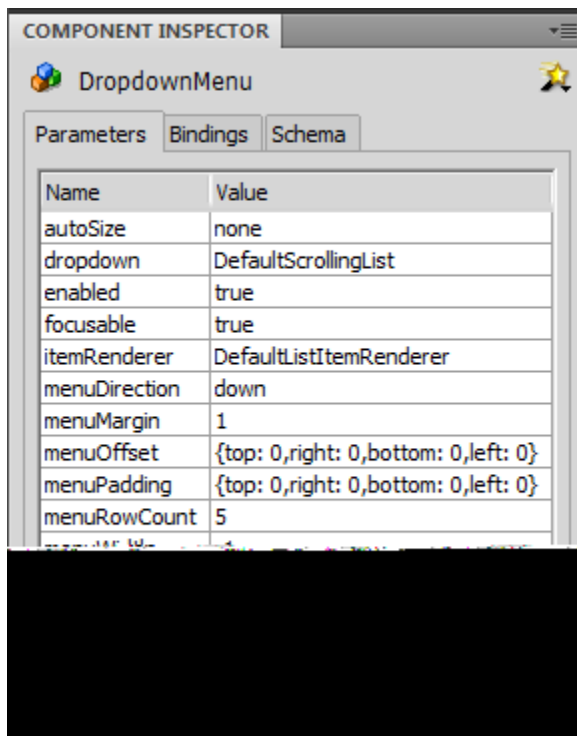

autoSize

Dropdown

Enabled

Focusable

menuDirection

menuMargin	
menuOffset	
menuPadding	
menuRowCount	
menuWidth	If set, this number will be enforced as the width of the drop down's list.
thumbOffset	
Scrollbar	
Visible	

-
-
-
-

-
-

ComponentEvent.SHOW

ComponentEvent.HIDE

ComponentEvent.STATE_CHANGE

Event.SELECT

FocusHandlerEvent.FOCUS_IN

FocusHandlerEvent.FOCUS_OUT

ListEvent.INDEX_CHANGE

-

-

-

-

MouseEvent.ROLL_OVER

MouseEvent.ROLL_OUT

ButtonEvent.PRESS

MouseEvent.DOUBLE_CLICK


true

ButtonEvent.CLICK

ButtonEvent.DRAG_OVER


ButtonEvent.DRAG_OUT

ButtonEvent.RELEASE_OUTSIDE

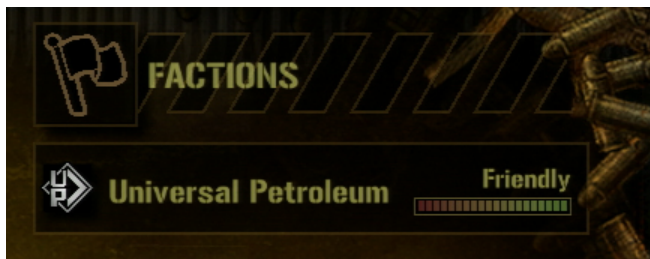


44: StatusIndicator

2.5.1 StatusIndicator

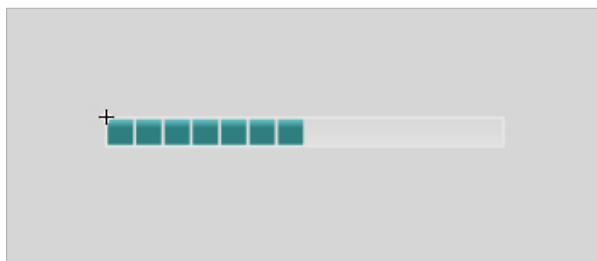

45: StatusIndicator.

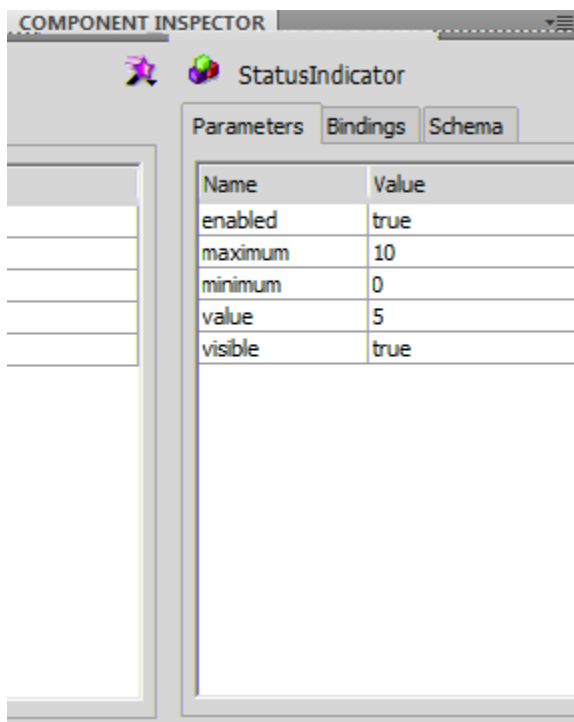

Visible
Enabled
Value

Minimum
Maximum

-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE

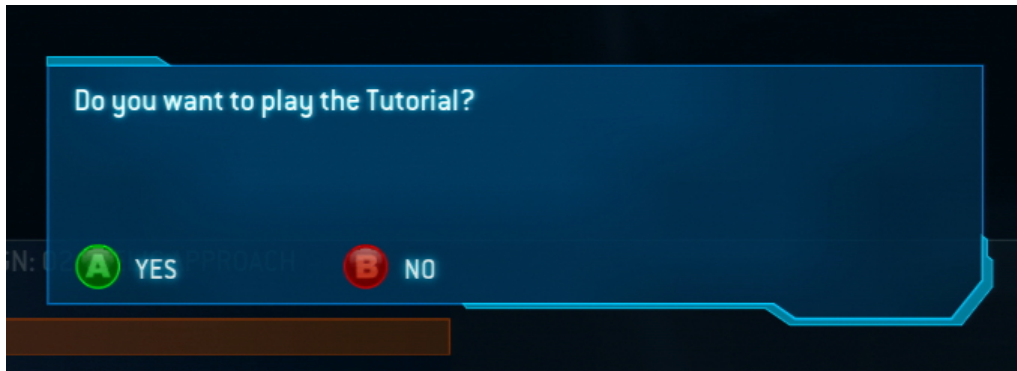


Figure 46: Window example from *Halo Wars*.

2.6.1 Window

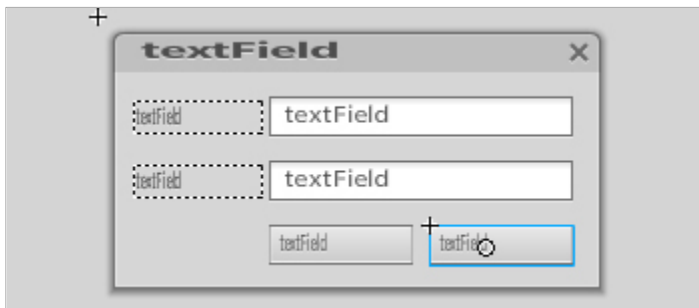


Figure 47: Sample unskinned Window.

-
-
-
-
-
-

COMPONENT INSPECTOR	
Window	
Parameters	Bindings Schema
Name	Value
contentPadding	{top: 0,right: 0,bottom: 0,left: 0}
enabled	true
maxHeight	150
maxWidth	150
minHeight	150
minWidth	150
source	
title	My Window
visible	true

contentPadding

Enabled
maxHeight
maxWidth
minHeight
minWidth
Source
Title
Visible

-
-
-
-
-
-

ComponentEvent.SHOW
ComponentEvent.HIDE


```
myWindow.addEventListener(ComponentEvent.HIDE, onWindowClosed);
function onWindowClosed(e:ComponentEvent) {
    // Do something.
}
```

3


3.1.1 (Pixel-perfect Images)

→

→

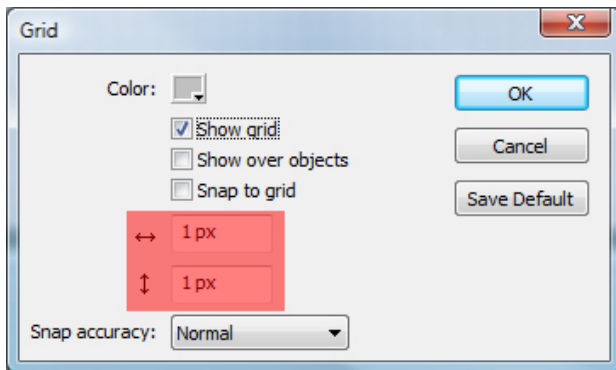

48: Edit Grid .

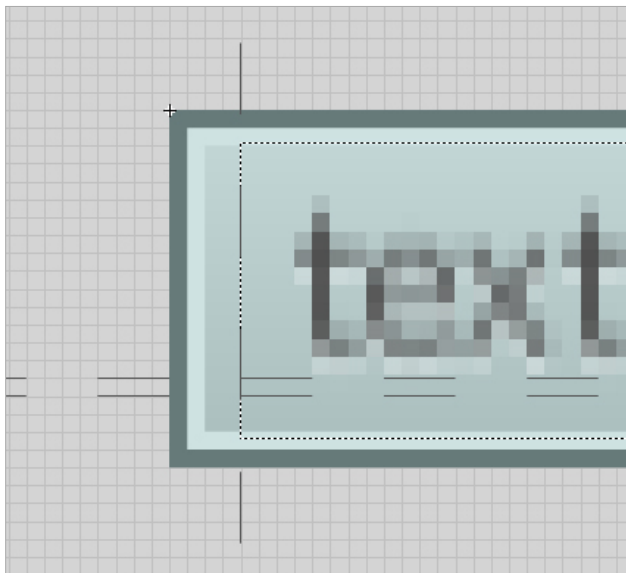

49:

3.1.2 (Masks)

3.1.3

(Animations)

3.1.4

(Layers and Draw Primitives)

3.1.5

3.1.6 2


- •
•
•

-
-
-
-


3.2.1

→

→

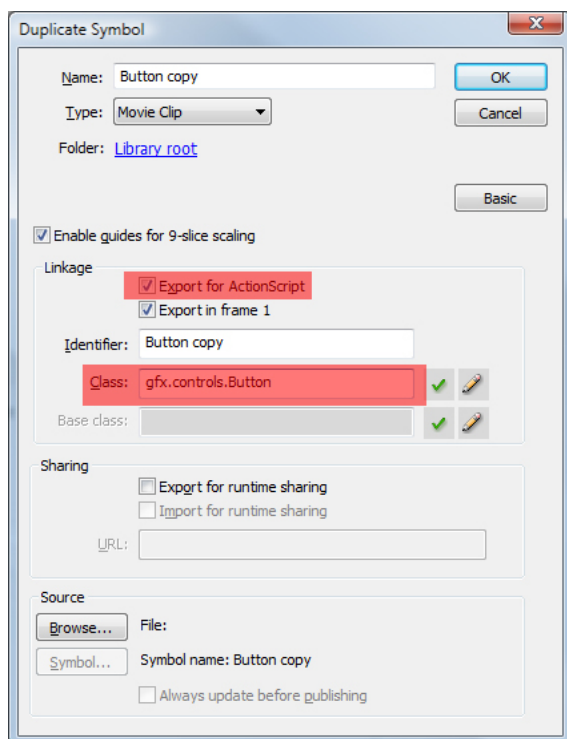


50: ().

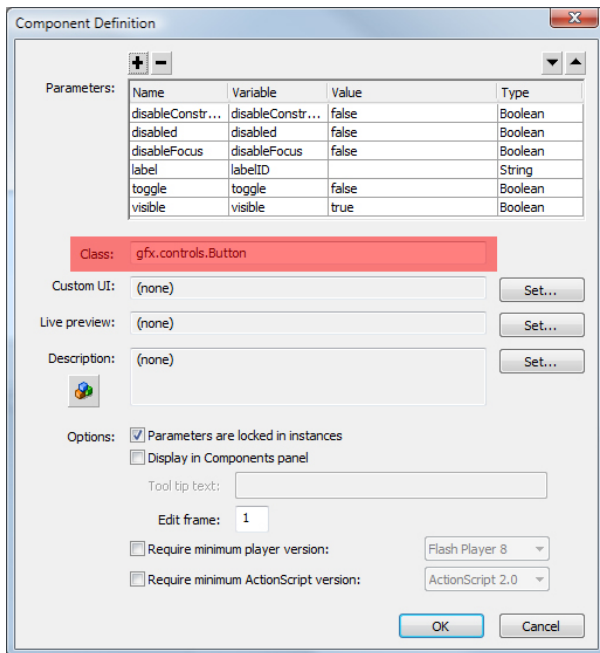


51: ().

-
-
-

3.3.1 StatusIndicator

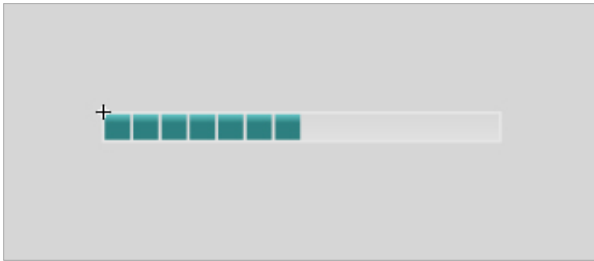

53: StatusIndicator PSD

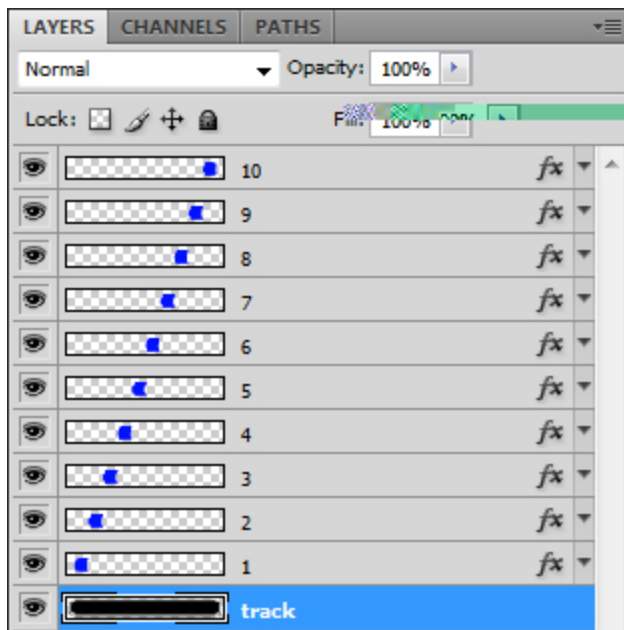


54: StatusIndicator PSD

→


→

→

→

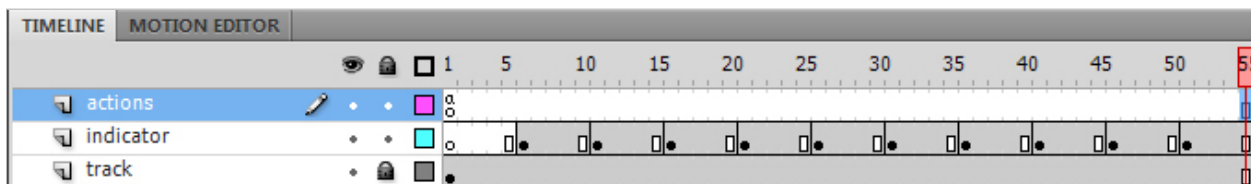

55: The ().

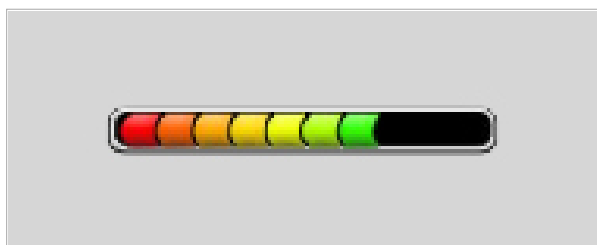

56: StatusIndicator.


3.4.1

3.4.2

3.4.3 textField

→

3.4.4 Scaleform Localization System

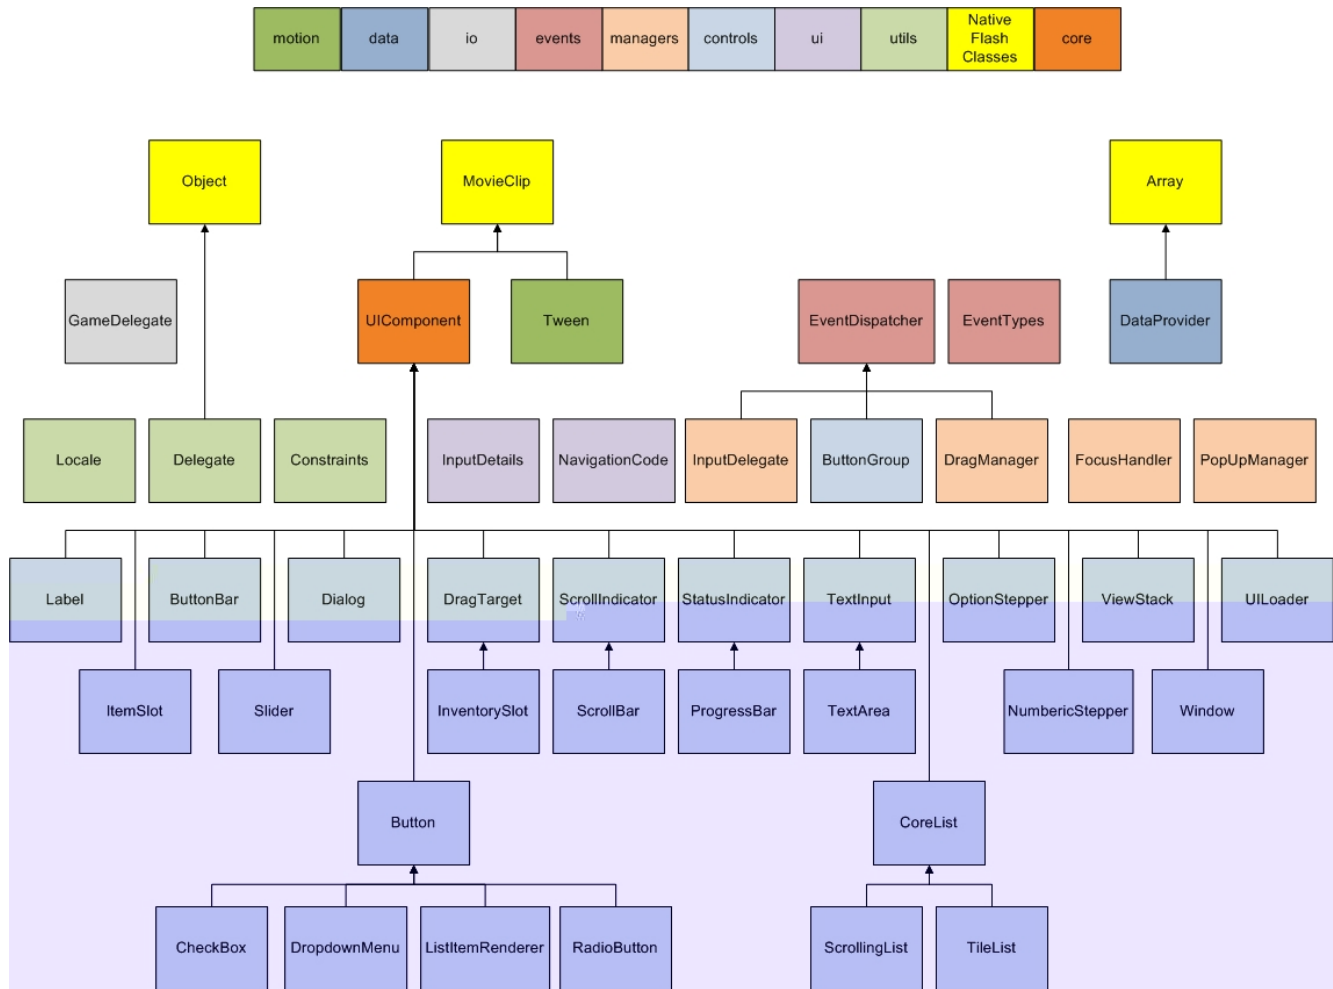

57: CLIK

- *enabled;*
- *visible;*
- *focused;*
- *focusable;*
- *width;*
- *height;*
- *scaleX;*
- *scaleY;*
- *displayFocus*

-
-
-
-

4.1.1

-
-
-

4.2.1 Button

-
-
-
-

-
-
-
-
-
-
-
-

```
protected function getStatePrefixes():Vector.<String> {  
    return _selected ? statesSelected : statesDefault;  
}
```

```
protected var _stateMap:Object = {  
    up:["up"],  
    over:["over"],  
    down:["down"],  
    release: ["release", "over"],  
    out:["out","up"],  
    disabled:["disabled"],  
    selecting: ["selecting", "over"],  
    toggle: ["toggle", "up"],  
    kb_selecting: ["kb_selecting", "up"],  
    kb_release: ["kb_release", "out", "up"],  
    kb_down: ["kb_down", "down"]  
}
```

Figure 58: Process used to determine the correct keyframe to play.

4.2.2

⊥

```
,
    .TextInput TextArea
    roll over roll out
    asAsButton
    over out
.
```

4.3.1 (Usage and Best Practices)

4.3.1.1 (Subscribing to an Event)

useCapture, priority

useWeakReference

```
buttonInstance.addEventListener(ButtonEvent.CLICK, onButtonClick, false,  
0, true);
```

```
buttonInstance.addEventListener(ButtonEvent.CLICK, onButtonClick, false,  
0, true);  
function onButtonClick (e:Event):void {  
    buttonInstance.removeEventListener(ButtonEvent.CLICK,  
onButtonClick, false);  
}
```

4.3.1.2 (Dispatching an Event)

```
dispatchEvent(new Event(Event.CHANGE));
```

```
import flash.utils.getDefinitionByName;
import scaleform.clik.controls.Button;

public var myButton:Button;

// Retrieve a reference to the Class definition.
var classRef:Class = getDefinitionByName("ButtonLinkageID") as Class;
// Instantiate a new instance of the class and store it.
if (classRef != null) { myButton = new classRef () as Button; }
myButton.addEventListener(ButtonEvent.CLICK, onButtonClick, false, 0, true);
```

-
-
-

4.5.1

(Usage and Best Practices)

```
function changeFocus():void {  
    track.displayFocus = _focused;  
}
```

```
background.tabEnabled = false;
```

4.5.2


1. mouseEnabled = focusable =
2. focusable
- 3.

4.6.1 (Usage and Best Practices)

-
-
-

InputValue.KEY_UP (“keyUp”) InputValue.KEY_DOWN (“keyDown”)

- NavigationCode.UP (“up”), NavigationCode.DOWN (“down”),
NavigationCode.LEFT (“left”), or NavigationCode.RIGHT (“right”),

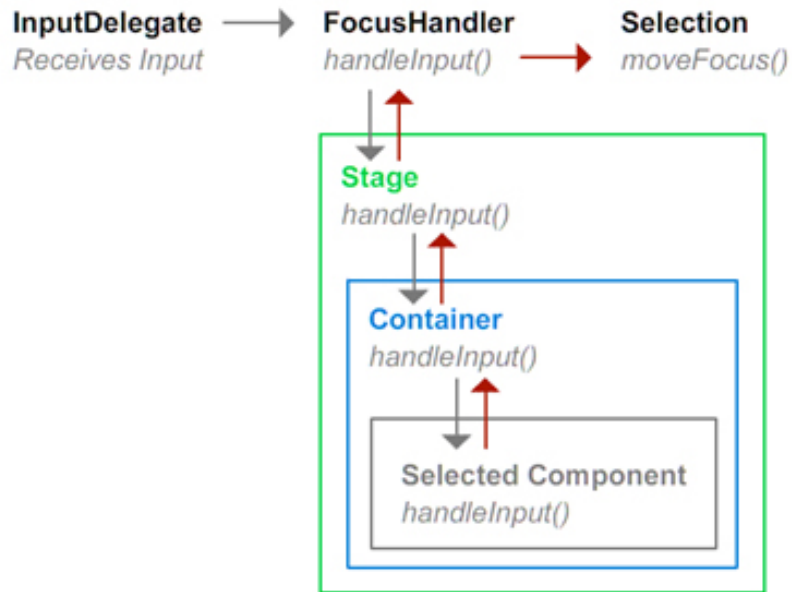

59: handleInput()

```

override public function handleInput(event:InputEvent):void {
    // Check whether the event has already been handled by another component.
    if (event.isDefaultPrevented()) { return; }
    var details:InputDetails = event.details;

    switch (details.navEquivalent) {
        case NavigationCode.ENTER:
            if (details.value == InputValue.KEY_DOWN) {
                // Do something.
                event.handled = true;
            }
            break;
        default:
            break;
    }
}

```

```

override public function handleInput(event:InputEvent):void {
    if (event.isDefaultPrevented()) { return; }
    // Pass on to selected renderer first
    var renderer:IListItemRenderer = getRendererAt(_selectedIndex,
_scrollPosition);
    if (renderer != null) {
        // Since we are just passing on the event, it won't bubble, and should
properly stopPropagation.
        renderer.handleInput(event);
        if (event.handled) { return; }
    }
    . . .
}

```

```

InputDelegate.instance.addEventListener(InputEvent.INPUT, handleInput);
function handleInput(e:InputEvent):void {
    var details:InputDetails = e.details;
    if (details.value == Key.TAB) { doSomething(); }
}

```

4.6.2

controllerIdx

```

myButton.addEventListener(ButtonEvent.CLICK, onCursorClick);
function onCursorClick(event:ButtonEvent):void {

```

```
        trace(event.controllerIdx);  
    }
```

```
btnInstance.setSize(100,22);  
btnInstance.width = 200;  
btnInstance.label = "text";  
draw();  
    btnInstance.toggle = true;  
    btnInstance.selected = true;  
    btnInstance.data = obj;  
    invalidate();
```

60: CLIK

4.7.1 (Usage and Best Practices)

1.

2.

4.8.1 Scale9Grid

4.8.2 Constraints

initialize

```
override protected function initialize():void {
    super.initialize();

    // The upArrow doesn't need a constraints, since it sticks to top left.
    if (downArrow) {
        constraints.addElement("downArrow", downArrow, Constraints.BOTTOM);
    }
    constraints.addElement("track", track, Constraints.TOP |
                          Constraints.BOTTOM);
}

override protected function preInitialize():void {
```

```
        constraints = new Constraints(this, ConstrainMode.REFLOW);
    }

    protected function draw():void {
        constraints.update(_width, _height);
    }
```

```
myComponent.dataProvider = new DataProvider([
    "data1",
    4.3,
    {label:"anObjectElement",
value:6}]);
```

-
-

•

•

•

-

-

-

-

-

-

-
-

4.10.1

(Usage and Best Practices)

```
import fl.transitions.easing.*;
import scaleform.clik.motion.Tween;

// Perform a 1 second tween from the current horizontal position and
// alpha values to the ones specified
var myTween:Tween = new Tween(300,
                               myMovieClip,
                               { x:100, y:100, alpha:0 },
                               { ease:Strong.easeOut,
                                 onComplete:onCompleteCallback } );

function onCompleteCallback(t:Tween):void { // Do something. }
```

- `scaleform.clik.layout.Layout`
- `scaleform.clik.layout.LayoutData`

4.11.1

rect

tiedToStageSize

tiedToParent

hidden

4.11.2 LayoutData

4.11.2. 1

alignH

alignV

offsetH

offsetV

offsetHashH

offsetHashV

relativeToH
relativeToV
layoutIndex
layoutIdentifier


4.12.1

(Usage and Best Practices)

```
import scaleform.clik.managers.PopUpManager;  
PopUpManager.createPopUp("PopupLinkageID", {alpha:.5}, 100, 100  
myMovieClip);
```

4.13.1

(Usage and Best Practices)

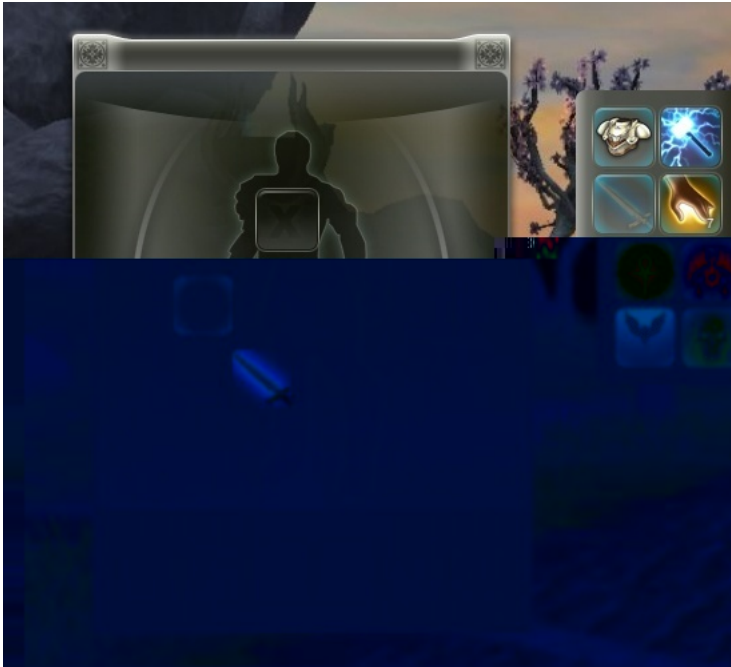

64:

DragDemo

5.1.1 2 textField ListItem



65: 2

ScrollingList

```
list.dataProvider = [{fname: "Michael", lname: "Jordan"},  
                    {fname: "Roger",   lname: "Federer"},  
                    {fname: "Michael", lname: "Schumacher"},  
                    {fname: "Tiger",   lname: "Woods"},  
                    {fname: "Babe",    lname: "Ruth"},  
                    {fname: "Wayne",   lname: "Gretzky"},  
                    {fname: "Usain",   lname: "Bolt"}];
```

```

import scaleform.clik.controls.ListItemRenderer;

class MyItemRenderer extends ListItemRenderer {

    public var textField1:TextField;
    public var textField2:TextField;


    public function MyItemRenderer() { super(); }

    override public function setData(data:Object):void {
        this.data = data;
        textField1.text = data ? data.fname : "";
        textField2.text = data ? data.lname : "";
    }

    override protected function updateAfterStateChange():void {
        super.updateAfterStateChange();
        textField1.text = data ? data.fname : "";
        textField2.text = data ? data.lname : "";
    }
}

```

5.1.2

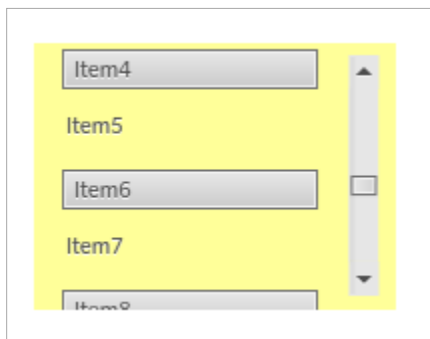

66: CLIK

-
-

-

-

-

```
// 133 is the view size (height of the mask)
sb.setScrollProperties(1, 0, content.height - 133);
sb.position = 0;

sb.addEventListener(Event.SCROLL, onScroll, false, 0, true);
function onScroll(e:Event) {
    content.y = -sb.position;
}
```

6

1. Flash Studio

.

Quote:

2. .FLA

CLIK

.

.

•

-
-

3.

. .SWF

.

