

Autodesk® Scaleform®

擴展 ActionScript 參考

Scaleform 4.3

ActionScript 2.0

Artem Bolgar

4.03

2012 9 17

Copyright Notice

Autodesk® Scaleform® 4.3

© 2013 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk 123D, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo), BIM 360, Built with ObjectARX (design/logo), Burn, Buzzsaw, CADmep, CAiCE, CAMduct, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, Design Server, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver, Exposure, Extending the Design Team, FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, Freewheel, GDX Driver, Glue, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, Map It, Build It, Use It, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, Revit LT, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Socialcam, Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform

ActionScript 2.0

Autodesk Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

www.scaleform.com

info@scaleform.com

(301) 446-3200

(301) 446-3199

1	介紹	1
2	擴展滑鼠類	2
2.1		2
2.2		2
2.3		4
2.4		5
2.5	ActionScript	7
3	擴展按鈕類	10
4	MovieClip 擴展類	12
5	擴展 NetStream 類	16
6	擴展選擇類	19
7	擴展 TextField 類	27
7.1		27
7.2		36
7.3		42
7.4	HTML	44
7.5		45
7.6		49
7.7	IME	53
8	擴展 TextFormat 類	56
9	擴展 Stage 類	57
10	陣列類擴展	59
11	String 類擴展	60
12	視頻類擴展	61
13	3Di Extensions	62
14	全局擴展	63
15	標準方法和事件處理常式擴展	66

1

Autodesk Scaleform SDK

PC

Adobe® Flash

2

	Scaleform		
RIGHT, MIDDLE		16	
Scaleform			Flash Mouse Class

2.1

	Wii™	Scaleform 3.2	4
Gfx::Movie::SetMouseCursorCount(unsigned n)			
Gfx::Movie::HandleEvent with Gfx::MouseEvent		Scaleform	
Gfx::MouseEvent	Gfx::MouseEvent		

2.2

	onRollOver, onRollOut, onDragOver, onDragOut, onPress, onRelease, onReleaseOutside		
Scaleform			
1	onPress	1	
<pre>mc.onPress = function(mouseIdx:Number) { if (mouseIndex == 0) . . . else if (mouseIndex == 1) }</pre>			
onPress	onRelease	,	/
-1,	/	,	0
<pre>mc.onPress = function(mouseIdx:Number, keyboardOrMouse:Number) { if (keyboardOrMouse == 0) . . . else</pre>			

```

    . . .
}

```

```

2    onRollOver/Out    onDragOver/Out                                rollover/dragover
                                onRollOver/onRollOut    onDragOver/onDragOut
                                onRollOver/onDragOver    onRollOut/onDragOut
                                2                                onRollOver/onRollOut
onDragOver/onDragOut
onRollOver/onDragOver    2    0                                onRollOver/onRollOut
                                1                                onRollOut/onDragOut
                                2    1    onRollOut/onDragOut    2    0
                                2                                onRollOver/onRollOut    onDragOver/onDragOut    2

```

```

mc.onRollOver = function(mouseIdx:Number, nestingIdx:Number)
{
    //    nestingIdx == 0
    if (nestingIdx == 0)
        doOverAnimation();
    . . .
}
mc.onRollOut = function(mouseIdx:Number, nestingIdx:Number)
{
    //    nestingIdx == 0
    if (nestingIdx == 0)
        doOutAnimation();
    . . .
}

```

RollOver RollOut

onPress onRelease

- onPressAux
- onReleaseAux
- onReleaseOutsideAux
- onDragOver
- onDragOut

```

        , index != 0 (0
    )
    (
    )
    ,
    .

```

```

mc.onPressAux = function(mouseIdx:Number, keyboardOrMouse:Number, buttonIdx:Number)
{
    if (buttonIdx == 1) // Right mouse button
        . . .
    . . .
}

```

2.3

ActionScript

Flash

Mouse.addListener

- onMouseMove = function() { }
- onMouseDown = function() { }
- onMouseUp = function() { }
- onMouseWheel = function(delta : Number, targetPath : String) { }

Flash OnMouseDown

onMouseUp

Scaleform

_global.gfxExtensions

- onMouseDown = function(button : Number, [targetPath : String],
[mouseIdx : Number], [x : Number], [y : Number],
[dblClick : Boolean]) { }
- onMouseUp = function(button : Number, [targetPath : String],
[mouseIdx : Number], [x : Number], [y : Number]) { }

Scaleform

RIGHT,

MIDDLE

LEFT RIGHT MIDDLE

1 2 3

16

LEFT

Flash

- -
- - useHandCursor
- | -

Flash		Scaleform	C++ API	ActionScript
	C++	Gfx::StateBag::SetUserEventHandler		
		FxPlayer.cpp		
		ActionScript		
SDK		Mouse.flc/swf		
				' Cursor_M '
		" " " " " - "		
		_x _y		
			Scaleform	Mouse.setCursorType
		cursorType mouseIdx		
		(Mouse["ARROW"] Mouse["HAND"] and Mouse["IBEAM"]) cursorType		

```

_global.gfxExtensions = 1;
//
Mouse.hide();

var mouseListener:Object = new Object;
mouseListener.onMouseMove = function(mouseIdx, x,y)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    if (x == undefined)
    {
        x = _xmouse;
        y = _ymouse;
    }
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));

    cmc._x = x;
    cmc._y = y;
}
Mouse.addListener(mouseListener);

```

```

Mouse["setCursorType"] = function(cursorType, mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    switch(cursorType)
    {
        case Mouse["HAND"]:
            cmc.Cursor.gotoAndPlay("hand");
            break;
        case Mouse["ARROW"]:
            cmc.Cursor.gotoAndPlay("arrow");
            break;
        case Mouse["IBEAM"]:
            cmc.Cursor.gotoAndPlay("ibeam");
            break;
        default: return;
    }
}

//      Mouse.show      Mouse.hide
//
ASSetPropFlags(Mouse, "show,hide", 0, 7);

Mouse.show = function(mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    cmc._visible = true;
}
Mouse.hide = function(mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    cmc._visible = false;
}

```

2.5 ActionScript

Scaleform	ActionScript	ActionScript 1.0
	Mouse.setCursorType(...)	ActionScript 2.0
ActionScript 2.0		:Mouse["setCursorType"](...)

```
public function getButtonsState(mouseIndex : Number) : Number
```

1

getTopMostEntity()

Scaleform	1.2.34,	2.2
-----------	---------	-----

onMouseDown, onRollOver

```

mouseIndex : Number      -
testAll : Boolean        -           false           false
                                getTopMostEntity      ' true '
x : Number, y : Number -

```

```
var listenerObj = new Object;
```

```

listenerObj.onMouseMove = function()
{
    var target = Mouse["getTopMostEntity"]();
    trace("Mouse moved, target = "+target);
}

Mouse.addListener(listenerObj);
var target = Mouse["getTopMostEntity"](480, 10);
trace("The character at the (480, 10) is " + target);

```

getPosition

```
public function getPosition(mouseIndex : Number) : flash.geom.Point
```

Scaleform 2.2

_root flash.geom.Point

mouseIndex : Number –

setCursorType()

```
public function setCursorType(cursorType : Number, [mouseIndex : Number]) : void
```

Scaleform 1.2.32

cursorType “ ”

cursorType : Number – Mouse.ARROW, Mouse.HAND, Mouse.IBEAM.
mouseIndex : Number –

3

hitTestDisable

hitTestDisable:Boolean [-]

Scaleform 2.1.51

true MovieClip.hitTest

false

TextField.hitTestDisable
MovieClip.hitTestDisable

topmostLevel

topmostLevel:Boolean [-]

Scaleform 2.1.50

true

false

- "topmostLevel" , :
Scaleform 3.0.71 , "topmostLevel" " "
(, " ");
- Scaleform 3.0.72 , , " " , A
B , A B , "topmostLevel"
" "

: "topmostLevel",swapDepth ActionScript

TextField.topmostLevel
MovieClip.topmostLevel

focusGroupMask

focusGroupMask : Number

Scaleform 3.3.84

(ALL)

setControllerFocusGroup

1, "1"(button1) 0, "2"(movieclip2) 0

```
Selection.setControllerFocusGroup(0, 0);  
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0  
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

"focusGroupMask" (parent movieclip)

4 MovieClip

hitTest ()

```
public hitTest(x:Number, y:Number, [shapeFlag:Boolean],
               [ignoreInvisibleChildren:Boolean]):Boolean
```

Scaleform 2.1.51

```
3 hitTest
  "true" x y
_alpha 0
```

Flash hitTest
_visible false

```
ignoreInvisibleChildren:Boolean - true
```

hitTestDisable

```
hitTestDisable:Boolean [ - ]
```

Scaleform 1.2.32

```
true MovieClip.hitTest
```

```
false
```

```
TextField.hitTestDisable
Button.hitTestDisable
```

noAdvance

```
noAdvance : Boolean
```

Scaleform 2.1.52

true
 Flash
 Scaleform Flash " true "

ActionScript

_global.noInvisibleAdvance

topmostLevel

topmostLevel:Boolean [-]

Scaleform 2.1.50

true
 false
 "topmostLevel" , :
 • Scaleform 3.0.71 , "topmostLevel" " "
 (, " ");
 • Scaleform 3.0.72 , " " , A
 B , A B , "topmostLevel"
 " "
 : "topmostLevel",swapDepth ActionScript

TextField.topmostLevel
 Button.topmostLevel

rendererString

rendererString:String [-]

Scaleform 2.2.55

MovieClip ActionScript

```
myMovieInstance.rendererString = "SHADER_Blur"
```

rendererFloat

```
rendererFloat:Number [ - ]
```

Scaleform

```
Selection.setControllerFocusGroup(0, 0);
Selection.setControllerFocusGroup(1, 1);

button1.focusGroupMask = 0x1; // bit 0 - focus group 0
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1

"focusGroupMask"                (parent movieclip)
```

5 NetStream

Scaleform NetStream

onMetaData

```
onMetaData = function(info:Object) { }
```

Scaleform 3.0.63

Scaleform

onMetaData

```
1. audioTracks –  
    audioTracks  
        channelsNumber – (1– , 2– , 6–5.1 )  
        totalSamples –  
        trackIndex –  
        NetStream.audioTrack ( )  
        sampleRate –
```

2. subtitleTracksNumber –

audioTrack: [-]

Scaleform 3.0.63

/

```
var ns:NetStream = new NetStream(nc);  
var audioTracks;
```

```
ns.onMetaData = function(info:Object)
```

```

{
    audioTracks = info.audioTracks;
}

if (audioTracks != undefined && audioTracks.length > 0)
    ns.audioTrack = audioTracks[0].trackIndex;

```

subtitleTrack: Number [-]

Scaleform 3.0.63

0

onSubtitle

```
onSubtitle = function(msg:String) {}
```

Scaleform 3.0.63

```

var ns:NetStream = new NetStream(nc);
var subtitlesNumber = 0;

ns.onMetaData = function(info:Object)
{
    subtitlesNumber = info.subtitleTracksNumber;
}

ns.onSubtitle = function(msg:String)
{
    sbTextField.text = msg;
}
if (subtitlesNumber > 0)
    ns.subtitleTrack = 1;

```

setNumberOfFramePools

```
public function setNumberOfFramePools(pools : Number) : Void
```


Scaleform 3.0.68



setReloadThresholdTime

```
public function setReloadThresholdTime(reloadTime : Number) : Void
```

Scaleform 3.0.68

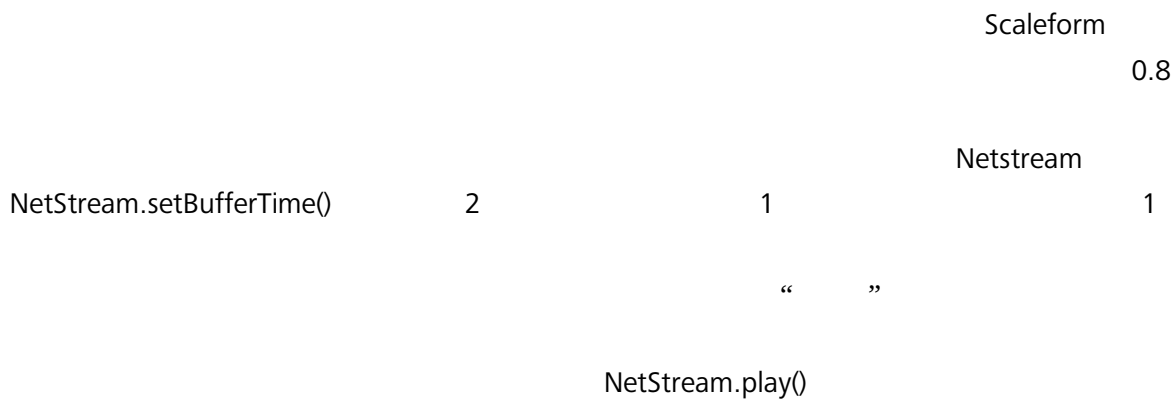

6

Scaleform	ActionScript 1.0
Selection.captureFocus()	ActionScript 2.0
ActionScript 2.0	Selection["captureFocus"]()

alwaysEnableArrowKeys

alwaysEnableArrowKeys : Boolean

Scaleform 1.2.34

“_focusrect ”	false
“_focusrect = false ”	Flash
alwaysEnableArrowKeys	“true ”

```
Selection["alwaysEnableArrowKeys"] = true;
```

alwaysEnableKeyboardPress

alwaysEnableKeyboardPress : Boolean

Scaleform 3.0.63

	onPress / onRelease	focusrect
false		focusrect = false
Flash		alwaysEnableKeyboardPress
true		

```
Selection["alwaysEnableKeyboardPress"] = true;
```

captureFocus()

```
public function captureFocus([doCapture:Boolean, controllerIdx:Number]) : void
```

Scaleform 1.2.34

```
captureFocus doCapture true
              Tab
captureFocus doCapture false
```

```
doCapture:Boolean –
                    captureFocus true
controllerIdx:Number – , / , 0
```

```
Selection["captureFocus"](); // “true”
Selection["captureFocus"](false);
```

disableFocusAutoRelease

```
disableFocusAutoRelease : Boolean
```

Scaleform 1.2.34

Flash true

```
Selection["disableFocusAutoRelease"] = true;
```


disableFocusKeys

disableFocusKeys : Boolean

Scaleform 2.2.58

TAB, Shift-TAB

```
Selection["disableFocusKeys"] = true;
```

```
moveFocus()
```

disableFocusRolloverEvent

disableFocusRolloverEvent : Boolean

Scaleform 2.0.37

rollover/out

true

```
Selection["disableFocusRolloverEvent "] = true;
```

modalClip

modalClip : MovieClip

Scaleform 2.2.58

“ modal ”

TAB,Shift-TAB

“ tabable ”

```
Selection["modalClip"] = _root.mc;
```

```
...
Selection["modalClip"] = undefined;
```

```
disableFocusKeys
moveFocus()
```

moveFocus()

```
public function moveFocus(keyToSimulate : String [, startFromMovie:Object,
    includeFocusEnabledChars : Boolean = false,
    controllerIdx :Number]) : Object
```

Scaleform : 2.2.58

TAB, Shift-TAB

disableFocusKeys modalClip

```
keyToSimulate:String - "up", "down", "left", "right", "tab", "shifftab"
startFromMovie:Object - moveFocus
                        null
```

```
includeFocusEnabledChars:Boolean - moveFocus
                                focusEnabled
                                tabEnabled / tabIndex
                                false
```

```
                                tabEnabled / tabIndex
controllerIdx:Number - , / , 0
```

```
Selection["moveFocus"]("up");
Selection["moveFocus"]("tab", _root.mc);
Selection["moveFocus"]("tab", _root.mc, true);
Selection["moveFocus"]("tab", null, true);
```

```

disableFocusKeys
modalClip

```

findFocus()

```

public function findFocus(keyToSimulate : String [, parentMovie:Object, loop :
    Boolean, startFromMovie:Object, includeFocusEnabledChars : Boolean,
    controllerIndex : Number]) : Object

```

Scaleform 3.3.84

:TAB Shift-TAB

disableFocusKeys setModalClip/getModalClip

```

keyToSimulate:String- " " " " " " " " " " "
"shifftab"
parentMovie - " "(Null)
loop - " , findFocus "null"( "false"( ) ),
( "true"( ) )
startFromMovie:Object - , findFocus
"null" " undefined"( ),

includeFocusEnabledChars:Boolean - , moveFocus focusEnabled
tabEnabled/tabIndex
false( ), tabEnabled/tabIndex

controllerIndex -

```

```

var a = Selection["findFocus"]("up");

```

```

, null ---

```

```

disableFocusKeys
setModalClip
getModalClip

```

setModalClip()

```
public function setModalClip(modalClip : Object, controllerIndex : Number)
```

Scaleform 3.3.84

```

                                " " TAB Shift-TAB
    "tabable"

```

```

    modalClip      -
    controllerIndex -

```

getModalClip()

```
public function getModalClip(controllerIndex : Number) : Object
```

Scaleform 3.3.84

```

    controllerIndex -

```

```

    , ---

```

setControllerFocusGroup()

```
public function setControllerFocusGroup (controllerIndex : Number, focusGroupIdx :
                                         Number) : Boolean
```

Scaleform 3.3.84

```

    controllerIndex , 0
    '
    ( ), setControllerFocusGroup (1,1) 1
    setControllerFocusGroup (1,0) 0 1

```

```

    controllerIndex -
    focusGroupIdx   -

```

```

Selection["setControllerFocusGroup"](0,0);
Selection["setControllerFocusGroup"](1,1);
Selection["setControllerFocusGroup"](2,1);

```

true ---

getControllerFocusGroup()

public function getControllerFocusGroup (controllerIndex : Number) : Number

Scaleform 3.3.84

controllerIndex -

getFocusArray()

public function getFocusArray(mc : Object) : Array

Scaleform 3.3.84

, / /

mc -

()

getFocusBitmask()

public function getFocusBitmask(mc : Object) : Number

Scaleform 3.3.84

, / /

mc -

getControllerMaskByFocusGroup()

```
public function getControllerMaskByFocusGroup (focusGroupIdX :Number) :Number
```

Scaleform 3.3.84

```
setControllerFocusGroup
```

```
focusGroupIdX -
```

numFocusGroups

```
numFocusGroups : Number
```

Scaleform 3.3.84

```
setControllerFocusGroup 0 3 ,  
numFocusGroups 2
```


appendHtml ()

public function appendHtml(newHtml:String):void

Scaleform 2.0.37

newHtml HTML
txt.htmlText += moreHtml htmlText += newHtml HTML HTML
newHtml HTML += HTML
:
,

newHtml:String - HTML

appendText()

caretIndex

caretIndex:Number [-]

Scaleform 2.0.37


Selection.getCaretIndex() caretIndex 0
Selection.getCaretIndex() -1
0

Selection.getCaretIndex()

getCharBoundaries ()

public function getCharBoundaries(charIndex:Number): flash.geom.Rectangle

Scaleform 2.0.37

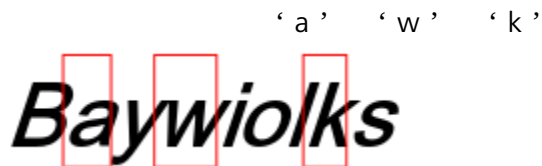

charIndex:Number – 0 1

flash.geom.Rectangle – x y
0 0

getExactCharBoundaries()

getExactCharBoundaries ()

public function getExactCharBoundaries(charIndex:Number): flash.geom.Rectangle

Scaleform 2.0.37

getCharBoundaries()
‘ a ’ ‘ w ’ ‘ k ’



charIndex: Number - 0 1

flash.geom.Rectangle - x y
0 0

getCharBoundaries()

getCharIndexAtPoint ()

public function getCharIndexAtPoint(x: Number, y: Number): Number

Scaleform 2.0.37

x y

x: Number - x
y: Number - y

Number - 0 1
-1

getFirstCharInParagraph ()

public function getFirstCharInParagraph(charIndex: Number): Number

Scaleform 2.0.37

charIndex

charIndex: Number - 0 1

Number –

getLineIndexAtPoint ()

```
public function getLineIndexAtPoint(x:Number, y:Number): Number
```

Scaleform 2.0.37

x y

x:Number - x

y:Number - y

Number - 0 1
-1

getLineLength()

```
public function getLineLength(lineIndex:Number): Number
```

Scaleform 2.0.37

lineIndex:Number - 0 1

Number –

getLineMetrics()

```
public function getLineMetrics(lineIndex:Number): Object
```

Scaleform 2.0.43

ascent : Number


descent : Number

height : Number

leading : Number

width : Number

x : Number

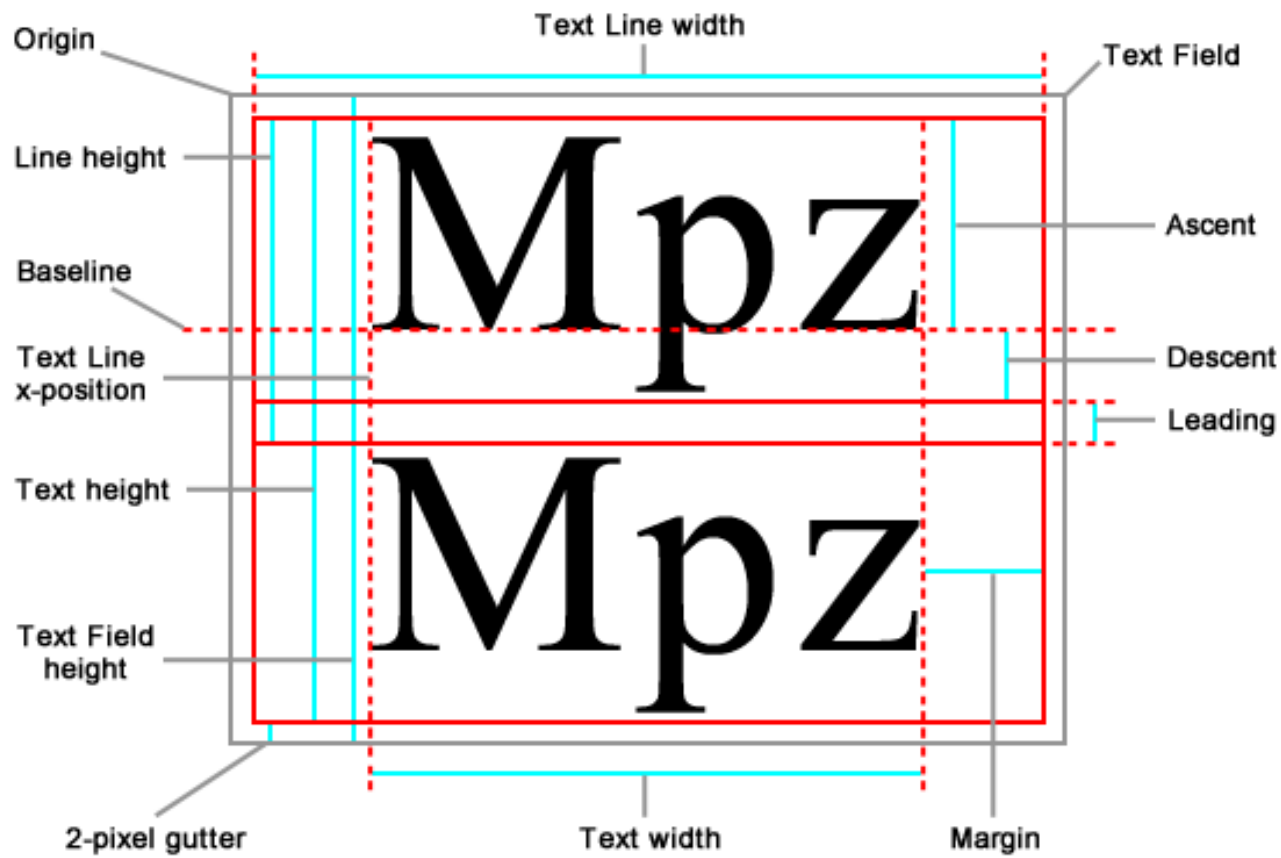

lineIndex: Number - 0 1

Number -

getLineOffset ()

public function getLineOffset(lineIndex: Number): Number

Scaleform 2.0.37

lineIndex

lineIndex: Number - 0 1

Number -

getLineText ()

public function getLineText(lineIndex:Number): String

Scaleform 2.0.43

lineIndex

lineIndex:Number - 0 1

String -

hitTestDisable

hitTestDisable:Boolean [-]

Scaleform 1.2.32

true MovieClip.hitTest

false

noTranslate

noTranslate:Boolean [-]

Scaleform 1.2.34

true GfxTranslator::Translate

false

numLines

numLines:Number [-]

Scaleform 2.0.43

wordWrap true

topmostLevel

topmostLevel:Boolean [-]

Scaleform 2.1.50

true

false

- "topmostLevel" , :
Scaleform 3.0.71 , "topmostLevel" " "
(, " ");
- Scaleform 3.0.72 , " " , A
B , A B , "topmostLevel"
" "

: "topmostLevel",swapDepth ActionScript

MovieClip.topmostLevel
Button.topmostLevel

focusGroupMask

focusGroupMask : Number

Scaleform 3.3.84

(ALL)

setControllerFocusGroup

1 , " 1"(button1) 0 , " 2"(movieclip2) 0

```

Selection.setControllerFocusGroup(0, 0);
Selection.setControllerFocusGroup(1, 1);

button1.focusGroupMask = 0x1; // bit 0 - focus group 0
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1

"focusGroupMask"                (parent movieclip)

```

7.2

alwaysShowSelection

```
alwaysShowSelection:Boolean [ - ]
```

Scaleform 2.1.45

```

                Scaleform
Scaleform
                true
                Scaleform
                "
                "
                false

                selectionBkgColor
                selectionTextColor
                inactiveSelectionBkgColor
                inactiveSelectionTextColor

```

copyToClipboard ()

```

public function copyToClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endTime:Number]):void

```

Scaleform 2.1.45

richClipboard:Boolean –	true	
	useRichTextClipboard	
startIndex:Number –		selectionBeginIndex
endIndex:Number –		selectionEndIndex

```

useRichTextClipboard
selectionBeginIndex
selectionEndIndex
cutToClipboard()
pasteFromClipboard()

```

cutToClipboard ()

```
public function cutToClipboard([richClipboard:Boolean], [startIndex:Number],
[endIndex:Number]):void
```

Scaleform 2.1.45

richClipboard:Boolean –	true	
	useRichTextClipboard	
startIndex:Number –		selectionBeginIndex
endIndex:Number –		selectionEndIndex

```

useRichTextClipboard
selectionBeginIndex
selectionEndIndex
copyToClipboard()
pasteFromClipboard()

```

inactiveSelectionBkgColor

inactiveSelectionBkgColor: Number [-]

Scaleform 2.1.45

		alwaysShowSelection	true
0xAARRGGBB	AA	alpha	[0,255] RR -
[0,255] BB -		[0,255] GG -	[0,255]
	alpha	0	alpha 0
	Flash		
0xFFFF0000	alpha	0xFF (255)	"backgroundColor" 0xFF0000

alwaysShowSelection
inactiveSelectionTextColor
selectionBkgColor
selectionTextColor

inactiveSelectionTextColor

inactiveSelectionTextColor: Number [-]

Scaleform 2.1.45

		alwaysShowSelection	true
0xRRGGBB	AA	alpha	[0,255] RR -
-	[0,255]	GG -	[0,255] BB
	alpha	0	alpha 0
	Flash		
0xFFFF0000	alpha	0xFF (255)	"textColor" 0xFF0000

alwaysShowSelection
inactiveSelectionBkgColor
selectionBkgColor
selectionTextColor

noAutoSelection

noAutoSelection: Boolean [-]

Scaleform 2.1.45

true

false

pasteFromClipboard ()

```
public function pasteFromClipboard([richTextClipboard:Boolean], [startIndex:Number],  
[endIndex:Number]):void
```

Scaleform 2.1.45

richTextClipboard – true

useRichTextClipboard

startIndex:Number –

selectionBeginIndex

endIndex:Number –

selectionEndIndex

useRichTextClipboard

selectionBeginIndex

selectionEndIndex

copyToClipboard()

cutToClipboard()

selectionBeginIndex

selectionBeginIndex: Number [-]

Scaleform 2.1.45

caretIndex

Selection.getBeginIndex()

Selection.getBeginIndex()

Selection.getBeginIndex()

-1

caretIndex

selectionEndIndex

Selection.getBeginIndex()

selectionEndIndex

selectionEndIndex: Number [-]

Scaleform 2.1.45

caretIndex

Selection.getEndIndex()

Selection.getEndIndex()

Selection.getEndIndex()

-1

caretIndex

selectionBeginIndex

Selection.getEndIndex()

selectionBkgColor

selectionBkgColor: Number [-]

Scaleform 2.1.45

0xRRGGBB

AA alpha

[0,255] RR -

[0,255] BB -

[0,255] GG -

[0,255]

alpha	0	alpha	0
Flash			
0xFFFF0000	alpha	0xFF (255)	BkgColor
			0xFF0000

```

inactiveSelectionTextColor
inactiveSelectionBkgColor
selectionTextColor

```

selectionTextColor

selectionTextColor: Number [-]

Scaleform 2.1.45

		0xRRGGBB	AA	alpha
[0,255]	RR-	[0,255]	BB -	[0,255]
[0,255]				GG -
alpha	0		alpha	0
Flash				
0xFFFF0000	alpha	0xFF (255)	textColor	0xFF0000

```

inactiveSelectionBkgColor
inactiveSelectionBkgColor
selectionBkgColor

```

useRichTextClipboard

useRichTextClipboard: Boolean [-]

Scaleform 2.1.45

true Scaleform

useRichTextClipboard true

false

7.3

Scaleform

fontScaleFactor

fontScaleFactor: Number [-]

Scaleform 2.0.43

fontScaleFactor

1.0

textAutoSize

textAutoSize: String [-]

Scaleform 2.0.43

textAutoSize “none” “shrink” “fit”

“shrink” “fit”

5pt

textAutoSize “fit”

“shrink”

wwerwqwe2q2e2e2eww

wwerwqwe2q2e2e2ewwdfsd fsdfsd fsdfsd fsdfsd

“none”

verticalAlign

verticalAlign:String [-]

Scaleform 2.0.43

“ bottom ” “ center ” “ center ” “ none ” “ top ” “ none ” “ bottom ”

“ none ”

verticalAutoSize
TextField.align


verticalAutoSize

verticalAutoSize:String [-]

Scaleform 2.0.43

verticalAutoSize “ none ” “ top ” “ bottom ” “ center ” “ none ”

verticalAutoSize “ bottom ”

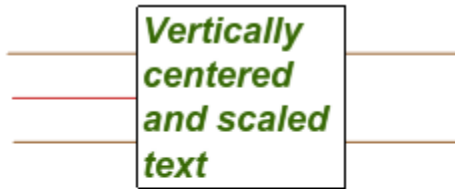

“ none ”

verticalAlign
TextField.autoSize

7.4 HTML

Scaleform HTML

**** **ALPHA**

ALPHA="#xx"

alpha	00	FF	0-255	0	255	COLOR
ALPHA						HTML

Scaleform	2.0/2.1		Scaleform	Web
		(	"http://", "file://"	

HTML “ myImage ”

```
t.htmlText = "<p align='right'>abra<img src='myImage' width='20' height='30' align='baseline' vspace='-10'>bed232</p>";
```


IMG

```
src - ;  
      (JPEG GIF PNG SWF ) "img://",  
      ; , Gfx::ImageCreator:: LoadImage。
```

width -

height -

align - " baseline "

vspace - " baseline "

id - Flash Player SWF

align - " left " " right "

hspace - " left " " right "

Flash SWF Flash IMG
Flash SWF
IMG SWF Flash

7.5

blur knockout

blurX, blurY

blurX:Number [-]
blurY:Number [-]

Scaleform 2.0.41

blur 0 15.9()

0

blurStrength

blurStrength

blurStrength:Number [-]

Scaleform 2.0.41

blur 0 15.9

0

blurX
blurY

shadowAlpha

shadowAlpha:Number [-]

Scaleform 2.0.41

alpha 0.00 1.00 0.25 25%

shadowColor

shadowAngle

shadowAngle: Number [-]

Scaleform 2.0.41

DropShadowFilter 0 360° ()

45

DropShadowFilter

shadowBlurX, shadowBlurY

shadowBlurX: Number [-]

shadowBlurY: Number [-]

Scaleform 2.0.41

blur 0 15.9()

0

shadowStrength

shadowColor

shadowColor: Number [-]

Scaleform 1.1.31

[0..255] BB - shadowStyle [0..255] GG - 0xRRGGBB RR - [0..255]

shadowStyle

shadowDistance

shadowDistance:Number [-]

Scaleform 2.0.41

DropShadowFilter

DropShadowFilter

shadowHideObject

shadowHideObject:Boolean [-]

Scaleform 2.0.41

true

false

shadowKnockOut

shadowKnockOut:Boolean [-]

Scaleform 2.0.41

true

false

shadowQuality

shadowQuality:Number [-]

Scaleform 2.0.41

Flash

1 2

1

2

shadowStrength

shadowStrength: Number [-]

Scaleform 2.0.41

0-15.9

0

shadowBlurX
shadowBlurY

shadowStyle

shadowStyle: String [-]

Scaleform 1.1.31

shadowColor

shadowStyle

```
field.shadowStyle = "s{0, -1.5}{-1.4, 1.2}{1.4, 1.2}t{0, 0}";  
field.shadowColor = 0xff0000;
```

“ s ”

shadowColor

“ t ”

TextField.textColor

“ t ”

“ t 0 0 ”

shadowColor
TextField.textColor

7.6

setImageSubstitutions()

```
public setImageSubstitutions(substInfoArr:Array) : void
public setImageSubstitutions(substInfo:Object) : void
public setImageSubstitutions(null) : void
```

Scaleform 2.0.38

SWF

SWF

- 1.
2. Windows Macintosh
3. ActionScript myImage
4. OK

BitmapData

ActionScript

```
import flash.display.BitmapData;
var imageBmp:BitmapData = BitmapData.loadBitmap("myImage");
```

```
( import flash.display.BitmapData;
flash.display.BitmapData) " "
```

ID

subString:String

15

image : BitmapData

width : Number

height : Number

baseLineY : Number

Y

w/o

id : String

ID “ updateImageSubstitution ”

“ substInfoArr ”

“ substInfo ”

setImageSubstitutions(substInfo:Object)

setImageSubstitutions(substInfoArr:Array)

setImageSubstitutions

setImageSubstitutions(null)

setImageSubstitutions

ActionScript

ActionScript

substInfoArr:Array –

substInfo:Object –

null –

updateImageSubstitution()

var b1 = BitmapData.loadBitmap("smile1");

var b2 = BitmapData.loadBitmap("smile2");

var b3 = BitmapData.loadBitmap("smile3");

var a = new Array;

a[0] = { subString:"="), image:b1, baseLineY:35, width:20, height:20, id:"sm=)" };

a[1] = { subString:"-)", image:b2, baseLineY:20, id:"sm:-)" };

a[2] = { subString:"-\\", image:b3, baseLineY:35, height:100 };

a[3] = { subString:"-\\", image:b1 };

t.setImageSubstitutions(a);

“ = ”

“ smile1 ”

updateImageSubstitution()

```
public updateImageSubstitution(id:String, image:BitmapData) : void
```

Scaleform 2.0.38

setImageSubstitutions

id:String -	ID	setImageSubstitutions
	ID	
image:BitmapData -		null

```
setImageSubstitutions()
```

```
t.updateImageSubstitution("sm="), b3);
```

onEnterFrame setInterval

updateImageSubstitution

```
var phase = 0;
var b1a = BitmapData.loadBitmap("smile1a");
var b2a = BitmapData.loadBitmap("smile2a");

onEnterFrame = function()
{
    if (phase % 10 == 0)
    {
        if (phase % 20 == 0)
        {
            _root.t.updateImageSubstitution("sm="), b1);
            _root.t.updateImageSubstitution("sm:-)", b2);
        }
        else
        {
            _root.t.updateImageSubstitution("sm="), b1a);
            _root.t.updateImageSubstitution("sm:-)", b2a);
        }
    }
    ++phase;}

```


7.7 IME

IME

disableIME

disableIME:Boolean [-]

Scaleform 2.1.50

true IME

false

getIMECompositionStringStyle()

public function getIMECompositionStringStyle(categoryName:String): Object

Scaleform 2.1.50

IME categoryName setIMECompositionStringStyle

categoryName:String – IME setIMECompositionStringStyle

- setIMECompositionStringStyle

setIMECompositionStringStyle
disableIME

setIMECompositionStringStyle()

```
public function setIMECompositionStringStyle(categoryName:String,
                                             styleDescriptor:Object): Number
```

Scaleform 2.1.50

IME categoryName

```
"compositionSegment" –
"clauseSegment" –
"convertedSegment" –
"phraseLengthAdj" –
"lowConfSegment" –
```

styleDescriptor

textColor : Number

backgroundColor : Number

underlineColor : Number

underlineStyle : String

```
“ single ”
“ thick ”
“ dotted ”
“ ditheredSingle ”
“ ditheredThick ”
```

```
0xRRGGBB          RR-                          [0..255]   BB-
[0..255]   GG-                          [0..255]
```

```
categoryName:String – IME
styleDescriptor:Object –
```

getIMECompositionStringStyle
disableIME

8 **TextFormat**

TextFormat

alpha

alpha:Number [-]

Scaleform 2.0.41

	alpha	0-100%	Flash TextFormat.color
alpha			

TextFormat

HTML

9 Stage

Stage Scaleform
“ visibleRect ” “ safeRect ” “ originalRect ” “ onResize ”

ActionScript 1.0 Stage.visibleRect ActionScript 2.0
ActionScript 2.0 Stage["visibleRect"]

visibleRect

visibleRect:flash.geom.Rectangle [-]

Scaleform 2.2.56

topLeft Viewport

safeRect
originalRect

safeRect

safeRect:flash.geom.Rectangle [-]

Scaleform 2.2.56

Scaleform::Movie::SetSafeRect
“ visibleRect ”

visibleRect
originalRect

originalRect

```
originalRect:flash.geom.Rectangle [ - ]
```

Scaleform 2.2.56

SWF SWF Flash Studio “ Document properties ”
600pxx400px { 0, 0, {600, 400} }

```
visibleRect  
safeRect
```

onResize

```
onResize = function([visibleRect:flash.geom.Rectangle]) {}
```

Scaleform 2.2.56

onResize Stage.visibleRect

```
visibleRect
```

translateToScreen()

```
public function translateToScreen(pt:Object): Point
```

Scaleform 3.3.84

Stage

pt:Object – x y Object flash.geom.Point,
Object

–

[illegible]

11 String

localeCompare()

0

“ ”

Unicode

```
public localeCompare(other:String [, caseInsensitive:Boolean]) : Number
```

Scaleform 3.0.65

```
other:String –  
caseInsensitive:Boolean –
```

Array.sort

12

Flash

NetStream

Scaleform

NetStream

clipRect

clipRect: flash.geom.Rectangle [-]

Scaleform 3.0.70

```
video.clipRect = new flash.geom.Rectangle(10, 20, 100, 100);
```

13 3Di Extensions

Scaleform 3Di 是使用一組內置到 Scaleform 中的基本 AS2 擴展實現的。為 3Di 增加了下列 ActionScript 擴展：

Scaleform 3.2.82

_z

Z (), 0

_zscale

將 Z 向的物件伸縮設置一個百分比,預設值為 100。

_xrotation

X(), 0

_yrotation

Y(), 0

_matrix3d

使用一組 16 個浮點數(4 x 4 矩陣)設置物件的完整 3D 轉換。如果此值設置為 NULL,就會刪除所有 3D 轉換,而且物件將會變為 2D。

perspfov

在物件上設置透視視野 (Field Of View) 角度,有效角度必須 > 0 度和 < 180 度。180=""></ 180 度。>如果不設置,物件就繼承根 FOV 角,該角預設為 55 度。

使用這些新擴展需要在 ActionScript 中把全域變數 gfxExtensions 設置為 True(真)。

14

noInvisibleAdvance

noInvisibleAdvance : Boolean

Scaleform 2.1.52

```

true
Flash
"true"
Scaleform
Flash
ActionScript
SWF

```

MovieClip.noAdvance

Imecommand()

```
imecommand(command:String, parameters:String) : Void
```

Scaleform 2.1.50

fscommand	Scaleform IME	Scaleform
-----------	---------------	-----------

getIMECandidateListStyle()

```
public function getIMECompositionStringStyle(categoryName:String): Object
```

Scaleform 2.1.50

IME setIMECandidateListStyle

Object –

```
setIMECandidateListStyle
TextField.disableIME
```

setIMECandidateListStyle()

public function setIMECandidateListStyle(styleDescriptor:Object)

Scaleform 2.1.50

styleDescriptor

styleObject.textColor	= 0x5EADFF;
styleObject.selectedTextColor	= 0xFFFFFFFF;
styleObject.fontSize	= 20;
styleObject.backgroundColor	= 0x001430;
styleObject.selectedTextBackgroundColor	= 0x2C5A99;
styleObject.indexBackgroundColor	= 0x12325A;
styleObject.selectedIndexBackgroundColor	= 0x2C5A99;
styleObject.readingWindowTextColor	= 0xFFFFFFFF;
styleObject.readingWindowBackgroundColor	= 0x001430;
styleObject.readingWindowFontSize	= 20;

textColor : Number

selectedTextColor : Number

fontSize : Number

backgroundColor : Number

seletedTextBackgroundColor : Number

indexBackgroundColor : Number

selectedIndexBackgroundColor : Number

readingWindowTextColor : Number

readingWindowBackgroundColor : Number

readingWindowFontSize : Number

0xRRGGBB RR - [0,255] BB -
[0,255] GG - [0,255]

getIMECandidateListStyle
TextField.disableIME

15

Key

```
Key.getCode(controllerIdx:Number)
Key.getAscii(controllerIdx:Number)
Key.isDown(controllerIdx:Number)
Key.isToggled(controllerIdx:Number)
```

```
Key / controllerIdx 0
```

```
Key.onKeyDown(controllerIdx:Number)
```

```
Key onKeyDown /
```

Selection

```
Selection.setFocus(ch:Object, controllerIdx:Number)
Selection.getFocus(controllerIdx:Number)
Selection.getBeginIndex(controllerIdx:Number)
Selection.getEndIndex(controllerIdx:Number)
Selection.setSelection(start:Number, end:Number, controllerIdx:Number)
Selection.getCaretIndex(controllerIdx:Number)
```

```
Selection / , controllerIdx 0
```

```
Selection.onSetFocus(old:Object, new:Object, controllerIdx:Number)
```

```
Selection onSetFocus /
```

MovieClip/Button/TextField

```
MovieClip.onSetFocus(old:Object, controllerIdx:Number)
MovieClip.onKillFocus(new:Object, controllerIdx:Number)
Button.onSetFocus(old:Object, controllerIdx:Number)
Button.onKillFocus(new:Object, controllerIdx:Number)
TextField.onSetFocus(old:Object, controllerIdx:Number)
TextField.onKillFocus(new:Object, controllerIdx:Number)
TextField.onChange(controllerIdx:Number)
```

```
MovieClip/Button/TextField /
```

System.capabilities

```
System.capabilities.numControllers –
```