

Autodesk® Scaleform®

Scaleform 4.3 AS3

Scaleform 4.3 中可以使用的 ActionScript 3.0 扩展。

Artem Bolgar, Prasad Silva

1.05

2013 2 26

Autodesk Scaleform

AS3

Autodesk Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

www.scaleform.com

info@scaleform.com

(301) 446-3200

(301) 446-3199

1		1
2		2
3	DisplayObjectEx	7
4	FocusEventEx	10
5	FocusManager	11
6	GamePad	17
7	GamePadAnalogEvent	19
8	InteractiveObjectEx	21
9	KeyboardEventEx	23
10	MouseEventEx	24
11	MouseEventEx	26
12	TextEventEx	29
13	System	31
14	TextFieldEx	32

1

Autodesk Scaleform® SDK™
PC
Adobe Creative Suite®

Adobe® Flash®
Autodesk Scaleform

Flash

Web

IME

Autodesk Scaleform
Scaleform

(Extension)

ActionScript

scaleform.gfx.Extensions.enabled

true (真)

scaleform.gfx.Extensions.enabled = true;

scaleform.gfx.*;
Extensions.enabled = true;

GFXSDK/Resources/AS3/CLIK

Flash

(Source)

ActionScript 3.0

Flash Studio

'Edit'

-> 'Preferences'

-> 'ActionScript'

-> 'ActionScript 3.0 Settings...'

ActionScript 3.0

...

-> 'Source path'

Source

FLA

Scaleform

Flash

Flash

Scaleform

Scaleform

SDK

Scaleform

Autodesk

API

Scaleform

API

2

enabled 静态属性

enabled:Boolean [read-write]

Scaleform 4.0.12

/

noInvisibleAdvance 静态属性

noInvisibleAdvance:Boolean [read-write]

Scaleform 4.0.12

true
SWF Flash
ActionScript true Scaleform Flash

getTopMostEntity() 静态方法

```
public function getTopMostEntity(x :Number, y :Number,  
testAll:Boolean) :DisplayObject
```

Scaleform 4.0.13

(x, y) stage DisplayObject
CLICK MOUSE_DOWN ROLL_OVER

```

        MovieClip.hitTest          hitTest      x      y
getTopMostEntity          x      y          Extensions.getTopMostEntity(x, y).hitTest(x, y,
true) == true

```

参数

```

testAll :Boolean –          (false)          (true)
        getTopMostEntity          true
x :Number, y :Number –          Stage

```

另请参见：

[getMouseTopMostEntity](#)

getMouseTopMostEntity() 静态方法

```

public function getTopMostEntity([testAll : Boolean],
    [mouseIndex : uint]) : DisplayObject

```

Scaleform 4.0.13

DisplayObject getTopMostEntity

参数

```

testAll :Boolean –          (false)          (true)
        getTopMostEntity          true
mouseIndex :Number –

```

另请参见：

[getTopMostEntity](#)

getMouseCursorType() 静态方法

```

public function getMouseCursorType([mouseIndex : uint]) : String

```

Scaleform 4.0.13

flash.ui.Mouse.cursor

MouseEvent.CURSOR_CHANGE

参数

mouseIndex :Number –

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW : String = “arrow”
- flash.ui.MouseCursor.BUTTON : String = “button”
- flash.ui.MouseCursor.HAND : String = “hand”
- flash.ui.MouseCursor.IBEAM : String = “ibeam”

另请参见：

[setMouseEventType](#)
[MouseEvent](#)

setMouseEventType()

public function setMouseEventType(cursor : String, [mouseIndex : uint]) : void

Scaleform 4.0.13

cursor

flash.ui.Mouse.cursor

MouseEvent.CURSOR_CHANGE

参数

cursor :uint – flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW : String = “arrow”
- flash.ui.MouseCursor.BUTTON : String = “button”
- flash.ui.MouseCursor.HAND : String = “hand”
- flash.ui.MouseCursor.IBEAM : String = “ibeam”

mouseIndex :Number –

另请参见：

[getMouseCursorType](#)
[MouseEvent](#)

numControllers 静态属性

numControllers:uint [read]

Scaleform 4.0.12

setEdgeAAMode() 静态方法

public function setEdgeAAMode(dispatchObj:DisplayObject, mode:uint):void

Scaleform 4.0.12

EdgeAA

- scaleform.gfx.Extensions.EDGEAA_INHERIT = 0;Inherit EdgeAA On
- scaleform.gfx.Extensions.EDGEAA_ON = 1;Enable EdgeAA
EDGEAA_DISABLE
- scaleform.gfx.Extensions.EDGEAA_OFF = 2;Do not use EdgeAA
- scaleform.gfx.Extensions.EDGEAA_DISABLE = 3;Disable EdgeAA
EDGEAA_ON

dispatchObj:DisplayObject –
mode:uint – EdgeAA

EdgeAA

[getEdgeAAMode](#)

getEdgeAAMode() 静态方法

static public function getEdgeAAMode(dispatchObj:DisplayObject):uint

Scaleform 4.0.12

EdgeAA

参数

dispObj :DisplayObject – EdgeAA

另请参见：

[setEdgeAAMode](#)

visibleRect 静态属性

visibleRect:Rectangle [read]

Scaleform : 4.0.14

3 DisplayObjectEx

setRendererString 静态方法

```
static public function setRendererString(o:DisplayObject, s:String)
```

Scaleform : 4.0.17

MovieClip

ActionScript

:

```
import scaleform.gfx.*;
```

```
// m is a MovieClip on stage.
```

```
DisplayObjectEx.setRendererString(m, "Abc");  
trace(DisplayObjectEx.getRendererString(m));
```

getRendererString()静态方法

```
static public function getRendererString(o:DisplayObject) : String
```

Scaleform : 4.0.17

setRendererFloat 静态方法

```
static public function setRendererFloat(o:DisplayObject, f:Number)
```

Scaleform : 4.0.17

MovieClip

ActionScript

```
import scaleform.gfx.*;

// m is a MovieClip on stage.

DisplayObjectEx.setRendererFloat(m, 17.1717);
trace(DisplayObjectEx.getRendererFloat(m));
```

getRendererFloat()静态方法

```
static public function getRendererFloat(o:DisplayObject) : Number
```

Scaleform : 4.0.17

disableBatching 静态方法

```
static public function disableBatching(o:DisplayObject, b:Boolean)
```

Scaleform : 4.0.17

```
import scaleform.gfx.*;

// m is a MovieClip on stage.

DisplayObjectEx.disableBatching(batchDisable, true);
```

```
trace(DisplayObjectEx.isBatchingDisabled(batchDisable));
```

isBatchingDisabled() 静态方法

```
static public function isBatchingDisabled(o:DisplayObject) : Boolean
```

Scaleform : 4.0.17

4 FocusEventEx

```
package scaleform.gfx
{
    import flash.events.FocusEvent;

    public final class FocusEventEx extends FocusEvent
    {
        public var controllerIdx : uint = 0;

        public function FocusEventEx(type:String) { super(type); }
    }
}
```

	flash.events.FocusEvent		'controllerIdx'
		Extensions.enabled	true
FocusEventEx	FocusEvent		Scaleform FocusEventEx

```
import scaleform.gfx.*;
import flash.events.FocusEvent;

Extensions.enabled = true;

function ev(e: FocusEvent)
{
    if (e is FocusEventEx)
    {
        var ee: FocusEventEx = e as FocusEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}

stage.addEventListener(FocusEvent.MOUSE_FOCUS_CHANGE, ev);
```

controllerIdx 属性

controllerIdx : uint [read]

Scaleform 4.0.12

/

5 FocusManager

alwaysEnableArrowKeys 静态属性

`alwaysEnableArrowKeys: Boolean [read-write]`

Scaleform 4.0.12

此静态属性允许箭头键更改焦点 -- 即使把 `_focusrect` 属性设置为 `false` (捕获焦点时应用) 。

```
_focusrect = false           Flash
alwaysEnableArrowKeys         true
```

disableFocusKeys 静态属性

`disableFocusKeys: Boolean [read-write]`

Scaleform 4.0.12

TAB Shift-TAB

moveFocus() 静态方法

```
static public function moveFocus(keyToSimulate : String,
                                startFromMovie:InteractiveObject = null,
                                includeFocusEnabledChars : Boolean = false,
                                controllerIdx : uint = 0) : InteractiveObject
```

Scaleform 4.0.12

TAB Shift-TAB

```
disableFocusKeys modalClip
```

参数

keyToSimulate :String - "tab"
"shifftab"
startFromMovie:InteractiveObject - moveFocus
(Null)
includeFocusEnabledChars :Boolean - moveFocus focusEnabled
tabEnabled / tabIndex
false tabEnabled / tabIndex
controllerIdx :uint - 0

返回

null

另请参见：

[findFocus](#)
[disableFocusKeys](#)
[setModalClip](#)
[getModalClip](#)

findFocus() 静态方法

```
static public function findFocus(keyToSimulate : String,  
                                parentMovie:DisplayObjectContainer = null,  
                                loop : Boolean = false,  
                                startFromMovie:InteractiveObject = null,  
                                includeFocusEnabledChars : Boolean = false,  
                                controllerIdx : uint = 0) : InteractiveObject
```

Scaleform 4.0.12

此静态方法用来通过对以下焦点键之一进行模拟按键操作来查找下一个焦点项：TAB Shift-TAB

disableFocusKeys setModalClip/getModalClip

参数

keyToSimulate :String - "tab"
"shifftab"


```

parentMovie:DisplayObjectContainer -
    null
loop :Boolean - Boolean
    findFocus "null" "false"
    "true"
startFromMovie:InteractiveObject - moveFocus
    null
includeFocusEnabledChars :Boolean - moveFocus focusEnabled
    tabEnabled / tabIndex
false tabEnabled / tabIndex
controllerIdx :uint -

```

返回

null

另请参见：

[moveFocus](#)
[disableFocusKeys](#)
[setModalClip](#)
[getModalClip](#)

setFocus() 静态方法

```
static public function setFocus(obj:InteractiveObject, controllerIdx:uint = 0) :void
```

Scaleform 4.0.12

stage.focus

参数

```

obj:InteractiveObject -
controllerIdx :uint - /

```

getFocus() 静态方法

```
static public function getFocus(controllerIdx:uint = 0) :InteractiveObject
```

Scaleform 4.0.12

stage.focus 唯一不同的是，可以指定应与此操作关联的控制器的索引。

参数

controllerIdx :uint - /

返回

numFocusGroups 静态属性

numFocusGroups() :uint [read]

Scaleform 4.0.12

	setControllerFocusGroup	0 3
numFocusGroups	2	

setFocusGroupMask() 静态方法

public function setFocusGroupMask(obj:InteractiveObject, mask:uint) :void

Scaleform 4.0.12

setControllerFocusGroup

1	0	2	0 1
---	---	---	-----

```
FocusManager.setControllerFocusGroup(0, 0);  
FocusManager.setControllerFocusGroup(1, 1);
```

```
FocusManager.setFocusGroupMask(button1, 0x1); // 0 - 0  
FocusManager.setFocusGroupMask(movieclip2, 0x1 | 0x2); // 0 1 -  
// 0 1
```

“focusGroupMask”

参数

obj:InteractiveObject -
mask:uint -

另请参见：

[setControllerFocusGroup](#)
[getFocusGroupMask](#)

getFocusGroupMask() 静态方法

```
static public function getFocusGroupMask(obj:InteractiveObject) :uint
```

Scaleform 4.0.12

setFocusGroupMask

参数

obj:InteractiveObject -

返回

另请参见：

[setControllerFocusGroup](#)
[setFocusGroupMask](#)

setControllerFocusGroup() 静态方法

```
static public function setControllerFocusGroup(controllerIdx:uint,  
                                                focusGroupIdx:uint) : Boolean
```

Scaleform 4.0.12

	controllerIndex		
0			
		setControllerFocusGroup(1,1)	
1	setControllerFocusGroup(1,0)	0	1

参数

controllerIdx:uint -
focusGroupIdx:uint -

返回

true

getControllerFocusGroup() 静态方法

```
static public function getControllerFocusGroup(controllerIdx:uint) :uint
```

Scaleform 4.0.12

参数

controllerIndex -

返回

setModalClip() 静态方法

```
static public function setModalClip(mc:Sprite, controllerIdx:uint = 0) : void
```

Scaleform 4.0.12

“tabable” (modal) TAB Shift-TAB

参数

controllerIdx:uint -
mc:Sprite -

getModalClip() 静态方法

```
static public function getModalClip(controllerIdx:uint = 0) : Sprite
```

Scaleform 4.0.12

参数

controllerIdx -

返回

6 GamePad

Scaleform

SF_KeyCodes.h
SWF

Scaleform FxPlayer	
GFX::Movie::HandleEvent	AS3

Scaleform FxPlayer	GamePadAnalogEvents
	GamePad

supportsAnalogEvents() 静态方法

```
public static function supportsAnalogEvents() :Boolean
```

Scaleform	4.0.13
-----------	--------

Scaleform	true
GamePadAnalogEvents	

另请参见：

[GamePadAnalogEvent](#)

7 GamePadAnalogEvent

```
package scaleform.gfx
{
    import flash.events.Event;

    public final class GamePadAnalogEvent extends Event
    {
        public static const CHANGE:String = "gamePadAnalogChange";

        public var code :uint = 0; // scaleform.gfx.GamePad
//
        public var controllerIdx : uint = 0;
        public var xvalue :Number = 0; // [-1, 1]
        public var yvalue :Number = 0; // [-1, 1]

        public function GamePadAnalogEvent(bubbles:Boolean, cancelable:Boolean,
                                           code:uint, controllerIdx:uint = 0,
                                           xvalue:Number = 0, yvalue:Number = 0)
        {
            super(GamePadAnalogEvent.CHANGE, bubbles, cancelable);
            this.code = code;
            this.controllerIdx = controllerIdx;
            this.xvalue = xvalue;
            this.yvalue = yvalue;
        }
    }
}
```

Scaleform

Stage

Scaleform FxPlayer

'code'

Stage
GamePad

Scaleform

示例：

```
import scaleform.gfx.*;

trace("GamePadAnalogEvents supported? " + GamePad.supportsAnalogEvents());

function ev(e: GamePadAnalogEvent)
{
    trace("code = " + ev.code);
    trace("controllerIdx = " + ev.controllerIdx);
    trace("xvalue = " + ev.xvalue);
    trace("yvalue = " + ev.yvalue);
}
```

```
}
stage.addEventListener(GamePadAnalogEvent.CHANGE, ev);
```

code 属性

code : uint

Scaleform 4.0.13

/

Scaleform FxPlayer

[GamePad](#)

controllerIdx 属性

controllerIdx : uint

Scaleform 4.0.13

/

xvalue 属性

xvalue : Number

Scaleform 4.0.13

x

-1 1

-1 1

yvalue 属性

yvalue : Number

Scaleform 4.0.13

y

-1 1

-1 1

8 InteractiveObjectEx

getHitTestDisable() 静态方法

```
public function getHitTestDisable(o:InteractiveObject) : Boolean
```

Scaleform 4.0.13

'hitTestDisable'	true	MovieClip.hitTest
	false	

参数

o - An interactive object.

返回

'hitTestDisable'	Boolean
------------------	---------

另请参见：

[InteractiveObjectEx.setHitTestDisable](#)

setHitTestDisable() 静态方法

```
public function setHitTestDisable(o:InteractiveObject, f:Boolean) : void
```

Scaleform 4.0.13

'hitTestDisable'	true	MovieClip.hitTest
此外，所有其它鼠标事件都传播到该对象。	false	

参数

o -

f - 'hitTestDisable' Boolean

另请参见：

[InteractiveObjectEx.getHitTestDisable](#)

getTopmostLevel() 静态方法

```
public function getTopmostLevel (o:InteractiveObject) : Boolean
```

Scaleform 4.0.13

'topmostLevel' true

参数

o - An interactive object.

返回

'topmostLevel' Boolean

另请参见：

[InteractiveObjectEx.setTopmostLevel](#)

setTopmostLevel () 静态方法

```
public function setTopmostLevel(o:InteractiveObject, f:Boolean) : void
```

Scaleform 4.0.13

'topmostLevel' true

false

"topmostLevel"

A B

A B

"topmostLevel" true

"topmostLevel" swapDepth ActionScript

false

参数

o -

f - 'topmostLevel' Boolean

另请参见：

[InteractiveObjectEx.getTopmostLevel](#)

9 KeyboardEventEx

```
package scaleform.gfx
{
    import flash.events.KeyboardEvent;

    public final class KeyboardEventEx extends KeyboardEvent
    {
        public var controllerIdx : uint = 0;

        public function KeyboardEventEx(type:String) { super(type); }
    }
}
```

	flash.events.KeyboardEvent		'controllerIdx'	
		Extensions.enabled	true	Scaleform
KeyboardEventEx	KeyboardEvent			KeyboardEventEx

示例：

```
import scaleform.gfx.*;
import flash.events.KeyboardEvent;

Extensions.enabled = true;

function ev(e: KeyboardEvent)
{
    if (e is KeyboardEventEx)
    {
        var ee: KeyboardEventEx = e as KeyboardEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}

stage.addEventListener(KeyboardEvent.KEY_DOWN, ev);
stage.addEventListener(KeyboardEvent.KEY_UP, ev);
```

controllerIdx 属性

controllerIdx : uint [read]

Scaleform 4.0.12

/

10 MouseCursorEvent

```
package scaleform.gfx
{
    import flash.events.Event;

    public final class MouseCursorEvent extends Event
    {
        public var cursor : String = "auto";
        public var mouseIdx : uint = 0;

        static public const CURSOR_CHANGE : String = "mouseCursorChange";

        public function MouseCursorEvent()
        {
            super("MouseCursorEvent", false, true);
        }
    }
}
```

/

bubbles – false (bubble)
cancellable – true preventDefault()

Scaleform

flash.ui.Mouse.cursor

stage

Extensions.enabled true 示例：

```
Extensions.enabled = true;
```

```
function e(e:MouseCursorEvent)
{
    trace(e.type + " " + e.mouseIdx + " " + e.cursor);
    e.preventDefault();
}
stage.addEventListener(MouseCursorEvent.CURSOR_CHANGE, e);
```

注意： Stage

cursor 属性

cursor : String [read]

Scaleform 4.0.13

flash.ui.MouseCursor

- flash.ui.MouseCursor.ARROW : String = "arrow"
- flash.ui.MouseCursor.BUTTON : String = "button"
- flash.ui.MouseCursor.HAND : String = "hand"
- flash.ui.MouseCursor.IBEAM : String = "ibeam"

mouseIdx 属性

mouseIdx : uint [read]

Scaleform 4.0.13

/

11 MouseEventEx

```
package scaleform.gfx
{
    import flash.events.MouseEvent;

    public final class MouseEventEx extends MouseEvent
    {
        public var mouseIdx : uint = 0;
        public var nestingIdx : uint = 0;
        public var buttonIdx : uint = 0; // LEFT_BUTTON, RIGHT_BUTTON, ...

        public static const LEFT_BUTTON : uint = 0;
        public static const RIGHT_BUTTON : uint = 1;
        public static const MIDDLE_BUTTON : uint = 2;

        public function MouseEventEx(type:String) { super(type); }
    }
}
```

	flash.events.MouseEvent	/	
Extensions.enabled	true	Scaleform	MouseEventEx
		MouseEventEx	MouseEvent

示例：

```
import scaleform.gfx.*;
Extensions.enabled = true;

stage.doubleClickEnabled = true;

function ev(e:MouseEvent):void
{
    trace("!!!! EVENT. " + cnt++);
    trace("    eventType      = "+e.type);
    trace("    bubbles          = "+e.bubbles);
    trace("    eventPhase        = "+e.eventPhase);
    trace("    target             = "+e.target.name);
    trace("    currentTarget      = "+e.currentTarget.name);
    if (e is MouseEventEx)
    {
        var ee:MouseEventEx = e as MouseEventEx;
        trace("    mouseIdx          = "+ee.mouseIdx);
        trace("    nestingIdx         = "+ee.nestingIdx);
    }
}
```

```

        trace("    buttonIdx    = "+ee.buttonIdx);
    }
    trace(e);
}
stage.addEventListener(MouseEvent.MOUSE_DOWN, ev);
stage.addEventListener(MouseEvent.MOUSE_UP, ev);
stage.addEventListener(MouseEvent.CLICK, ev);
stage.addEventListener(MouseEvent.DOUBLE_CLICK, ev);

```

注意：

buttonIdx

buttonIdx 属性

buttonIdx : uint [read]

Scaleform 4.0.13

- MouseEventEx.LEFT_BUTTON :uint = 0 -
- MouseEventEx.RIGHT_BUTTON :uint = 1 -
- MouseEventEx.MIDDLE_BUTTON :uint = 2 -
- 3 2

mouseIdx 属性

mouseIdx : uint [read]

Scaleform 4.0.13

/

nestingIdx 属性

nestingIdx : uint [read]

Scaleform 4.0.13

rollOver/Out	mouseOver/Out	dragOver/Out	
/	(rollover/dragover)		
rollOver/rollOut	mouseOver/Out	dragOver/dragOut	
		0	
1	rollOver/rollOut		1
rollOut/mouseOut/dragOut		0	rollOut/mouseOut/dragOut

12 TextEventEx

```
package scaleform.gfx
{
    import flash.events.TextEvent;

    public final class TextEventEx extends TextEvent
    {
        public var controllerIdx : uint = 0;

        public function TextEventEx(type:String) { super(type); }
    }
}
```

	flash.events.TextEvent		'controllerIdx'
		Extensions.enabled	true
TextEventEx	TextEvent		Scaleform TextEventEx

示例：

```
import scaleform.gfx.*;
import flash.events.TextEvent;

Extensions.enabled = true;

function ev(e: TextEvent)
{
    if (e is TextEventEx)
    {
        var ee: TextEventEx = e as TextEventEx;
        trace("    controllerIdx = "+ee.controllerIdx);
    }
}
txf.addEventListener(TextEvent.TEXT_INPUT, ev);
```

controllerIdx 属性

controllerIdx : uint [read]

Scaleform 4.0.12

/

LINK_MOUSE_OVER/LINK_MOUSE_OUT 事件

```
public static const LINK_MOUSE_OVER:String = "linkMouseOver";  
public static const LINK_MOUSE_OUT:String = "linkMouse";
```

Scaleform 4.0.14

	TextFieldEx.LINK_MOUSE_OVER	TextFieldEx.LINK_MOUSE_OUT
TextField	HTML	over/out
	addEventListener	AS3

buttonIdx 属性

buttonIdx : uint [read]

Scaleform : 4.0.14

	TextEventEx	MouseEventEx.LEFT_BUTTON	MouseEventEx.RIGHT_BUTTON
	MouseEventEx.buttonIdx		

13 System

actionVerbose 静态属性

actionVerbose:Boolean [read-write]

Scaleform 4.0.12

启用/禁用

getStackTrace() 静态方法

public function getStackTrace() : String

Scaleform 4.0.12

getCodeFileName() 静态方法

public function getCodeFileName() : String


Scaleform 4.0.12

14 TextFieldEx

appendHtml() 静态方法

```
public function appendHtml(textField:TextField, newHtml:String) :void
```

Scaleform 4.0.12

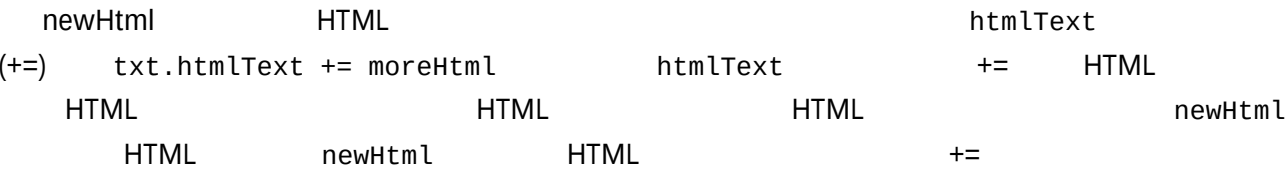

注意 :


参数

`textField:TextField` - `HTML`
`newHtml:String` - `HTML`

setIMEEnabled() 静态方法

```
static public function setIMEEnabled(textField:TextField, isEnabled:Boolean): void
```

Scaleform 4.0.12



参数

`textField :TextField` -
`isEnabled :Boolean` - `true` - `IME`

setVerticalAlign() 静态方法

```
public function setVerticalAlign(textField:TextField, valign:String) :void
```

Scaleform 4.0.12

```
TextFieldEx  
public static const VALIGN_TOP:String = "top";  
public static const VALIGN_CENTER:String = "center";  
public static const VALIGN_BOTTOM:String = "bottom";
```

center

bottom



top

参数

textField:TextField -
valign:String - ("top", "center", "bottom")

getVerticalAlign()静态方法

```
static public function getVerticalAlign(textField:TextField) : String
```

Scaleform : 4.0.14

setImageSubstitutions ()静态方法

```
public setImageSubstitutions(substInfoArr:Array) : void
public setImageSubstitutions(substInfo:Object) : void
public setImageSubstitutions(null) : void
```

Scaleform 2.0.38

SWF

SWF

- 1.
- 2. Windows Macintosh
- 3. ActionScript myImage
- 4. OK

BitmapData ActionScript

```
import flash.display.BitmapData;
var imageBmp:BitmapData = BitmapData.loadBitmap("myImage");

( import flash.display.BitmapData;
flash.display.BitmapData) “ ”
```

ID

subString:String

15

image : BitmapData

width : Number

height : Number

baseLineY : Number

Y

w/o

id : String

ID “updateImageSubstitution ”

“substInfoArr ”

“ substInfo”

setImageSubstitutions(substInfo:Object)

setImageSubstitutions(substInfoArr:Array)

setImageSubstitutions

setImageSubstitutions(null)

setImageSubstitutions

ActionScript

ActionScript

substInfoArr:Array –

substInfo:Object –

null –

updateImageSubstitution()

```
var b1 = BitmapData.loadBitmap("smile1");
```

```
var b2 = BitmapData.loadBitmap("smile2");
```

```
var b3 = BitmapData.loadBitmap("smile3");
```

```
var a = new Array;
```

```
a[0] = { subString:"=", image:b1, baseLineY:35, width:20, height:20, id:"sm=" };
```

```
a[1] = { subString:":-)", image:b2, baseLineY:20, id:"sm:-)" };
```

```
a[2] = { subString:":\\", image:b3, baseLineY:35, height:100 };
```

```
a[3] = { subString:":-\\", image:b1 };
```

```
t.setImageSubstitutions(a);
```

“ = ”

“ smile1 ”

updateImageSubstitution ()静态方法

```
public updateImageSubstitution(id:String, image:BitmapData) : void
```

Scaleform 2.0.38

setImageSubstitutions

id:String –	ID	setImageSubstitutions
	ID	
image:BitmapData –		null

setImageSubstitutions()

```
t.updateImageSubstitution("sm="), b3);
```

onEnterFrame setInterval

updateImageSubstitution

```
var phase = 0;
var b1a = BitmapData.loadBitmap("smile1a");
var b2a = BitmapData.loadBitmap("smile2a");

onEnterFrame = function()
{
    if (phase % 10 == 0)
    {
        if (phase % 20 == 0)
        {
            _root.t.updateImageSubstitution("sm="), b1);
            _root.t.updateImageSubstitution("sm:-)", b2);
        }
        else
        {
            _root.t.updateImageSubstitution("sm="), b1a);
        }
    }
}
```



```

        _root.t.updateImageSubstitution("sm:-)", b2a);
    }
}
++phase;
}

```

setTextAutoSize() 静态方法

```
static public function setTextAutoSize(textField:TextField, autoSz:String) : void
```

Scaleform : 4.0.14

TextFieldEx

```

public static const TEXTAUTOSZ_NONE:String = "none";
public static const TEXTAUTOSZ_SHRINK:String = "shrink";
public static const TEXTAUTOSZ_FIT:String = "fit";

```

shrink fit

5 号

textAutoSize “fit”

“shrink”



textField:TextField –

autoSz:String - ("none", "shrink", "fit")

getTextAutoSize() 静态方法

```
static public function getTextAutoSize(textField:TextField) : String
```

Scaleform : 4.0.14

"fit"

"none"

"shrink"

setNoTranslate() 静态方法

```
static public function setNoTranslate(textField:TextField, noTranslate:Boolean) :  
void
```

Scaleform : 4.1.20

```
Scaleform::Gfx::Translator::Translate  
Gfx::Translator (true)
```

```
textField:TextField -  
noTranslate:Boolean - /
```

getNoTranslate() 静态方法

```
static public function getNoTranslate(textField:TextField) : Boolean
```

Scaleform : 4.1.20