

Autodesk® **Scaleform**®

Scaleform CLIK

Scaleform CLIK

Prasad Silva, Matthew Doyle

2.0

2010 8 19

Copyright Notice

Autodesk® Scaleform® 4.2

© 2012 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AUGI, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo) Built with ObjectARX (design/logo), Burn, Buzzsaw, CAiCE, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, DesignServer, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWFX, DXF, Ecotect, Evolver, Exposure, Extending the Design Team, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, Freewheel, GDX Driver, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, Tinkerbox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

How to Contact Autodesk Scaleform:

Document	Scaleform 4.2 CLIK A53 User Guide
----------	-----------------------------------

Address	Autodesk Scaleform Corporation 6305 Ivy Lane, Suite 310 Greenbelt, MD 20770, USA
---------	--

Website	www.scaleform.com
---------	--

Email	info@scaleform.com
-------	--

Direct	(301) 446-3200
--------	----------------


Fax	(301) 446-3199
-----	----------------

1		i
1.1		i
1.1.1.	Scaleform CLIK	i
1.2		ii
1.3	UI	ii
2		iii
2.1		iv
2.1.1	Button	v
2.1.2	CheckBox	x
2.1.3	Label	xiii
2.1.4	TextInput	xv
2.1.5	TextArea	xix
2.2		xxii
2.2.1	RadioButton	xxii
2.2.2	ButtonGroup	xxvi
2.2.3	ButtonBar	xxviii
2.3		xxx
2.3.1	ScrollIndicator	xxx
2.3.2	ScrollBar	xxxii
2.3.3	Slider	xxxv
2.4		xxxvi
2.4.1	NumericStepper	xxxviii
2.4.2	OptionStepper	xl
2.4.3	ListItemRenderer	xlii
2.4.4	ScrollingList	xlvi
2.4.5	TileList	l
2.4.6	DropDownMenu	liv
2.5		lx
2.5.1	StatusIndicator	lx
2.5.2	ProgressBar	lxii
2.6		lxiv
2.6.1	Dialog	lxiv
2.6.2	UILoader	lxvi
2.6.3	ViewStack	lxvii


3		 lxxix
3.1		 lxxix
3.1.1		 lxxix
3.1.2		 lxx
3.1.3		 lxx
3.1.4		 lxx
3.1.5		 lxxi
3.1.6	2	 lxxi
3.2		 lxxi
3.2.1		 lxxi
3.3		 lxxiii
3.3.1	StatusIndicator	 lxxiv
3.4		 lxxvi
3.4.1		 lxxvi
3.4.2		 lxxvi
3.4.3	textField	 lxxvii
3.4.4		 lxxvii
4		 lxxix
4.1	UI UIComponent	 lxxx
4.1.1		 lxxx
4.2		 lxxx
4.2.1		 lxxxii
4.2.2		 lxxxii
4.2.3		 lxxxiii
4.2.4		 lxxxiii
4.3		 lxxxiii
4.3.1		 lxxxiii
4.4		 lxxxiv
4.4.1		 lxxxiv
4.4.2		 lxxxv
4.5		 lxxxvi
4.5.1		 lxxxvi
4.5.2		 lxxxviii
4.6		 lxxxix
4.6.1		 lxxxix
4.7		 lxxxix
4.7.1	Scale9Grid	 xc

4.7.2		xc
4.8		xc <i>i</i>
4.8.1	最佳使用方法.....	xc <i>i</i>
4.9		xc <i>ii</i>
4.9.1		xc <i>ii</i>
4.10		xc <i>iii</i>
4.10.1		xc <i>iii</i>
4.11		xc <i>iii</i>
4.11.1		xc <i>iv</i>
4.12		xcv
4.12.1	Delegate.....	xcv
4.12.2	Locale	xcv
5		xcvi
5.1		xcvi
5.1.1	textField ListItem Renderer.....	xcvi
5.1.2		xcv <i>iii</i>
5.2		xc <i>ix</i>
5.2.1	ScrollingList TreeView	xc <i>ix</i>
5.2.2		ci

1

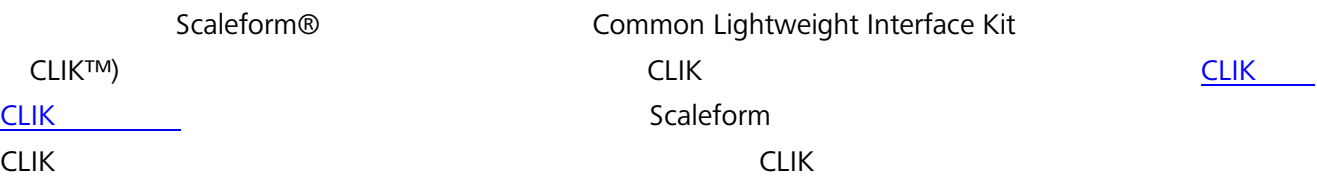

1.1

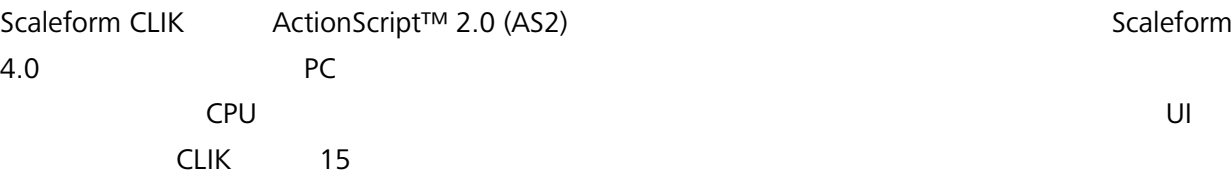

1.1.1. Scaleform CLIK

UI

Button	Slider
ButtonBar	StatusIndicator
CheckBox	ProgressBar
RadioButton	UILoader
Label	ScrollingList
TextInput	TileList
TextArea	DropDownMenu
ScrollIndicator	Dialog
ScrollBar	NumericStepper


API

InputManager	Locale
FocusManager	Tween
DragManager	DataProvider
PopUpManager	IDataProvider
EventDispatcher	IList
Delegate	IListItemRenderer


Constraints	GameDataProvider
-------------	------------------

CLIK
CLIK
CLIK API
CLIK
CLIK Flash
CLIK

1.2

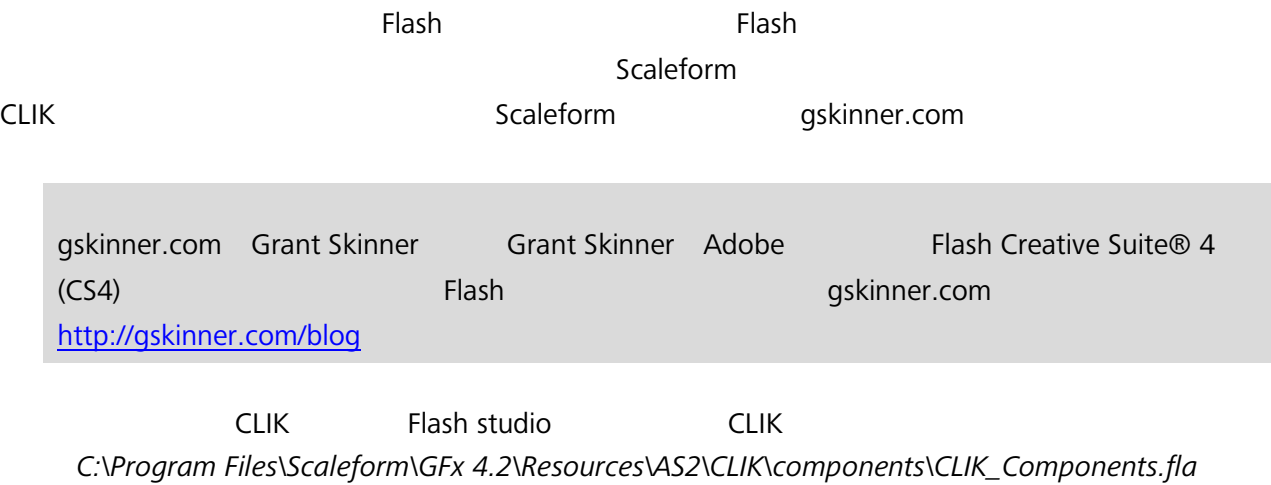

1.3 UI

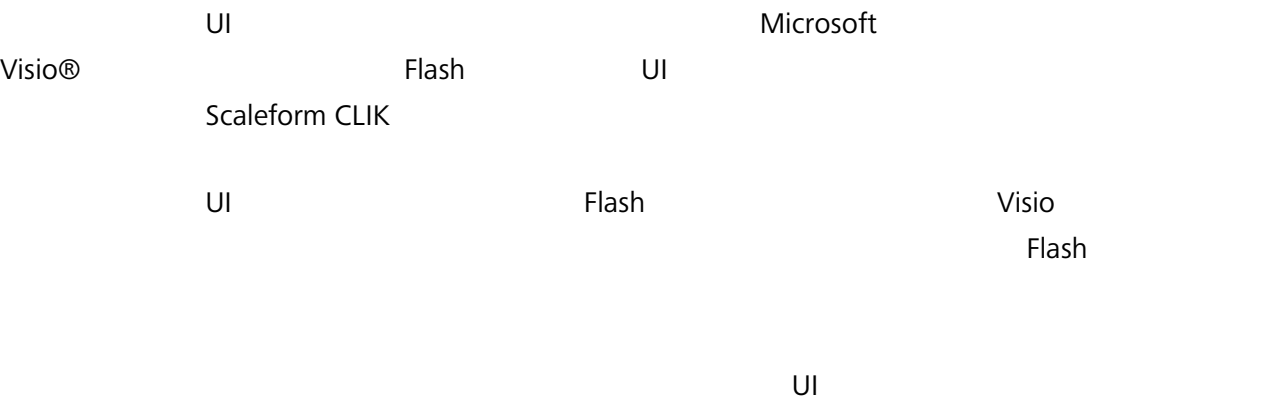


2.1


Button CheckBox Label TextInput
TextArea Button CheckBox Button Label
 TextInput TextArea



1 *Free Realms*

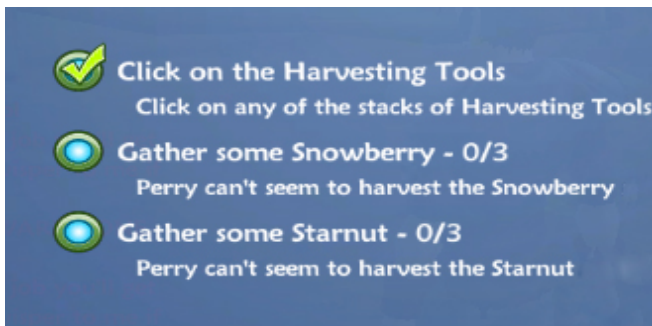


2 *Free Realms* Check box

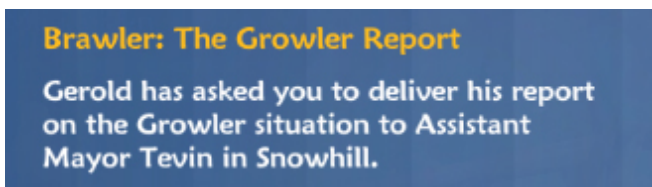

3 *Free Realms* Label



4: *Crysis Warhead* Text input

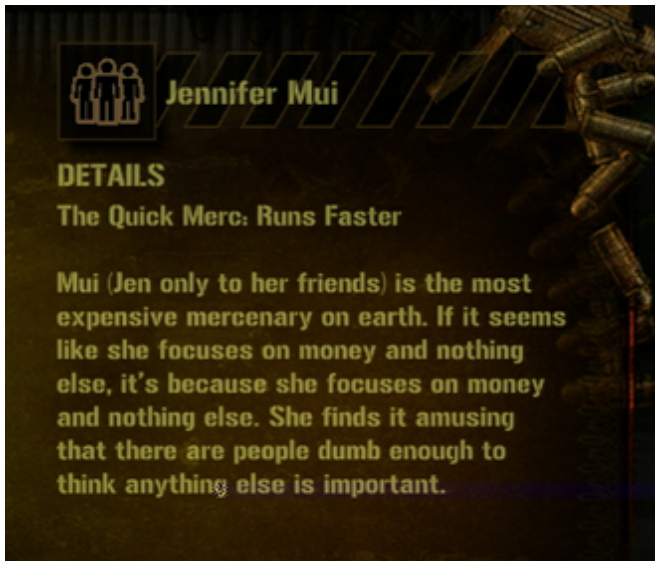


5 *Mercenaries 2* Text area

2.1.1 Button



6


on Button CLIK But
 on gfx.controls.Button textField ScrollBar Slider

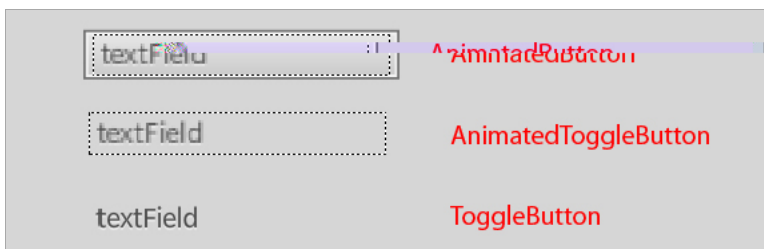


7 AnimatedButton AnimatedToggleButton ToggleButton

CLIK
Button
ToggleButton AnimatedButton
AnimatedToggleButton Button fla

2.1.1.1

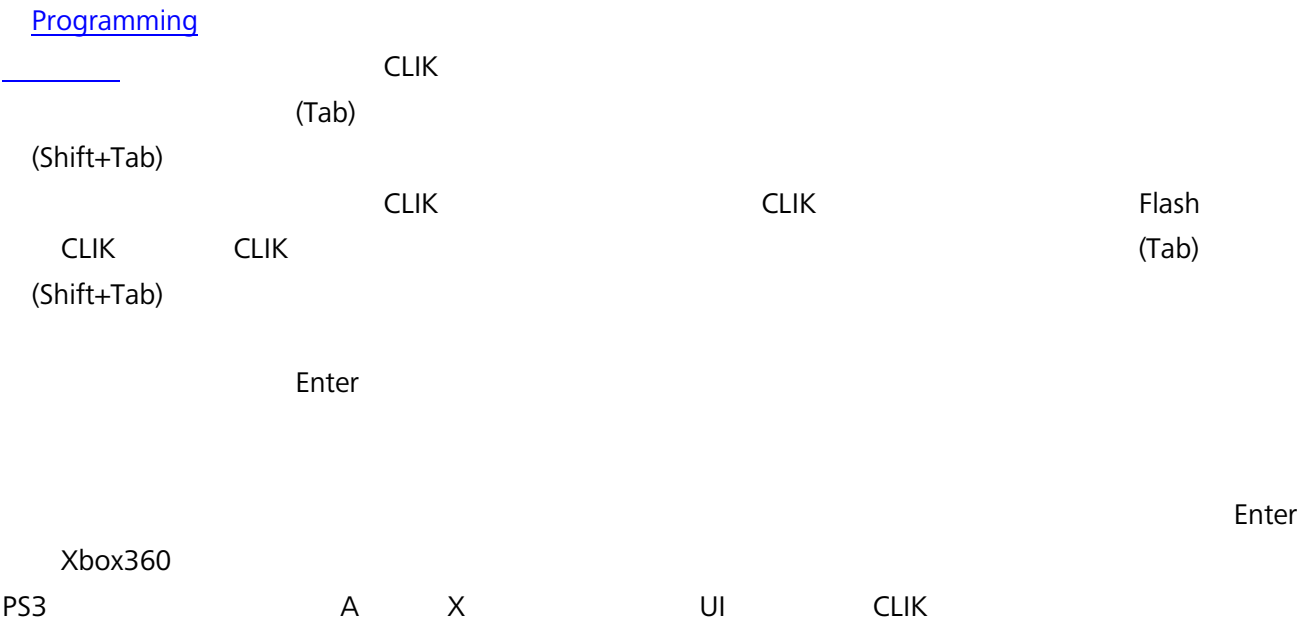

2.1.1.2

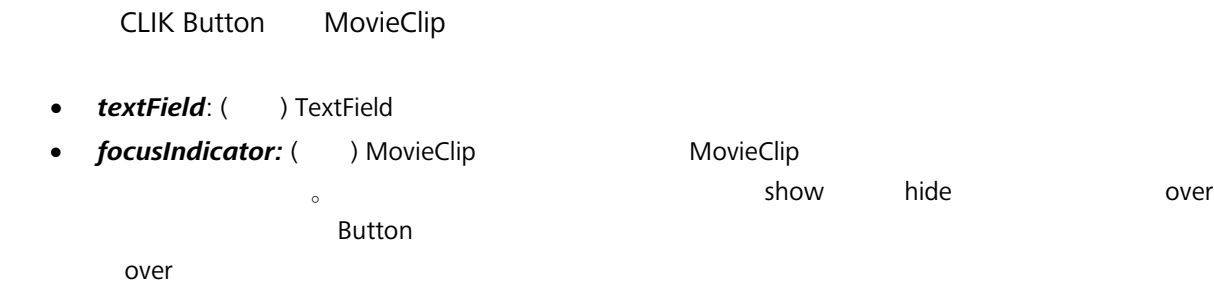


2.1.1.3

CLIK

- **up**

- *over*
- *down*
- *disabled*

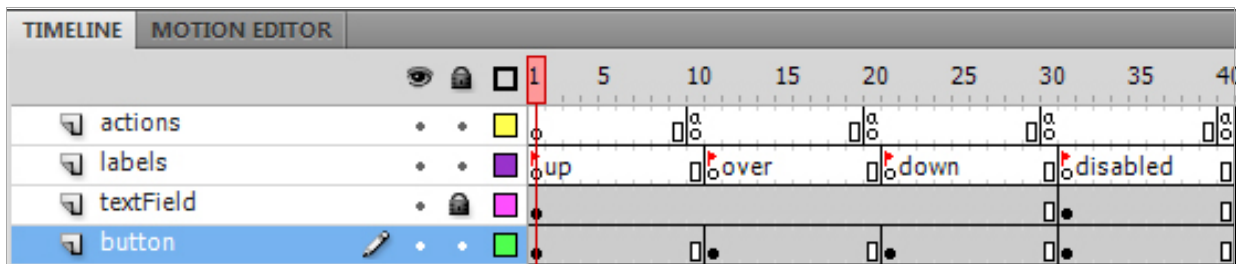

8 Button

Flash

[Getting Started with CLIK](#)

[Buttons](#)

2.1.1.4

Flash IDE Component

Inspector

Parameters

CS4

Window


Component Inspector

(Shift+F7)

Component

Inspector

AS

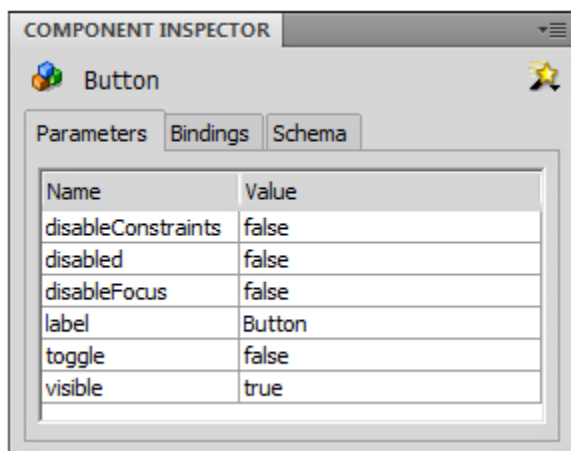

9 CS4

:

disableConstraints	Button	textField
--------------------	--------	-----------

	textField	true	textField	textField	/
Disabled	true	disabled			
disableFocus				ture	
Label					
Toggle			true		
Visible	false				

IDE

SWF

Flash

CLIK

2.1.1.5

CLIK

- *type:*
- *target:*

Show	true
Hide	false
focusIn	
focusOut	
Select	
	<i>Selected</i> true
stateChange	
	<i>State</i> String up over down
	CLIK
rollOver	
	<i>mouseIndex</i> -

		0-3		
rollOut	<i>mouseIndex</i>	0-3		
Press	<i>mouseIndex</i>			-
doubleClick	<i>mouseIndex</i>	0-3	<i>doubleClickEnabled</i> true	-
Click	<i>mouseIndex</i>	0-3		-
dragOver	<i>mouseIndex</i>	0-3		-
dragOut	<i>mouseIndex</i>	0-3		-
releaseOutside	<i>mouseIndex</i>	0-3		-

ActionScript

```
myButton.addEventListener("click", this, "onButtonPress");
function onButtonPress(event:Object) {
    //
}
```

click myButton onButtonPress函数。相同的代码类型也可以用来处理其他的事件。事件句柄中返回的Object参数（例子中名为‘event’）包含了事件的相关信息。某些信息作为Object参数属性返回并与多数事件有所不同。

2.1.1.6

```
import gfx.controls.Button;
attachMovie("Button", "btnInstanceName", someDepth, {_x:33, _y:262, ...});
```

CLIK

Toggle

```
btn.toggle = true;
```

```
btn.doubleClickEnabled = true;  
btn.addEventListener("doubleClick", this, "onDoubleClick");  
function onDoubleClick(e:Object):Void {  
    //  
    !  
}
```

```
btn.autoRepeat = true;
```

2.1.2 CheckBox



10

CheckBox

CheckBox (gfx.controls.CheckBox)

true/false

ToggleButton

Toggle

2.1.2.1

CheckBox

2.1.2.2

CLIK CheckBox


MovieClip

- **textField:** () TextField
 - **focusIndicator:** () MovieClip
- MovieClip MovieClip show hide

2.1.2.3

Toggle CheckBox

- **up**
-
- **over**
- **down**
- **disabled**
- **selected_up**
-
- **selected_over**
- **selected_down**
- **selected_disabled**

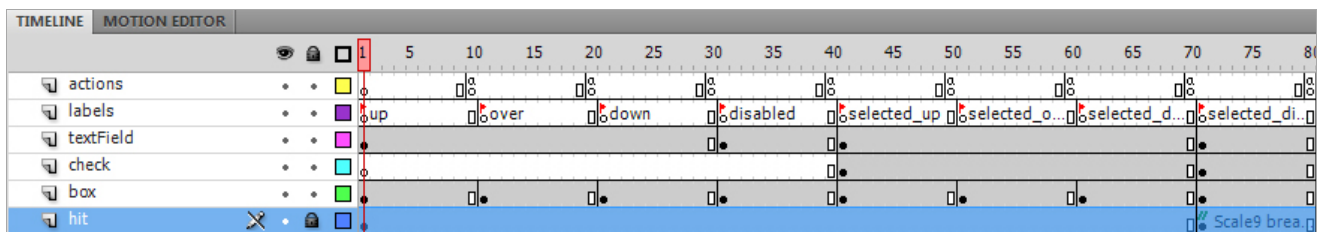

11: CheckBox

CheckBox Button

[CLIK](#)

2.1.2.4

CheckBox disableFocus Togg

e

data	Box	Check
disableConstraints	textField	disabled
	textField	true
	textField	textField
	textField	/
disabled	true	

label		
selected	true	CheckBox
visible	false	

2.1.2.5

Object

- **type:**
- **target:**

CheckBox

show		true			
hide		false			
focusIn					
focusOut					
select					
	<i>Selected</i>	true			
stateChange	<i>State</i>	String	up	over	down
	<u>CLIK</u>				
rollOver	<i>mouseIndex</i>				–
		0-3			
rollOut	<i>mouseIndex</i>				
		0-3			
press	<i>mouseIndex</i>				–
		0-3			
doubleClick		<i>doubleClickEnabled</i>	true		
	<i>mouseIndex</i>				–
		0-3			
click	<i>mouseIndex</i>				–
		0-3			
dragOver					

	<i>mouseIndex</i>	0-3	–
dragOut	<i>mouseIndex</i>	0-3	–
releaseOutside	<i>mouseIndex</i>	0-3	–

CheckBox
 Toggle

```

myCheckBox.addEventListener("select", this, "onCheckBoxToggle");
function onCheckBoxToggle(event:Object) {
    //
}


```

2.1.3 Label



12:

CLIK

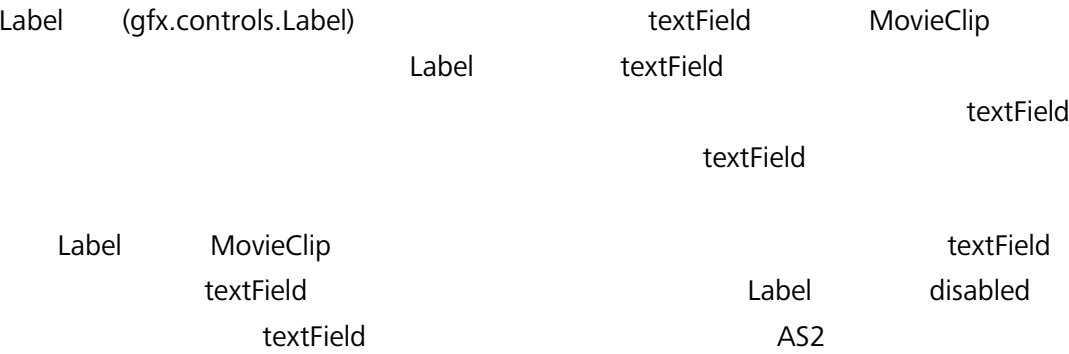

Label

Label

textField

Label

textField

d

Label

2.1.3.1

Label

2.1.3.2


CLIK Label MovieClip

- **textField:** TextField Label

2.1.3.3

CLIK Label

- **default** enabled
- **disabled**

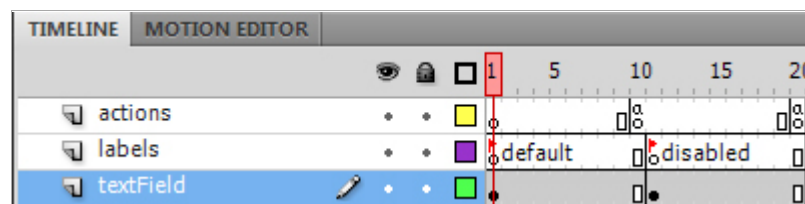

13: Label

2.1.3.4

Label

text	
visible	false
disabled	true

2.1.3.5

Object

- **type:**

- **target:**

Label

show	true				
hide	false				
stateChange	Label				
	State	Label	String	default	disabled

Label

```
myLabel.addEventListener("stateChange", this, "onStateChange");
function onStateChange(event:Object) {
    if (event.state == "default") {
        //
    }
}
```

2.1.3.6

Label HTML textField HTML Flash 8

```
lbl.htmlText = "<b>foo</b>bar";
```

2.1.4 TextInput

textField

Label

Label

UI

PC

textFields

TextInput

textField

TextInput

disabled

textField

AS2

TextInput

Flash

TextInput

Studio

TextInput

textField,

HTML

(Shift+Arrows)

(Shift+Delete)

(Ctrl+Insert)

(Shift+Insert)

actAsButton

over

out

actAsButton

"over"/"out"

(0xAAAAAA)

2.1.4.1

```

TextInput      textField
               textField

```

2.1.4.2


CLIK TextInput MovieClip

- ***textField***: textField

2.1.4.3 States

CLIK TextInput disabled

- **default** enabled
- **focused** textField
- **disabled**

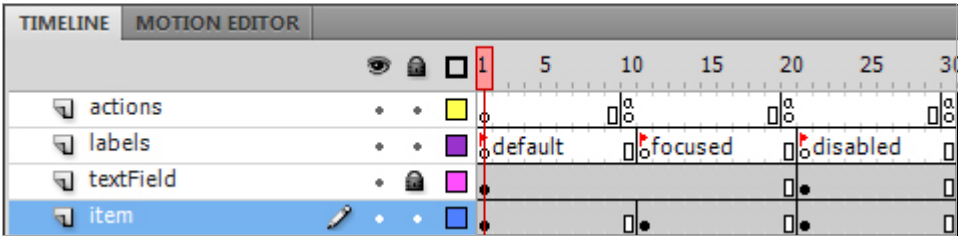

15: TextInput

2.1.4.4

TextInput :

text	textField		
visible	false		
disabled	true		
editable	false	TextInput	
maxChars	textField		
password	true	textField	'*' textField
defaultText			
actAsButton			
tab			

2.1.4.5

Object

- **type:**
- **target:**

TextInput组件产生的事件列表如下。事件旁边的属性列表为通用属性的补充内容。

show	true
hide	false
focusIn	
focusOut	
textChange	textField
rollover	<i>mouseIndex:</i>
	0 3.
rollout	<i>mouseIndex:</i>
	0 3.

textField

```
myTextInput.addEventListener("textChange", this, "onTextChange");
function onTextChange(event:Object) {
    //
}
```


2.1.4.6

```
_global.gfxExtensions = true;
textInput.textField.noAutoSelection = true;
```

在TextInput组件中显示HTML文本 关于在标准textField 中支持HTML标签请参考Flash 8文档：

```
textInput.htmlText = "<b>foo</b>bar";
```


2.1.5 TextArea

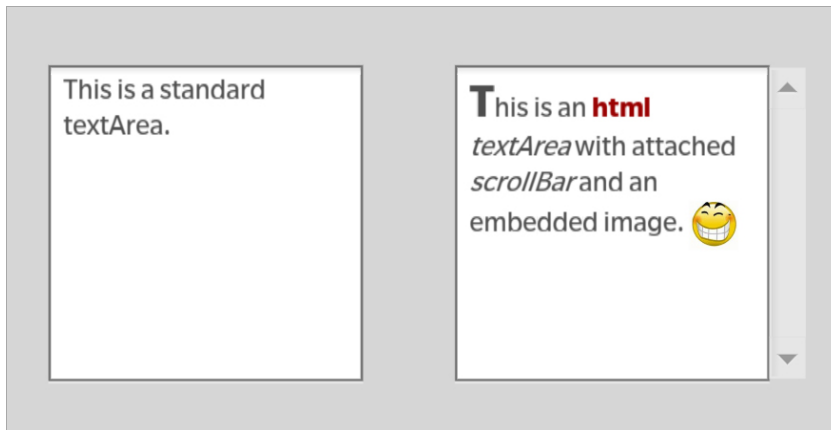

16: TextArea.

TextArea (gfx.controls.TextArea) CLIK

TextInput

ScrollBar

Label TextInput TextArea

textField

textField

HTML

textField

Text

Area

textField

ScrollIndicator

ScrollBar

TextArea

textField

TextArea

TextArea

2.1.5.1

TextArea

textField

textField

2.1.5.2

CLIK TextArea


MovieClip

- **textField:** TextField

2.1.5.3

TextInput TextArea disabled

- **default** enabled
- **focused** textField
- **disabled**

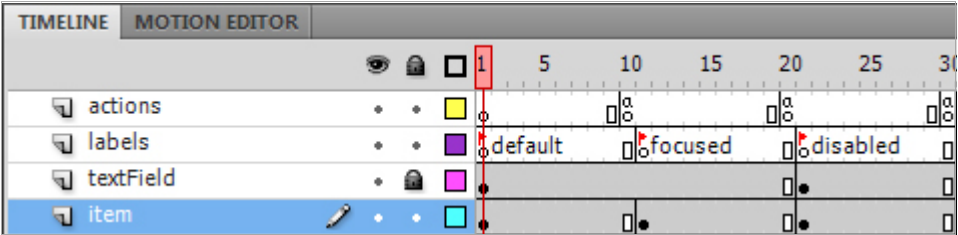

17: TextArea

2.1.5.4

TextArea TextInput CLIK

ScrollBar 2.4

text	textField		
visible	false		
disabled	false		
editable	false	TextInput	
maxChars	.	textField	
scrollBar	CLIK ScrollBar	ScrollBar	ID
	TextArea		
scrollPolicy	auto		
	on	ScrollBar	off
	ScrollBar	ScrollBar	
defaultText			
actAsButton	tab		

2.1.5.5

Object

- *type:*
- *target:*

TextArea

show	true
hide	false
focusIn	
focusOut	
textChange	textField
scroll	
rollover	mouseIndex: 03.
rollout	mouseIndex: 03.

TextArea

```
myTextArea.addEventListener("scroll", this, "onTextScroll");
function onTextScroll(event:Object) {
    //
}
```

2.1.5.6 提示

```
_global.gfxExtensions = true;
textInput.textField.noAutoSelection = true;
```

TextArea HTML textField HTML Flash 8

```
textInput.htmlText = "<b>foo</b>bar";
```


2.2

RadioButton ButtonGroup
ButtonBar ButtonGroup
ButtonBar
ButtonGroup
Button
RadioButton



18: *Dawn of War II*

2.2.1 RadioButton

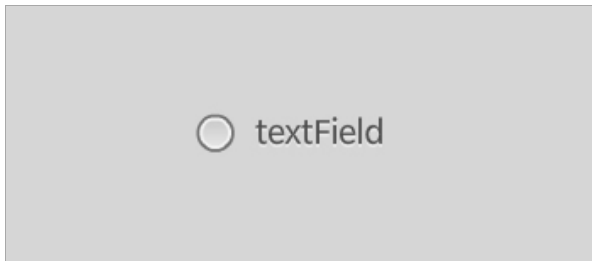

19: **RadioButton**

RadioButton
(gfx.controls.RadioButton)

CLIK
CheckBox
ButtonGroup

2.2.1.1 用交互

2.2.1.2


使用CLIK RadioButton 的MovieClip必 具 下面所列的子 元。也列出了可 元素：

- **textField** () TextField
- **focusIndicator** : MovieClip MovieClip
MovieClip show hide

2.2.1.3

CheckBox

- *up*
- *over*
- *down*
- *disabled*
- *selected_up*
- *selected_over*
- *selected_down*
- *selected_disabled*

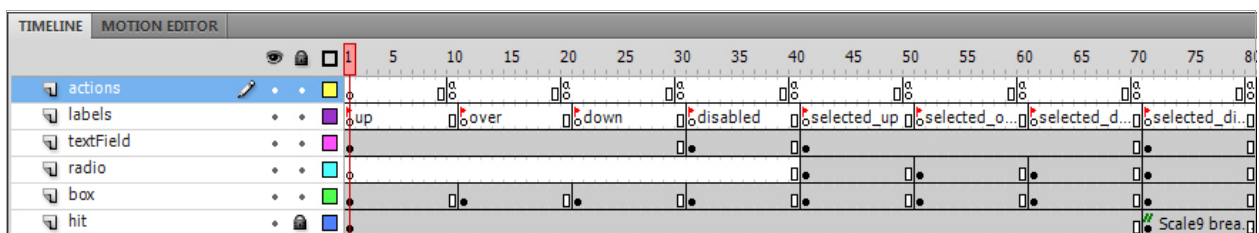

20: RadioButton

RadioButton Button
RadioButton CLIK

2.2.1.4

Button

RadioButton

disableF

ocus

Toggle

label	Button									
visible	false									
disabled	true									
disableConstraints	Button				textField					
		true								
	extField				t					
	bled	textField			disa					
		textField	/							
selected	true		RadioButton							
data	RadioB									
	utton									
group	ButtonGroup				RadioButton					
	ButtonGroup									
	_root				_root					

2.2.1.5 事

Object

- type:
- target:

RadioButton

show	true				
hide	false				
focusIn					
focusOut					
select					
	Selected	true			
stateChange	State				
	CLIK	String	up	over	down

rollOver	<i>mouseIndex</i>	0-3	-
rollOut	<i>mouseIndex</i>	0-3	-
press	<i>mouseIndex</i>	0-3	-
doubleClick	<i>mouseIndex</i>	<i>doubleClickEnabled</i>	true
		0-3	-
click	<i>mouseIndex</i>	0-3	-
dragOver	<i>mouseIndex</i>	0-3	-
dragOut	<i>mouseIndex</i>	0-3	-
releaseOutside	<i>mouseIndex</i>	0-3	-

RadioButton

```
myRadio.addEventListener("select", this, "onRadioToggle");
function onRadioToggle(event:Object) {
    //
}
```


2.2.1.6 提示

RadioButton

```
import gfx.controls.ButtonGroup;
var myGroup:ButtonGroup = new ButtonGroup("groupName");
radio1.group = myGroup;
radio2.group = myGroup;
```

```
someMovie.radio1.group = myGroup;  
someMovie.radio2.group = myGroup;
```

2.2.2 ButtonGroup

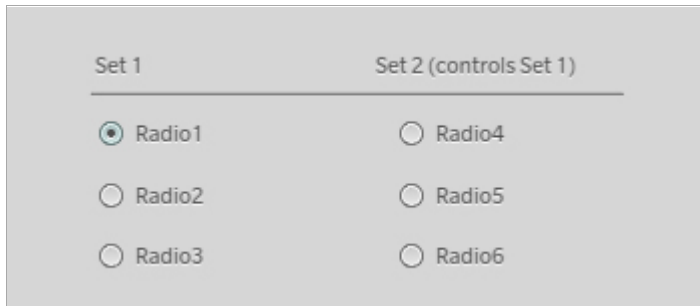

21: ButtonGroup.

CLIK ButtonGroup
(gfx.controls.ButtonGroup)

CLIK

CheckBox

RadioButton

ButtonGroup

2.2.2.1 用 交互

RadioButton

2.2.2.2 件 置

CLIK

ButtonGroup

MovieClip

2.2.2.3

ButtonGroup

2.2.2.4 属性

ButtonGroup

2.2.2.5 事件

Object

- **type:**
- **target:**

ButtonGroup

change			
	• item :	CLIK	Button
	• data		AS2
itemClick			
	• item :	CLIK	Button

ButtonGroup

```
myGroup.addEventListener("change", this, "onNewSelection");
function onNewSelection(event:Object) {
    if (event.item == myRadio) {
        // 行操作
    }
}
```


2.2.2.6 提示

```
var selectedRadio:Button = group.selectedButton;
```

ButtonGroup

```
radioBtn1.group.addEventListener("itemClick", this, "onClick");
```

2.2.3 ButtonBar

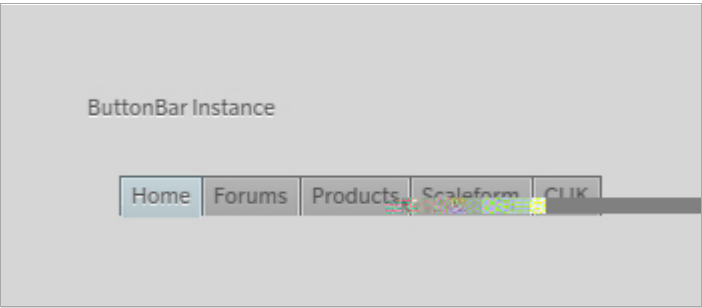

22: ButtonBar.

ButtonBar
(gfx.controls.ButtonBar) ButtonGroup dataProvider
dataProvider tab UI

```
buttonBar.dataProvider = ["item1", "item2", "item3", "item4", "item5"];
```

2.2.3.1 用 交互

ButtonGroup

2.2.3.2 件 置

CLIK ButtonBar MovieClip

2.2.3.3 状

CLIK

2.2.3.4 属性

Flash
IDE ButtonBar

visible	false	ButtonBar
disabled	true	buttonBar
itemRenderer	ID	

direction	
spacing	<i>direction</i>
autoSize	true
buttonWidth	autoSize true

2.2.3.5

Object

- *type:*
- *target:*

ButtonBar

show	true
hide	false
focusIn	
focusOut	
change	• <i>index</i> 0 1 • <i>renderer</i> : CLIK Button • <i>item</i> : dataProvider AS2 Object • <i>data</i> dataProvider AS2 Object
itemClick	• <i>index</i> 0 1 • <i>item</i> : dataProvider AS2 Object • <i>data</i> dataProvider AS2 Object • <i>mouseIndex</i> 0-3


```

myBar.addEventListener("itemClick", this, "onItemClick");
function onItemClick(event:Object) {
    processData(event.data);
    // □行操作
}

```


2.3

	ScrollIndicator	ScrollBar	
Slider	ScrollIndicator	ScrollBar	SI
ider			

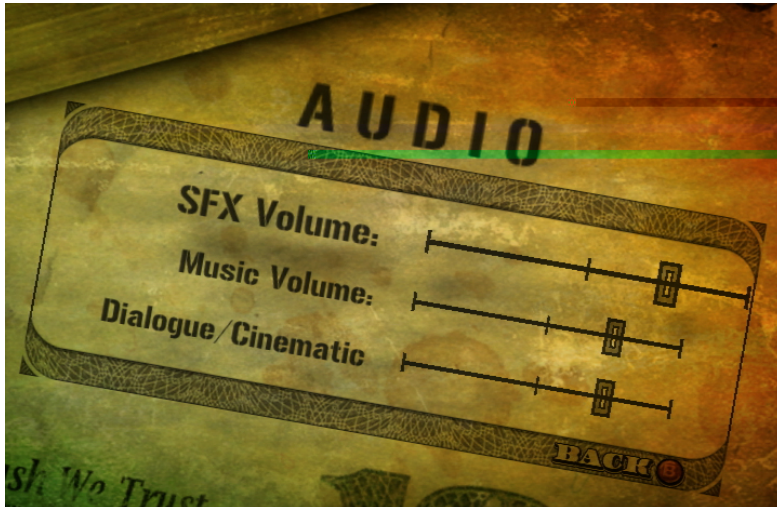

23: *Mercenaries 2*

2.3.1 ScrollIndicator

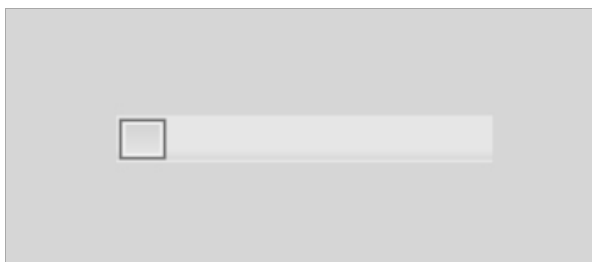

24: **ScrollIndicator.**

CLIK	ScrollIndicator	
(gfx.controls.ScrollIndicator)		textField
	TextArea	
ID		


2.3.1.1 用 交互

2.3.1.2 件 置

CLIK ScrollIndicator MovieClip

- *thumb*: CLIK Button
- *track* MovieClip

2.3.1.3

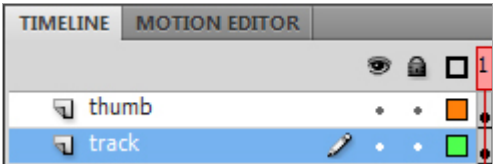

25: ScrollIndicator

2.3.1.4 属性

scrollTarget	TextArea	textField	ScrollIndicator
visible	false		
disabled	false		
offsetTop			
offsetBottom			

2.3.1.5

Object

- *type*:
- *target*:

ScrollIndicator

show	件可	属性在运行	已	置	true
hide	件可	属性在运行	已	置	false
scroll	<i>position</i>				

```
mySI.addEventListener("scroll", this, "onTextScroll");
function onTextScroll(event:Object) {
    trace("scroll position: " + event.position);
    // □行操作
}
```


2.3.1.6

```
scrollInd.setScrollProperties(pageSize, minPos, maxPos, pageScrollSz);
scrollInd.positon = currPos;
```

_rotation

```
scrollInd.direction = "horizontal";
```

2.3.2 ScrollBar

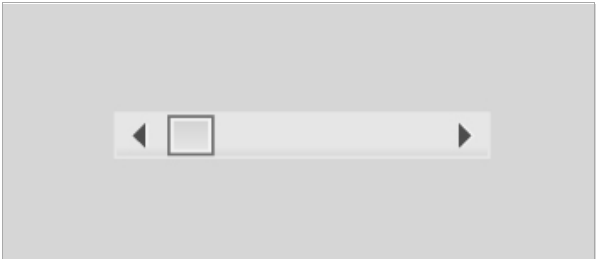

26: ScrollBar.

CLIK ScrollBar(gfx.controls.ScrollBar)

2.3.2.1 用 交互

ScrollBar

trackMode

trackMode


(Shift)

2.3.2.2 件 置

CLIK ScrollBar MovieClip

- ***upArrow*** CLIK
- ***downArrow***: CLIK
- ***thumb***: CLIK
- ***track***: CLIK

2.3.2.3

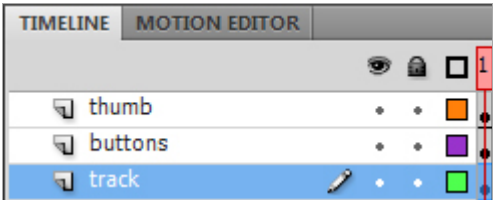

27: ScrollBar

ScrollBar ScrollIndicator

2.3.2.4 属性

scrollTarget	TextArea	textField
trackMode	scrollPage	
	scrollToCursor	
visible	false	
disabled	false	
offsetTop		
offsetBottom		

2.3.2.5 事件

Object

- *type*:
- *target*: `o`

ScrollBar

show	true
hide	false
scroll	• <i>position</i>

```
mySB.addEventListener("scroll", this, "onListScroll");
function onListScroll(event:Object) {
    trace("scroll position: " + event.position);
    // 翻页操作
}
```

2.3.2.6 属性

```
scrollBar.setScrollProperties(pageSize, minPos, maxPos, pageScrollSz);
scrollBar.positon = currPos;
```

`_rotation`

```
scrollBar.direction = "horizontal";
```

`scrollPage` 1

```
scrollBar.trackScrollPageSize = pageSize;
```


2.3.3 Slider



28: Slider.

Slider(gfx.controls.Slider)

2.3.3.1 用 交互


home end

2.3.3.2 件 置

CLIK Slider MovieClip

- **thumb** CLIK
- **Track** CLIK

2.3.3.3

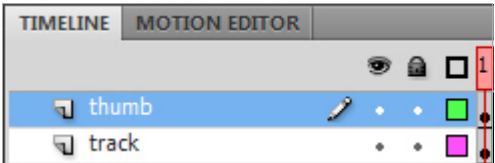

29: Slider

2.3.3.4 属性

Slider

visible	false
disabled	false

value	Slider	
minimum		
maximum		
snapping	true	
snapInterval	false	
liveDragging	true	Slider
offsetLeft		
offsetRight		

2.3.3.5 事件

Object

- **type:**
- **target:**

Slider

show	true
hide	false
focusIn	
focusOut	
change	Slider

Slider


```
mySlider.addEventListener("change", this, "onValueChange");
function onValueChange(event:Object) {
    trace("slider value: " + event.target.value);
    // 可操作
}
```

2.4


CLIK	NumericStepper	OptionStepper	ScrollingList	TileList	
DropDownMenu		NumericStepper		DataProvider	ListltemR
enderer		ScrollingList	TileList		
NumericStepper	OptionStepper			ScrollingList	
TileList			ScrollIndicator		
ScrollBar	DropDownMenu				ScrollingList
TileList					



☐ 30: ***Mercenaries 2***

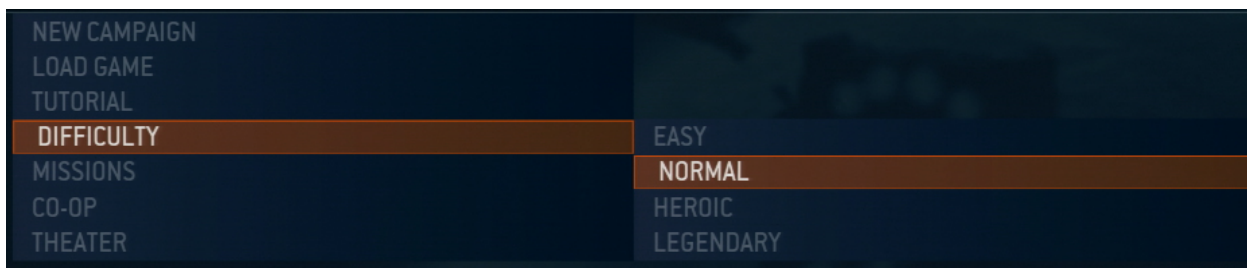

☐ 31: *Halo Wars* 'Difficulty Settings'

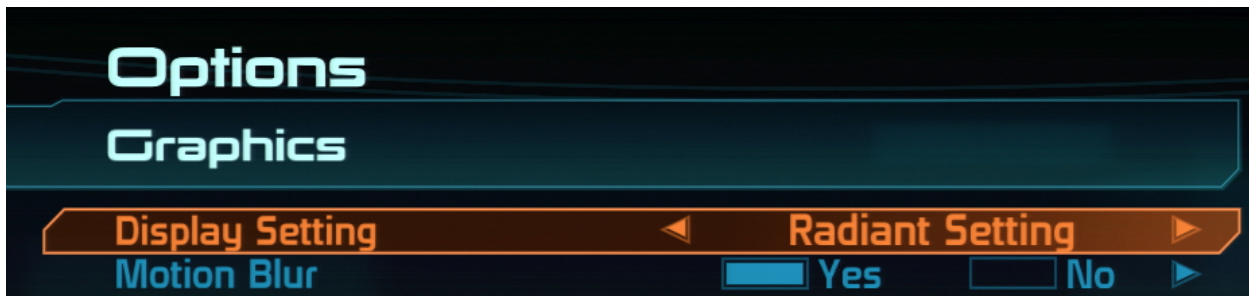

□ 32: *Mass Effect* 'Display Setting'

2.4.1 NumericStepper



□ 33: **Numeric Stepper.**

NumericStepper

(gfx.controls.NumericStepper)

2.4.1.1 用 交互

NumericStepper

(Home)

(End)

2.4.1.2 件 置

CLIK NumericStepper MovieClip


- **textField:** TextField
- **nextBtn:** CLIK Button
- **prevBtn:** CLIK Button

2.4.1.3

NumericStepper

- **default** enabled

- *focused* textField
- *disabled*

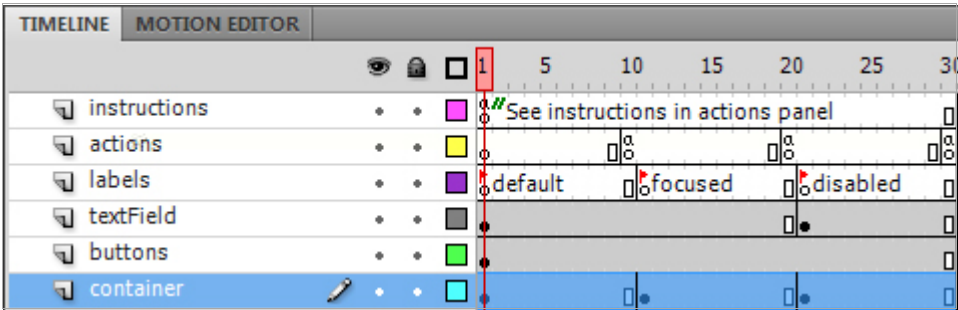

34: NumericStepper

2.4.1.4 属性

NumericStepper MovieClip

visible	false
disabled	false
value	NumericStepper.
minimum	NumericStepper
maximum	NumericStepper

2.4.1.5 事件

Object

- *type:*
- *target:*

NumericStepper

show	件可	属性在运行	已	置	true
hide	件可	属性在运行	已	置	false
change	NumericStepper				
stateChange	NumericStepper				
	• state	String	"default"	"focused"	"disabled"

NumericStepper

```
myNS.addEventListener("change", this, "onValueChange");
```

```
function onChange(event:Object) {
    trace("ns value: " + event.target.value);
    // 行操作
}
```

2.4.1.6 提示

/

```
ns.stepSize = 0.5;
```

```
ns.labelFunction = function(value:Number) {
    switch(value) {
        case 1:
            return value + "st";
        default:
            return value + "th";
    }
}
```

2.4.2 OptionStepper



□ 35: **OptionStepper.**

OptionStepper
(gfx.controls.OptionStepper), NumericStepper
dataProvider

OptionStepper
dataProvider

```
optionStepper.dataProvider = ["item1", "item2", "item3", "item4"];
```

2.4.2.1 用 交互


NumericStepper	OptionStepper
(Home)	
(End)	dataProvider

2.4.2.2 件 置

CLIK	NumericStepper	MovieClip	:
• textField	TextField		
• nextBtn	CLIK	Button	dataProvider
• prevBtn	CLIK	Button	dataProvider

2.4.2.3

OptionStepper	
• default	enabled
• focused	textField
• disabled	

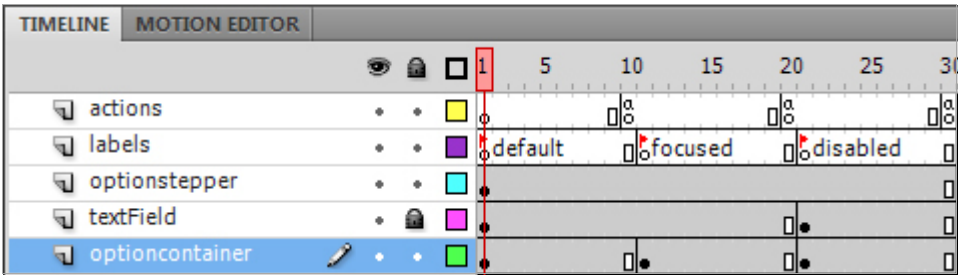

□ 36: OptionStepper

2.4.2.4 属性

OptionStepper	MovieClip
visible	false
disabled	false

2.4.2.5 事

Object

- **type:**
- **target:**

OptionStepper

show	true		
hide	false		
change	OptionStepper		
stateChange	OptionStepper		
	• <i>state</i>	String	“default” “focused” “disabled”

OptionStepper

```

myOS.addListener("change", this, "onValueChange");
function onValueChange(event:Object) {
    trace("os value: " + event.target.selectedItem);
    //  行操作
}

```

2.4.3 ListItemRenderer



37: **ListItemRenderer.**

 ListItemRenderer

(gfx.controls.ListItemRenderer) CLIK Button

ScrollingList TitleList Dropdo

wnMenu

2.4.3.1 用 交互

ListItemRenderer Button
ListItemRenderer ListItemRender
r

2.4.3.2 件 置


CLIK ListItemRenderert MovieClip :

- **textField** () TextField
- **focusIndicator:** () MovieClip
MovieClip show
hide

2.4.3.3

ListItemRenderer *selected*

- **up**
- **over**
- **down**
- **disabled**
- **selected_up**
- **selected_over**
- **selected_down**
- **selected_disabled**

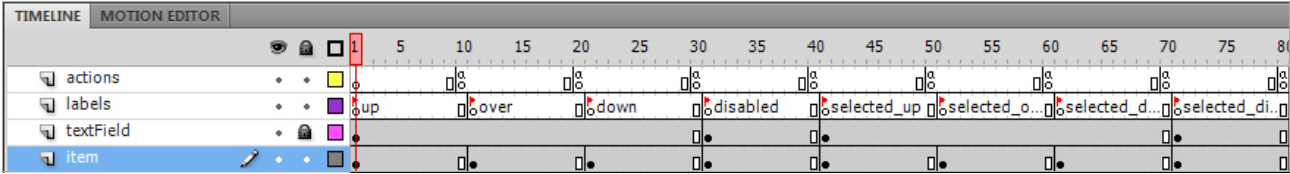

38: ListItemRenderer

ListItemRenderer Button
ListItemRenderer CLIK

2.4.3.4 属性

ListItemRenderer

label	ListItemRenderer
visible	false
disabled	true

2.4.3.5

Object

- *type:*
- *target:*

ListItemRenderer


show	true
hide	false
focusIn	
focusOut	
select	• <i>Selected</i> true
stateChange	按 状 已改 State：按 新状 。String 型。 “up” 、 “over” 、 “down” 等。参 考 CLIK 按 入 文档 取 的状 列表信息。
rollOver	• <i>mouseIndex</i> - 0-3
rollOut	• <i>mouseIndex</i> 0-3
press	• <i>mouseIndex</i> - 0-3
doubleClick	<i>doubleClickEnabled</i> true • <i>mouseIndex</i> -

		0-3	
click			
	<i>mouseIndex</i>	-	
		0-3	
dragOver			
	<i>mouseIndex</i>	-	
		0-3	
dragOut			
	<i>mouseIndex</i>	-	
		0-3	
releaseOutside			
	<i>mouseIndex</i>	-	
		0-3	


2.4.4 ScrollingList



39: ScrollingList.

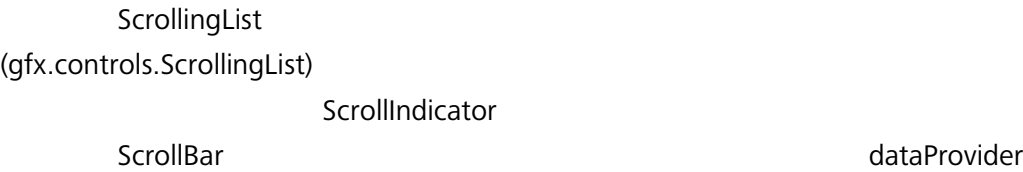

```
scrollingList.dataProvider = ["item1", "item2", "item3", "item4"];
```



[illegible]

ScrollingList ScrollingList

ScrollingList

-
- The screenshot displays the Timeline and Motion Editor interface. The Timeline shows a sequence of actions, labels, and border elements. The Motion Editor shows a timeline for the 'item' property, with a red dot indicating a keyframe at 10 seconds.

xlvi

2.4.4.4 属性

ScrollingList	MovieClip
visible	false
disabled	true
itemRenderer	ListItemRenderer <i>rendererInstanceName</i>
renderInstanceName	ScrollingList r r1 r2 r3' 1
scrollBar	ScrollBar ScrollingList ScrollingList
margin	<i>rendererIns</i> <i>tanceName</i>
rowHeight	<i>rendererInstanceName</i>
paddingTop	<i>rendererInstanceName</i>
paddingBottom	<i>rendererInstanceName</i>
paddingLeft	<i>rendererInstanceName</i>
paddingRight	<i>rendererInstanceName</i>
thumbOffsetTop	
thumbOffsetBottom	
thumbSizeFactor	1.0 1.0

2.4.4.5 事

Object

- *type:*
- *target:*

ScrollingList

show	true		
hide	false		
focusIn			
focusOut			
change			
	• <i>index</i>	0	1.
itemPress			
	• <i>renderer</i>	CLIK	
	• <i>item</i>		dataProvider
	AS2		
	• <i>index</i>	dataProvider	
		0	1
	• <i>mouseIndex</i>		
		0 3	
itemClick			
	• <i>renderer</i>	CLIK	
	• <i>item</i>		dataProvider
	AS2		
	• <i>index</i>	dataProvider	
		0	1
	• <i>mouseIndex</i>		
		0 3	
itemDoubleClick			
	• <i>renderer</i>	CLIK	
	• <i>item</i>		dataProvider
	AS2		
	• <i>index</i>	dataProvider	
		0	1
	• <i>mouseIndex</i>		

			0	3	
itemRollOver					
• <i>renderer</i>		CLIK			
• <i>item</i>					dataProvider
	AS2				
• <i>index</i>		dataProvider			
			0		1
• <i>mouseIndex</i>					
			0	3	
itemRollOut					
• <i>renderer</i>		CLIK			
• <i>item</i>					dataProvider
	AS2				
• <i>index</i>		dataProvider			
			0		1
• <i>mouseIndex</i>					
			0	3	

```

myList.addEventListener("itemClick", this, "onItemClicked");
function onItemClicked(event:Object) {
    trace("list item was clicked: " + event.renderer);
    // 行操作
}

```

2.4.4.6 提示

```

// ScrollingList      'label'
//
list.dataProvider = [{label: "one", data:1}, {label: "two", data:2}];

//
//
list.labelField = "name";
list.dataProvider = [{name: "one", data:1}, {name: "two", data:2}];

//


```

```
//      labelFunction
list.labelFunction = function(itemObj:Object):String {
    //
}
list.dataProvider = [{p1: "foo", p2: 1}, {p1: "bar", p2: 2}];
```


2.4.5 TileList




□ 41: TileList.

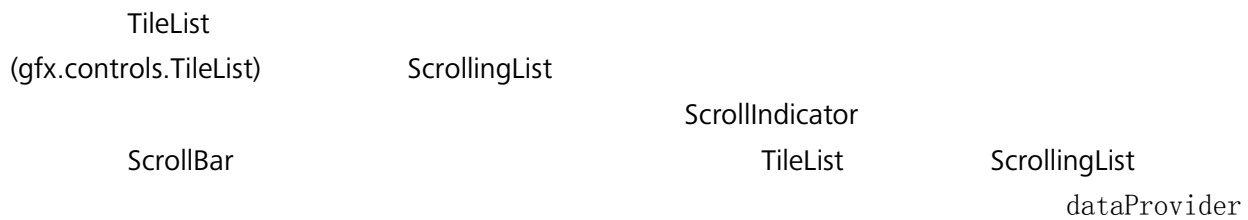

```
tileList.dataProvider = ["item1", "item2", "item3", "item4", "item5"];
```



2.4.5.1 用 交互

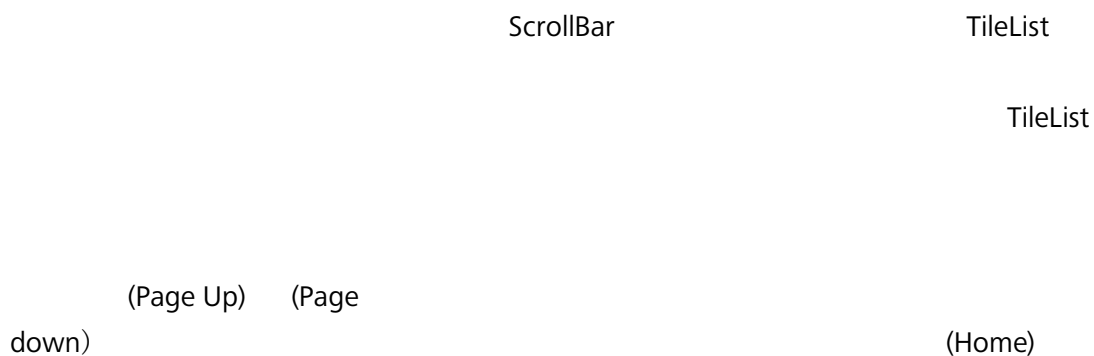

(End)

TileList

ScrollBar

ScrollBar

2.4.5.2 件 置


TileList

TileList

2.4.5.3 状

TileList

- *default* enable
- *focused*
- *disabled*

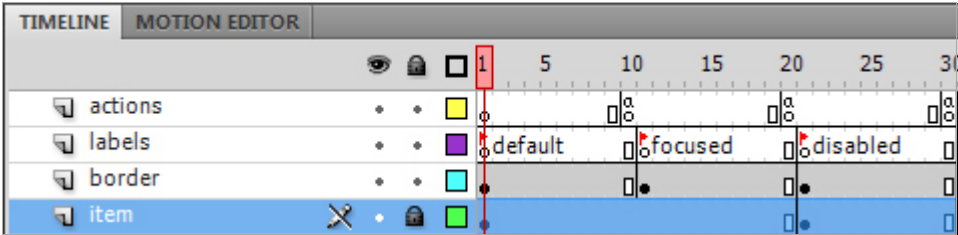

42: TileList

2.4.5.4 属性

TileList

MovieClip

Visible	false
Disabled	true
itemRenderer	ListItemRenderer rendererInstanceName
rendererInstanceName	TileList r r1 r2 r3'

itemClick

- *renderer* CLIK
- *item* AS2 dataProvider
- *index* dataProvider 0 1
- *mouseIndex* 0 3

itemDoubleClick

- *renderer* CLIK
- *item* AS2 dataProvider
- *index* dataProvider 0 1
- *mouseIndex* 0 3

itemRollOver

- *renderer* CLIK
- *item* AS2 dataProvider
- *index* dataProvider 0 1
- *mouseIndex* 0 3

itemRollOut

- *renderer* CLIK
- *item* AS2 dataProvider
- *index* dataProvider 0 1
- *mouseIndex* 0 3

TileList

```
myList.addEventListener("focusIn", this, "onListFocused");  
function onListFocused(event:Object) {  
    trace("tile list was focused!");  
}
```

```
// 行操作
}
```


2.4.5.6 提示

```
// ScrollingList 'label'
//
list.dataProvider = [{label: "one", data:1}, {label: "two", data:2}];

//
//
list.labelField = "name";
list.dataProvider = [{name: "one", data:1}, {name: "two", data:2}];

//
// labelFunction
list.labelFunction = function(itemObj:Object):String {
    // 上构建一个 Logic to construct a label
}
list.dataProvider = [{p1: "foo", p2: 1}, {p1: "bar", p2: 2}];
```

2.4.6 DropdownMenu

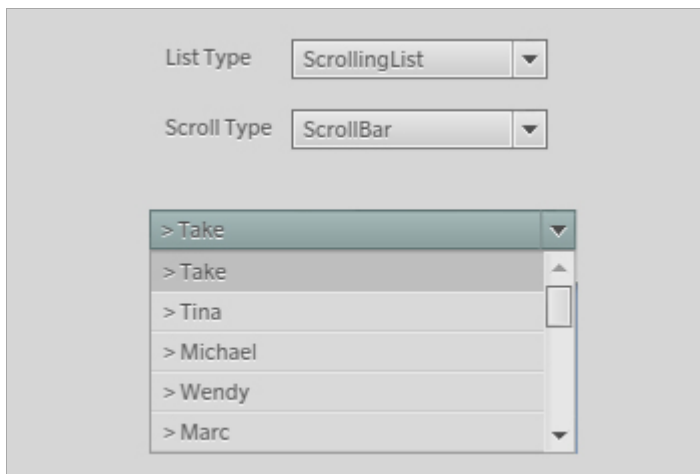

❑ 43: DropdownMenu.

DropdownMenu
(gfx.controls.DropdownMenu)

Dr

opdownMenu

ScrollBar ScrollIndicator ScrollingList TileList
dataProvider dataProvider DropdownMenu

```
dropdownMenu.dataProvider = ["item1", "item2", "item3", "item4"];
```

DropdownMenu ListItemRenderer Dro
pdownMenu ListItemRenderrer FLA

ScrollIndicator DropdownMenu ScrollBar
DropdownMenu

2.4.6.1 用 交互

DropdownMenu (Enter)
ScrollBar ScrollingList TileList
DropdownMenu

2.4.6.2 件 置

DropdownMenu MovieClip


- **textField** () TextField 。
- **focusIndicator:** ()
MovieClip
show hide

2.4.6.3 状

DropdownMenu ToggleButton CheckBox

- **up**
- **over**
- **down**

- disabled
- selected_up
- selected_over
- selected_down
- selected_disabled

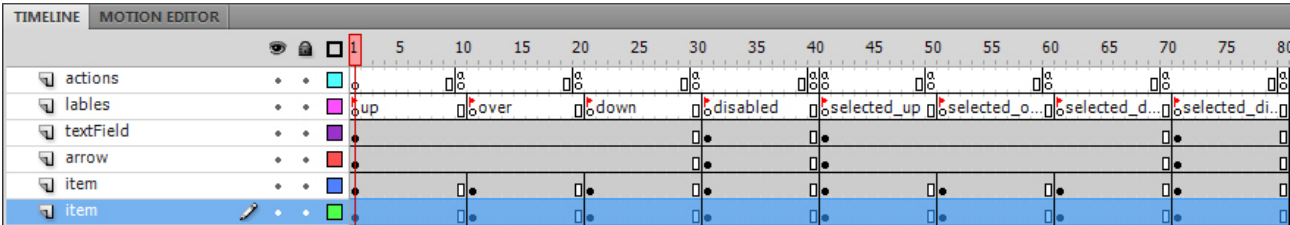

44: DropdownMenu



2.4.6.4 属性

DropdownMenu

Visible	false
Disabled	false
Dropdown	ScrollingList
	TileList
	DropdownMenu
dropdownWidth	-1
itemRenderer	
scrollbar	
Margin	
paddingTop	
paddingBottom	
paddingLeft	
paddingRight	
thumbOffsetTop	
thumbOffsetBottom	
thumbSizeFactor	thumb 1.0 thumb

1.0		thumb
offset		
offset		
Extent	offsetX	dropdownWidth
	1	-
Direction		

2.4.6.5 事件

Object	
• <i>type:</i> • <i>target:</i>	
DropDownMenu	change Button

show	true
Hide	false
focusIn	
focusOut	
change	• <i>index</i> 0 1. • <i>data :</i> AS2
select	• <i>Selected</i> true
stateChange	按 状 已改 State：按 新状 。String 型。 “up” 、 “over” 、 “down” 等。参 考 CLIK 按 入 文档 取 的状 列表信息。
rollOver	• <i>mouseIndex</i> 0-3
rollOut	• <i>mouseIndex</i> 0-3
press	

	<i>mouseIndex</i>	0-3	
doubleClick	<i>doubleClickEnabled</i> <i>mouseIndex</i>	true	
		0-3	
click	<i>mouseIndex</i>	0-3	
		0-3	
dragOver	<i>mouseIndex</i>	0-3	
		0-3	
dragOut	<i>mouseIndex</i>	0-3	
		0-3	
releaseOutside	<i>mouseIndex</i>	-	
		0-3	

2.4.6.6 提示

```
dropdown.addEventListener("click", this, "onClick");
function onClick(e:Object) {
    if (e.target.isOpen) {
        // open
    }
}
```

DropDownMenu

```
//          ;
//          /          FLA
//          DropDownMenu  ScrollingList
//  ScrollBar  .
attachMovie("DropDownMenu", "dd", this.getNextHighestDepth(),
            {dropdown: "ScrollingList"});
dd.dataProvider = ["one", "two", "three", "four", "five", "six"];

//
//
```



```
//
onEnterFrame = function() {
    dd.dropdown.scrollBar = "ScrollBar";
    onEnterFrame = null;
}
```

```
// ScrollingList          'label'
//
list.dataProvider = [{label: "one", data:1}, {label: "two", data:2}];

//
//

list.labelField = "name";
list.dataProvider = [{name: "one", data:1}, {name: "two", data:2}];
//
//      labelFunction
list.labelFunction = function(itemObj:Object):String {
    //
}
list.dataProvider = [{p1: "foo", p2: 1}, {p1: "bar", p2: 2}];
```


2.5

CLIK
Bar

ProgressBar
StatusIndicator


The Scaleform
StatusIndicator

Progress

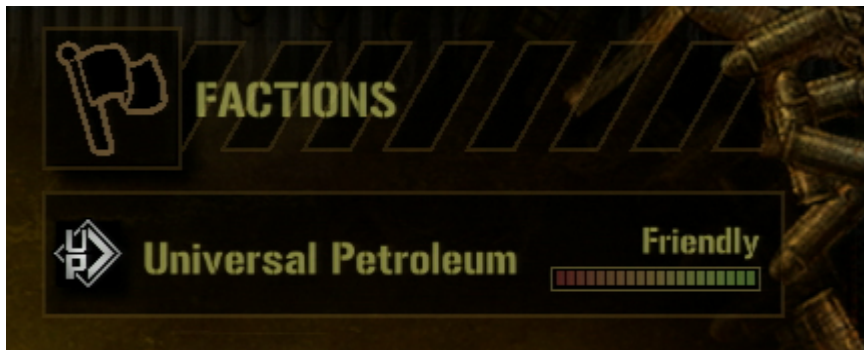

□ 45: *Mercenaries 2* Faction

2.5.1 StatusIndicator

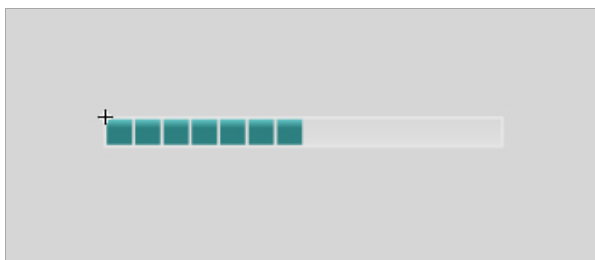


□ 46: **StatusIndicator.**

StatusIndicator component
(gfx.controls.StatusIndicator)

2.5.1.1 用 交互

StatusIndicator

2.5.1.2 件 置

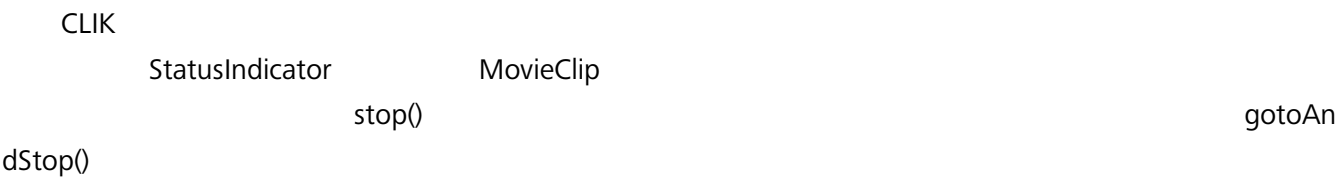

2.5.1.3 状




2.5.1.4 属性



visible	false
disabled	false
value	
minimum	
maximum	


2.5.1.5 事

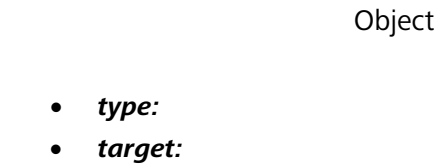

StatusIndicator

show	件可	属性在运行	已	置	true
hide	件可	属性在运行	已	置	false

2.5.2 ProgressBar

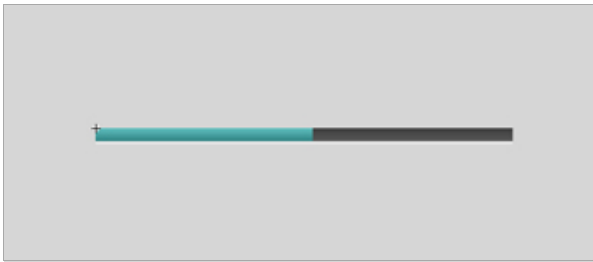

47: ProgressBar.

```

ProgressBar
(gfx.controls.ProgressBar)

StatusIndicator

bytesLoaded  bytesTotal

```

b

2.5.2.1 用交互

ProgressBar

2.5.2.2 件 置

```

    StatusIndicator      CLIK      StatusIndicator      MovieClip
    ProgressBar          stop()
ProgressBar             gotoAndStop()

```

2.5.2.3 状

ProgressBar

2.5.2.4 属性

ProgressBar MovieClip

visible	false		
disabled	false		
target	ProgressBar		bytesLoaded bytesTotal
mode	properties.	ProgressBar	manual
		setProgress	
	polled	bytesLoaded	

	bytesTotal	event	progress	byt
	esLoaded	bytesTotal		

2.5.2.5 ~~서버~~

Object

- *type:*
- *target:*

ProgressBar

show	true
hide	false
progress	ProgressBar
complete	

```

myProgress.addEventListener("progress", this, "onProgress");
myProgress.addEventListener("complete", this, "onProgress");
function onProgress(event:Object) {
    if (event.type == "progress") {
        //
    } else
    {
        trace("Loading complete!");
    }
}

```

2.6

Scaleform

CLIK

UI

Dialog

UILoader


ViewStack

Dialog

UI

UILoader


ViewStack

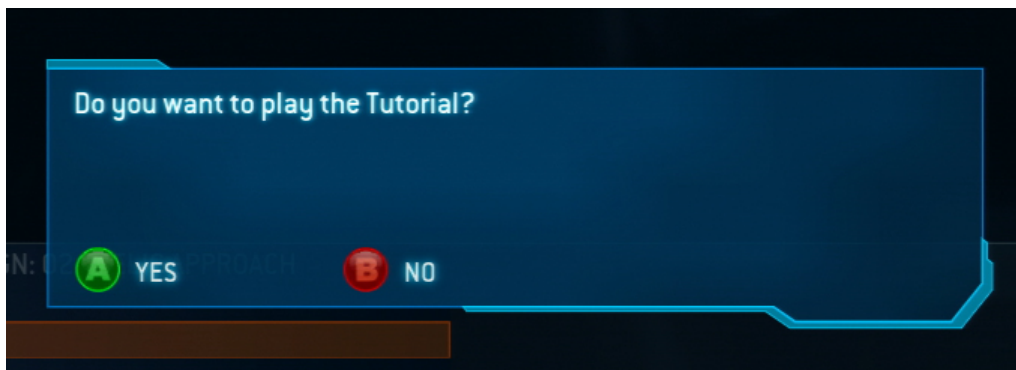

48: *Halo Wars*

Dialog

2.6.1 Dialog

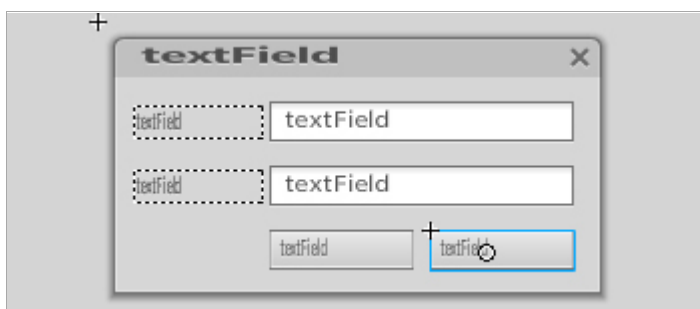

49: Dialog

CLIK Dialog
(gfx.controls.Dialog)

MovieClip

MovieCli

p

Dialog.show()

2.6.1.1 用 交互

Dialog

2.6.1.2 件 置

CLIK Dialog MovieClip :

- **closeBtn** () CLIK Button
- **cancelBtn** () CLIK Button cancel
- **submitBtn** () CLIK Button OK
- **dragBar** () MovieClip

2.6.1.3 状

Dialog MovieClip

2.6.1.4 属性

Dialog MovieClip

visible	false
disabled	false

2.6.1.5 事

Object

- **type:**
- **target:**

Dialog

show	件可	属性在运行	已 置	true
hide	件可	属性在运行	已 置	false
submit	Dialog			
	• data	Dialog	getSubmitData	getSubmi
			true	

	tData	AS2
close	Dialog	

```

myDialog.addEventListener("submit", this, "onLoginSubmit");
function onLoginSubmit(event:Object) {
    trace("Received data from dialog: " + event.data);
}

```

2.6.2 UILoader

CLIK UILoader
 (gfx.controls.UILoader) SWF/GFX UILoaders
 Scaleform

2.6.2.1 用 交互

UILoader SWF/GFX UILoader

2.6.2.2 件 置

CLIK UILoader MovieClip :

- **bg** () MovieClip
 UILoader

2.6.2.3 状

UILoader SWF/GFX UILoader

2.6.2.4 属性

UI UILoader MovieClip

Visible	false	
autoSize	true	UILoader
maintainAspectRatio	true	UILoader false
		UILoader
Source	SWF/GFX	
Timeout		UILoad
	er	ioError

2.6.2.5 事件

Object


- *type*:
- *target*:

UIloader

show	件可	属性在运行	已	置	true
hide	件可	属性在运行	已	置	false
progress				a	b
loaded			0	100	
complete					
ioError					

```
myUIloader.addEventListener("ioError", this, "onLoadingError");
function onLoadingError(event:Object) {
    displayErrorMessage("Could not load" + event.target.source);
}
```

2.6.3 ViewStack

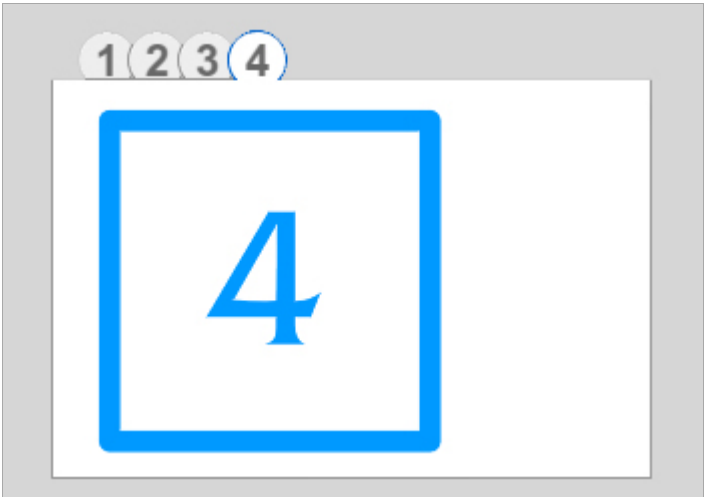

50: ViewStack

CLIK

ViewStack

(gfx.controls.ViewStack)

TabBo

x

ViewStack

Accordion

RadioButton

2.6.3.1 用 交互

ViewStackViewStack

2.6.3.2 件 置

MovieClipCLIKViewStack

2.6.3.3 状

ViewStackViewStack

2.6.3.4 属性

ViewStackMovieClip

visible	false				
cache	true				
		ViewStack	targetGroup		
targetGroup		ButtonGroup	change		
				ID	Radio
	Buttons		Flash IDE		ID

2.6.3.5 事

ViewStack

3

Scaleform

CLIK

3.1


Scaleform CLIK

3.1.1

CLIK


Flash

- 1. Flash
- 2.
- 3. Flash
- 4.
- 5. 1px
- 6. OK

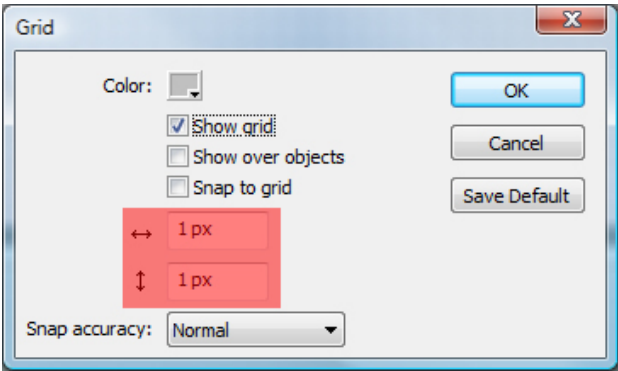

51: Grid

SWF

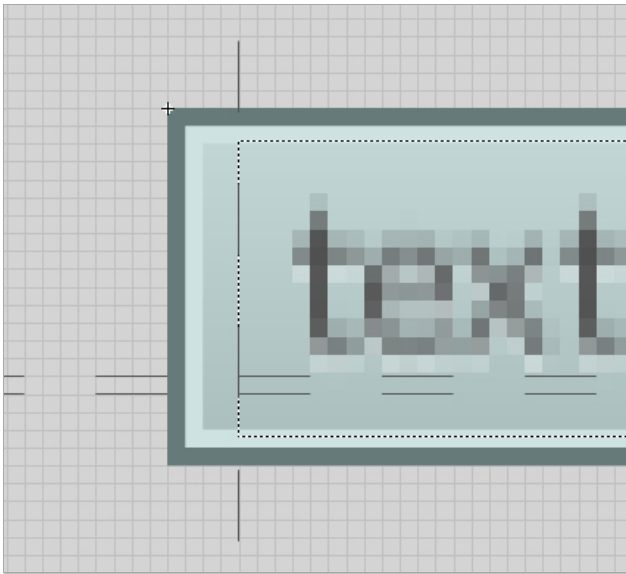

□ 52:

3.1.2

Flash

Scaleform

Flash

Photoshop®

PNG

3.1.3

—

3.1.4

Flash

3.1.5

3.1.6 2

2 2

- 16x16
- 32x32
- 64x64
- 128x128
- 128x256
- 256x256
- 512x256
- 512x512


3.2

Flash Scaleform CLIK


3.2.1

Flash


3.2.1.1 1

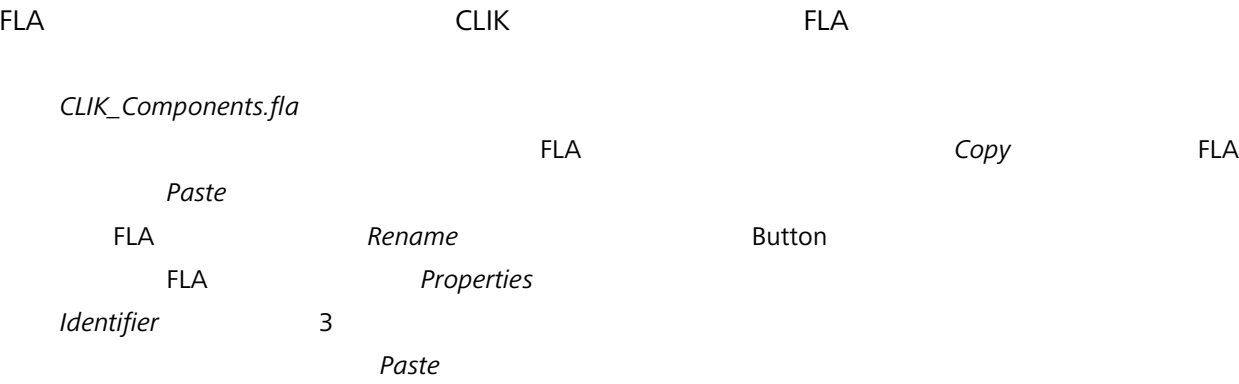

1. *library* *Properties*
2. *Properties* `gfx.controls.Button` *Class* (CTRL+C)
3. *Cancel*
4. *Duplicate*
5. *Duplicate Symbol* *Export* *ActionScript*
6. *Class* (CTRL+V) `textField`
7. *OK*
8. *library* *Component Definition*
9. *Class* `textField` (CTRL+V) `textField`
10. *OK*

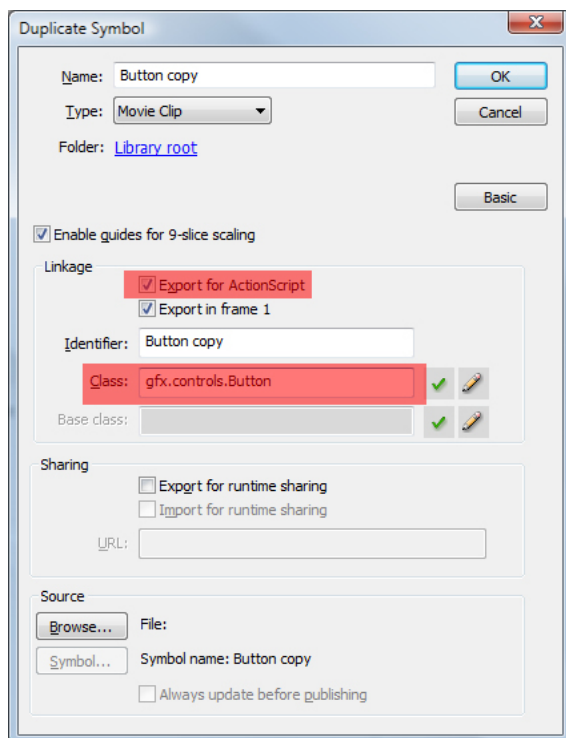

□ 53:

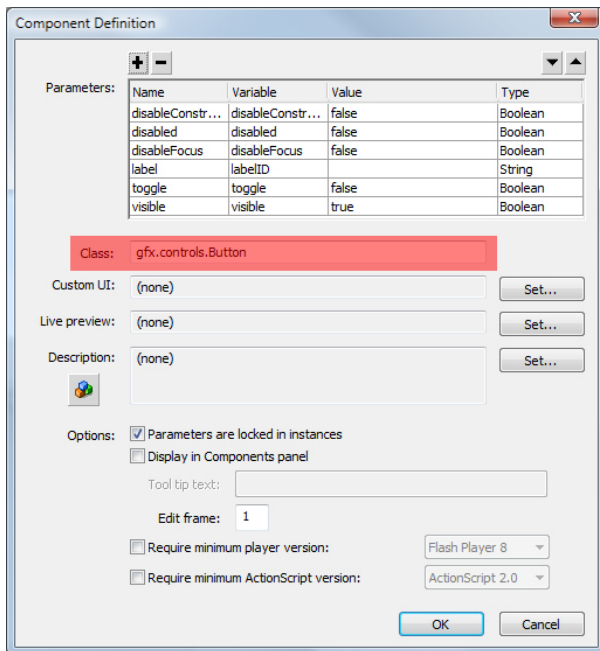

□ 54:

3.3

Scaleform

CLIK

CLIK

CLIK

- Flash

- Flash

- Photoshop Illustrator®


Flash

FLA

Flash

[CLIK](#)

3.3.1 StatusIndicator

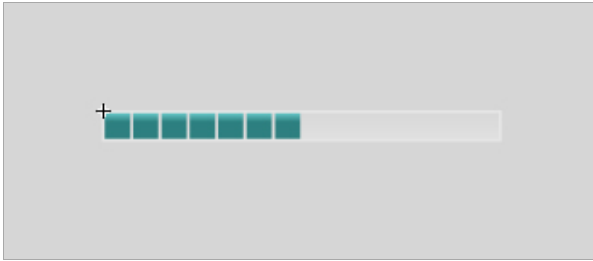

□ 55: **StatusIndicator.**

StatusIndicator

indicator


track *Track*

Indicator

Photoshop



□ 56: **StatusIndicator PSD**

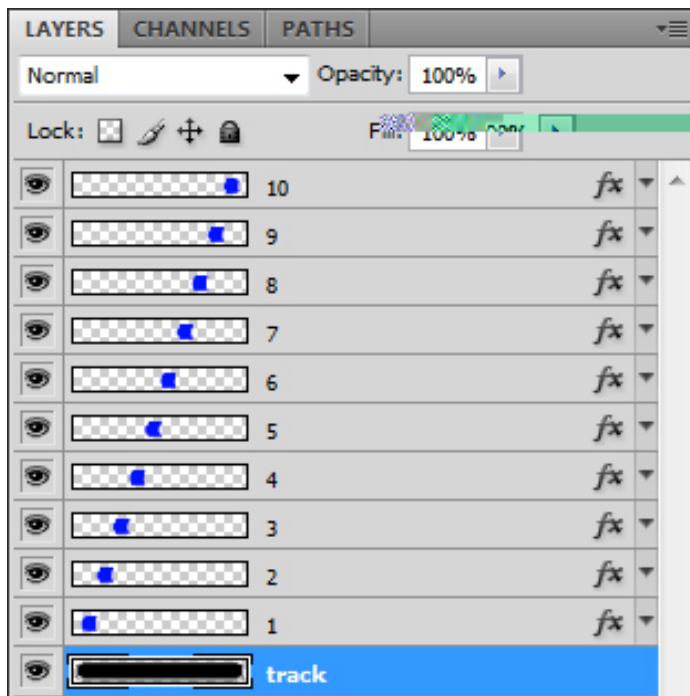

☐ 57 Photoshop StatusIndicator PSD

1. Photoshop StatusIndicator
2. PSD
3. Flash *File Import -> Import to Stage*
4. StatusIndicator PSD
5. *Import* *Convert layers to:* Layers
6. OK
7. Flash PSD 10 10 10 10
PSD 10 layer 1
- 8.
- 9.
10. layer 1 6
11. *Insert* layer 1 11
12. layer 2 (Ctrl+X)
13. layer 1 11 (Ctrl+Shift+V) layer 1
14. 10 (layer 5 layer
- 1) 11 layer 3 16 layer
- 2 10 PSD 51
- 4 21
15. 2-10

16.

Remove Frames


55

17. *indicator layer*

18. *track* *track*

19. *layer 1* *indicator*

20. *indicator* *track* *actions layer* *track* *indicator*

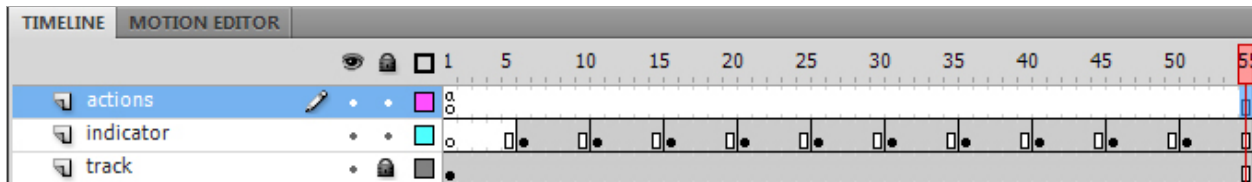

□ 58:

21. *StatusIndicator*

22. *1 10*

23.

24.



□ 59: **StatusIndicator**

3.4

Scaleform CLIK

3.4.1

Scaleform

SWF

Scaleform

Flash UI

3.4.2

Flash

Scaleform

Scaleform

Scaleform
 Mobile
 Mobile
 te Mobile

Slate
 CJK
 CJK

Scaleform
 textFidld
 Slate
 ASCII
 Sla

textFields
 Scaleform
 3.4.4
 Scalefor

m
 Scaleform
 UI

3.4.3 textField

textFields
 textFidld
 Inspector)
 LA

Embed
 FLA

OK
 (Window > Property
 F

3.4.4

Scaleform
 SWF
 SWF
 Scaleform

Scaleform
 textField
 gfontlib fla
 Scaleform
 swf

fontconfig.txt
 Scaleform

fontconfig.txt

Scaleform

\$TITLE

\$TITLE=Scaleform


Scaleform

Scaleform

Scaleform




Scaleform CLIK

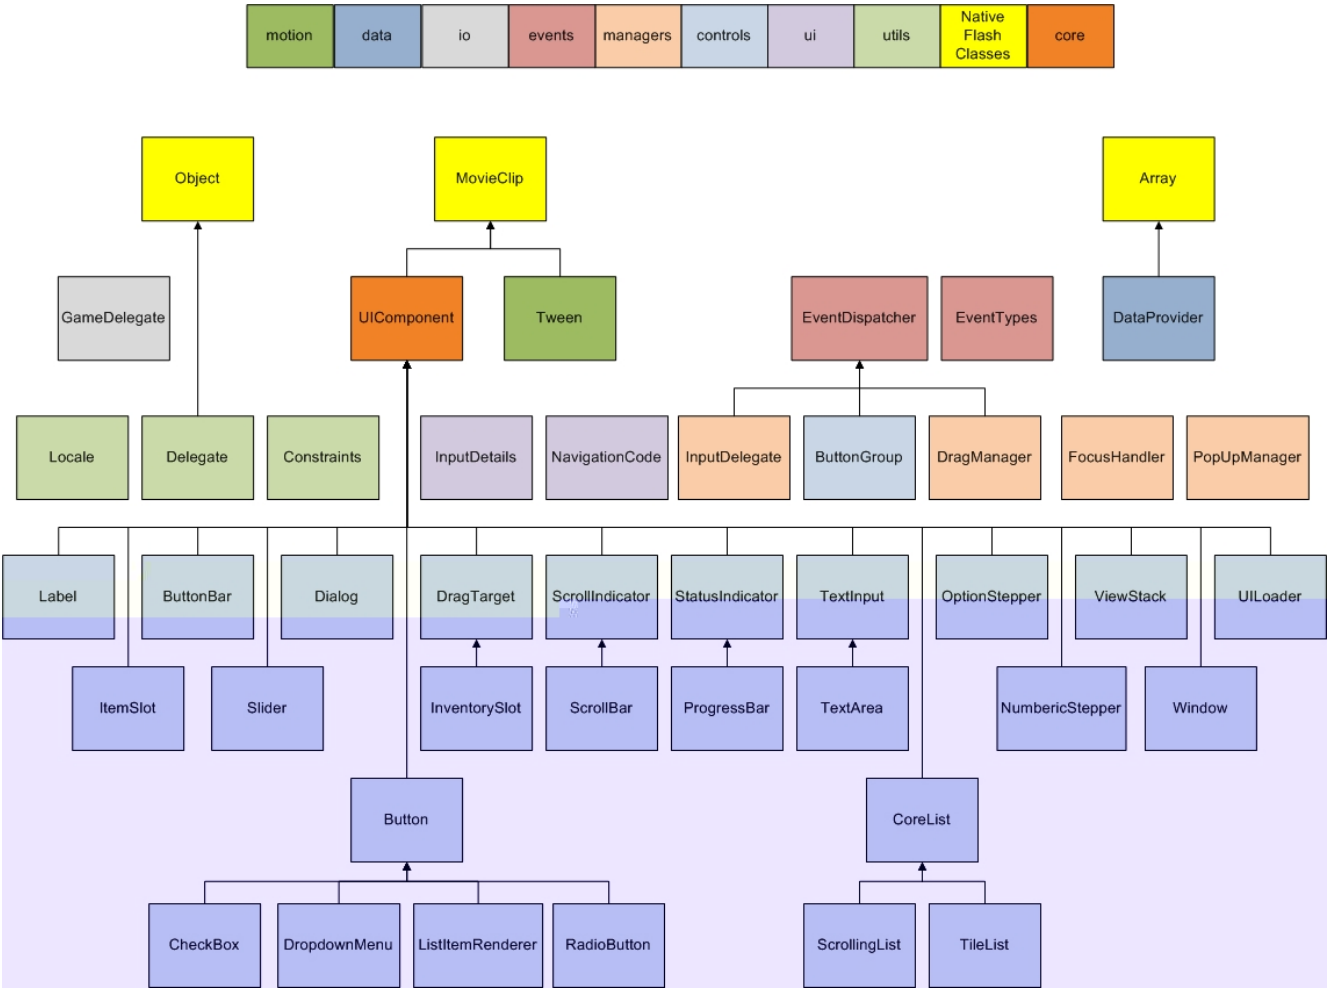

□ 60: Scaleform CLIK

4.1 UI *UIComponent*

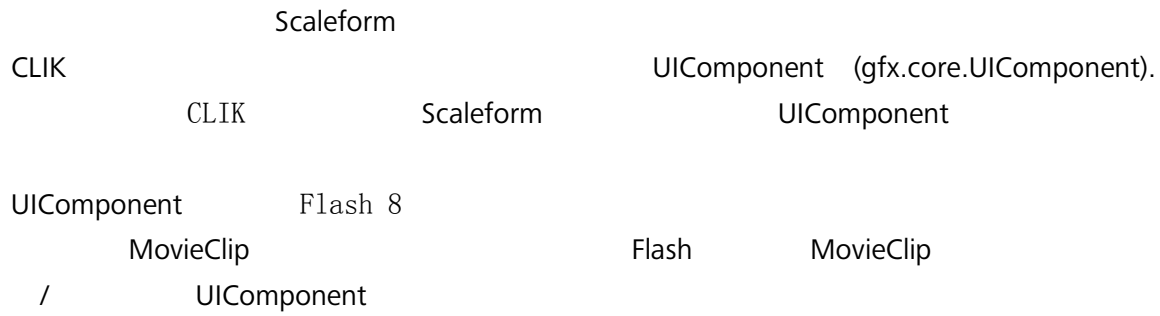

- ***disabled;***
- ***visible;***
- ***focused;***
- ***width;***
- ***height;***
- ***displayFocus:*** true

- UIComponent
- ***configUI:***
 - ***draw:***
 - ***changeFocus:***
 - ***scrollWheel:*** 当鼠标光标在组件上方被调用。

UIComponent EventDispatcher

4.1.1

- onLoad()
- MovieClip
 - configUI()
 - validateNow()
 - draw()

4.2

Scaleform
CLIK

4.2.1

ListItemRenderer RadioButton
CheckBox Button (gfx.controls.Button) ScrollBar Button
CLIK Button
CLIK

- *up*
 -
 - *down*
 - *disabled*
- over*

Button
selected_
CLIK Button

- *up*
-
- *down*
- *disabled*
- *selected_up*
-
- *selected_over*
- *selected_down*
- *selected_disabled*

CLIK

[CLIK](#)

CLIK
getStatePrefixes()

```
private function getStatePrefixes():Array {  
    return (_selected) ? ["selected_", ""] : [""];  
}
```

CLIK

selected_


getStatePrefixes()

stateMap

CLIK

```
private var stateMap:Object = {
    up:["up"],
    over:["over"],
    down:["down"],
    release: ["release", "over"],
    out:["out","up"],
    disabled:["disabled"],
    selecting: ["selecting", "over"],
    kb_selecting: ["kb_selecting", "up"],
    kb_release: ["kb_release", "out", "up"],
    kb_down: ["kb_down", "down"]
}
```

getStatePrefixes()

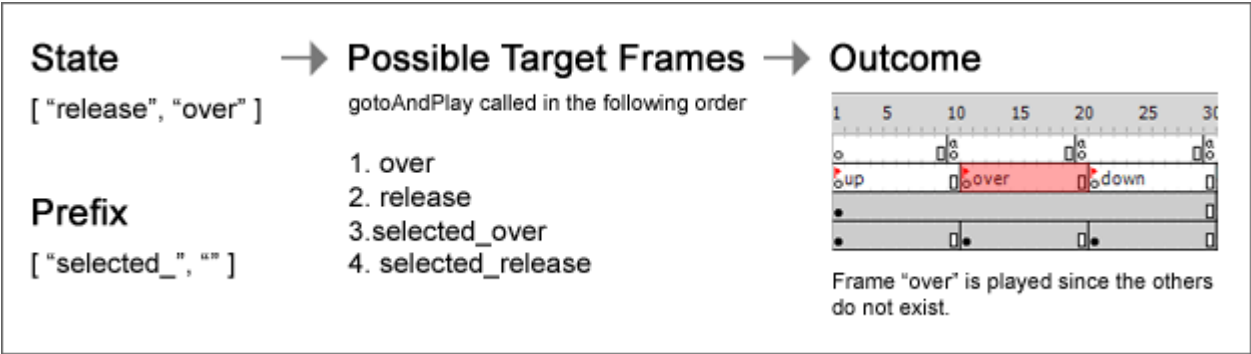

□ 61:

4.2.2

CLIK Scrolli


ngList OptionStepper Slider
 TextArea

- *default*
- *focused*
- *disabled*


4.2.3

- *default*
- *disabled*

4.2.4

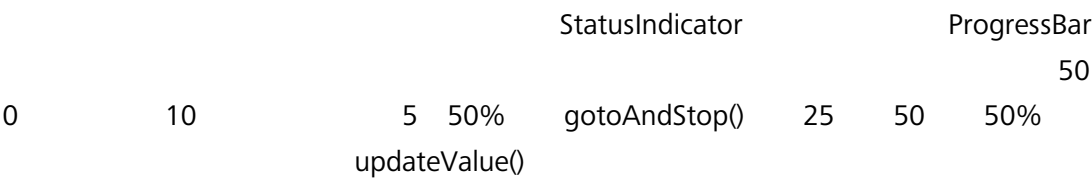


4.3

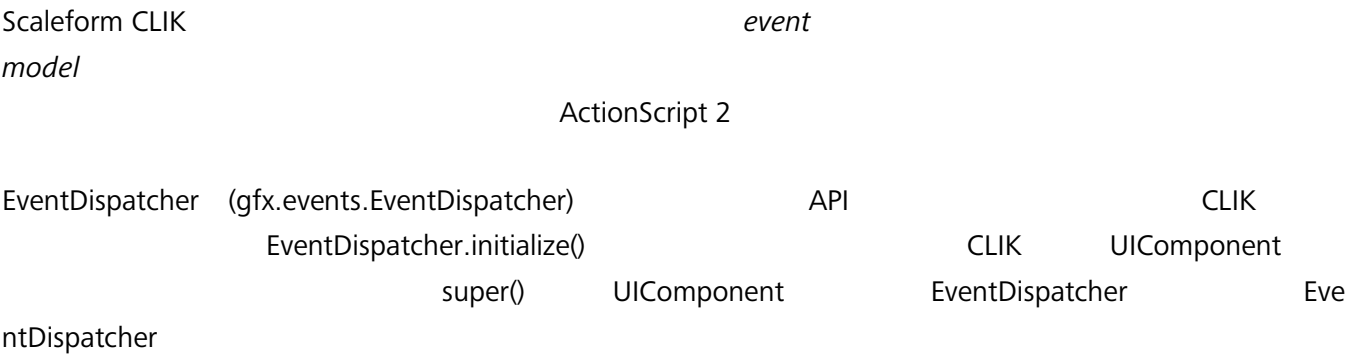

4.3.1

4.3.1.1

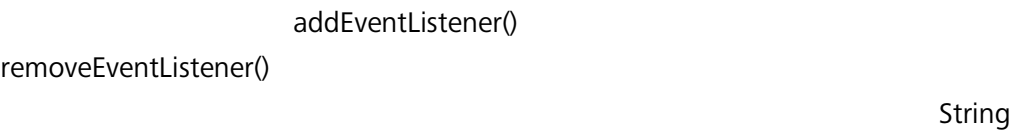

EventTypes (gfx.events.EventTypes)
(EventTypes.SHOW show)

```
buttonInstance.addEventListener("itemClick", this, "callBack");
function callBack(eventObj:Object):Void {
    buttonInstance.removeEventListener("itemClick", this, "callBack");
}
```

在本例中按例置听“itemClick”事件并在接收到事件行函数“callback”。回收函数移除事件听器。


事件象的属性基于原始型但各不相同。CLIK件生的事件象（及其属性）列表，参考[内置件](#)相关章。

4.3.1.2

CLIK dispatchEvent()

```
dispatchEvent({type:"itemClick", item:selectedItem});
```

4.4

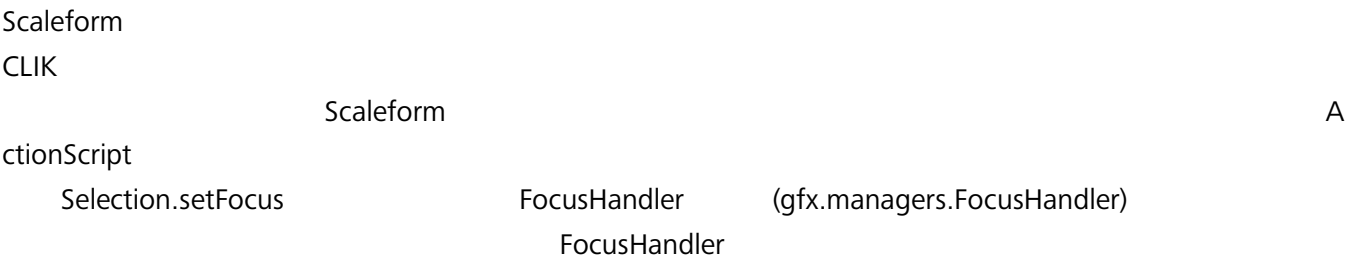

4.4.1

```
Selection.setFocus(firstComponentOrMovieClip);
```


4.5

Scaleform CLIK Flash 8
MovieClip MovieClip
CLIK

4.5.1

InputDelegate class
(gfx.managers.InputDelegate) InputDelegate InputDetails (gfx.u
i.InputDetails) InputDelegate.readInput() InputDelegate


InputDetails

- key
-
- 关闭窗口事件 由窗口的按下与窗口起作用而生成，相窗口输入窗口的数字参数也分窗口 “keyUp” 或 “keyDown” ；
- navEquivalent(navigation equivalent) “up” “down” “left” “right” NavigationCode (gfx.ui.NavigationCode)

FocusHandler InputDelegate

the handleInput()

InputDetails pathToFocus

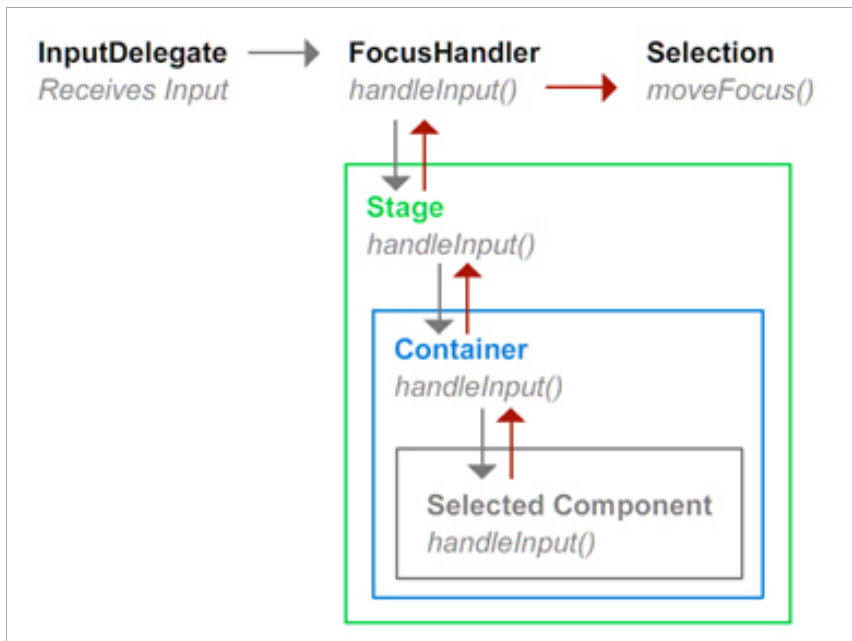

□ 62: handleInput()

FocusHandler handleInput() false null navEquivalent Scalef
orm

```
function handleInput(details:InputDetails, pathToFocus:Array):Boolean {
    if (details.navEquivalent == "left")
    { //    NavigationCode.LEFT
        doSomething();
        return true;
    }
    return false;
}
```

pathToFocus true fa

lse

```
function handleInput(details:InputDetails, pathToFocus:Array):Boolean {
    var nextItem:MovieClip = pathToFocus.shift();
    var handled:Boolean = nextItem.handleInput(details, pathToFocus);
    if (handled) { return true; }
    //
    return false; //    true
}
```

DropDownMenu handleInput

pathToFocus

```
function handleInput(details:InputDetails, pathToFocus:Array):Boolean {
    var handled:Boolean = dropdown.handleInput(details);
    if (handled) { return true; }
    //
    return false; //          true
}
```

InputDelegate.instance

FocusHandler

```
InputDelegate.instance.addEventListener("input", this, "handleInput");
function handleInput(event:Object):Void {
    var details:InputDetails = event.details;
    if (details.value = Key.TAB) { doSomething(); }
}
```

InputDelegate

InputDelegate

W A S D

4.5.2

Nintendo


Wii™

CLIK

SWF


```
myButton.addEventListener("click", this, "onCursorClick");
function onCursorClick(event:Object):Void {
    switch (event.mouseIndex) {
        ...
    }
}
```

4.6

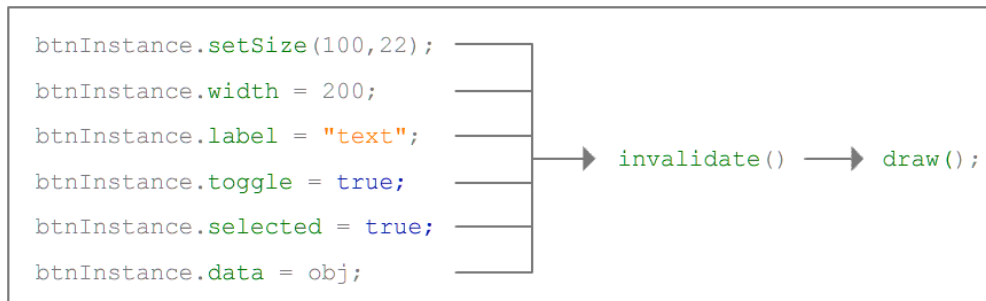

□ 63: CLIK


4.6.1

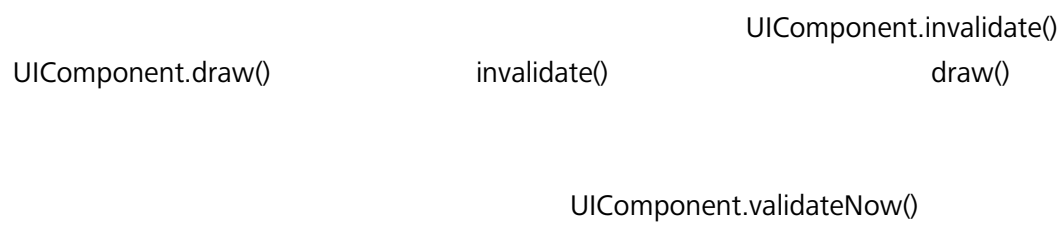


4.7

Scaleform CLIK


- 1.
- 2.

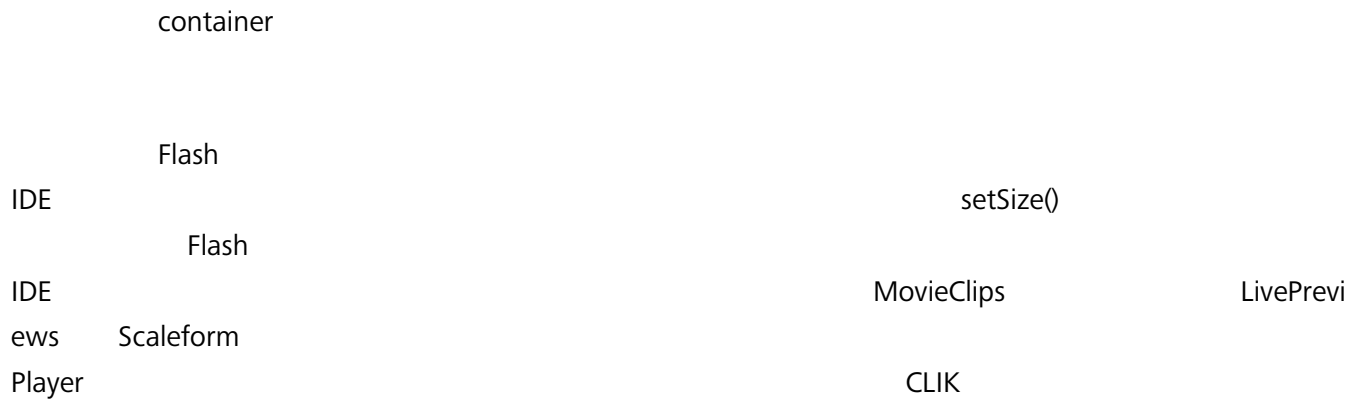

4.7.1 Scale9Grid

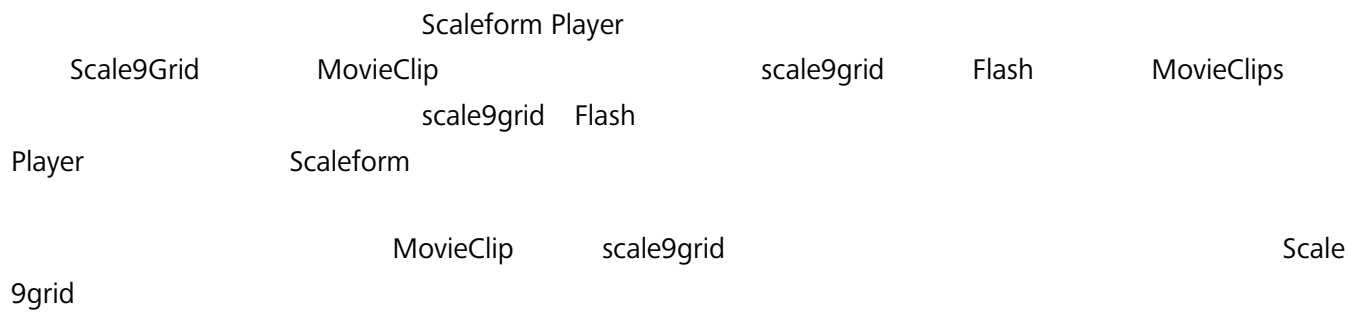

4.7.2

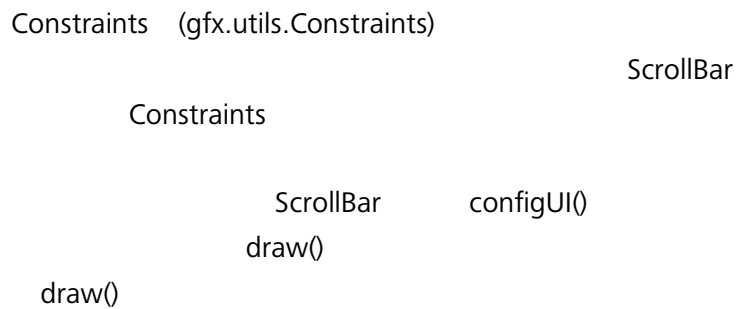

```

private function configUI():Void {
    ...
    constraints = new Constraints(this);
    //      upArrow
    constraints.addElements(downArrow, Constraints.BOTTOM);
    constraints.addElenent(track, Constraints.TOP|Constraints.BOTTOM);
    ...
}
  
```



```
private function draw():Void {
    ...
    constraints.update(__width, __height);
    ...
}
```

4.8

dataProvider
Scaleform CLIK IDataProvider (gfx.interfaces.IDataProvider) API

dataProvider

dataProvider
DropdownMenu CLIK IDataProvider

CoreList (ScrollingList, TileList) OptionStepper
IDataProvider API

4.8.1 最佳使用方法

DataProvider
(gfx.data.DataProvider)

initialize() dataProvider A

ctionScript dataProvider dataProvider I

dataProvider dataProvider

```
myComponent.dataProvider = [ "data1",
    4.3,
    {label:"anObjectElement", value:6} ];
```

dataProvider

- *length*:
 - *requestItemAt*: dataProvider Op
 - *requestItemRange*: dataProvider
ScrollingList
 - *indexOf*:
 - *invalidate*: dataProvider dataChange
- dataProvider

Tween	Scaleform		easing	mx.transitions.easing.*
-------	-----------	--	--------	-------------------------

4.9.1

```
Tween      MovieClip      Tween      T
ween.init()
```

```
import mx.transitions.easing.*;
import gfx.motion.Tween;
Tween.init();           // tween      MovieClip
//      1      Tween      alpha
myMovieClip.tweenTo(1, {_x: 200, _alpha: 0}, Strong.easeIn);
```

```
Tween Tween onTweenComplete()
```

xcii

```
}  
mc.tweenTo(5, {_rotation: 20}, Bounce.easeOut);
```

4.10

Scaleform

```
CLIK      PopUpManager  (gfx.managers.PopUpManager)
          PopUpManager
```

4.10.1

```

PopUpManager
    MovieClip
        CLIK
            ID
                createPopUp()
                MovieClips

```

```
import gfx.managers.PopUpManager;
PopUpManager.createPopUp(context, "MyToolTipLinkageID",
                          {_x: 200, _y:200}, relativeTo);
```

```
graph TD; Scaleform --> topmostLevel1[topmostLevel]; topmostLevel1 --> root; root --> SWF; SWF --> topmostLevel2[topmostLevel]; topmostLevel2 --> Z; Z --> true; topmostLevel3[topmostLevel] --- true;
```

4.11

DragManager
(gfx.managers.DragManager)

```
startDrag()      MovieClip      ID
                stopDrag()      DragManager  InputDelegate
```

4.11.1



□ 64: **DragDemo**



ItemSlot
 (gfx.controls.ItemSlot) InventorySlot
 ItemSlot DragTarget CLIK ItemSlot

4.12

4.12.1 Delegate

Delegate (gfx.utils.Delegate) Scaleform
 CLIK DragManager

```
eventProvider.onMouseMove = Delegate.create(this, doDrag);
```

4.12.2 Locale

Locale (gfx.utils.Locale)
 Scaleform
 Button Label TextInput
 Locale.getTranslatedString() ActionScript
 Locale

5

Scaleform CLIK


5.1

Scaleform CLIK

5.1.1 textField ListItem Renderer

Michael	Jordan
Roger	Federer
Michael	Schumacher
Tiger	Woods
Babe	Ruth
Wayne	Gretzky

☐ 65: **ScrollingList**

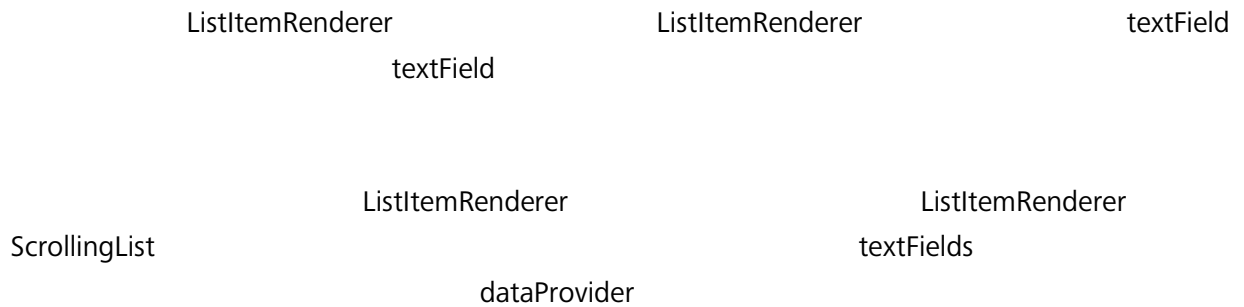


```
list.dataProvider = [{fname: "Michael", lname: "Jordan"},
                     {fname: "Roger",   lname: "Federer"},
                     {fname: "Michael", lname: "Schumacher"},
                     {fname: "Tiger",   lname: "Woods"},
                     {fname: "Babe",    lname: "Ruth"},
                     {fname: "Wayne",   lname: "Gretzky"},
                     {fname: "Usain",   lname: "Bolt"}];
```

```

    lname      fname      textField

```


5.1.2

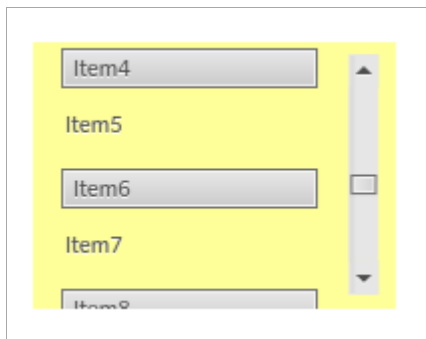

□ 66: **CLIK**

CLIK ScrollBar

- **actions:** `ActionScript`
- **scrollbar:** `CLIK` `ScrollBar` `sb`
- **mask** `MovieClip`
- **content**
- **background**

`content` `y` `0`

`ActionScript`

code

```
// 133
sb.setScrollProperties(1, 0, content._height - 133);
sb.position = 0;

sb.addEventListener("scroll", this, "onScroll");
function onScroll() {
    content._y = -sb.position;
}
```


setScrollProperties

Scaleform

HUD

Scaleform

5.2

Scaleform

CLIK

Flash ActionScript 2

5.2.1 **ScrollingList TreeView**

❑ **67: TreeView**

TreeView Demo

(Resources/AS2/CLIK/demos/TreeViewDemo.fla) ScrollingList

ListItemRenderer DataProvider

ScrollingList

-
-

ListItemRenderer tab

tabbed

•

ListItemRenderer

ListItemRenderer

Tre

eViewItemRenderer

TreeViewDataProvider

TreeViewConstants

Resources/AS2/CLIK/demos/com/

ActionScript

2

```
var root:Object =
{
    label: "System",
    nodes:[
        {label: "Applications",
          nodes:[
              {label: "CGStudio",
                nodes:[
                    {label: "Data"},
                    {label: "Samples"},
                    {label: "Config"}
                ]
              },
              {label: "Money Manager"},
              {label: "Role Call v6"},
              {label: "Super Draft",
                nodes:[
                    {label: "Templates"},
                    ...
                ]
              }
          ]
        }
    ]
}
```

label

nodes

ScrollingList

TreeViewDataProvider

ListItemRenderer

/

/

TreeViewDataProvider

CLIK

ci

-
-
-
-
-

Window

Title					
formPadding					
formType	symbol				
	swf	symbol		swf	SWF
formSource	formType symbol SWF				
	formType	swf			
allowResize					
minWidth, maxWidth, minHeight, maxHeight	0				

```

[Inspectable(name="formType", enumeration="symbol,swf")
private var _formType:String = "symbol";

```

Flash

pe

formType

_formTy

```

[Inspectable(defaultValue="Title")]
public function get title():String { return _title; }
public function set title(value:String):Void {
    _title = value;
}

```

```

        invalidate();
    }

```

CLIK

```

    UIComponent
draw()  configUI()

    configForm()

```

Flash 8

```

MovieClipLoader
pLoader.onLoadComplete()

    configForm()

Scaleform

MovieCli

```

```

draw()
validateNow()

```

```

    UIComponent
        validateNow()
draw()

    draw()
validateNow()

```

SWF

```

private function onMouseDown() {
    var targetObj:Object = Mouse.getTopMostEntity();
    while (targetObj != null && targetObj != _root)
    {
        if (targetObj == this) {
            swapDepths(_parent.getNextHighestDepth());
            return;
        }
        targetObj = targetObj._parent;
    }
}

```

WindowManager

z Win

dowManager