

Autodesk® Scaleform®

Scaleform CLIK

Scaleform CLIK

: Prasad Silva Matthew Doyle
: 2.0
: 2010 8 19

Copyright Notice

Autodesk® Scaleform® 4.3

© 2013 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk 123D, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo), BIM 360, Built with ObjectARX (design/logo), Burn, Buzzsaw, CADmep, CAiCE, CAMduct, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, Design Server, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver, Exposure, Extending the Design Team, FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, Freewheel, GDX Driver, Glue, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, Map It, Build It, Use It, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, Revit LT, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Socialcam, Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER

EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform :

Scaleform CLIK User Guide (Scaleform CLIK)

Autodesk Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

www.scaleform.com

info@scaleform.com

(301) 446-3200

Fax (301) 446-3199

1		1
1.1		1
1.1.1	Scaleform CLIK	1
1.2		2
1.3	UI	2
2		3
2.1		4
2.1.1	Button	6
2.1.2	CheckBox	12
2.1.3	Label	15
2.1.4	TextInput	18
2.1.5	TextArea	22
2.2		25
2.2.1	RadioButton	26
2.2.2	ButtonGroup	30
2.2.3	ButtonBar	32
2.3		35
2.3.1	ScrollIndicator	35
2.3.2	ScrollBar	38
2.3.3	Slider	41
2.4		43
2.4.1	NumericStepper	45
2.4.2	OptionStepper	47
2.4.3	ListItemRenderer	50
2.4.4	ScrollingList	53
2.4.5	TileList	59
2.4.6	DropDownMenu	65
2.5		71
2.5.1	StatusIndicator	71
2.5.2	ProgressBar	73
2.6		75
2.6.1	Dialog	75
2.6.2	UILoader	77

2.6.3	ViewStack	79
3		81
3.1		81
3.1.1		81
3.1.2		82
3.1.3		82
3.1.4		83
3.1.5		83
3.1.6	2	83
3.2		83
3.2.1		84
3.3		86
3.3.1	StatusIndicator	86
3.4		89
3.4.1		89
3.4.2		89
3.4.3	textField	89
3.4.4	Scaleform	90
4		91
4.1	UIComponent.....	92
4.1.1		92
4.2		93
4.2.1		93
4.2.2		95
4.2.3		95
4.2.4		96
4.3		96
4.3.1		96
4.4		97
4.4.1		98
4.4.2		99
4.5		99
4.5.1		99
4.5.2		102
4.6		102
4.6.1		102
4.7		103
4.7.1	Scale9Grid	104

4.7.2	Constraints	104
4.8		105
4.8.1		105
4.9		106
4.9.1		106
4.10		107
4.10.1		107
4.11		108
4.11.1		108
4.12		109
4.12.1	Delegate	109
4.12.2	Locale	109
5		111
5.1		111
5.1.1	2 textField ListItem Renderer	111
5.1.2		113
5.2		115
5.2.1		117

1

Scaleform® Common Lightweight Interface Kit (CLIK™)
CLIK User Guide

[Getting Started with CLIK](#) [Getting Started with CLIK Buttons](#)
2 Scaleform CLIK
CLIK

1.1 はじめに

Scaleform CLIK ActionScript™ 2.0 (AS) (UI)
PC Scaleform 4.3 UI
CPU (UI)
CLIK 15 UI
()

1.1.1 Scaleform CLIK

: UI

Button	Slider
ButtonBar	StatusIndicator
CheckBox	ProgressBar
RadioButton	UILoader
Label	ScrollingList
TextInput	TileList
TextArea	DropDownMenu
ScrollIndicator	Dialog
ScrollBar	NumericStepper

: API

InputManager	Locale
FocusManager	Tween
DragManager	DataProvider
PopUpManager	IdataProvider

EventDispatcher	Ilist
Delegate	IlistItemRenderer
Constraints	GameDataProvider

:

Getting Started with CLIK
Getting Started with CLIK Buttons
CLIK API Reference
CLIK User Guide
CLIK Flash Samples
CLIK Video Tutorials

1.2 コンポーネントについて

Flash

Flash

gskinner.com

Scaleform

Scaleform CLIK

gskinner.com		Adobe
Flash Creative Suite® 4 (CS4)		
gskinner.com	Flash	1
gskinner.com		http://gskinner.com/blog

CLIK

CLIK

Flash Studio

:

C:\Program Files\Scaleform\GFx 4.3\Resources\AS2\CLIK\components\CLIK_Components fla

1.3 UIについての考察

UI

Microsoft Visio®

UI

Flash UI

Scaleform CLIK

UI

Flash

Visio

Flash

Web

Flash

/

(Lua

ActionScript

CLIK


CLIK

UI


- ユーザーの操作 :
- コンポーネントのセットアップ : Flash
- ステート :
) (
- 検証可能なプロパティ :
Flash
- イベント : UI
- ヒントとコツ :

2.1 基本的なボタンとテキストのタイプ


Button CheckBox Label TextInput TextArea
CheckBox Button Label
TextInput TextArea textField

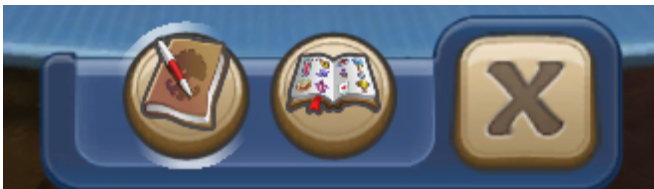


1: Free Realms -

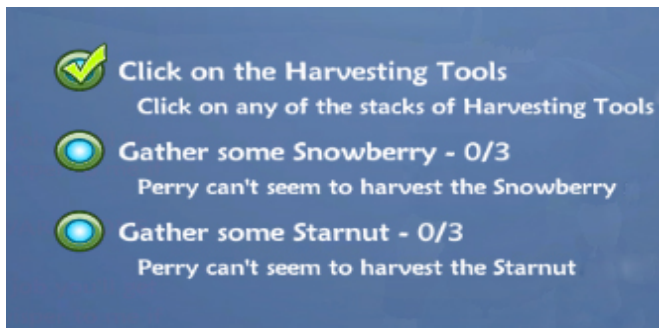

2: *Free Realms* -

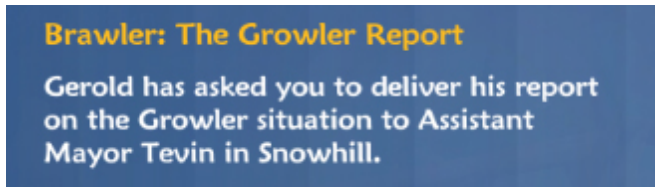


3: *Free Realms* -

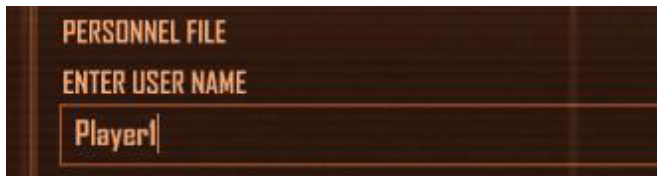

4: *Crysis Warhead* -

TextInput

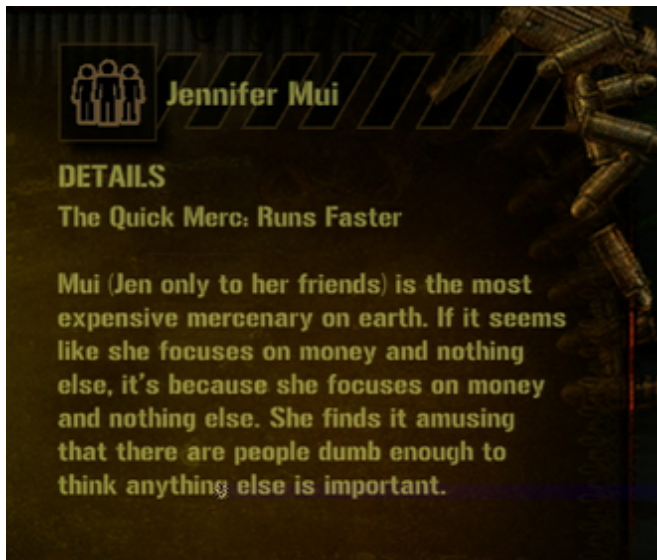

5: *Mercenaries 2* -

TextArea

2.1.1 Button



6:

Button CLIK

(gfx.controls.Button)

Button


textField

ScrollBar

Button

Slider

Button

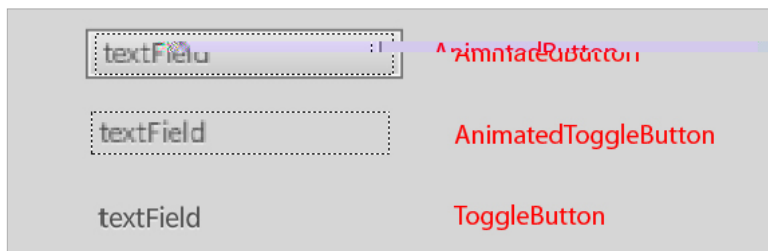

7: `AnimatedButton` `AnimatedToggleButton` `ToggleButton`

CLIK Button

Button.fla

ToggleButton AnimatedButton

AnimatedToggleButton

2.1.1.1

Button

CLIK

Tab


Shift+Tab

$$\begin{pmatrix} \cdot \\ \cdot \end{pmatrix}$$

)

	Web		CLIK		
Shift+Tab		CLIK		Flash	Tab
					CLIK
Button	Button	Enter		Button	/
		Button			
				Enter	
Xbox360					

- *disabled*

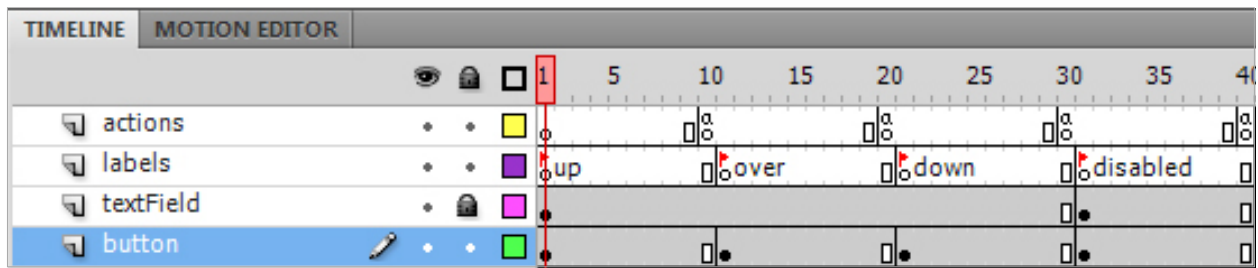

8: Button

Flash


Button

Buttons

Getting Started with CLIK

2.1.1.4

Flash IDE [CS4]
 + F7 [Shift
 AS

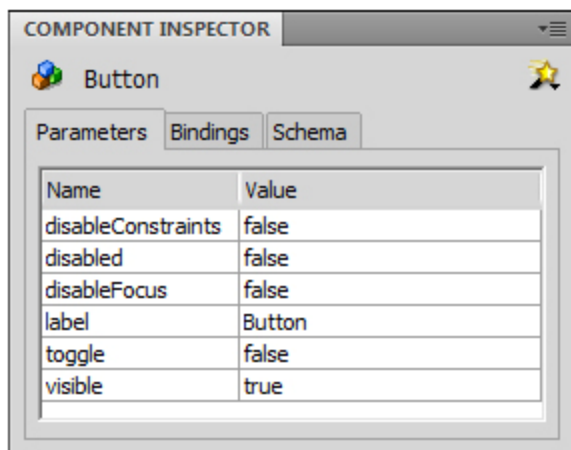

9: CS4 [Button

Button :

disableConstraints Button

		constraints (	textField	)	constraints
		true			
		textField			
		textField			
		textField		/	
Disabled		true			
disableFocus					true
Label	Button				
Toggle	Button	(		)	true
		Button			
Visible		false			

Flash IDE CLIK SWF

2.1.1.5

CLIK

1 Object

- *type* :
- *target* :

Button

Show	visible	true
Hide	visible	false
focusIn		
focusOut		

Select	<code>selected</code> <code>selected : Button</code> <code>true</code>
stateChange	<code>state : Button</code> <code>"up" "over" "down"</code> Getting Started with CLIK Buttons
rollOver	<code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code>
rollOut	<code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code>
Press	<code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code>
doubleClick	<code>doubleClickEnabled</code> <code>true</code> <code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code>
Click	<code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code>
dragOver	<code>(</code> <code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code> <code>)</code>
dragOut	<code>(</code> <code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code> <code>)</code>
releaseOutside	<code>mouseIndex :</code> <code>(</code> <code>0 3</code> <code>)</code>

ActionScript

:

```
myButton.addEventListener("click", this, "onButtonPress");
function onButtonPress(event:Object) {
    //
}
```

```
'myButton'           "click"
                      onButtonPress
Object ( 'event' )
        Object
```

2.1.1.6

Button :

```
import gfx.controls.Button;
attachMovie("Button", "btnInstanceName", someDepth, {_x:33, _y:262, ...});
```

CLIK Button

toggle

:

```
btn.toggle = true;
```

:

```
btn.doubleClickEnabled = true;
btn.addEventListener("doubleClick", this, "onDoubleClick");
function onDoubleClick(e:Object):Void {
    //
}
```

click :

```
btn.autoRepeat = true;
```

2.1.2 CheckBox



10: CheckBox

CheckBox (gfx.controls.CheckBox)
Button

CheckBoxes true/false ()
ToggleButton

toggle

2.1.2.1

CheckBox Button / CheckBox

2.1.2.2

CLIK CheckBox

MovieClip

:

- *textField* : () TextField
- *focusIndicator* : () MovieClip
MovieClip

MovieClip "show"

"hide" 2

2.1.2.3


toggle

CheckBox

:

- *up*

- *over*
- *down*
- *disabled*
- *selected_up*
- *selected_over*
- *selected_down*
- *selected_disabled*

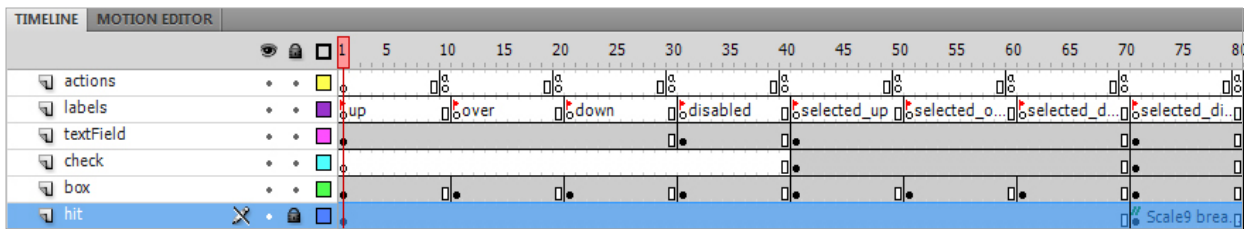

11: CheckBox

CheckBox

Button
CheckBox

[Getting Started with CLIK Buttons](#)

2.1.2.4

CheckBox Button

toggle disableFocus

Button

Data	CheckBox
disableConstraints	Button
	constraints (true)
	textField
	constraints
	textField
	textField /
disabled	true
Label	Button

selected	true	CheckBox	(
Visible	false		)

2.1.2.5

1 Object

- *type* :
- *target* :

CheckBox

Show	visible	true
Hide	visible	false
focusIn		
focusOut		
Select	selected	
	<i>selected</i> : Button	selected
stateChange	<i>state</i> : Button "up" "over" "down" Getting Started with CLIK Buttons	
rollOver	<i>mouseIndex</i> :	
	(	0 3
	)	
rollOut	<i>mouseIndex</i> :	
	(	0 3
	)	
Press	<i>mouseIndex</i> :	
	(	0 3
	)	
doubleClick	true <i>mouseIndex</i> :	<i>doubleClickEnabled</i>
	(	0 3
	)	
Click	<i>mouseIndex</i> :	

	(	0	3
dragOver	)	(	)
	<i>mouseIndex :</i>	(	)
	)	0	3
dragOut	(	)	)
	<i>mouseIndex :</i>	(	)
	)	0	3
releaseOutside	(	)	)
	<i>mouseIndex :</i>	(	)
	)	0	3

CheckBox

```
myCheckBox.addEventListener("select", this, "onCheckBoxToggle");
function onCheckBoxToggle(event:Object) {
    //
}
```

2.1.3 Label



12: Label

```
CLIK Label (gfx.controls.Label)
MovieClip textField
Label textField
Label textField
textField
Label
Label
```

Label	MovieClip
-------	-----------

```

    textField
      textField
        Label
      textField

```

disabled
AS2

Label

Label
textField
textField

Label

textField

Label

2.1.3.1

Label

2.1.3.2

CLIK Label

MovieClip

■

■

- ***textField*** : TextField Label

2.1.3.3


CLIK Label

disabled

2

■ ■

- *default*
- *disabled*

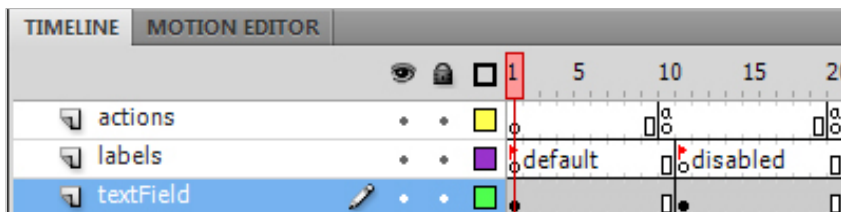

13: Label

2.1.3.4

Label :

Text	
Visible	false
disabled	true

2.1.3.5

1 Object

- *type :*
- *target :*

Label

Show	visible	true
Hide	visible	false
stateChange	Label state : "default"	Label "disabled"

Label :


```
myLabel.addEventListener("stateChange", this, "onStateChange");
function onStateChange(event:Object) {
    if (event.state == "default") {
        //
    }
}
```

2.1.3.6

Label HTML HTML Flash 8 textField :

```
lbl.htmlText = "<b>foo</b>bar";
```

2.1.4 TextInput

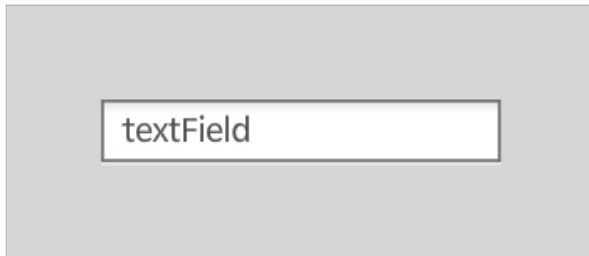

14: TextInput

TextInput (gfx.controls.TextInput)
textField

textField
textField

Label

HTML

TextInput textField

TextInput

Label
textField
UI

TextInput

Label
TextInput PC
textField

TextInput focused disabled
textField

TextInput
textField

AS2

TextInput
TextInput

textField

Flash Studio
TextInput

TextInput

HTML

textField

(Shift+
(Shift+Insert)

)

(Shift+Delete

)

(Ctrl+Insert

)

TextInput

actAsButton inspectable

"default
 TextInput
 over
 rollOver
 out
 rollOut
 over
 out"
 actAsButton
 TextInput
 CLIK

Text
 String
 0xAAAAAA
 TextFormat
 Text

2.1.4.1

TextInput
 textField
 textField

2.1.4.2


CLIK TextInput
 MovieClip
 :

- ***textField*** : textField

2.1.4.3

CLIK TextInput
 : focused disabled 3

- *default*
- *focused* textField
- *disabled*

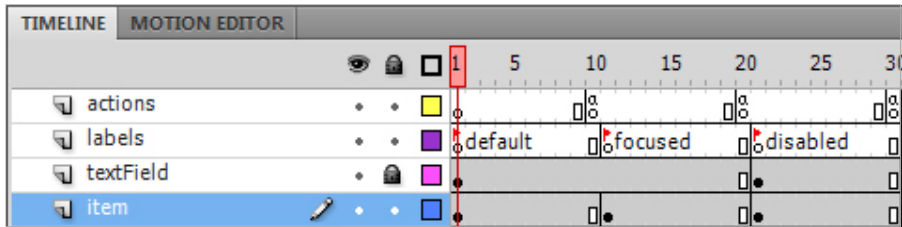

15: TextInput

2.1.4.4

TextInput :

Text	textField				
Visible	false				
disabled	true				
editable	false		TextInput		
maxChars			textField		
password	true		'*'		textField
		textField			
	text				
defaultText	textField				
	defaultTextFormat				
actAsButton	true	TextInput			Button
		rollOver	rollOut		
		TextInput			

2.1.4.5

1 Object

- **type :**
- **target :**

TextInput

Show	visible	true
Hide	visible	false

focusIn	
focusOut	
textChange	textField
rollOver	actAsButton
	<i>mouseIndex:</i>
	0 3
rollOut	actAsButton
	<i>mouseIndex:</i>
	0 3

textField :

```
myTextInput.addEventListener("textChange", this, "onTextChange");
function onTextChange(event:Object) {
    //
}
```

2.1.4.6


:

```
_global.gfxExtensions = true;
textinput.textField.noAutoSelection = true;
```

TextInput HTML HTML Flash 8 textField :

```
textinput.htmlText = "<b>foo</b>bar";
```

2.1.5 TextArea

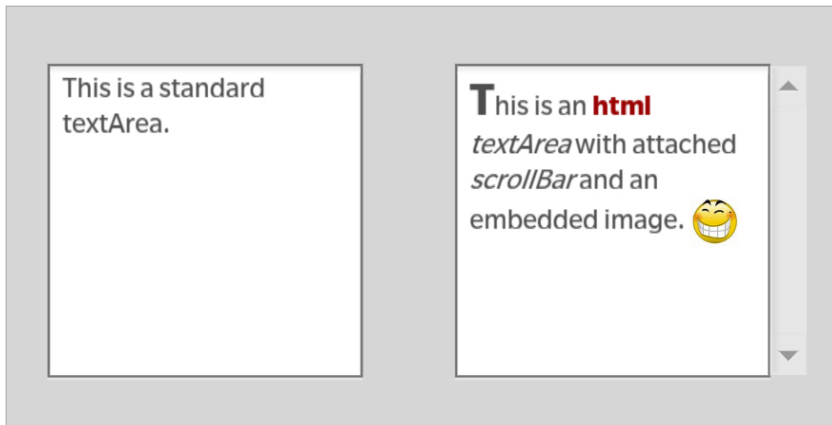

16: TextArea

TextArea (gfx.controls.TextArea) CLIK TextInput

		ScrollBar TextInput		TextInput	TextArea
Label	TextInput				
textField		TextArea HTML		textField	
				TextArea	textField
	textField	ScrollIndicator	ScrollBar		
TextArea				TextArea	textField
		TextArea			

2.1.5.1

TextArea
textField

2.1.5.2

CLIK TextArea

MovieClip

:

- *textField* : TextField

2.1.5.3

focused disabled


TextInput

3

TextArea

-
-

- **default**
- **focused** textField
- **disabled**

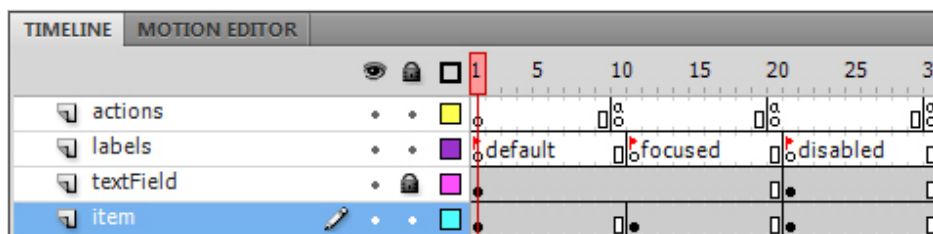

17: TextArea

2.1.5.4

TextArea

password

TextInput

2.4

■

CLIK ScrollBar

Text	textField	
Visible	false	
disabled	true	
editable	false	TextInput
maxChars		textField
scrollBar	CLIK ScrollBar ScrollBar TextArea	ID ()

scrollPolicy	"auto"				
	ScrollBar		"off"	"on"	
		ScrollBar	(ScrollBar		
	)				
defaultText					
	defaultTextFormat				
actAsButton	true	TextInput			Button
		rollOver	rollOut		
		TextArea			

2.1.5.5

1 Object

- **type :**
- **target :**

TextArea

Show		visible		true
Hide		visible		false
focusIn				
focusOut				
textChange	textField			
Scroll				
rollOver				
		actAsButton		
		<i>mouseIndex:</i>		
			0 3	
rollOut				
		actAsButton		
		<i>mouseIndex:</i>		

TextArea :

```
myTextArea.addEventListener("scroll", this, "onTextScroll");
function onTextScroll(event:Object) {
    //
}
```

2.1.5.6

:

```
_global.gfxExtensions = true;
textInput.textField.noAutoSelection = true;
```

TextArea
HTML

HTML
Flash 8

textField
:

```
textInput.htmlText = "<b>foo</b>bar";
```

2.2 グループ タイプ

RadioButton ButtonGroup

ButtonBar

ButtonGroup Button


ButtonBar

Button

RadioButton


ButtonGroup

Button

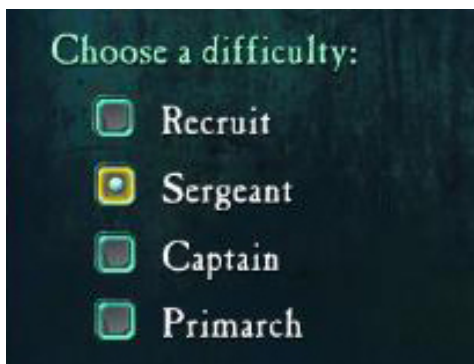

18: Dawn of War II -

2.2.1 RadioButton

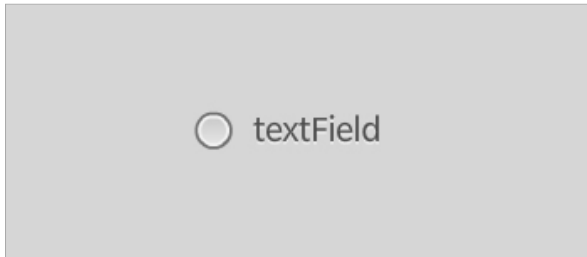

19: RadioButton

```
RadioButton (gfx.controls.RadioButton) 1
RadioButton 1
RadioButton
```

```
CLIK RadioButton CheckBox
RadioButton
ButtonGroup (
RadioButton toggle
ButtonGroup
)
```

2.2.1.1

```
RadioButton
RadioButton
Button RadioButton
RadioButton
RadioButton
ButtonGroup RadioButton
```

2.2.1.2

```
CLIK RadioButton MovieClip
:
• textField : ( ) TextField
• focusIndicator : ( ) MovieClip
MovieClip "hide" 2 MovieClip "show"
```


	textField		Button
	textField	Button	/
selected	true	RadioButton	(
Data	RadioButton		)
group	ButtonGroup	RadioButton	RadioButton
		ButtonGroup	RadioButton
		ButtonGroup	RadioButton _root
			_root
	RadioButton	1	

2.2.1.5

1 Object

- **type :**
- **target :**

RadioButton

Show	visible	true
Hide	visible	false
focusIn		
focusOut		
select	selected	selected
	<i>selected</i> : Button	selected
stateChange	<i>state</i> : Button	
	"up" "over" "down"	
	Getting Started with CLIK Buttons	
rollOver	<i>mouseIndex</i> :	

	<code>(</code>	<code>0</code>	<code>3</code>
rollOut	<code>)</code>		
	<code>mouseIndex :</code>	<code>(</code>	<code>0</code>
press	<code>)</code>	<code>3</code>	
	<code>mouseIndex :</code>	<code>(</code>	<code>0</code>
doubleClick	<code>)</code>	<code>3</code>	<code>doubleClickEnabled</code>
	<code>true</code>		
	<code>mouseIndex :</code>	<code>(</code>	<code>0</code>
click	<code>)</code>	<code>3</code>	
	<code>mouseIndex :</code>	<code>(</code>	<code>0</code>
dragOver	<code>)</code>	<code>3</code>	<code>)</code>
	<code>mouseIndex :</code>	<code>(</code>	
	<code>)</code>	<code>0</code>	<code>3</code>
dragOut	<code>(</code>		<code>)</code>
	<code>mouseIndex :</code>	<code>(</code>	
	<code>)</code>	<code>0</code>	<code>3</code>
releaseOutside			
	<code>mouseIndex :</code>	<code>(</code>	
	<code>)</code>	<code>0</code>	<code>3</code>

RadioButton :


```
myRadio.addEventListener("select", this, "onRadioToggle");
function onRadioToggle(event:Object) {
    //
}
```

2.2.1.6

RadioButton :

```
import gfx.controls.ButtonGroup;
var myGroup:ButtonGroup = new ButtonGroup("groupName");
radio1.group = myGroup;
radio2.group = myGroup;
someMovie.radio1.group = myGroup;
someMovie.radio2.group = myGroup;
```

2.2.2 ButtonGroup

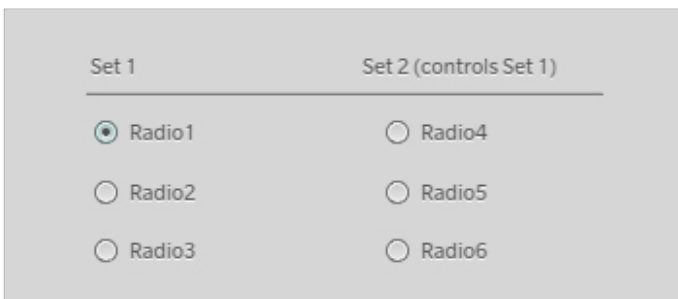

21: ButtonGroup

CLIK ButtonGroup (gfx.controls.ButtonGroup)

1

Button (CheckBox RadioButton)
ButtonGroup

ButtonGroup

CLIK

2.2.2.1

ButtonGroup
RadioButton

2.2.2.2

CLIK ButtonGroup MovieClip

2.2.2.3

ButtonGroup

2.2.2.4

ButtonGroup

2.2.2.5

1 Object

- **type :**
- **target :**

ButtonGroup

change	• <i>item :</i> • <i>data :</i>	CLIK Button AS2 Object
itemClick	• <i>item :</i>	CLIK Button

ButtonGroup :

```
myGroup.addEventListener("change", this, "onNewSelection");
function onNewSelection(event:Object) {
    if (event.item == myRadio) {
        //
    }
}
```

2.2.2.6

RadioButton :

```
var selectedRadio:Button = group.selectedButton;
```

RadioButton
:

ButtonGroup

```
radioBtn1.group.addEventListener("itemClick", this, "onClick");
```

2.2.3.3

CLIK ButtonBar

Button

2.2.3.4

ButtonBar

(Flash IDE

	ButtonBar	)	Button
visible	false	ButtonBar	
disabled	true	ButtonBar	
itemRenderer	Button	ID	
	ButtonBar		
direction	Button	horizontal	Button
		vertical	
spacing	Button		
	(<i>direction</i>	)	
autoSize	true	Button	
buttonWidth	Button		autoSize
	true		

2.2.3.5

1

Object

- *type* :
- *target* :

ButtonBar

show	visible	true
hide	visible	false
focusIn		
focusOut		
change	• <i>index</i> : ButtonBar	0
	1	


	• <i>item</i> : Button CLIK Button • <i>item</i> : dataProvider AS2 Object • <i>data</i> : dataProvider AS2 • <i>Object</i>
itemClick	• <i>index</i> : Button ButtonBar 0 1 • <i>item</i> : dataProvider AS2 Object • <i>data</i> : dataProvider AS2 • <i>Object</i> • <i>mouseIndex</i> : (0 3)

ButtonBar Button
:

```
myBar.addEventListener("itemClick", this, "onItemClick");
function onItemClick(event:Object) {
    processData(event.data);
    //
}
```

2.3 スクロール タイプ

ScrollIndicator ScrollBar Slider
 ScrollIndicator
) ScrollBar 4 ScrollBar
 Slider ScrollBar
 Slider ScrollBar

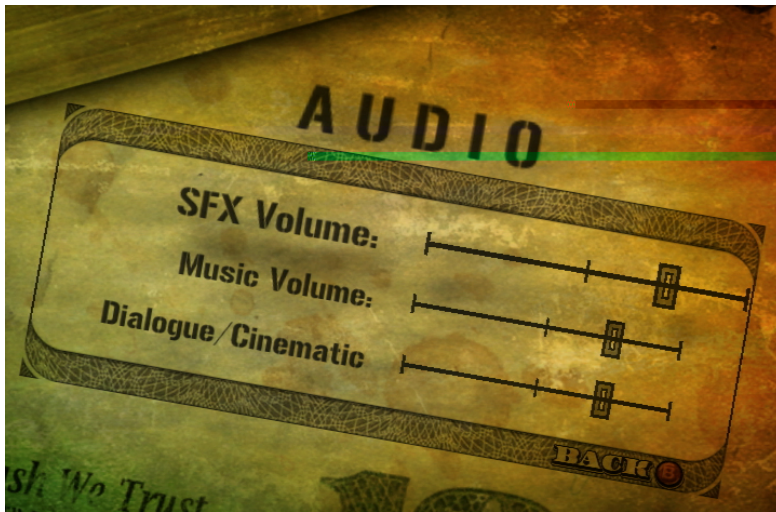

23: Mercenaries 2 -

2.3.1 ScrollIndicator



24: ScrollIndicator

CLIK ScrollIndicator (gfx.controls.ScrollIndicator)
 ScrollIndicator

textField

textField				
TextArea	ScrollIndicator	ScrollBar (		)
	ID	scrollBar		

2.3.1.1

ScrollIndicator

2.3.1.2

CLIK ScrollIndicator

MovieClip

:

- thumb* : CLIK Button
- track* : MovieClip


2.3.1.3

ScrollIndicator

track

Button

thumb

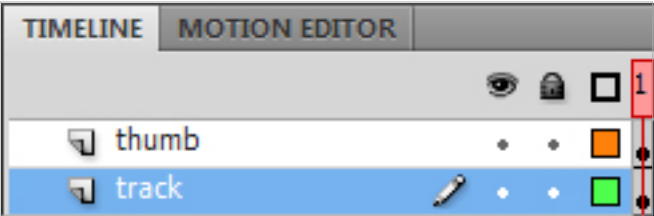

25: ScrollIndicator

2.3.1.4

ScrollIndicator

:

scrollTarget	TextArea	textField	textField
	ScrollIndicator		
visible	false		
disabled	true		
offsetTop	thumb		

offsetBottom	thumb
--------------	-------

2.3.1.5

1 Object

- *type* :
- *target* :

ScrollIndicator

show	visible	true
hide	visible	false
scroll	• <i>position</i> :	

:

```
mySI.addEventListener("scroll", this, "onTextScroll");
function onTextScroll(event:Object) {
    trace("scroll position: " + event.position);
    //
}
```

2.3.1.6

:


```
scrollInd.setScrollProperties(pageSize, minPos, maxPos, pageScrollSz);
scrollInd.positon = currPos;
```

 _rotation
 ScrollIndicator

:

```
scrollInd.direction = "horizontal";
```

2.3.2 ScrollBar

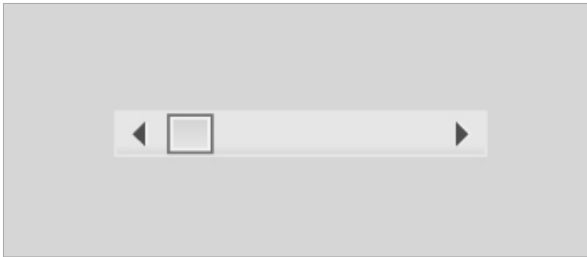

26: ScrollBar

CLIK ScrollBar (gfx.controls.ScrollBar)

ScrollIndicator

2.3.2.1

ScrollBar

ScrollBar

ScrollBar

2

1

1

trackMode inspectable
) trackMode

Shift (

2.3.2.2


CLIK ScrollBar

MovieClip

:

- *upArrow* : CLIK Button Button
- *downArrow* : CLIK Button Button
- *thumb* : CLIK Button
- *track* : CLIK Button

2.3.2.3

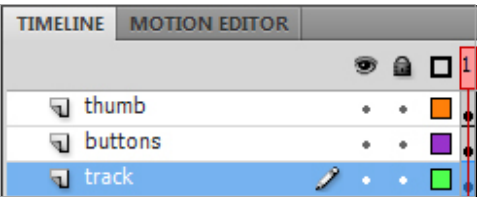

27: ScrollBar

ScrollIndicator ScrollBar
thumb up down track Button

2.3.2.4

ScrollBar ScrollIndicator 1 :

scrollTarget	TextArea	textField	textField
ScrollIndicator			
trackMode	scrollPage scrollToCursor		
visible	false		
disabled	true		
offsetTop	thumb		
offsetBottom	thumb		

2.3.2.5

1 Object

- type :
- target :

ScrollBar

show	visible	true
hide	visible	false

scroll

- *position:*

:

```
mySB.addEventListener("scroll", this, "onListScroll");
function onListScroll(event:Object) {
    trace("scroll position: " + event.position);
    //
}
```

2.3.2.6

:

```
scrollBar.setScrollProperties(pageSize, minPos, maxPos, pageScrollSz);
scrollBar.positon = currPos;
```

_rotation
ScrollBar

:

```
scrollBar.direction = "horizontal";
```

scrollPage
1 :

```
scrollBar.trackScrollPageSize = pageSize;
```

2.3.3 Slider



28: Slider

Slider (gfx.controls.Slider)

2.3.3.1

Slider

Slider

Home

End

2.3.3.2

CLIK Slider

MovieClip

:

- *thumb* : CLIK Button
- *track* : CLIK Button

2.3.3.3

ScrollIndicator ScrollBar Slider
thumb track Button

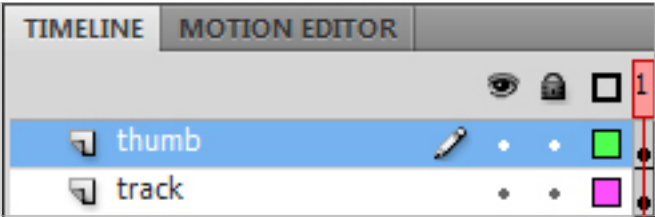


図 29: Slider のタイムライン

2.3.3.4

Slider :

visible	false			
disabled	true			
value	Slider			
minimum	Slider			
maximum	Slider			
snapping	true	snapInterval		
snapInterval	snapInterval false		snapping	
liveDragging	true	Slider false	Slider	change
	change			
offsetLeft	thumb			
offsetRight	thumb			

2.3.3.5

1 Object


- *type* :
- *target* :

Slider

Show	visible	true
Hide	visible	false
focusIn		
focusOut		
change	Slider	


```
Slider :
mySlider.addListener("change", this, "onValueChange");
function onValueChange(event:Object) {
    trace("slider value: " + event.target.value);
    //
}
```

2.4 リストタイプ

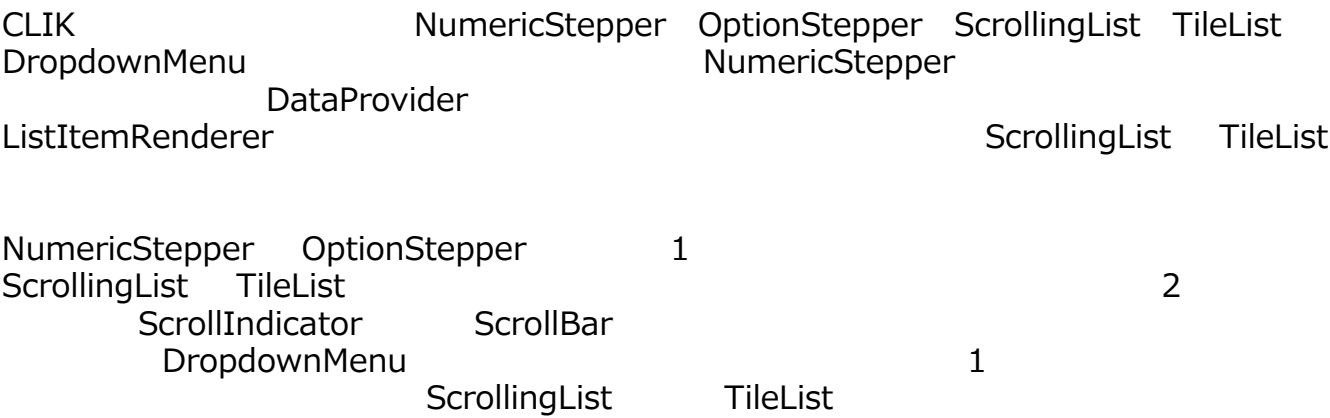




30: Mercenaries 2 -

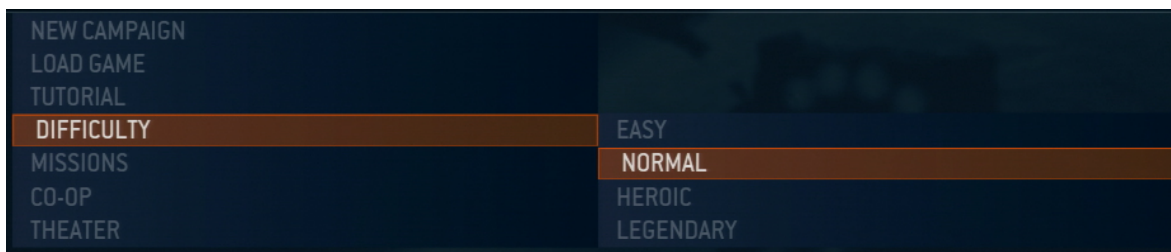

31: Halo Wars -

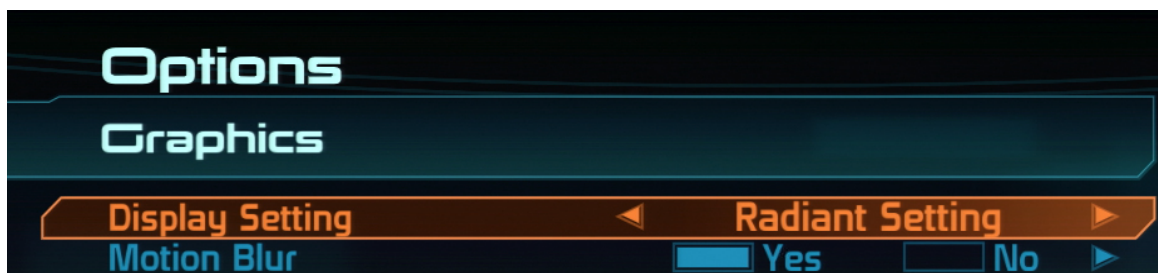

32: Mass Effect -

2.4.1 NumericStepper



33: NumericStepper

NumericStepper (gfx.controls.NumericStepper)

1

2.4.1.1

NumericStepper 2

Home

End

2.4.1.2

NumericStepper

MovieClip

:

- *textField* : TextField
- *nextBtn* : CLIK Button
- *prevBtn* : CLIK Button

2.4.1.3

NumericStepper

:


focused

disabled

3

- *default*
- *focused* textField

- *disabled*

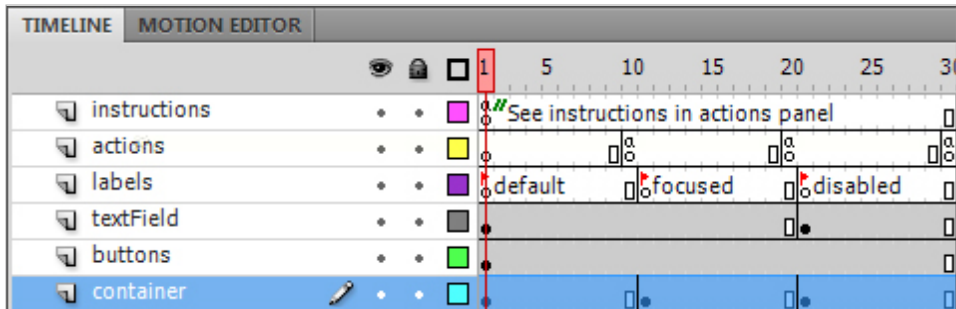

34: NumericStepper

2.4.1.4

NumericStepper

:

MovieClip

visible	false
disabled	true
value	NumericStepper
minimum	NumericStepper
maximum	NumericStepper

2.4.1.5

1 Object

- *type* :
- *target* :

NumericStepper

show	visible	true
hide	visible	false
change	NumericStepper	
stateChange	NumericStepper	focused disabled
	• <i>state</i> :	"default" "focused" "disabled"

NumericStepper

:

```
myNS.addEventListener("change", this, "onValueChange");
function onValueChange(event:Object) {
    trace("ns value: " + event.target.value);
    //
}
```

2.4.1.6

:

```
ns.stepSize = 0.5;
```

:

```
ns.labelFunction = function(value:Number) {
    switch(value) {
        case 1:
            return value + "st";
        default:
            return value + "th";
    }
}
```

2.4.2 OptionStepper



35:

OptionStepper

NumericStepper

OptionStepper (gfx.controls.OptionStepper) 1

dataProvider

OptionStepper selectedIndex

dataProvider dataProvider 0-
 dataProvider :

```
optionStepper.dataProvider = ["item1", "item2", "item3", "item4"];
```

2.4.2.1

NumericStepper OptionStepper 2

Home End dataProvider

2.4.2.2


NumericStepper MovieClip :

- *textField* : TextField
- *nextBtn* : CLIK Button dataProvider
- *prevBtn* : CLIK Button dataProvider

2.4.2.3

OptionStepper : focused disabled 3

- default
- focused textField
- disabled

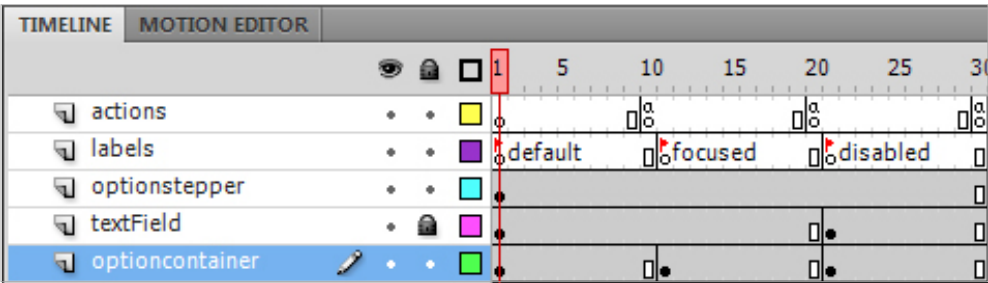

36: OptionStepper

2.4.2.4

OptionStepper : MovieClip

visible	false
disabled	true

2.4.2.5

1 Object

- type :
- target :

OptionStepper

show	visible	true
hide	visible	false

change	OptionStepper		
stateChange	OptionStepper	focused	disabled
	• state :		
	"default"	"focused"	"disabled"

OptionStepper :

```
myOS.addEventListener("change", this, "onValueChange");
function onValueChange(event:Object) {
    trace("os value: " + event.target.selectedItem);
    //
}
```

2.4.3 ListItemRenderer



37: ListItemRenderer

ListItemRenderer (gfx.controls.ListItemRenderer) CLIK Button

ScrollingList TileList DropdownMenu

2.4.3.1

ListItemRenderer Button
Button

ListItemRenderer

ListItemRenderer

2.4.3.2

CLIK ListItemRenderer

MovieClip

:

- *textField* : () TextField
- *focusIndicator* : () MovieClip
- MovieClip "hide" 2
- MovieClip "show"


2.4.3.3

ListItemRenderer

selected

:

- *up*
- *over*
- *down*
- *disabled*
- *selected_up*
- *selected_over*
- *selected_down*
- *selected_disabled*

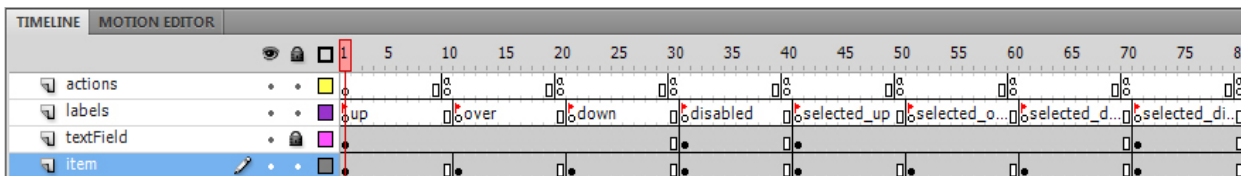

38: ListItemRenderer

ListItemRenderer

Button

ListItemRenderer

[Getting Started with CLIK Buttons](#)

2.4.3.4

ListItemRenderer
Button

label	ListItemRenderer
visible	false
disabled	true

2.4.3.5

1 Object

- *type* :
- *target* :

ListItemRenderer Button

show	visible	true
hide	visible	false
focusIn		
focusOut		
select	selected	
	• <i>selected</i> : Button	selected
stateChange	• <i>state</i> : Button "up" "over" "down" Getting Started with CLIK Buttons	
rollOver	• <i>mouseIndex</i> :	
	) (	0 3
rollOut	• <i>mouseIndex</i> :	
	) (	0 3
press	• <i>mouseIndex</i> :	
	(	

doubleClick	0 3 doubleClickEnabled true • mouseIndex : ()
click	0 3 • mouseIndex : ()
dragOver	0 3 • mouseIndex : ()
dragOut	0 3 • mouseIndex : ()
releaseOutside	0 3 • mouseIndex : ()

2.4.4 ScrollingList



39: ScrollingList

ScrollingList (gfx.controls.ScrollingList)

ScrollIndicator ScrollBar

dataProvider : dataProvider

```
scrollingList.dataProvider = ["item1", "item2", "item3", "item4"];
```

```
ScrollingList
    itemRenderer
    ListItemRenderer
        FLA
    [
    ]
```

2.4.4.1


```
ScrollingList
    ScrollBar
        1
    ScrollingList
        wrapping
        ScrollingList
            wrapping
            "normal"
        wrapping
        "wrap"
        wrapping
        "stick"
        Page Up
        Page Down
        End
        Home
    ScrollingList
        ScrollBar
        ScrollBar
        ScrollBar
    D
        CLIK
        UI
```

2.4.4.2

```
ScrollingList
    ScrollingList
```

ScrollingList	:	focused	disabled	3
---------------	---	---------	----------	---

- *default*
- *focused*
- *disabled*

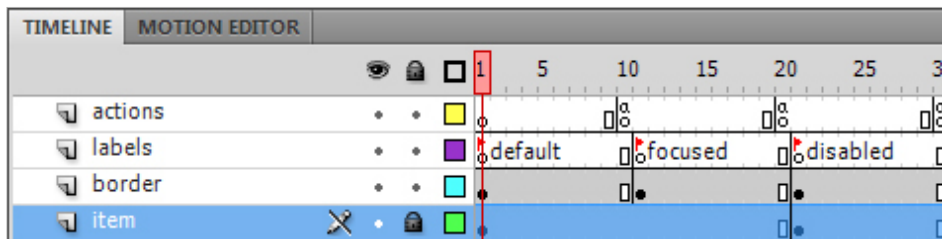

40: ScrollingList

ScrollingList MovieClip
:

visible	false
disabled	true
itemRenderer	ListItemRenderer
renderInstanceName	ScrollingList
scrollBar	ScrollBar
	ScrollingList

ScrollingList		
margin	<i>rendererInstanceName</i>	
rowHeight	<i>rendererInstanceName</i>	
paddingTop	rendererInstanceName	
padding Bottom	rendererInstanceName	
paddingLeft	rendererInstanceName	
paddingRight	rendererInstanceName	
thumbOffsetTop		
thumbOffsetBottom		
thumbSizeFactor	1.0	1.0

2.4.4.5

1 Object

- *type* :
- *target* :

ScrollingList

show	visible	true
hide	visible	false
focusIn		
focusOut		
change	<i>index</i> : 0 1	
itemPress	<i>renderer</i> : CLIK Button <i>item</i> : dataProvider AS2 Object <i>index</i> : dataProvider 0 1 <i>mouseIndex</i> : (0 3)	
itemClick	<i>renderer</i> : CLIK Button <i>item</i> : dataProvider AS2 Object <i>index</i> : dataProvider 0 1 <i>mouseIndex</i> : (0 3)	
itemDoubleClick	<i>renderer</i> : CLIK Button <i>item</i> : dataProvider AS2 Object <i>index</i> : dataProvider 0 1 <i>mouseIndex</i> : (	

	)	0	3
itemRollOver			
• <i>renderer</i> :	Button		CLIK
• <i>item</i> :	dataProvider	AS2	Object
• <i>index</i> :	dataProvider	0	1
• <i>mouseIndex</i> :	(	0	3
	)		
itemRollOut			
• <i>renderer</i> :			CLIK Button
• <i>item</i> :	dataProvider	AS2	Object
• <i>index</i> :	dataProvider	0	1
• <i>mouseIndex</i> :	(	0	3
	)		

:

```
myList.addEventListener("itemClick", this, "onItemClicked");
function onItemClicked(event:Object) {
    trace("list item was clicked: " + event.renderer);
    //
}
```

2.4.4.6

1 :


```
//
// ScrollingList 'label' :
list.dataProvider = [{label: "one", data:1}, {label: "two", data:2}];

// label
//
```

```
//
//      :
list.labelField = "name";
list.dataProvider = [{name: "one", data:1}, {name: "two", data:2}];

//
//      labelFunction
//      :
list.labelFunction = function(itemObj:Object):String {
//
}
list.dataProvider = [{p1: "foo", p2: 1}, {p1: "bar", p2: 2}];
```

2.4.5 TileList

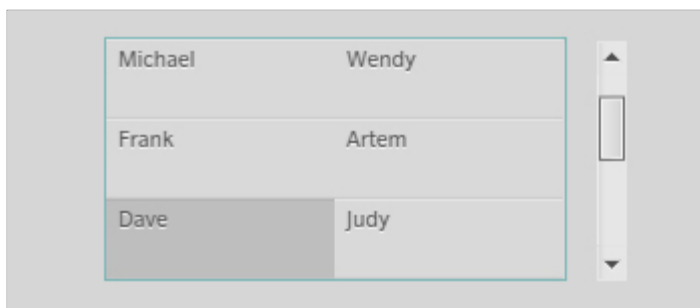

41: TileList

TileList (gfx.controls.TileList) ScrollingList

ScrollBar ScrollIndicator

TileList ScrollingList TileList

dataProvider 4 dataProvider

:


```
tileList.dataProvider = ["item1", "item2", "item3", "item4", "item5"];
```

TileList ListItemRenderer

itemRenderer FLA []

ListItemRenderer

2.4.5.1

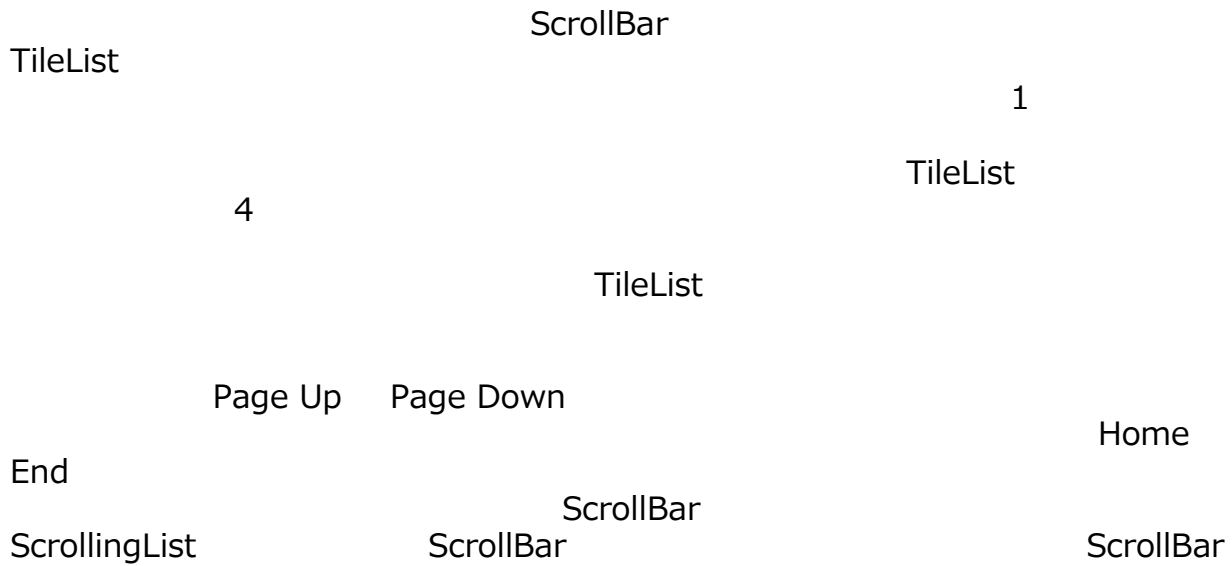


2.4.5.2

TileList
TileList

2.4.5.3

TileList : focused disabled 3

- *default*
- *focused*
- *disabled*

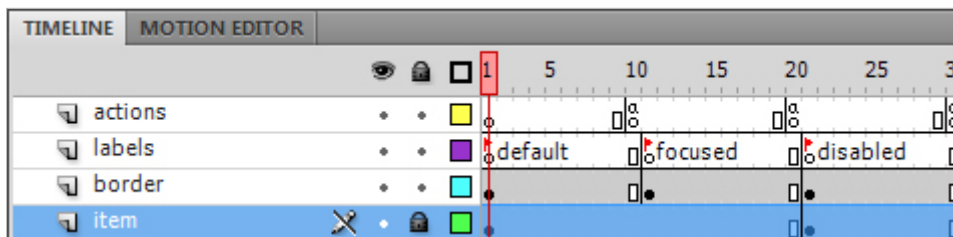

42: TileList

TileList	MovieClip
visible	false
disabled	true
itemRenderer	ListItemRenderer
renderInstanceName	TileList
scrollBar	ScrollBar
margin	renderInstanceName
rowHeight	renderInstanceName
columnWidth	renderInstanceName
externalColumnCount	renderInstanceName
direction	

2.4.5.5

1 Object

- *type* :
- *target* :

TileList

show	visible	true
hide	visible	false
focusIn		
focusOut		
change	<i>index</i> : 0 1	
itemPress	<i>renderer</i> : CLIK Button <i>item</i> : dataProvider AS2 Object <i>index</i> : dataProvider 0 1 <i>mouseIndex</i> : (0 3)	
itemClick	<i>renderer</i> : CLIK Button <i>item</i> : dataProvider AS2 Object <i>index</i> : dataProvider 0 1 <i>mouseIndex</i> : (0 3)	

itemDoubleClick

- *renderer* :
Button CLIK
- *item* :
dataProvider AS2 Object
- *index* : dataProvider 0 1
- *mouseIndex* :
(0 3
)

itemRollOver

- *renderer* :
Button CLIK
- *item* :
dataProvider
- *index* : dataProvider 0 1
- *mouseIndex* :
(0 3
)

itemRollOut

- *renderer* :
CLIK Button
- *item* :
dataProvider AS2 Object
- *index* : dataProvider 0 1
- *mouseIndex* :
(0 3
)

TileList

:


```
myList.addEventListener("focusIn", this, "onListFocused");  
function onListFocused(event:Object) {  
    trace("tile list was focused!");  
    //  
}
```

2.4.5.6

1 :

```
//  
// TileList      'label'      :  
list.dataProvider = [{label: "one", data:1}, {label: "two", data:2}];  
  
//      label  
//  
//      :  
list.labelField = "name";  
list.dataProvider = [{name: "one", data:1}, {name: "two", data:2}];  
  
//      labelFunction  
//      :  
list.labelFunction = function(itemObj:Object):String {  
//  
}  
list.dataProvider = [{p1: "foo", p2: 1}, {p1: "bar", p2: 2}];
```

2.4.6 DropdownMenu

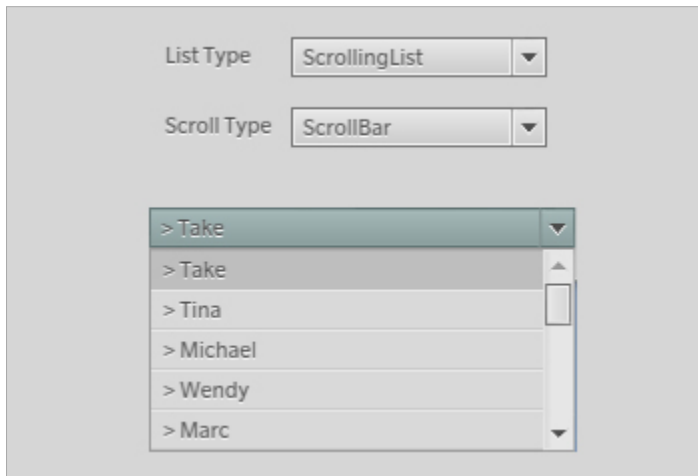

43: DropdownMenu

DropdownMenu (gfx.controls.DropdownMenu)

DropdownMenu

ScrollBar

ScrollIndicator

ScrollingList

TileList

dataProvider

DropdownMenu

dataProvider

dataProvider

:

```
dropdownMenu.dataProvider = ["item1", "item2", "item3", "item4"];
```

DropdownMenu

ScrollingList

dropdown

ScrollingList ListItemRenderer

FLA

[

]

DropdownMenu

ScrollBar

ScrollIndicator

DropdownMenu

2.4.6.1

DropDownMenu

Enter

ScrollingList TileList ScrollBar

DropDownMenu

DropDownMenu

2.4.6.2

DropDownMenu

DropDownMenu

Button

MovieClip

:

- *textField* : () TextField
 - *focusIndicator* : () MovieClip
- MovieClip "show"
- "hide" 2

2.4.6.3


DropDownMenu

ToggleButton

CheckBox

:

- *up*
- *over*
- *down*
- *disabled*
- *selected_up*
- *selected_over*
- *selected_down*
- *selected_disabled*

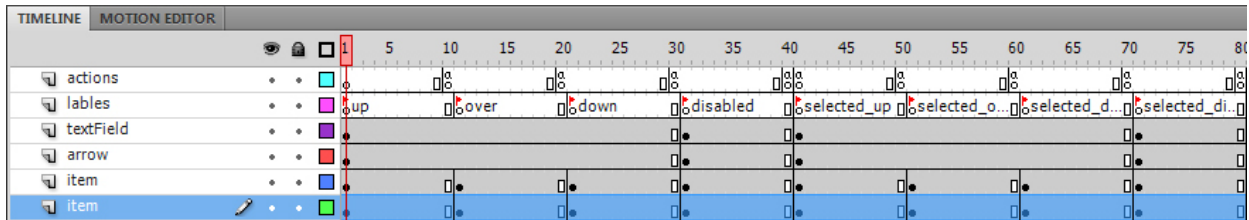

44: DropdownMenu

DropdownMenu

Button

DropdownMenu

[Getting Started with CLIK Buttons](#)

2.4.6.4

DropdownMenu

:

visible	false
disabled	true
dropdown	DropdownMenu (ScrollingList TileList)
dropdownWidth	-1
itemRenderer	DropdownMenu
scrollBar	
margin	
paddingTop	
paddingBottom	
paddingLeft	
paddingRight	
thumbOffsetTop	
thumbOffsetBottom	

thumbSizeFactor	1.0		
offsetX			
offsetY			
extent	offsetX dropdownWidth	-1	
direction		up	down

2.4.6.5

1 Object

- *type* :
- *target* :

DropdownMenu *change*
Button

show	visible	true
hide	visible	false
focusIn		
focusOut		
change	• <i>index</i> : 0 1 • <i>data</i> : AS2 Object	
select	selected	
	• <i>selected</i> : Button selected	
stateChange	• <i>state</i> : Button "up" "over" "down"	

[Getting Started with CLIK Buttons](#)

rollOver	• <i>mouseIndex</i> :	(	0	3	)
rollOut	• <i>mouseIndex</i> :	(	0	3	)
press	• <i>mouseIndex</i> :	(	0	3	)
doubleClick	• <i>mouseIndex</i> :	(	0	3	)
	• <i>doubleClickEnabled</i> :	(	0	3	)
click	• <i>mouseIndex</i> :	(	0	3	)
dragOver	• <i>mouseIndex</i> :	(	0	3	)
dragOut	• <i>mouseIndex</i> :	(	0	3	)
releaseOutside	• <i>mouseIndex</i> :	(	0	3	)

2.4.6.6

:

```
dropdown.addEventListener("click", this, "onClick");
function onClick(e:Object) {
    if (e.target.isOpen) {
```

```

    //
  }
}

```

DropDownMenu :

```

//
// ID ID ;
// fla
// DropDownMenu ScrollingList ScrollBar
attachMovie("DropDownMenu", "dd", this.getNextHighestDepth(),
            {dropdown: "ScrollingList"});
dd.dataProvider = ["one", "two", "three", "four", "five", "six"];

//
//
//
//
//
onEnterFrame = function() {
    dd.dropdown.scrollBar = "ScrollBar";
    onEnterFrame = null;
}

```

1 :

```

//
// DropDownMenu 'label' :
list.dataProvider = [{label: "one", data:1}, {label: "two", data:2}];

//
// label
//
// :
list.labelField = "name";
list.dataProvider = [{name: "one", data:1}, {name: "two", data:2}];


//
// labelFunction :
list.labelFunction = function(itemObj:Object):String {
    //
}
list.dataProvider = [{p1: "foo", p2: 1}, {p1: "bar", p2: 2}];

```

2.5 プロGRESS タイプ


Scaleform CLIK
ProgressBar 2
StatusIndicator

()
StatusIndicator
StatusIndicator
ProgressBar

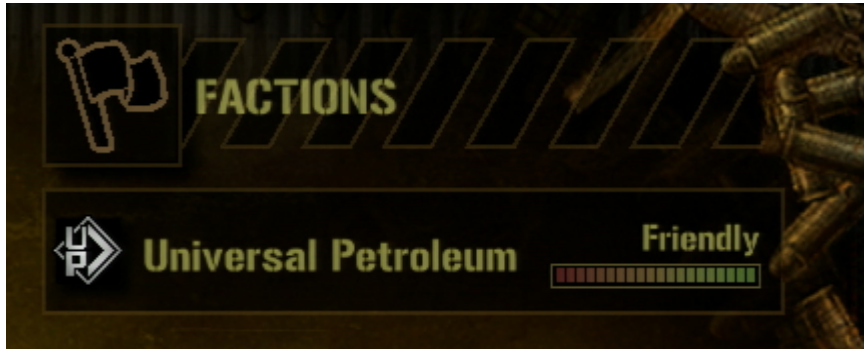

45: *Mercenaries 2* - FACTIONS

2.5.1 StatusIndicator

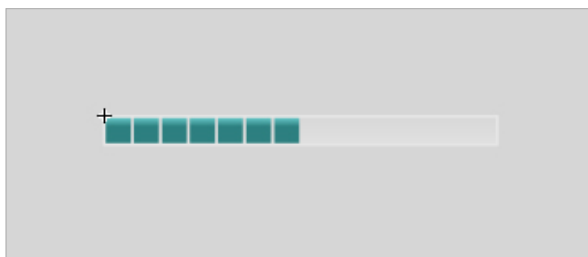

46: StatusIndicator

StatusIndicator


(gfx.controls.StatusIndicator)

StatusIndicator

2.5.1.1

StatusIndicator

2.5.1.2

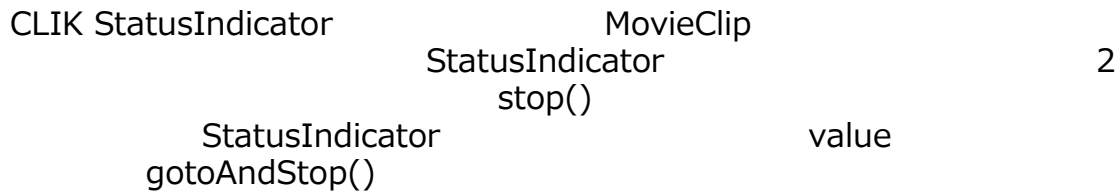

2.5.1.3

StatusIndicator

2.5.1.4

StatusIndicator : MovieClip

visible	false
disabled	true
Value	
minimum	
maximum	

2.5.1.5


1 Object

- *type* :
- *target* :

StatusIndicator

Show	visible	true
Hide	visible	false

2.5.2 ProgressBar

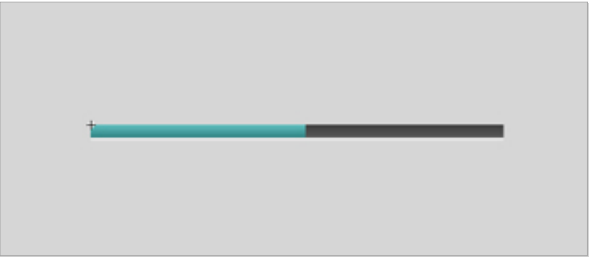

47: ProgressBar

ProgressBar (gfx.controls.ProgressBar)
StatusIndicator

(bytesLoaded bytesTotal) ProgressBar

2.5.2.1

ProgressBar

2.5.2.2

StatusIndicator CLIK ProgressBar MovieClip
2 ProgressBar stop() value
gotoAndStop()

2.5.2.3

ProgressBar

2.5.2.4

ProgressBar : MovieClip

visible	false
---------	-------

disabled	true		
Target	bytesLoaded	bytesTotal	ProgressBar
Mode	ProgressBar	"manual"	
	setProgress		
	"polled"	bytesLoaded	bytesTotal
		"event"	
	"progress"	bytesLoaded	bytesTotal

2.5.2.5

1 Object

- *type* :
- *target* :

ProgressBar

Show	visible	true
Hide	visible	false
progress	ProgressBar	
complete	ProgressBar	

:

```

myProgress.addListener("progress", this, "onProgress");

function onProgress(event:Object) {


    //
} else

```

2.6 その他のタイプ


Scaleform CLIK

Dialog UI
Dialog UILoader ViewStack Dialog
UILoader
ViewStack

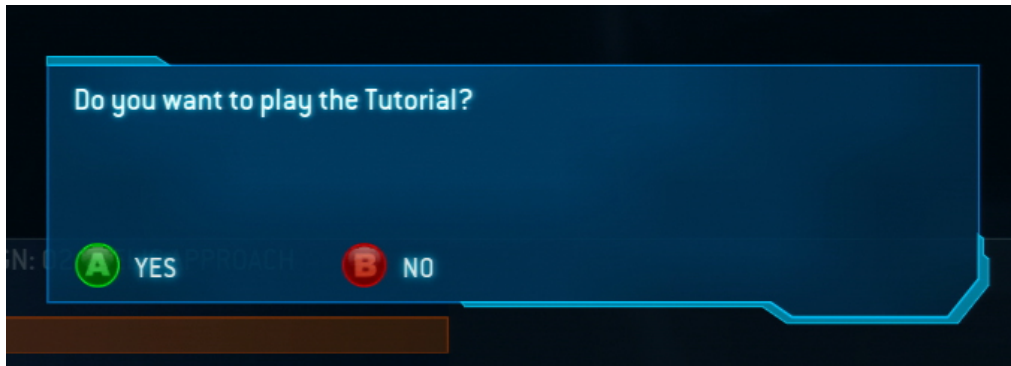

48: Halo Wars -

2.6.1 Dialog

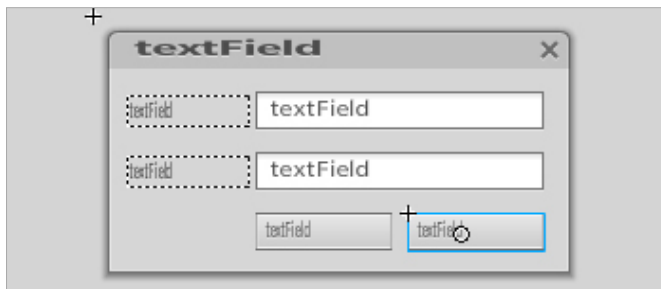

49: Dialog

CLIK Dialog (gfx.controls.Dialog)

MovieClip
1 MovieClip () Dialog.show()

2.6.1.1

Dialog

2.6.1.2

CLIK Dialog

MovieClip

:

• *closeBtn* :

(

) CLIK Button

• *cancelBtn* :

(

) CLIK Button

• *submitBtn* :

(

) CLIK Button

• *dragBar* :

(

) MovieClip

OK

2.6.1.3

Dialog

MovieClip

2.6.1.4

Dialog

MovieClip

:

visible	false
disabled	true

2.6.1.5

1 Object

- *type* :
- *target* :

Dialog

Show	visible	true
Hide	visible	false
Submit	Dialog • <i>data</i> : Dialog getSubmitData	Dialog true () getSubmitData AS2 Object
Close	Dialog	

:

```
myDialog.addEventListener("submit", this, "onLoginSubmit");
function onLoginSubmit(event:Object) {
    trace("Received data from dialog: " + event.data);
}
```

2.6.2 UILoader

CLIK UILoader (gfx.controls.UILoader)
UILoader

SWF/GFX

Scaleform

2.6.2.1

UILoader

SWF/GFX UILoader

2.6.2.2

CLIK UILoader

MovieClip

:

- *bg* : () MovieClip UI Loader

2.6.2.3

UILoader		SWF/GFX	UILoader
----------	--	---------	----------

2.6.2.4

```

UILoader
:
MovieClip

```

visible	false	
autoSize	true	UILoader
maintainAspectRatio	true	UILoader false
Source		UILoader SWF/GFX
timeout		
	UILoader	'ioError'

2.6.2.5

1 Object

- *type* :
- *target* :

UILoader

Show	visible	true
Hide	visible	false
progress	a)	b)

Loaded	0	100
complete		
ioError	source	


:

```

myUILoader.addEventListener("ioError", this, "onLoadingError");
function onLoadingError(event:Object) {
    displayErrorMessage("Could not load" + event.target.source);
}

```

2.6.3 ViewStack

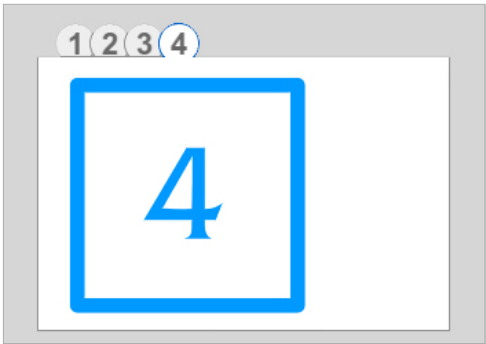

50: ViewStack

CLIK ViewStack (gfx.controls.ViewStack)

1

Accordion

RadioButton

demos

)

TabBox

(2

ViewStack

2.6.3.1

ViewStack

ViewStack

2.6.3.2

CLIK ViewStack

MovieClip

2.6.3.3

ViewStack

ViewStack

2.6.3.4

ViewStack

•

•

MovieClip

visible	false
Cache	true
	ViewStack targetGroup ()
targetGroup	ButtonGroup 'change'
	ID Flash IDE [] RadioButton ID

2.6.3.5

ViewStack

3

Scaleform CLIK

3.1 ベスト プラクティス

Scaleform CLIK


3.1.1

CLIK

Flash

:

1. Flash []
2. [] []
3. Flash []
4. [] []
5. 1 px
6. [OK]

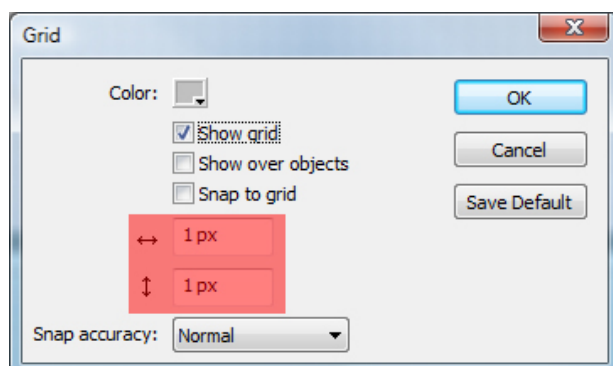


51: []

SWF

:

2

2

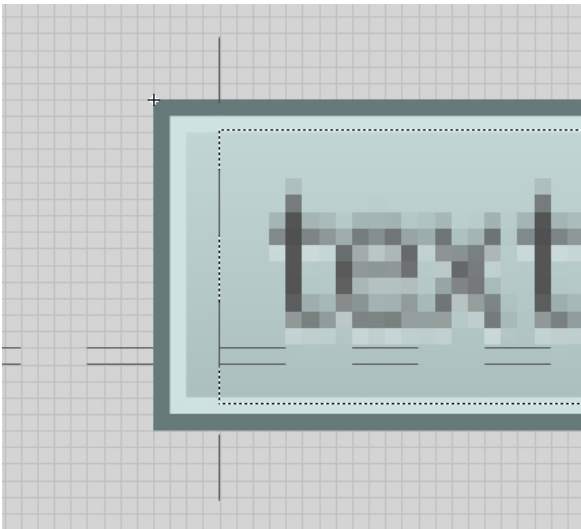

52:

3.1.2

Flash

Scaleform

Flash

PNG Photoshop®

3.1.3

1

(

)

3.1.4

Flash

1

3.1.5

()

3.1.6 2

2

2

:

- 16x16
- 32x32
- 64x64
- 128x128
- 128x256
- 256x256
- 512x256
- 512x512

3.2 既知の問題と推奨ワークフロー

Flash

Scaleform CLIK

3.2.1

Flash

2

3.2.1.1 (1)

Button FLA () CLIK : FLA

```
1. CLIK_Components fla
2. [ ] (Button FLA [
3. ] FLA [ 'Button' ] [
4. ] FLA [ ]
5. [ 3 ] [ ]
6. [ ] [ ]
```

3.2.1.2 (2)


() :

```
1. [ ] [ ]
2. [ ] [ ]
   (gfx.controls.Button ) Ctrl+C
3. [ ]
4.
5. [ ] [ActionScript [ ]]
6. [ ] Ctrl+V
7. [OK]
```

8. []
9. []

Ctrl+V


10.[OK]

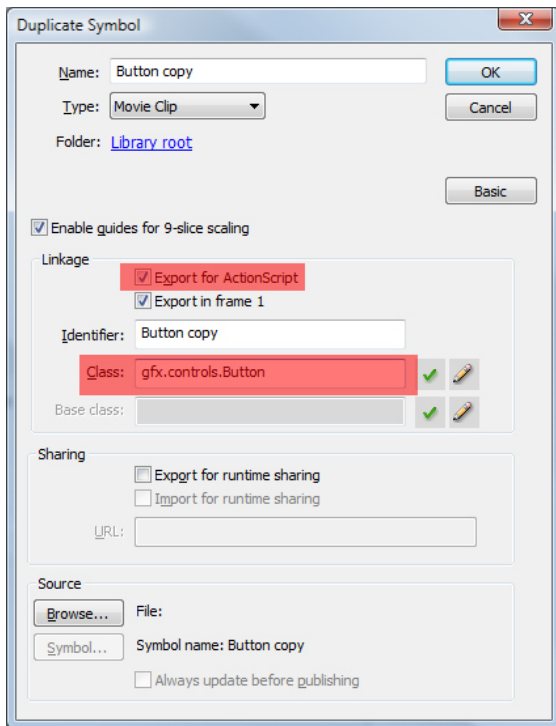

53:

(

)

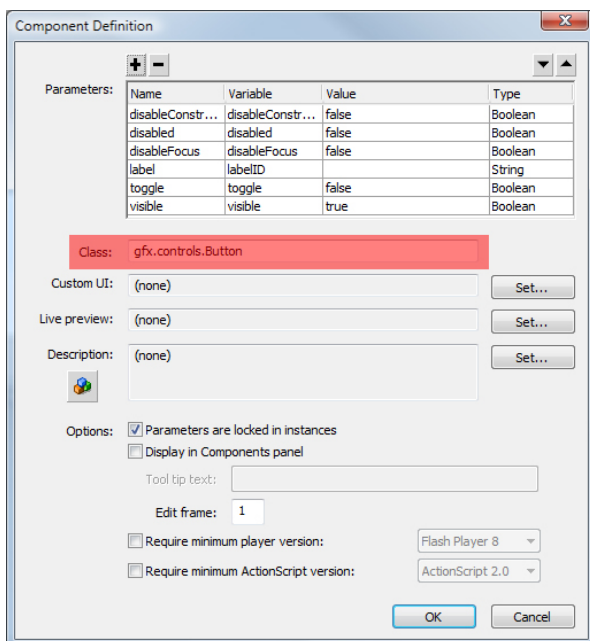

54:

([1

)

3.3 スキニングの例

Scaleform CLIK

1

CLIK

CLIK
FLA []

Flash


:

- Flash
- Flash
- Photoshop Illustrator®

Flash

[Getting Started with CLIK](#)

3.3.1 StatusIndicator

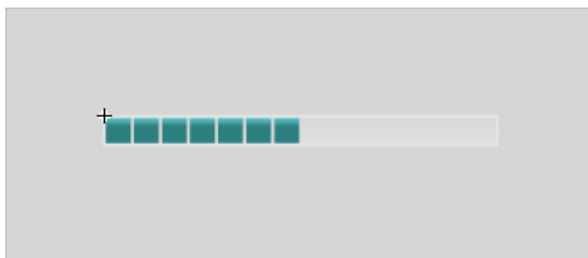

55: StatusIndicator

StatusIndicator

Button

StatusIndicator

indicator track

2

track

indicator

1 Photoshop


StatusIndicator

1

StatusIndicator



56: StatusIndicator PSD

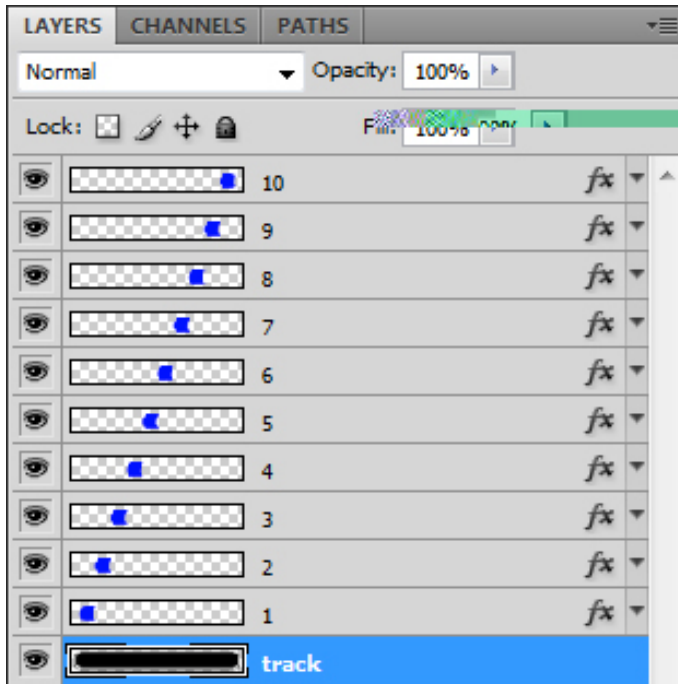

57: StatusIndicator PSD Photoshop

1. StatusIndicator Photoshop
2. PSD
3. Flash [] []->[]
4. StatusIndicator PSD
5. [] [] [Flash]
6. [OK]
7. PSD Flash

10

1

(

10

Flash

1

10


)

[

1


10
- 8.
- 9.
10. [1] 6

11.[1] 11 11
 12.[2] Ctrl+X
 13.[1] 11 Ctrl+Shift+V
 14.10 [1] (1) 5
 11 [3] 16 2] [4]
 21 10
 PSD 51
 15. (2-10)
 16. 5 [55
 17. indicator
 18. track track
 19.[1] 'indicator'
 20. indicator track actions
 track indicator

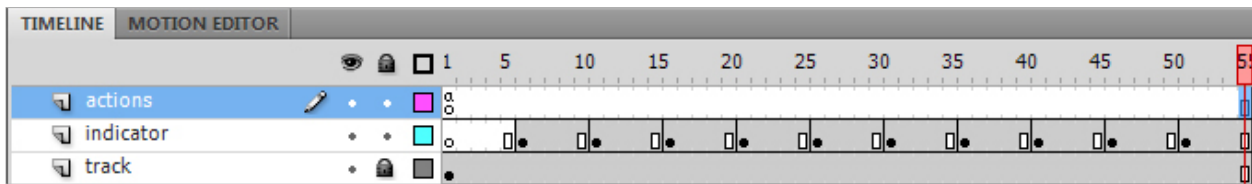

58: ()

21.StatusIndicator
 22. 1 10
 23.
 24.

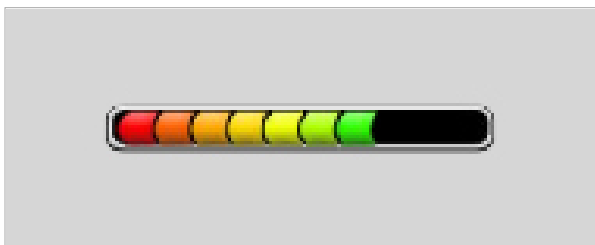

59: StatusIndicator

3.4 フォントとローカライズ

Scaleform CLIK

3.4.1

Scaleform () SWF
Scaleform
Flash UI

3.4.2

Flash Player Scaleform
Scaleform Player
Scaleform Slate Mobile textField (CJK)
Slate Mobile ASCII
Slate Mobile CJK
textField (3.4.4)
Scaleform Scaleform
UI

3.4.3 textField

textField ()
textField ([]) [] [OK]
FLA textField FLA
textField ([]) [] [OK]
FLA textField FLA

3.4.4 Scaleform


```
Scaleform
/
SWF
Scaleform
SWF
Scaleform
textField
textField
gfxfontlib fla
Scaleform
textField
) Scaleform
(
fontconfig txt
textField
fontconfig txt
Scaleform
textField '$TITLE'
textField $TITLE=Scaleform
textField 'Scaleform'
Scaleform
Scaleform
```

[Font Overview](#)

4


Scaleform

CLIK

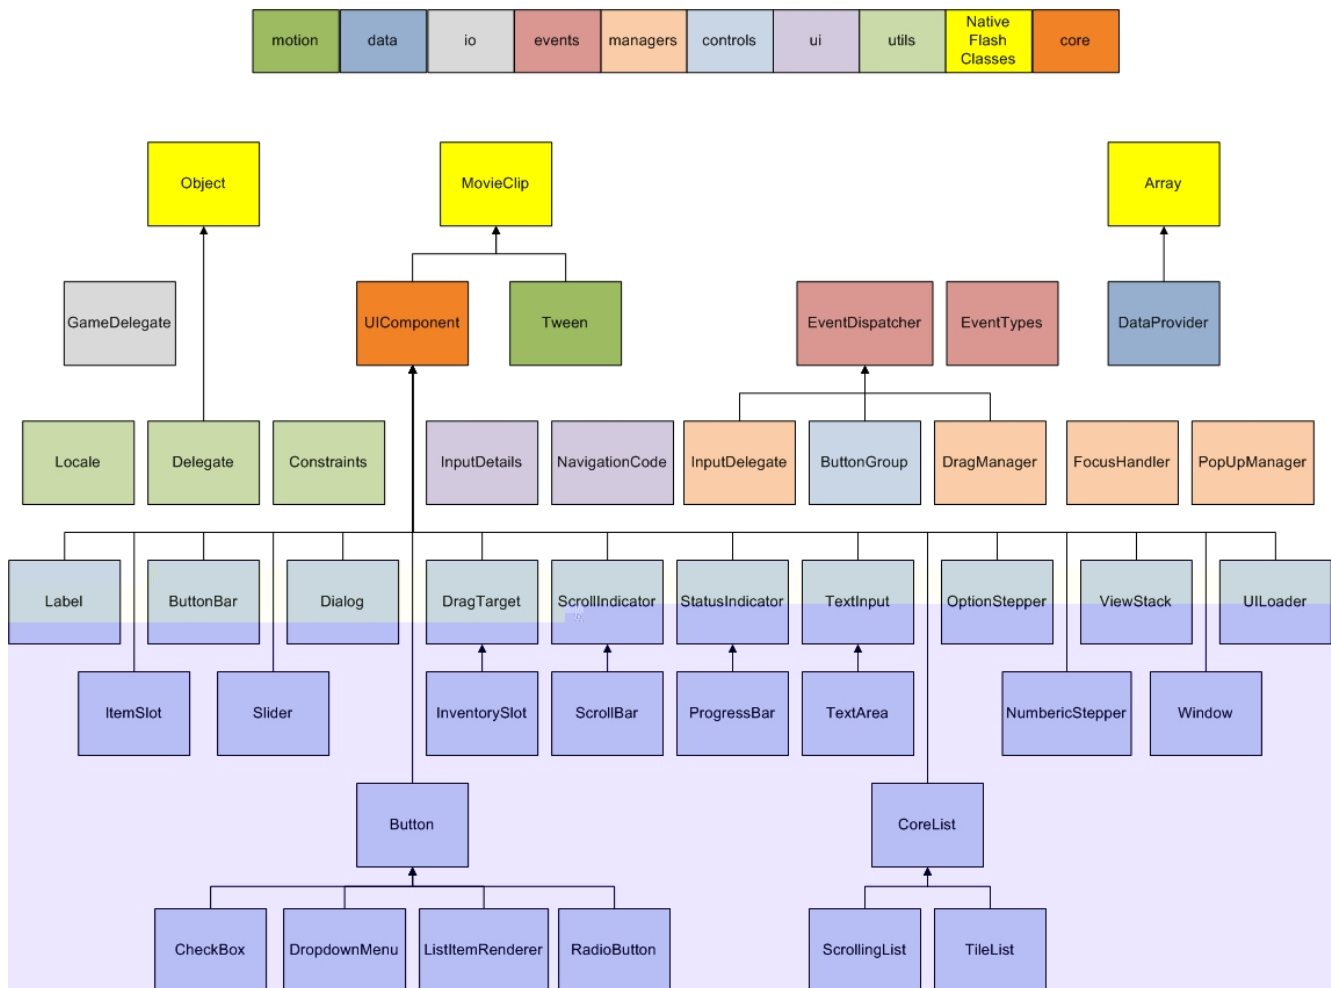

60: Scaleform CLIK

4.1 UIComponent

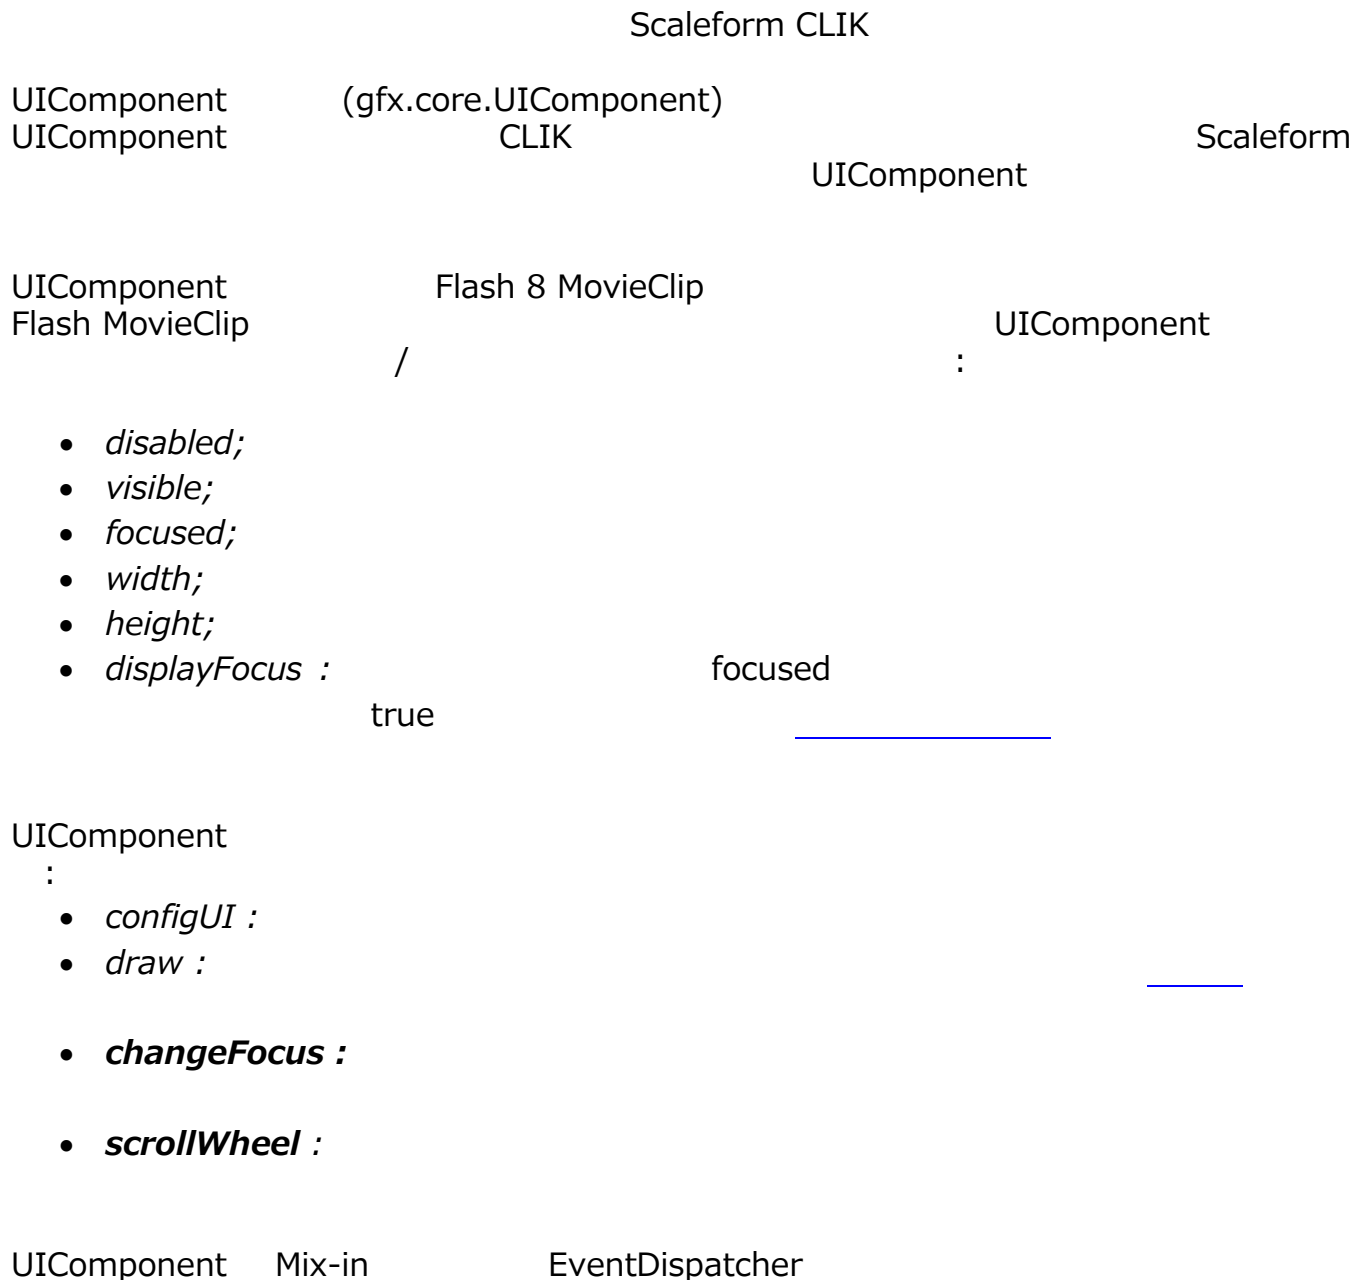

4.1.1

- **MovieClip** **onLoad()** :

- configUI()
- validateNow()
- draw()

4.2 コンポーネント ステート

Scaleform CLIK

3

4.2.1

CheckBox Button
(gfx.controls.Button)

ScrollBar

ListItemRenderer

CLIK RadioButton

CLIK Button

:

- *up*
- *over*
- *down*
- *disabled*

"selected_"

CLIK Button

selected

:

- *up*
- *over*
- *down*
- *disabled*

- *selected_up*
- *selected_over*
- *selected_down*
- *selected_disabled*

: CLIK

[Getting Started with CLIK](#)

[Buttons](#)

CLIK Button getStatePrefixes()

:

```
private function getStatePrefixes():Array {
    return (_selected) ? ["selected_", ""] : [""];
}
```

CLIK
getStatePrefixes() "selected_"
selected


Button stateMap
CLIK Button

:

```
private var stateMap:Object = {
    up: ["up"],
    over: ["over"],
    down: ["down"],
    release: ["release", "over"],
    out: ["out", "up"],
    disabled: ["disabled"],
    selecting: ["selecting", "over"],
    kb_selecting: ["kb_selecting", "up"],
    kb_release: ["kb_release", "out", "up"],
    kb_down: ["kb_down", "down"]
}
```

getStatePrefixes()

:

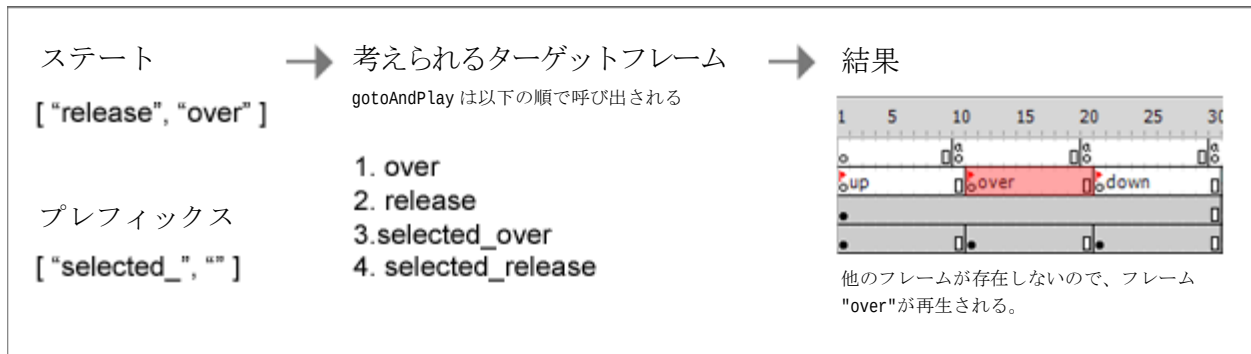

61:

4.2.2

ScrollingList OptionStepper Slider TextArea CLIK

:

- *default*
- *focused*
- *disabled*


4.2.3

Label

:


- *default*
- *disabled*

4.2.4

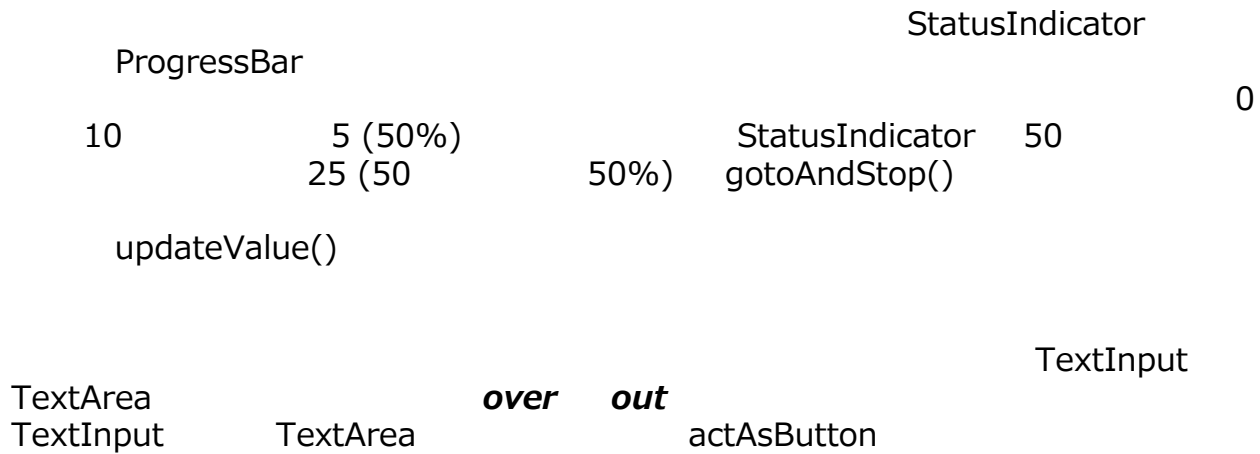

4.3 イベント モデル

Scaleform CLIK

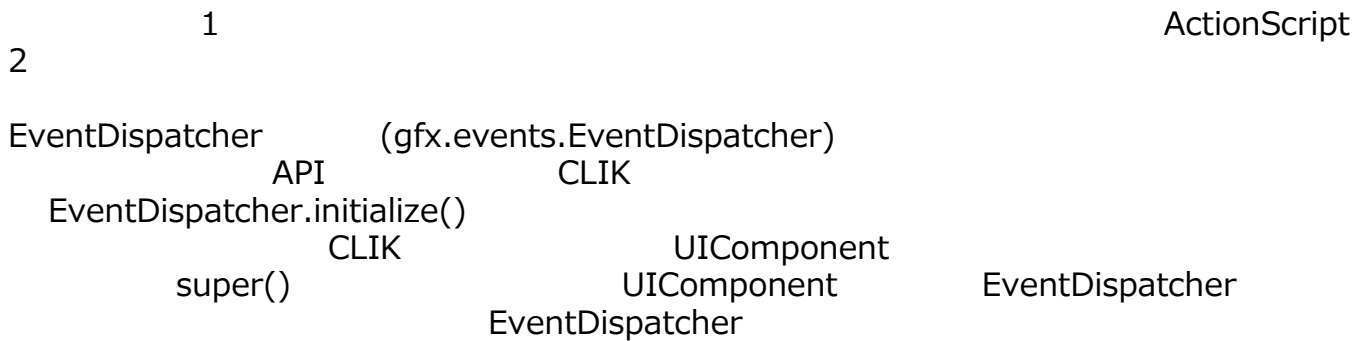

4.3.1

4.3.1.1



callBack

callBack

4.4.1

```
        CLIK
        Player
        (
            Tab
            focused
            true
        )
        :
        Selection.setFocus(firstComponentOrMovieClip);

        MovieClip (onRelease onRollOver ) Scaleform Flash
        Player
        MovieClip focusEnabled tabEnabled
        ScrollBar
        focusTarget
        FocusHandler
        focusTarget
        focusTarget
        Player
        displayFocus
        true
        Slider
        Slider
        UIComponent.changeFocus()
        focused
```

```
function changeFocus():Void {
    track.displayFocus = _focused;
}
```

```
        tabEnabled
        false
```

```
background.tabEnabled = false;
```

4.4.2

ScrollingList OptionStepper ButtonBar

Flash Scaleform Selection

□

- ```

1.) tabEnabled = false (OptionStepper
2. focusTarget
 focusEnabled = true
3. changeFocus displayFocus
 true

```

## 4.5 入力処理

Scaleform CLIK                      Flash 8 MovieClip  
MovieClip

CLIK

### 4.5.1

```

InputDelegate
(gfx.managers.InputDelegate)
InputDelegate

```

```
InputDetails (gfx.ui.InputDetails)
InputDelegate.readInput()
InputDetails
```

## InputDelegate

InputDetails :

- 
- 
- 


key up                      key down  
 InputDetails  
 keyUp              keyDown  
 •                      navEquivalent (                      )  
 NavigationCode              (gfx.ui.NavigationCode)

FocusHandler    InputDelegate

handleInput()

InputDetails

pathToFocus

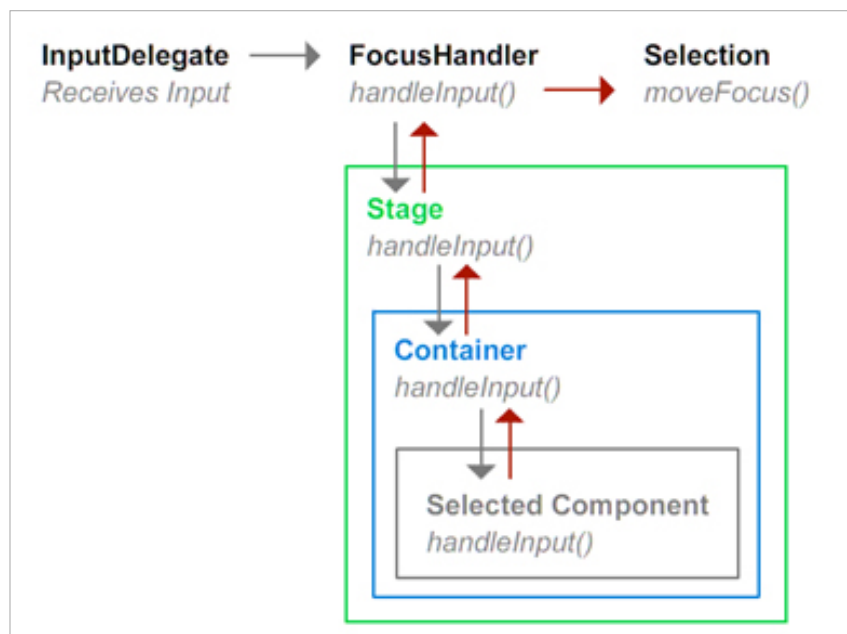

62: handleInput()

FocusHandler    handleInput()

false

Scaleform Player

null

navEquivalent

```
function handleInput(details:InputDetails, pathToFocus:Array):Boolean {
```

```

 if (details.navEquivalent == "left")
 {
 // NavigationCode.LEFT
 doSomething();
 return true;
 }
 return false;
 }
}

```

pathToFocus  
 true    false  
                 handleInput

```

function handleInput(details:InputDetails, pathToFocus:Array):Boolean {
 var nextItem:MovieClip = pathToFocus.shift();
 var handled:Boolean = nextItem.handleInput(details, pathToFocus);
 if (handled) { return true; }
 //
 return false; // true
}

```

pathToFocus                      DropdownMenu          handleInput

```

function handleInput(details:InputDetails, pathToFocus:Array):Boolean {
 var handled:Boolean = dropdown.handleInput(details);
 if (handled) { return true; }
 //
 return false; // true
}

```

InputDelegate.instance

FocusHandler

```

InputDelegate.instance.addEventListener("input", this, "handleInput");
function handleInput(event:Object):Void {
 var details:InputDetails = event.details;
 if (details.value == Key.TAB) { doSomething(); }
}

```

InputDelegate  
                 InputDelegate

W A S D

## 4.5.2

Wii

1 SWF CLIK

mouseIndex

```
myButton.addEventListener("click", this, "onCursorClick");
function onCursorClick(event:Object):Void {
 switch (event.mouseIndex) {
 ...
 }
}
```

## 4.6 無効化

```
btnInstance.setSize(100,22);
btnInstance.width = 200;
btnInstance.label = "text";
btnInstance.toggle = true;
btnInstance.selected = true;
btnInstance.data = obj;
```



```
invalidate() -> draw();
```

63:

CLIK

### 4.6.1

UIComponent.invalidate() ( setter )  
UIComponent.draw() invalidate()

draw()

UIComponent.validateNow()

## 4.7 コンポーネントのスケーリング

Scaleform CLIK 2 :

1.

2.

scale9grid

Flash 9  
Flash Flex


CLIK Scaleform 9  
CLIK

Flash IDE width height  
setSize()


Flash IDE  
LivePreview MovieClip

CLIK Scaleform Player Launcher

### 4.7.1 Scale9Grid

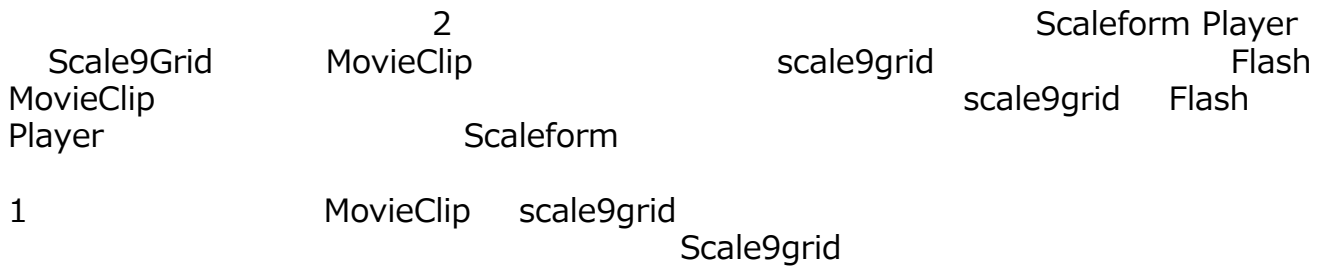

### 4.7.2 Constraints

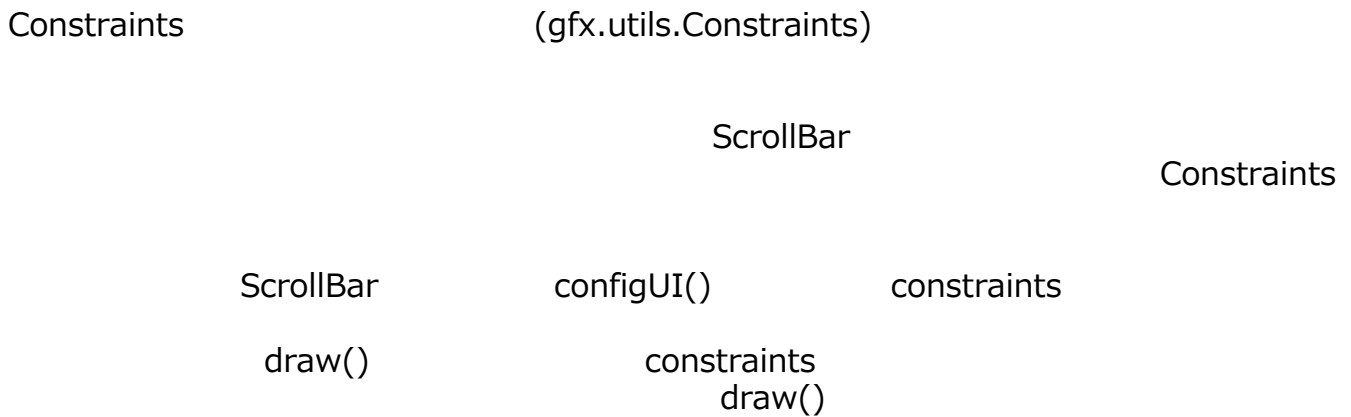

```

private function configUI():Void {
 ...
 constraints = new Constraints(this);
 // upArrow
 constraints.addElements(downArrow, Constraints.BOTTOM);
 constraints.addElenent(track, Constraints.TOP|Constraints.BOTTOM);
 ...
}

private function draw():Void {
 ...
 constraints.update(__width, __height);
 ...
}

```

## 4.8 コンポーネントとデータのセット

dataProvider (gfx.interfaces.IDataProvider)      dataProvider Scaleform CLIK IDataProvider API

dataProvider      dataProvider

dataProvider      CoreList (ScrollingList    TileList)  
OptionStepper    DropdownMenu    CLIK  
IDataProvider    IDataProvider  
API

### 4.8.1

initialize()      DataProvider      (gfx.data.DataProvider)  
dataProvider      dataProvider      ActionScript      dataProvider

IDataProvider  
dataProvider :

```
myComponent.dataProvider = ["data1",
 4.3,
 {label:"anObjectElement", value:6}];
```

dataProvider :

- *length* :      getter
- *requestItemAt* : dataProvider      OptionStepper  
1
- *requestItemRange* :      dataProvider  
ScrollingList
- *indexOf* :
- *invalidate* :      dataProvider  
"dataChange"      dataProvider

length

dataProvider

ActionScript 2

dataProvider

ExternalInterface.call

## 4.9 ダイナミック アニメーション

Scaleform CLIK

Flash 8 Tween

Scaleform

Tween

(gfx.motion.Tween)

Tween

mx.transitions.easing.\*

CLIK Tween

Flash

Flash 8 MovieClip

CLIK

MovieClip

CLIK Tween

onEnterFrame

MovieClip

1

MovieClip

MovieClip

### 4.9.1

Tween

MovieClip

2

tweenTo()

tweenFrom()

tweenTo()

MovieClip

tweenFrom()

MovieClip

Tween

Tween.init()

:

```
import mx.transitions.easing.*;
import gfx.motion.Tween;
Tween.init(); // MovieClip
// 1
myMovieClip.tweenTo(1, {_x: 200, _alpha: 0}, Strong.easeIn);
```

onTweenComplete()

```
import mx.transitions.easing.*;
import gfx.motion.Tween;
Tween.init();
mc.onTweenComplete = function() {
 trace("Tween has finished!");
}
mc.TweenTo(5, {_rotation: 20}, Bounce.easeOut);
```

## 4.10ポップアップのサポート

Scaleform CLIK      PopUpManager      (gfx.managers.PopUpManager)  
Dialog  
PopUpManager

### 4.10.1

PopUpManager  
createPopUp()  
)      ID      MovieClip      (CLIK      context  
relativeTo  
MovieClip

```
import gfx.managers.PopUpManager;
PopUpManager.createPopUp(context, "MyToolTipLinkageID",
 {_x: 200, _y:200}, relativeTo);
```

Scaleform      topmostLevel

SWF

topmostLevel

topmostLevel  
Z

topmostLevel      true

## 4.11ドラッグ&ドロップ

DragManager (gfx.managers.DragManager)

/

startDrag() MovieClip ID

stopDrag()  
DragManager InputDelegate

### 4.11.1



64:

DragManager DragManager

Scaleform CLIK DragTarget (gfx.controls.DragTarget)  
DragTarget UIComponent CLIK  
DragManager

```

DragTarget
/
DragTarget
DragTarget
dragBegin dragEnd
DragTarget DragManager
Inventory Demo DragTarget
DragManager DragTarget &
2 InventorySlot ItemSlot
2 CLIK
InventorySlot (gfx.controls.InventorySlot)
DragTarget DragManager
InventorySlot
ItemSlot (gfx.controls.ItemSlot) InventorySlot
ItemSlot DragTarget 2 CLIK Button
& ItemSlot

```

## 4.12 その他

### 4.12.1 Delegate

```

Delegate (gfx.utils.Delegate)
Scaleform CLIK
DragManager :

```

```

eventProvider.onMouseMove = Delegate.create(this, doDrag);

```

### 4.12.2 Locale

```

Locale (gfx.utils.Locale)
Scaleform
ActionScript

```

Button Label TextInput  
Locale.getTranslatedString()

Locale

5

Scaleform CLIK


5.1 基礎編

Scaleform CLIK

5.1.1 2      textField      ListItem Renderer



65: 2      ScrollingList

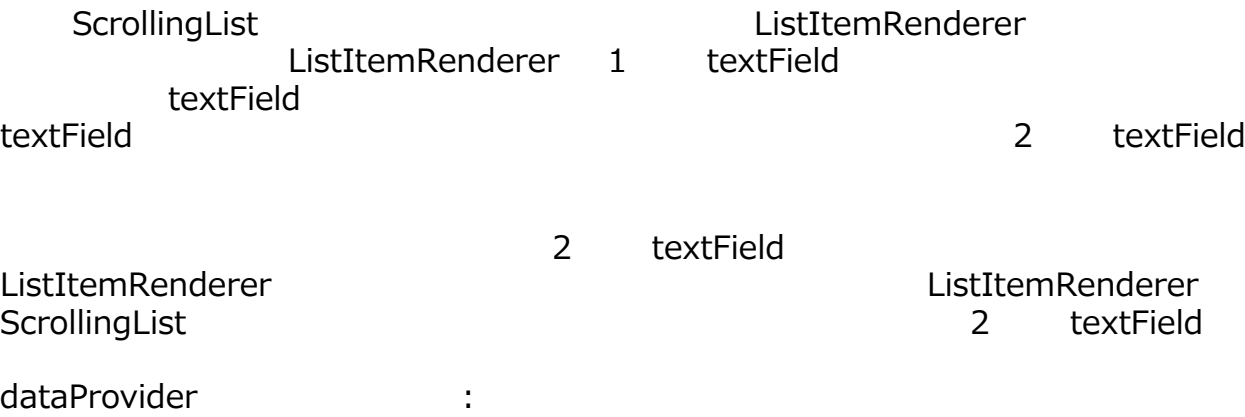

```
list.dataProvider = [{fname: "Michael", lname: "Jordan"},
 {fname: "Roger", lname: "Federer"},
 {fname: "Michael", lname: "Schumacher"},
 {fname: "Tiger", lname: "Woods"},
 {fname: "Babe", lname: "Ruth"},
 {fname: "Wayne", lname: "Gretzky"},
 {fname: "Usain", lname: "Bolt"}];
```

```

dataProvider 2 2 fname lname
 2 2 textField
 ListItemRenderer 1 textField 2
textField
ListItemRenderer MyItemRenderer
 ListItemRenderer 2
textField (FLA
 MyItemRenderer.as :

```

```

import gfx.controls.ListItemRenderer;

class MyItemRenderer extends ListItemRenderer {

 public var textField1:TextField;
 public var textField2:TextField;

 public function MyItemRenderer() { super(); }

 public function setData(data:Object):Void {
 this.data = data;
 textField1.text = data ? data.fname : "";
 textField2.text = data ? data.lname : "";
 }

 private function updateAfterStateChange():Void {
 textField1.text = data ? data.fname : "";
 textField2.text = data ? data.lname : "";
 }
}

```

```

ListItemRenderer setData updateAfterStateChange
 setData
 (ScrollingList TileList)
 ListItemRenderer 1 textField
MyItemRenderer textField updateAfterStateChange
 ListItemRenderer
 textField

 dataProvider
 ListItemRenderer


 ListItemRenderer

ListItemRenderer 'textField1' 'textField2' 2 textField

```

|                  |                |                |                    |
|------------------|----------------|----------------|--------------------|
|                  | MyItemRenderer | MyItemRenderer |                    |
|                  | itemRenderer   |                | 'ListItemRenderer' |
| 'MyItemRenderer' |                |                |                    |
| FLA              | dataProvider   | fname          | lname              |
| 2                |                |                |                    |

### 5.1.2

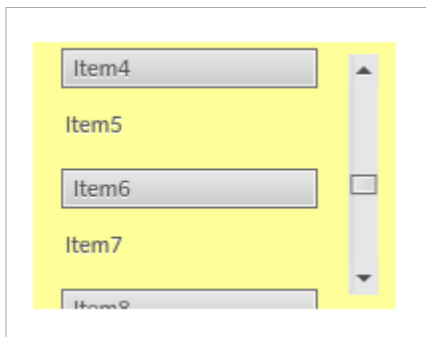

66: CLIK

CLIK ScrollBar

:

- *actions* : ActionScript
- *scrollbar* : CLIK ScrollBar  
'sb'
- *mask* : MovieClip
- *content* :
- *background* :

'content' y 0

*code*

ActionScript

:

```
// 133 ()
sb.setScrollProperties(1, 0, content._height - 133);
sb.position = 0;

sb.addEventListener("scroll", this, "onScroll");
function onScroll() {
 content._y = -sb.position;
}
```

setScrollProperties

Scaleform

HUD  
Scaleform

## 5.2 上級編

Scaleform CLIK

Flash    ActionScript 2

ScrollingList      TreeView

67: TreeView

TreeView Demo (*Resources/AS2/CLIK/demos/TreeViewDemo.fla*)  
ListItemRenderer    DataProvider      ScrollingList

ScrollingList :

- 

- 

ListItemRenderer

- 

ListItemRenderer



TreeViewItemRenderer                      ScrollingList                      TreeViewDataProvider

ListItemRenderer                                      TreeViewItemRenderer

ListItemRenderer      textField

TreeViewConstants                                      :

- :
- 
- 

2

ScrollingList

ScrollBar

/  
ScrollingList

### 5.2.1

68: Window

Window Demo (*Resources/AS2/CLIK/demos/WindowDemo.fla*)

Window

*Resources/AS2/CLIK/demos/com/scaleform*

Window

UIComponent

CLIK

Window

Window

:

- 
- 
- 
- 
- 

( )

Window

:

|                                          |          |       |                           |
|------------------------------------------|----------|-------|---------------------------|
| Title                                    | Window   |       |                           |
| formPadding                              | Window   |       |                           |
| formType                                 | 'symbol' | 'swf' | 'symbol' 'swf'            |
|                                          | 'swf'    | SWF   |                           |
| formSource                               | )        | SWF   | (formType 'swf' 'symbol') |
| allowResize                              | /        |       |                           |
| minWidth, maxWidth, minHeight, maxHeight | min      | max   | max 0                     |
|                                          | min      |       |                           |

:

```
[Inspectable(name="formType", enumeration="symbol,swf")
private var _formType:String = "symbol";
```

Inspectable  
Inspectable  
\_formType

Flash  
formType

getter      setter

```
[Inspectable(defaultValue="Title")]
public function get title():String { return _title; }
public function set title(value:String):Void {
 _title = value;
 invalidate();
}
```

Window

CLIK

Button

Window  
2

UIComponent  
constraints

configUI()      configUI()      draw()  
draw()  
constraints

configForm()

Flash 8 MovieClipLoader  
Scaleform

MovieClipLoader.onLoadComplete()

configForm()

constraints

Window

draw()

constraints  
constraints

validateNow()

UIComponent

draw()  
draw()  
UIComponent

validateNow()  
Window Demo

draw()

validateNow()

## SWF

Window

Window

2

```
private function onMouseDown() {
 var targetObj:Object = Mouse.getTopMostEntity();
 while (targetObj != null && targetObj != _root)
 {
 if (targetObj == this) {
 swapDepths(_parent.getNextHighestDepth());
 return;
 }
 targetObj = targetObj._parent;
 }
}
```

1

WindowManager

WindowManager

Window