

Autodesk® Scaleform®

CRI Movie

CRI

CRI

: Vladislav Merker
: 1.02
: 2013 1 18

Copyright Notice

Autodesk® Scaleform® 4.3

© 2013 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk 123D, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo), BIM 360, Built with ObjectARX (design/logo), Burn, Buzzsaw, CADmep, CAiCE, CAMduct, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, Design Server, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver, Exposure, Extending the Design Team, FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, Freewheel, GDX Driver, Glue, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, Map It, Build It, Use It, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder,

Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, Revit LT, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Socialcam, Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

:

CRI Movie
Scaleform Corporation
6305 Ivy Lane, Suite 310
Greenbelt, MD 20770, USA
www.scaleform.com
info@scaleform.com
(301) 446-3200
(301) 446-3199

1		1
2	Input/Output	1
2.1		1
2.1.1	(.....).....	1
2.1.2		3
2.2		3
2.3		4
2.3.1		4
2.3.2		4
2.4		5
2.4.1		5
2.4.2		6
3	CRI	7
3.1		7
3.1.1		7
3.1.2		8
3.1.3	Video	8
3.1.4	Audio Encode Setting Subcommands.....	8
3.1.5		9
3.2		9
3.2.1		9
3.2.2		12


3.2.3 Video13

3.2.4 GOP (Group of Pictures)15

3.2.517

3.2.618

1

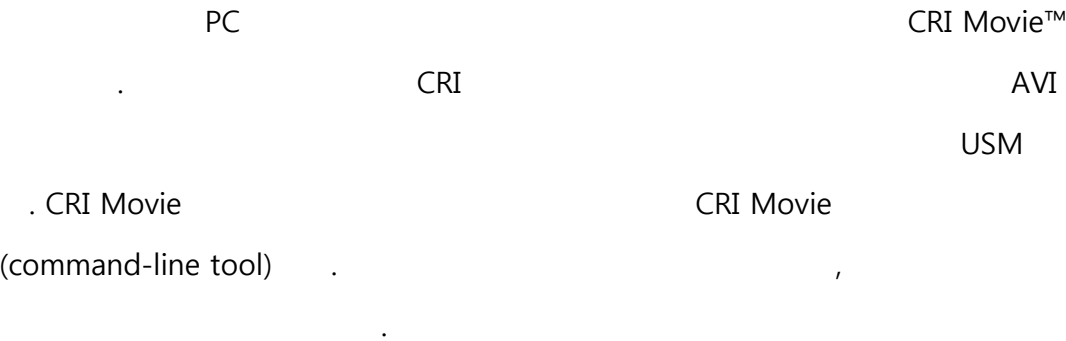

2 Input/Output

output input .

- **Input**
 - o
 - o
 - o
 - o
- **Output**
 - o CRI Movie data (.usm)

2.1

2.1.1 ()

(Material) AVI .

	Microsoft AVI (2GB)
	PCM (WAVE)
	RGB (BMP)

	AVI file (*1).
	24-bit / 32-bit
	[]72x72, [] 4088x4088, 8x8 (*2).
	60 /59.94 /50 /30 /29.97 /25 /24 /23.976 fps (*3).
	[TV] (*4) [TV] D1 v

[]

(*1) DirectShow AVI

AVI

. (DirectShow .)

(*2) PlayStation 2 Movie 16x16 .

(*3) 29.97 fps .

15 fps .

(*4) TV Wii movie .

2.1.2

. CRI

.

	1) 24- / 32- BMP () 2) 24- /32 TGA (/RLE)
	[] 72X72,[] (8x8)
	1) " "+" "+"." E.g., OK> abc001.bmp, abc002.bmp, abc003.bmp , ... E.g., NG> abc001def.bmp, abc002def.bmp, abc003def.bmp, ... 2) () E.g., OK> abc998.bmp, abc999.bmp, abc1000.bmp, ... 3) E.g., OK> abc001.bmp, abc004.bmp, abc008.bmp, ...

2.2

.

- AVI
-

.

	WAVE AIFF
	16 PCM ()
	48kHz

2.3

.
 () .

2.3.1

1. (time unit) () .
2. (INTIME), (OUTTIME),
 (,) .
3. () . .
4. .
5. " "() .
6. ' ' () .
7. ASCII, Shift JIS, UTF-8, UTF-16 (UTF-16LE) .

2.3.2

1

, 1000 , 0-2 , 5-7.5 , 7.5-10

.

;INTIME, OUTTIME, Subtitle, Comment

1000

0, 2000, FirstMessage.

5000, 7500, Second Message.

7500, 10000, Third Message.

2

29.97fps 29970 1000 .

29.97*1000 = 29970 . , 29970 .

0-100, 150-200, 200-250 .

;INTIME, OUTTIME, Subtitle, Comment

29970

0, 100000, FirstMessage.

150000, 200000, Second Message.

200000, 250000, Third Message.

2.4

" " () (movie) .
"

" .

2.4.1

1. () .

2. , "Time", "Value", "EventPointName", "String" (,)

.

3. "Time" , .
4. "Value" .
5. "EventPointName" .
6. "String" , .
7. .
8. ASCII, Shift JIS, UTF-8, UTF-16 (UTF-16LE) .

2.4.2

1

1000 .

0, 5, 7, 8, 15, 23 .

#3 #4 .

```
;Time, Value, EventPointName, String
1000
0, 0, navi1
5000, 0, navi2
7000, 1, evpt1, param, test
8000, 1, evpt2, param1, 300, param2, 500
15000, 0, navi3
15000, 1, evpt3
25000, 0, navi4
```

3 CRI

MS-DOS

```
[ ] medianoche [-subcommand=param1[,param2,...]]
[ ] subcommand : subcommand
    param#      : subcommand parameter

:
    AVI         "sample.avi"          CRI         "sample.usm"
> medianoche -in=sample.avi -out=sample.usm
```

3.1

" " . ,

3.1.1

in	
out	
video##	
alpha##	
audio##	
mca**_##	
subtitle##	
cuepoint	

3.1.2

Crop	
Scale	

3.1.3 Video

Bitrate	()
br_range	
Framerate	
Hcfilter	
gop_i	GOP (group of pictures) I-picture
gop_p	GOP P-picture
gop_b	GOP B-picture
gop_closed	GOP
Detects	
ms_fullpel_still	

3.1.4 Audio Encode Setting Subcommands

hca	HCA .
hca_quality	HCA .

3.1.5

Cleanup	
work_dir	
Debug	i-
Preview	

3.2

3.2.1

in:

```
[ ] -in=filename
[ ] filename : input video file
[ ]
```

```
      : sample.avi
```

```
> medianoche -in=sample.avi -out=sample.usm
```

out:

```
[ ] -out=filename
[ ] output : output movie file (usm file)
[ ]
```

```
      "usm" .
```

```
      : sample.usm
```

```
> medianoche -in=sample.avi -out=sample.usm
```

video:

```
[ ] -video##=filename
[ ] filename : video file
    ##      : video track number (## = 00)
[ ]
```

```
1.      :      2.1
2.      :      00 .
```

```
: AVI      smpvid.avi      00 .
```

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm
```

alpha:

```
[ ] -alpha##=filename
[ ] filename : alpha file
    ##      : alpha track number (## = 00)
[ ]
```

```
,      AVI .
```

```
1.      :      00 .
```

```
: smpvid.avi      0
```

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \
    -alpha00=smpvid.avi
```

audio:

```
[ ] -audio##=filename
[ ] filename : audio file
    ##      : audio track number (## = 00 - 31)
[ ]
```

```
1.      :      2.2 .
```

```
2.
```

```
•      CRI .
```

- 00 .
- 32

: , , 00, 01, 02

```
> medianoche -video00=smpvid.avi -out=sample.usm \
    -audio00=music.wav -audio01=voice_en.wav -audio02=voice_ja.wav
```

mca:

```
[ ] -mca**_##=filename
[ ] filename : audio files
    **       : audio track number
    ##       : audio channel number (## = 00 - 05)
```

[]

1. :

- .
- .

2.

- .
- .

00	
01	
02	
03	
04	
05	LFE

: 0

```
> medianoche -video00=smpvid.avi -out=sample.usm \
    -mca00_00=fl.wav -mca00_01=fr.wav -mca00_02=sl.wav -mca00_03=sr.wav \
    -mca00_04=c.wav -mca00_05=lfe.wav
```

subtitle

```
[ ] -subtitle##=filename
[ ] filename : subtitle information file
    ##      : subtitle channel (## = 00 - 15)
[ ]
```

```
1.          :                               2.3
2.          : 16                             .
```

```
:                               00          01          .
```

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \
    -subtitle00=subttl_en.txt -subtitle01=subttl_ja.txt
```

cuepoint

```
[ ] -cuepoint=filename
[ ] filename: cuepoint information file
[ ]
```

2.4

```
:
```

```
> medianoche -in=sample.avi -out=sample.usm -cuepoint=sample_cuepoint.txt
```

3.2.2

crop:

```
[ ] crop=crx,cry,crw,crh
```

```
[ ] crx: X coordinate of cropped image against the original image
    cry: Y coordinate of cropped image against the original image
    crw: Image width after cropping
    crh: Image height after cropping
```

```
[ ]
```

```
: (0.0) 640, 480
```

```
> medianoche -in=sample.avi -out=sample.usm -crop=0,0,640,480
```

scale: /

```
[ ] scale=scw,sch
```

```
[ ] scw : the width of resized image
    sch : the height of resized image
```

```
[ ] /
```

```
: 640, 480
```

```
> medianoche -in=sample.avi -out=sample.usm -scale=640,480
```

3.2.3 Video

bitrate:

```
[ ] -bitrate=rate
```

```
[ ] rate: bitrate [bps]
```

```
[ ] bps( )
```

```
: 3000000bps.
```

```
: 6Mbps
```

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \
```

-bitrate=6000000

br_range:

[] -br_range=min,max

[] min: minimum bitrate [bps]
max: maximum bitrate [bps]

[] ,

: =0bps, =3000000bps

: 0bps, 3000000bps .

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \  
- br_range=0,3000000
```

framerate:

[] -framerate=decfr

-framerate=fr_num,fr_den

[] decfr: frame rate in decimal number

fr_num: numerator of frame rate in fractional number

fr_den: denominator of frame rate in fractional number

[] (fps)

1. :- =29.97

2. :- =30000/1001

60 fps . .

: 29.97 .

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \  
-framerate=29.97
```

hcfiter:

```
[ ] -hcfiter=fltype
[ ] fltype: high compression filter type
      ON: always on
      OFF: always off
      AUTO: automatically applies when it's applicable. (Default)
[ ]
```

3.2.4 GOP (Group of Pictures)

GOP

GOP

GOP

- I-picture I-frame () –
GOP
- P-picture P-frame () - I P frame
- B picture B frame ()- (GOP) I P
frame

gop_i: GOP I picture

```
[ ] -gop_i=count
[ ] count: number of I pictures in GOP
[ ] GOP I picture
```

GOP (I, P, B) GOP

- I picture
I picture

- :1

gop_p: GOP P

[] -gop_p=count
 [] count: number of P pictures in one GOP
 [] GOP P

GOP (I, P, B) GOP .

- P I B .
- :4

gop_b: GOP B

[] -gop_b=count
 [] count: number of B pictures in one GOP
 [] GOP B

GOP (I, P, B) GOP .

- B .
- :2

gop_closed: GOP

[] -gop_closed=sw
 [] sw: switch for the closed GOP
 ON: closed GOP (Default)
 OFF: non closed GOP
 [] GOP
 GOP GOP .

detectsc:

```
[ ] -detectsc=sw
[ ] sw: switch for the scene change detection
      ON: (Default)
      OFF:
[ ]
```

I .

I .

```
[ ][ ][ ]
```

3.2.5

hca: HCA

```
[Format] -hca=sw
[Input]  sw: switch for HCA encoding
          ON: Encode as HCA
          OFF: Not encode as HCA (Default)
[Function] Specifies whether or not to encode audio source as HCA codec.
```

ADX .

hca_quality:

```
[Format] -hca_quality=count
[Input]  count: Selects encoding quality from the following 5 values
          5 = Highest
          4 = High (default)
          3 = Medium
          2 = Low (high compression)
          1 = Lowest (highest compression)
[Function] Set sound quality for HCA encoding.
```

5	1/4	1/4
4	1/6	1/6
3	1/8	1/8
2	1/10	1/12
1	1/12	1/16

3.2.6

-ms_fullpel_still:

```
[ ] -ms_fullpel_still=sw
[ ] sw: switch for the motion search in full pel for still parts
      ON:
      OFF: (Default)
[ ]
```

cleanup:

```
[ ] -cleanup=sw
[ ] sw = switch for deleting intermediate files
      ON: Delete (Default)
      OFF: Not delete
[ ]
```

```
OFF          CRI          (.usv)  CRI          (.usa)  CRI          (.usm)
              .
              on ( )
```

work_dir:

```
[ ] -work_dir=dirname
[ ] dirname : working directory
[ ]
```

input

debug:

```
[ ] -debug=sw
[ ] sw = switch for outputting debug information
      ON: Display debug info.
      OFF: No debug info. (Default)
[ ]
      OFF ( )
```

preview:

```
[ ] -preview=sw
[ ] sw = switch for displaying preview screen
      ON: Display (Default)
      OFF: Not display
[ ]
      ON ( )
```