

Autodesk® **Scaleform®**

CRI

Copyright Notice

Autodesk® Scaleform® 4.3

© 2013 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD, AutoCAD Learning Assistance, AutoCAD LT, AutoCAD Simulator, AutoCAD SQL Extension, AutoCAD SQL Interface, Autodesk, Autodesk 123D, Autodesk Homestyler, Autodesk Intent, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, Beast (design/logo), BIM 360, Built with ObjectARX (design/logo), Burn, Buzzsaw, CADmep, CAiCE, CAMduct, CFdesign, Civil 3D, Cleaner, Cleaner Central, ClearScale, Colour Warper, Combustion, Communication Specification, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, Design Doctor, Designer's Toolkit, DesignKids, DesignProf, Design Server, DesignStudio, Design Web Format, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver, Exposure, Extending the Design Team, FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, Freewheel, GDX Driver, Glue, Green Building Studio, Heads-up Design, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, iMOUT, Incinerator, Inferno, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, Map It, Build It, Use It, MatchMover, Maya, Mechanical Desktop, MIMI, Moldflow, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moondust, MotionBuilder, Movimento, MPA, MPA (design/logo), MPI (design/logo), MPX, MPX (design/logo), Mudbox, Multi-Master Editing, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, PolarSnap, Powered with Autodesk Technology, Productstream, ProMaterials, RasterDWG, RealDWG, Real-time Roto, Recognize, Render Queue, Retimer, Reveal, Revit, Revit LT, RiverCAD, Robot, Scaleform, Scaleform GFx, Showcase, Show Me, ShowMotion, SketchBook, Smoke, Softimage, Socialcam, Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, U-Vis, ViewCube, Visual, Visual LISP, Vtour, WaterNetworks, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer


THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

CRI
MD 20770
6305 310
Scaleform
www.scaleform.com
info@scaleform.com
(301) 446-3200
(301) 446-3199

1		1
2	/	1
2.1		1
2.1.1		1
2.1.2		2
2.2		3
2.3		3
2.3.1		3
2.3.2		4
2.4		4
2.4.1		4
2.4.2		5
3	CRI	6
3.1		6
3.1.1		6
3.1.2		6
3.1.3		7
3.1.4		7
3.1.5		7
3.2		7
3.2.1		7
3.2.2		11
3.2.3		11
3.2.4	GOP ()	13
3.2.5		14

3.2.6 15

1

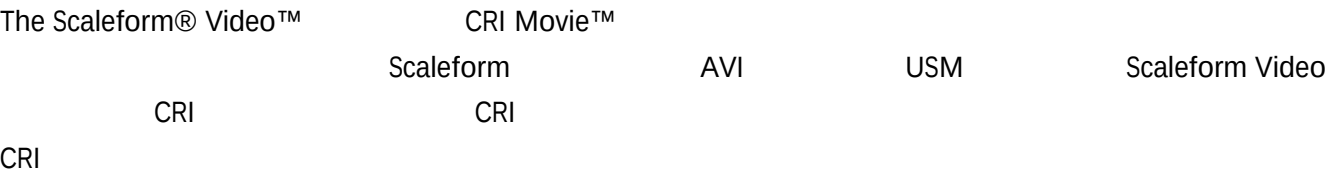

2 /

•

- o
- o
- o
- o

•

- o CRI (.usm)

2.1

2.1.1

AVI

	Microsoft AVI (2GB)
	PCM (WAVE)
	RGB (BMP)

	AVI (*1).
	24- / 32-
	[] 72x72 [] 4088x4088 8x8 (*2).
	60 /59.94 /50 /30 /29.97 /25 /24 /23.976 / (*3).
	[] (*4) [] D1

[]

(*1) DirectShow AVI

AVI
DirectShow

(*2) PlayStation 2 16x16

(*3) 29.97 /

(*4) Wii

2.1.2

CRI

	1) 24- / 32- BMP () 2) 24- / 32- TGA (/)
	[] 72x72 [] (8x8)
	1) " " + " " + ". " OK> abc001.bmp, abc002.bmp, abc003.bmp , ... NG> abc001def.bmp, abc002def.bmp, abc003def.bmp, ... 2)

2.3.2

1

1000.

0-2

5-7.5

7.5-10

```
;INTIME, OUTTIME, Subtitle, Comment
1000
0, 2000, FirstMessage.
5000, 7500, Second Message.
7500, 10000, Third Message.
```

2

29970

29.97

1000

29.97*1000 = 29970.

29970

0 – 100

150 – 200

200 – 250

```
;INTIME, OUTTIME, Subtitle, Comment
29970
0, 100000, FirstMessage.
150000, 200000, Second Message.
200000, 250000, Third Message.
```

2.4

“ ”

“ ”

2.4.1

1.

2. "Time" "Value" "EventPointName" " String"
- ';' ()
3. "Time" "Time"
4. "Value"
5. "EventPointName"
6. "String"
7. ';' ()
8. ASCII Shift JIS UTF-8 UTF-16 (UTF-16LE)

2.4.2

1

 1000
0 5 7 8 15 25
#3 #4

```
;Time, Value, EventPointName, String
1000
0, 0, navi1
5000, 0, navi2
7000, 1, evpt1, param, test
8000, 1, evpt2, param1, 300, param2, 500
15000, 0, navi3
15000, 1, evpt3
25000, 0, navi4
```

3 CRI

MS-DOS

[Format] medianoche [-subcommand=param1[,param2,...]]

[Input] subcommand : subcommand

param# : subcommand parameter

AVI "sample.avi"

CRI "sample.usm"

> medianoche -in=sample.avi -out=sample.usm

3.1

“ ”

3.1.1

in	
out	
video##	
alpha##	Alpha
audio##	
mca*_##	
subtitle##	
cuepoint	

3.1.2

crop	
scale	

3.1.3

bitrate	(/).
br_range	
framerate	
hcfilter	
gop_i	I
gop_p	P-
gop_b	B-
gop_closed	GOP
detectsc	
ms_fullpel_still	

3.1.4

说明：	
hca	HCA
hca_quality	HCA

3.1.5

cleanup	
work_dir	
debug	
preview	

3.2

3.2.1

in:

```
[Format]    -in=filename
[Input]     filename : input video file
[Function]  Specifies input video file.
```

sample.avi

```
> medianoche -in=sample.avi -out=sample.usm
```

out:

```
[Format]    -out=filename
[Input]     output : output movie file (usm file)
[Function]  Specifies output file name.
```

"usm"

sample.usm

```
> medianoche -in=sample.avi -out=sample.usm
```

video:

```
[Format]    -video##=filename
[Input]     filename : video file
             ##      : video track number (## = 00)
[Function]  Specifies input video file.
```

1. 2.1
2. 00

AVI *smpvid.avi* 00

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm
```

alpha: Alpha

```
[Format]    -alpha##=filename
[Input]     filename : alpha file
             ##      : alpha track number (## = 00)
[Function]  Specifies input alpha file.
```

alpha

alpha

AVI

1. Alpha 00 alpha

AVI *smpvid.avi* alpha 00

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \  
-alpha00=smpvid.avi
```

audio:

[Format] -audio##=filename
[Input] filename : audio file
: audio track number (## = 00 - 31)
[Function] Specifies input audio file.

1. 2.2

2.

- CRI
- 00
- 32

00 01 02.

```
> medianoche -video00=smpvid.avi -out=sample.usm \  
-audio00=music.wav -audio01=voice_en.wav -audio02=voice_ja.wav
```

mca:

[Format] -mca**_##=filename
[Input] filename : audio files
** : audio track number
: audio channel number (## = 00 - 05)
[Function] Specifies audio file for surround movie

1.

-
-

2.

-
-

00
01
02
03
04
05

0.

```
> medianoche -video00=smpvid.avi -out=sample.usm \
    -mca00_00=fl.wav -mca00_01=fr.wav -mca00_02=sl.wav -mca00_03=sr.wav \
    -mca00_04=c.wav -mca00_05=lfe.wav
```

subtitle:

```
[Format]    -subtitle##=filename
[Input]     filename : subtitle information file
            ##      : subtitle channel (## = 00 - 15)
[Function]  Specifies subtitle information file.
```

1. 2.3

2. 16

00 01.

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \
    -subtitle00=subttl_en.txt -subtitle01=subttl_ja.txt
```

cuepoint:

```
[Format]    -cuepoint=filename
[Input]     filename: cuepoint information file
[Function]  Specifies cuepoint information file.
```

2.4

```
> medianoche -in=sample.avi -out=sample.usm -cuepoint=sample_cuepoint.txt
```

3.2.2

crop:

[Format] crop=crx,cry,cw,crh
[Input] crx: X coordinate of cropped image against the original image
 cry: Y coordinate of cropped image against the original image
 cw: Image width after cropping
 crh: Image height after cropping
[Function] Crops a part of original image.

0 0 640 480.

```
> medianoche -in=sample.avi -out=sample.usm -crop=0,0,640,480
```

scale:

[Format] scale=scw,sch
[Input] scw : the width of resized image
 sch : the height of resized image
[Function] Scales up/down the original image by averaging pixel value

640 480.

```
> medianoche -in=sample.avi -out=sample.usm -scale=640,480
```

3.2.3

bitrate:

[Format] -bitrate=rate
[Input] rate: bitrate [bps]
[Function] Specifies the bitrate of output movie file in bps (bits per second).

3000000bps.

6Mbps.

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \  
-bitrate=6000000
```

br_range:

```
[Format]    -br_range=min,max  
[Input]     min: minimum bitrate [bps]  
            max: maximum bitrate [bps]  
[Function]  Sets the bitrate range with minimum and maximum values for variable  
            bitrate control.  
            =0bps,      =3000000bps  
  
            =0bps      =3000000bps.
```

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \  
- br_range=0,3000000
```

framerate:

```
[Format]    -framerate=decfr  
            -framerate=fr_num,fr_den  
[Input]     decfr: frame rate in decimal number  
            fr_num: numerator of frame rate in fractional number  
            fr_den: denominator of frame rate in fractional number  
[Function]  Specifies movie frame rate (fps).
```

1. - =29.97
2. - =30000/1001

60 fps

29.97 fps

```
> medianoche -video00=smpvid.avi -audio00=smpaud.wav -out=sample.usm \  
-framerate=29.97
```

hcfilter:

```
[Format]    -hcfilter=fltype  
[Input]     fltype: high compression filter type
```

ON: always on
 OFF: always off
 AUTO: automatically applies when it's applicable. (Default)
 [Function] Applies high compression filter for video encoding.

3.2.4 GOP ()

GOP GOP

GOP

- I- I- ()-
GOP
- P- P- ()- - I- P-
- B- B- ()- GOP I- P-

gop_i: I- GOP

[Format] -gop_i=count
 [Input] count: number of I pictures in GOP
 [Function] Specifies number of I pictures in GOP

GOP I,P,B GOP

- I
I
- 1

gop_p: P- GOP

[Format] -gop_p=count
 [Input] count: number of P pictures in one GOP
 [Function] Specifies number of P pictures in one GOP

GOP I,P,B GOP

- P I B

- 4

gop_b: B- GOP

[Format] -gop_b=count
 [Input] count: number of B pictures in one GOP
 [Function] Specifies number of B pictures in one GOP

GOP I,P,B GOP

- The more B

- 2

gop_closed: GOP

[Format] -gop_closed=sw
 [Input] sw: switch for the closed GOP
 ON: closed GOP (Default)
 OFF: non closed GOP
 [Function] Enables the closed GOP.

GOP GOP GOP

detectsc:

[Format] -detectsc=sw
 [Input] sw: switch for the scene change detection
 ON : (Default)
 OFF:
 [Function] Enables the scene change detection.

I-

I-

3.2.5

hca: HCA

[Format] -hca=sw
 [Input] sw: switch for HCA encoding
 ON: Encode as HCA

OFF: Not encode as HCA (Default)

[Function] Specifies whether or not to encode audio source as HCA codec.

, ADX

hca_quality: HCA

[Format] -hca_quality=count

[Input] count: Selects encoding quality from the following 5 values

5 = Highest

4 = High (default)

3 = Medium

2 = Low (high compression)

1 = Lowest (highest compression)

[Function] Set sound quality for HCA encoding.

5	1/4	1/4
4	1/6	1/6
3	1/8	1/8
2	1/10	1/12
1	1/12	1/16

3.2.6

-ms_fullpel_still:

[Format] -ms_fullpel_still=sw

[Input] sw: switch for the motion search in full pel for still parts

ON:

OFF: (Default)

[Function] Specifies whether or not to perform motion search in full pel for still parts.

cleanup:

[Format]	-cleanup=sw				
[Input]	sw = switch for deleting intermediate files				
	ON: Delete (Default)				
	OFF: Not delete				
[Function]	Specifies whether to delete intermediate files that are created during encoding process.				
	CRI	(.usv)	CRI	(.usa)	CRI (.usm)

work_dir:

```
[Format]      -work_dir=dirname
[Input]      dirname : working directory
[Function]    Sets the working directory to create intermediate files for encoding
              process.
```

debug:

```
[Format]      -debug=sw
[Input]       sw = switch for outputting debug information
               ON:  Display debug info.
               OFF: No debug info. (Default)
[Function]    Enables to output debug information.
```

preview:

[Format]	-preview=sw
[Input]	sw = switch for displaying preview screen
	ON: Display (Default)
	OFF: Not display
[Function]	Specifies whether or not to display the preview screen that appears during encoding process.