

Autodesk® Scaleform®

Scaleform 3D

Scaleform 3.2

3D

: Mustafa Thamer
: 2.03
: 2012 5 9

Copyright Notice

Autodesk® Scaleform® 4.4

© 2014 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD LT, AutoCAD, Autodesk, the Autodesk logo, Autodesk 123D, Autodesk CAM 360, Autodesk Homestyler, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, BIM 360, Burn, Buzzsaw, CADmep, CAiCE, CAMduct, CFdesign, Civil 3D, Cleaner, Combustion, Communication Specification, Configurator 360™, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, DesignKids, DesignStudio, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver, FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, FormIt, Freewheel, Fusion 360, Glue, Green Building Studio, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, Incinerator, Inferno, InfraWorks, InfraWorks 360, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor HSM, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Maya LT, Mechanical Desktop, MIMI, Mockup 360, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moldflow, Moondust, MotionBuilder, Movimento, MPA (design/logo), MPA, MPI (design/logo), MPX (design/logo), MPX, Mudbox, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-omatic, Productstream, Publisher 360, RasterDWG, RealDWG, ReCap, ReCap 360, Remote, Revit LT, Revit, RiverCAD, Robot, Scaleform, Showcase, Showcase 360 ShowMotion, Sim 360, SketchBook, Smoke, Socialcam, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, ViewCube, Visual LISP, Visual, VRED, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform

Scaleform 3D
Scaleform Corporation
6305 Ivy Lane, Suite 310
Greenbelt, MD 20770, USA
www.scaleform.com
info@scaleform.com
(301) 446-3200
(301) 446-3199

차례

1	개요	1
2	Flash 10 과의 유사성.....	2
2.1		2
2.2		3
3	3D 에서 Flash 출력하기	3
3.1		3
3.2	3Di.....	4
4	3Di API.....	4
4.1	ActionScript 2 API.....	4
4.2	C++ 3Di	8
4.2.1	Matrix4x4	8
4.2.2	Direct Access.....	8
4.2.3	Render::TreeNode	9
4.2.4	: Direct Access API	9
5	원근	10
5.1	AS3	12
6	스테레오스코픽 3D.....	14
6.1	NVIDIA 3D Vision.....	14
6.1.1	3D Vision	14
6.1.2		15

6.1.3		15
6.2	Scaleform API	16
6.2.1	Scaleform Stereo	17
7	예제 파일	18

1 개요

Scaleform® 3Di™ 3D Flash
UI .
Scaleform 3.2 Scaleform 3D ActionScript
. Scaleform 3.2 ActionScript
2.0 , AS 3.0 3D AS
.
(_z, _zscale, _xrotation, _yrotation, _matrix3d, _perspfov) , HUD
UI 3D . 3D
movieclip, button textfield .
3D Scaleform Direct Access API C++ . API
3D Gfx::Value movieclip, button, textfield ,
.
, 3D 3D Flash
.

2 Flash 10 과의 유사성

Scaleform

3Di

Flash 10

3D

. 3Di

Scaleform

AS2

2.1

Flash 10

3D

3Di

1.

2. (Back-face culling)

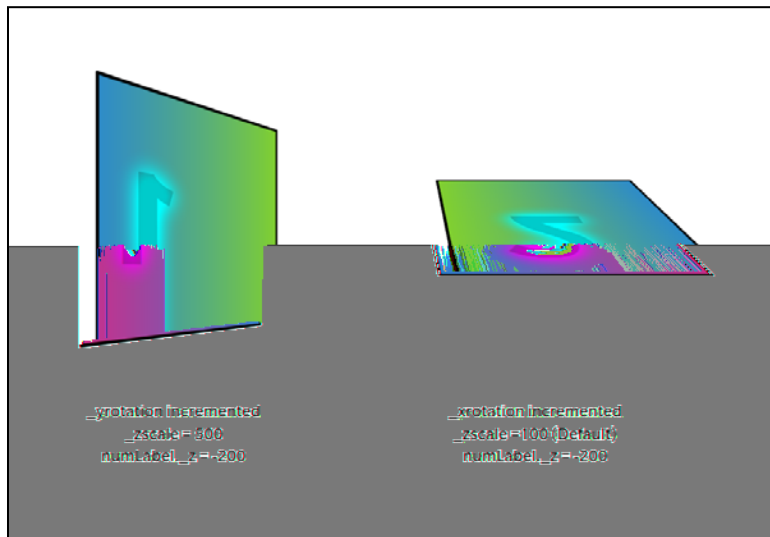


그림 1: 추려내지지 않았거나 후방에 그려진 후면 숫자의 예

2.2

Flash 10 3D , Scaleform 3Di .
2D 3D , 3D 2D .
3D . Flash 10 .

3 3D 에서 Flash 출력하기

Scaleform 3.2 3D Flash 2

3.1

Flash 3D . Scaleform 3.2 3D Flash .
3Di . Flash 3D , 3D , 3D Z() , / (UI) .
Flash (Scaleform) . Flash

movie clip
'SWF to Texture' Scaleform SDK Browser

3.2 3Di

Scaleform 3.2 , ActionScript Direct Access
API(C++) 3Di . 3Di
movie clip movie
Scaleform
Scaleform
, 3Di Scaleform UI
(back-face culling) , UI
, UI
, 3D
UI

4 3Di API

4.1 ActionScript 2 API

Flash 3Di 2D 3D
3D

2 3D . , 3D
 (x y , z , 3d), 3D . ,
 3D . 3d
 null 2D (ActionScript foo._matrix3d = null). z
 0 3D .
 , Z 2D , 3D 3 x, y, z
 . , 3D _zscale ActionScript

Scaleform 3D Flash 10 .
 , +X , +Y +Z ()
) . 55 FOV +Z .

3D Flash .

- Movie clips
- Text fields
- Buttons

3Di ActionScript .

- **_z** - Z () . 0 .
- **_zscale** - Z .
0 .
- **_xrotation** - X() . 0 .
- **_yrotation** - Y() . 0 .
- **_matrix3d** - 16 float (4 x 4) 3D
NULL 3D 2D .
- **_perspfov** - (Field Of View) 0
180 -1 .
FOV (55) .

•

.

Y	movie clip	45	
---	------------	----	--

예 2

$$Z \quad X \quad .$$

```
function rotateAboutXAxis(mc:MovieClip):Void
{
    mc._xrotation = mc._xrotation + 1;
    if (mc._xrotation > 360)
    {
        mc._xrotation = 0;
    }
}
```

6

예 3

3D

3D

.

```
function PixelsToTwips(iPixels):Number
{
    return iPixels*20;
}
```

```
function TranslationMatrix(tX, tY, tZ):Array
{
    var matrixC:Array = [ 1, 0, 0, 0,
                          0, 1, 0, 0,
                          0, 0, 1, 0,
                          tX,tY,tZ,1];
    return matrixC;
}
```

```
this._matrix3d = TranslationMatrix(PixelsToTwips(100),PixelsToTwips(100),0);
```

4.2 C++ 3Di

4.2.1 Matrix4x4

4x4 Matrix4x4 .
3D (,)
Render_Matrix4x4.h .

4.2.2 Direct Access

Gfx::Value Direct Access 3Di . 3D
API . 3Di ActionScript

Gfx_Player.h [Gfx::Value::DisplayInfo](#) .

```
void SetZ(Double z)
void SetXRotation(Double degrees)
void SetYRotation(Double degrees)
void SetZScale(Double zscale)
void SetFOV(Double fov)
void SetProjectionMatrix3D(const Matrix4F *pmat)
void SetViewMatrix3D(const Matrix3F *pmat)
bool SetMatrix3D(const Render::Matrix3F& mat)
```

```
Double GetZ() const
Double GetXRotation() const
Double GetYRotation() const
Double GetZScale() const
Double GetFOV() const
const Matrix4F* GetProjectionMatrix3D() const
const Matrix3F* GetViewMatrix3D() const
bool GetMatrix3D(Render::Matrix3F* pmat) const
```

4.2.3 Render::TreeNode

3D

Render::TreeNode

GfX_Player.h

```
void    SetProjectionMatrix3D(const Matrix4F& m)
void    SetViewMatrix3D(const Matrix3F& m);
```

4.2.4 예: Direct Access API 를 사용하여 원근 시야 변경하기

```
Ptr<GfX::Movie> pMovie = ...;
GfX::Value tmpVal;
bool bOK = pMovie->GetVariable(&tmpVal, "_root.Window");
if (bOK)
{
    GfX::Value::DisplayInfo dinfo;
    bOK = tmpVal.GetDisplayInfo(&dinfo);
    if (bOK)
    {
        // set perspectiveFOV to 150 degrees
        Double oldPersp = dinfo.GetFOV();
        dinfo.SetFOV(150);
        tmpVal.SetDisplayInfo(dinfo);
    }
}
```

5 원근

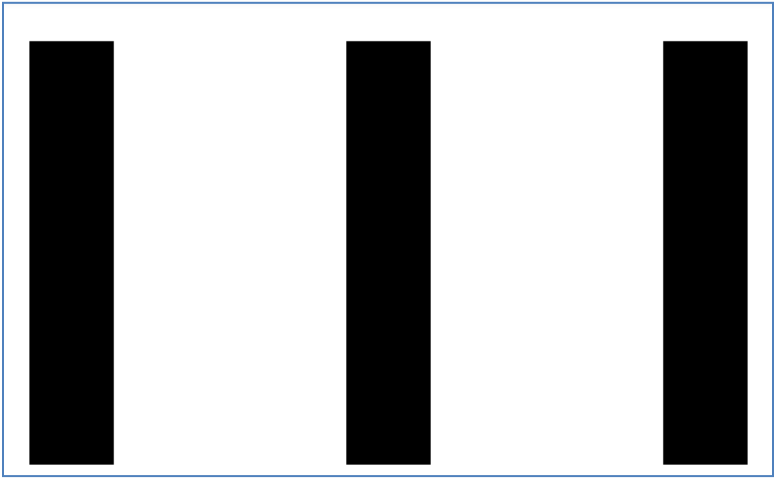
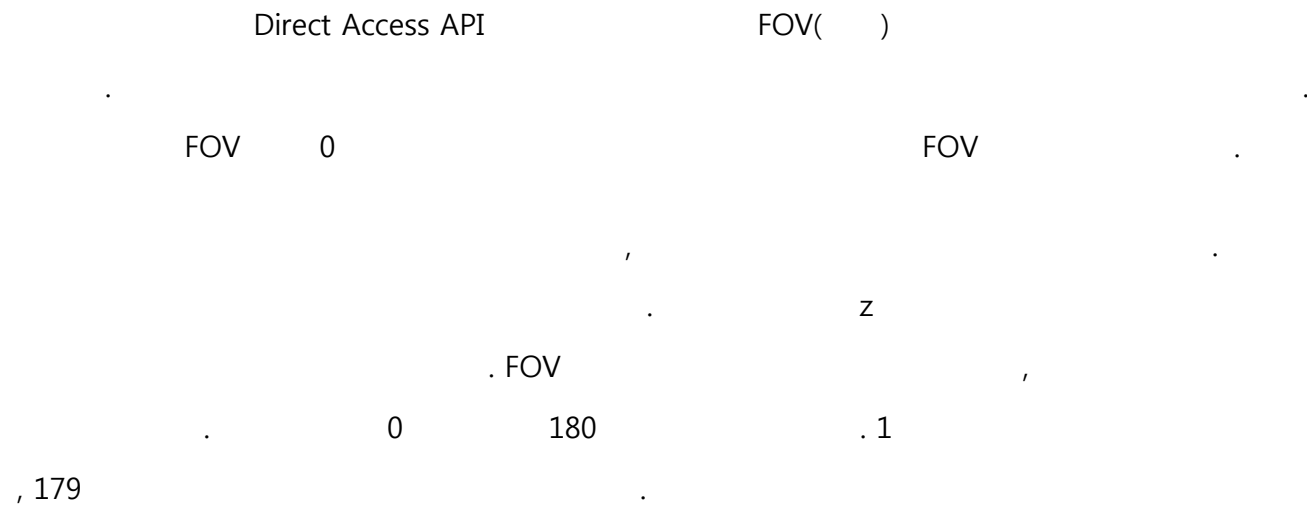


그림 2: 회전되지 않은 원래 Flash 이미지

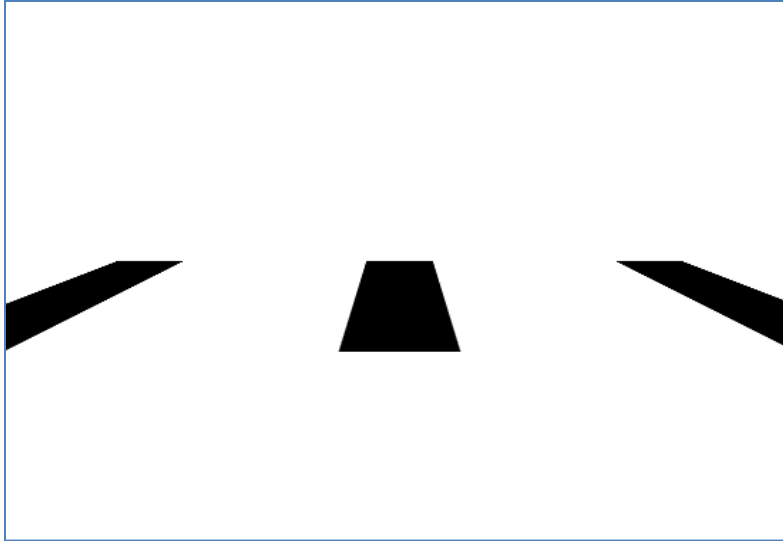


그림 3: -80 의 x 축 회전과 기본 원근 적용(55 도)

FOV (5)

. ActionScript _perspfov

-1

. C++

Direct Access API

```
// 1. FOV -1
Gfx::Value tmpVal;
bool bOK = pMovie->GetVariable(&tmpVal, "root"); //"_root" for AS2
if (bOK)
{
    Gfx::Value::DisplayInfo dinfo;
    bOK = tmpVal.GetDisplayInfo(&dinfo);
    if (bOK)
    {
        dinfo.SetPerspFOV(-1);
        tmpVal.SetDisplayInfo(dinfo);
    }
}
```

```
// 2.
void MakeOrthogProj(const RectF &visFrameRectInTwips, Matrix4F *matPersp)
{
    const float nearZ = 1;
    const float farZ = 100000;
```

```

float DisplayHeight = fabsf(visFrameRectInTwips.Height());
float DisplayWidth = fabsf(visFrameRectInTwips.Width());
matPersp->OrthoRH(DisplayWidth, DisplayHeight, nearZ, farZ);
}
Gfx::Value tmpVal;
bool bOK = pMovie->GetVariable(&tmpVal, "root.mc");
if (bOK)
{
    Gfx::Value::DisplayInfo dinfo;
    bOK = tmpVal.GetDisplayInfo(&dinfo);
    if (bOK)
    {
        Matrix4F perspMat;
        MakeOrthogProj(PixelsToTwips (pMovie->GetVisibleFrameRect()), &perspMat);
        dinfo.SetProjectionMatrix3D(&perspMat);
        tmpVal.SetDisplayInfo(dinfo);
    }
}
}

```

```

Ptr<Movie> pMovie = ...
// compute ortho matrix
Render::Matrix4F ortho;
const RectF &visFrameRectInTwips = PixelsToTwips(pMovie->GetVisibleFrameRect());
const float nearZ = 1;
const float farZ = 100000;
ortho.OrthoRH(fabs(visFrameRectInTwips.Width()), fabs(visFrameRectInTwips.Height()),
nearZ, farZ);
pMovie->SetProjectionMatrix3D(ortho);

```

5.1 AS3

ActionScript 3 PerspectiveProjection

Example:

```

import flash.display.Sprite;

var par:Sprite = new Sprite();
par.graphics.beginFill(0xFFCC00);
par.graphics.drawRect(0, 0, 100, 100);
par.x = 100;

```

```
par.y = 100;
par.rotationX = 20;

addChild(par);

var chRed:Sprite = new Sprite();
chRed.graphics.beginFill(0xFF0000);
chRed.graphics.drawRect(0, 0, 100, 100);
chRed.x = 50;
chRed.y = 50;
chRed.z = 0;

par.addChild(chRed);

var pp3:PerspectiveProjection=new PerspectiveProjection();
pp3.fieldOfView=120;
par.transform.perspectiveProjection = pp3;
```

6 스테레오스코픽 3D

Scaleform 3Di 3D UI

.

.

.

Scaleform 3Di NVIDIA PC 3D Vision Kit 3D

. NVIDIA

.

Display

. Scaleform

4.0 PS3 TinyPlayerStereo

. TinyPlayerStereo Scaleform

App\Sample\GFxPlayerTiny\GFxPlayerTinyPS3GcmStereo.cpp

6.1 NVIDIA 3D Vision

6.1.1 3D Vision 셋업

NVIDIA 3D Vision Kit 3Di

. NVIDIA 3D

3D . NVIDIA Stereoscopic 3D Test


.

6.1.2 실행

, D3D9 Scaleform Player .
 Automatic 3D Vision Direct3D Scaleform Player
 . Scaleform Player -f
 . NVIDIA 3D
 . 3D (CTRL + T)
 .

6.1.3 컨버전스 프로필

.
 . ,
 + -
 . 3D Vision ,
 .
 3D Vision IR (CTRL+F3)/(CTRL+F4)
 .
 .
 Scaleform Player
 (CTRL+F5) (CTRL+F6) ,
 .
 .
 NVidia "advanced in-game settings
 " , "Stereoscopic 3D" "Set up stereoscopic 3D"
 "Set Keyboard Shortcuts" (CTRL+F5) (CTRL+F6)
 . (CTRL+F7) .

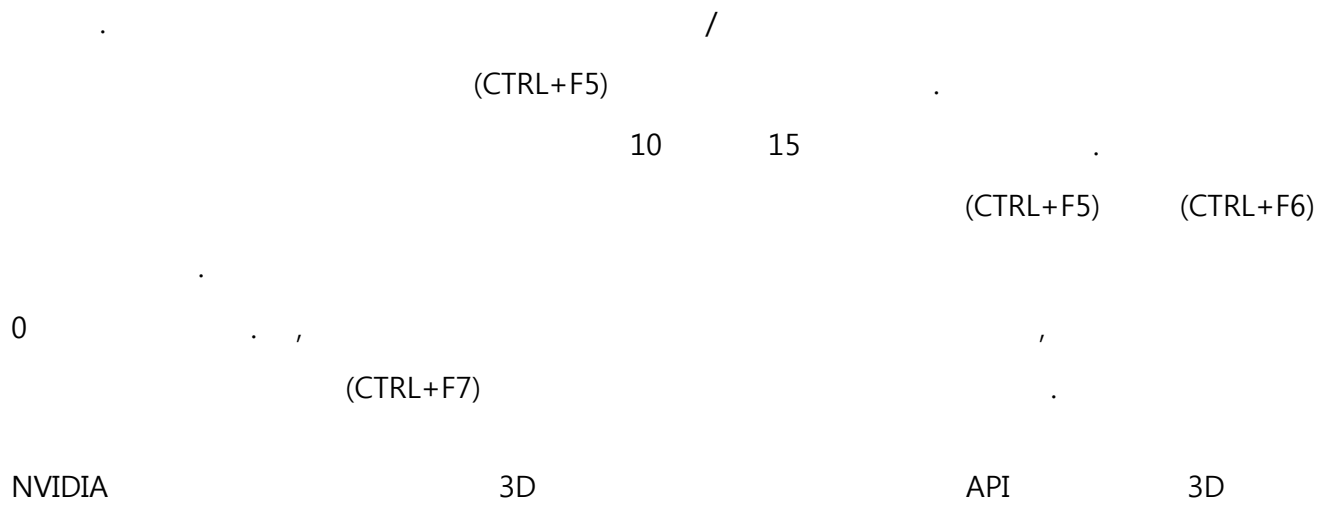


API

<http://developer.nvidia.com/object/nvapi.html>.

Designing for stereo()

http://developer.download.nvidia.com/presentations/2009/SIGGRAPH/3DVision_Develop_Design_Play_in_3D_Stereo.pdf.

6.2 Scaleform API

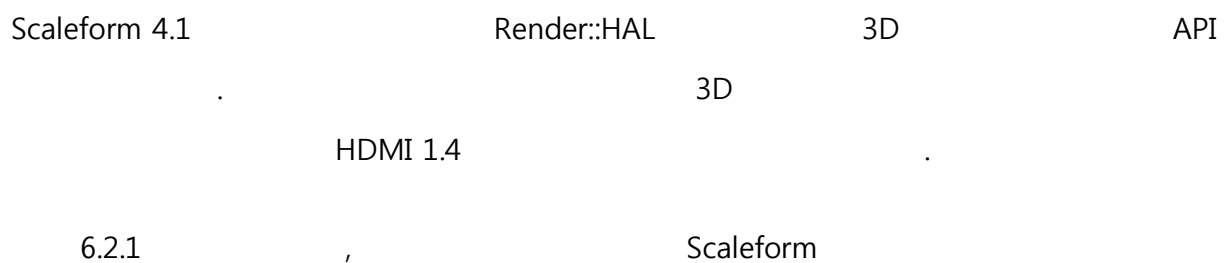

Scaleform 4

Render::Viewport::SetStereoViewport

SF4

Viewport Stereo

```
//  
  
View_Stereo_SplitV      = 0x40,  
View_Stereo_SplitH      = 0x80,  
View_Stereo_AnySplit    = 0xc0,  
  
void SetStereoViewport(unsigned display);
```

6.2.1 Scaleform Stereo 초기화

```
Render::StereoParams s3DInfo;  
s3DInfo.DisplayDiagInches = 46;      // 46      TV  
s3DInfo.DisplayAspectRatio = 16.f / 9.f;  
s3DInfo.Distortion = .75;           // 0      1  
s3DInfo.EyeSeparationCm = 6.4;      //      6.4cm  
pRenderHAL->SetStereoParams(s3DInfo);
```

Display

Display

. Scaleform

```
pMovie->Advance(delta);  
  
pRenderer->GetHAL()->SetStereoDisplay(Render::StereoLeft);  
pMovie->Display();  
  
pRenderer->GetHAL()->SetStereoDisplay(Render::StereoRight);  
pMovie->Display();
```

7 예제 파일

Scaleform SDK 3D Flash (SWF, FLA) 3Di

. C:\Program Files (x86)\Scaleform\GFx SDK

4.4\Bin\Data\AS2 or AS3\Samples



그림 4: 3DGenerator

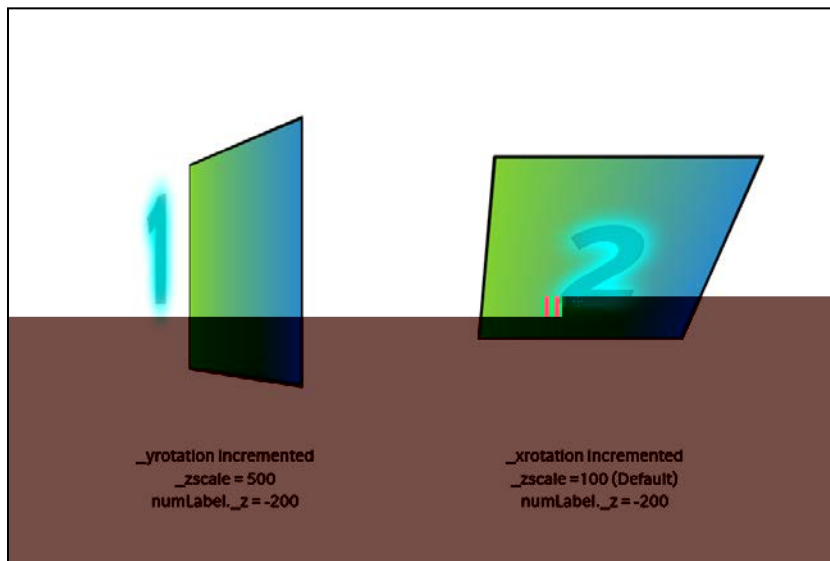


그림 5: 3D 사각형



그림 6: 3D 윈도우