

Autodesk® Scaleform®

ActionScript

Scaleform 4.4

ActionScript 2.0

充

Artem Bolgar

4.03

数

2012 9



Copyright Notice

Autodesk® Scaleform® 4.4

© 2014 Autodesk, Inc. All rights reserved. Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD LT,

A, AutoCAD, Autodesk Inventor, Autodesk MapGuide, Autodesk Simulation, AutoCAD LT, AutoSketch, AutoSnap, Auto-
 Backburner, Backdraft, Beast, BIM 360, Burn, Buzzsaw, CADmep, CAICE, CAMduct, CFdesign, Civil 3D,
 Cleaner, Combustion, Communication Specification, Configurator 360™, Constructware, Content Explorer,
 Creative Bridge, Dancing Baby (image), DesignCenter, DesignKids, DesignStudio, Discreet, DWF, DWG, DWG
 (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver,
 FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, FormIt, Freewheel,
 Fusion 360, Glue, Green Building Studio, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, Incinerator,
 Inferno, InfraWorks, InfraWorks 360, Instructables, Instructables (stylized robot design/logo), Inventor,
 Inventor HSM, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Maya LT,
 Mechanical Desktop, MIMI, Mockup 360, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moldflow,
 Moondust, MotionBuilder, Movimento, MPA (design/logo), MPA MPI (design/logo), MPX (design/logo), MPX
 Mudbox, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, Productstream,
 Publisher 360, RasterDWG, RealDWG, ReCap, ReCap 360, Remote, Revit LT, Revit, RiverCAD, Robot,
 Scaleform, Showcase, Showcase 360 ShowMotion, Sim 360, SketchBook, Smoke, Socialcam, Softimage,
 Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-
 Splines, ViewCube, Visual LISP, Visual, VRED, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

Disclaimer

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

ActionScript

Autodesk Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

www.scaleform.com

info@scaleform.com

(301) 446-3200

(301) 446-3199

引

1		1
2		2
2.1		2
2.2	之	2
2.3	之	4
2.4		5
2.5	ActionScript	7
3		10
4	MovieClip	12
5	NetStream	16
6		20
		28
7.1		28
7.2		37
7.3	容	43
7.4	HTML	45
7.5	间	47
7.6		51
7.7	IME	55
8	TextFormat	58
9	Stage	59
10		62
11	String	63
12	覆	64
13	3Di Extensions.....	65
14		67
15	之	70

1 介绍



2 扩展鼠标类

	Scaleform		
RIGHT, MIDDLE	之	16	
Scaleform	容		Flash Mouse Class

2.1

Wii™		Scaleform 3.2	4
Gfx::Movie::SetMouseCursorCount(unsigned n)			
Gfx::Movie::HandleEvent with Gfx::MouseEvent	之	Scaleform 充	容
Gfx::MouseEvent	Gfx::MouseEvent		

2.2 之

之	onRollOver, onRollOut, onDragOver, onDragOut, onPress, onRelease, onReleaseOutside	
Scaleform	之	
1	onPress 之	1
< < D E<		
<		
< < D < < LE<		
< < < < <		
< < < D < < ME<		
< < < < <		
< < <		
<		
onPress onRelease...	之 容 之 /	
-1 / 0		
< < D H< E<		
<		
< < D < < LE<		
< < < < <		
< <		
< < < < <		

< < <
 <
 2 onRollOver/Out onDragOver/Out 之 双 rollover/dragover
 之 onRollOver/onRollOut onDragOver/onDragOut 之
 容 onRollOver/onDragOver 离 onRollOut/onDragOut
 之 2 onRollOver/onRollOut
 onDragOver/onDragOut 之
 onRollOver/onDragOver 之 2 0 双 onRollOver/onRollOut 之
 1 onRollOut/onDragOut 之
 2 1 2 0

2 onRollOver/onRollOut onDragOver/onDragOut 之 2
 之

< < D H< E<

<
 < KK< < <L <
 < < D < <LE<
 < < DE <
 < < <

< < < D H< E<
 <
 < KK < <L <
 < < D < <LE<
 < < DE <
 < < <

之 RollOver RollOut
 之

onPress onRelease

之 数

- onPressAux
- onReleaseAux
- onReleaseOutsideAux
- onDragOver
- onDragOut

之 之 容 index != 0 0 之

双 反 之

	< <	D	H<	H	E<
<					
<	< D	<	< ME<< KK<	<	<
<	<	< < <			
	< < <				
<					

2.3 之

ActionScript 之 换 离 之 Flash 之
Mouse.addListener 之 换 容

- | | | | |
|---|--------|-----|--|
| ■ | << < | DE< | < < |
| ■ | << < | DE< | < < |
| ■ | <<<< < | DE< | < < |
| ■ | < < | D | < < H< < < E< < < |

Flash 之 OnMouseDown 与 onKeyUp 之 换 容 之

容 Scaleform 数

- [illegible]

MIDDLE	之	Scaleform	容	RIGHT,
1 2 3	16 之	LEFT	RIGHT	MIDDLE 容
Flash	双		LEFT	之

< < < <

<

< < D H< E<

<

<<< D> <I< <C><G< <G<

数 down/up 构
Mouse ["LEFT"], Mouse ["RIGHT"] Mouse ["MIDDLE"] Mouse ["LEFT"]
Mouse.LEFT ActionScript 2.0
容

■	< <	D		< <	H<<		E< < <	
				< <	H<	< <		
■	< <	D	< <	H<		< <	H<<	
				< <	H<	< <	H<	< <
				H		< <	E< < <	
■	<<< <	D	< <	H<		< <	H<<	
				< <	H<	< <	H<	< <
				< <				E<
■	< <	D	< <	H<		< <	H<<	
				< <	H<	< <	H<	< <
				< <				E<

之

构

_root

<

- - 容
- - useHandCursor
- | -


```

<<<      D      E<
<<< <
<<<<<<< <      >      > <
<<<<<<<<<      D>      >E <
<<<<<<<<<      <
<<<<<<< <      >      > <
<<<<<<<<<      D>      >E <
<<<<<<<<<      <
<<<<<< <      >      > <
<<<<<<<<<      D>      >E <
<<<<<<<<<      <
<<<<<<      <      <
<<< <
<
<
KK<      <      <
KK< 容      <
      D      H<>      H      >H<LH< E <
<
      < <      D      E<<
<<
<<<< < D      < <      E<
<<<<<<<<<      < <L <
<<<< <      < <      D>      >G D      GMEE <
      < <      <<
<
      < <      D      E<<
<<
<<<< < D      < <      E<
<<<<<<<<<      < <L <
<<<< <      < <      D>      >G D      GMEE <
      < <      <<
<
<

```

2.5 ActionScript

Scaleform ActionScript ActionScript 1.0

(...) ActionScript 2.0

ActionScript 2.0 : > > D E

getButtonsState()

< < D < < E< < <

Scaleform 2.2

容 1

< < << -

getTopMostEntity()

< < D < < E< < <
< < D < < H<<
<<< < < E< < <
< < D < < H< < < E< < <
< < D < < H< < < H< < < E< < <

Scaleform 1.2.34, 2.2

容 构 onPress,
onMouseDown, onRollOver 构 双 之
构

发 < x y 容 容 充
容 x y 阅容 D H<
E D H< H< E< <

< < < -
< < << - 构 false false
true
< < H< < < < <

:

< < < <
< < < DE<
<
<<< < < < > > DE <

```

<<<      D>      <      H<      < <>G      E <
<
<
      D      E <
<      < <      >      > DP LH<MLE <
DP <      <      < <      < DP LH<MLE<      <><G<      E <
<

```

getPosition

```

<
<      <      D      < <      E< <      <

```

Scaleform 2.2

容 _root flash.geom.Point

```

< <      <<      -

```

setCursorType()

```

<      <      D      < <      H<      < <      E< <      <

```

Scaleform 1.2.32

cursorType

```

< <      <-      Mouse.ARROW, Mouse.HAND, Mouse.IBEAM.
< <      <-

```

3 扩展按钮类

hitTestDisable

<<I<<

Scaleform2.1.51

容

之

<

<<<<

topmostLevel

<<I<<

Scaleform2.1.50

容false

topmostLevel

容Scaleform 3.0.71topmostLevel关

容Scaleform 3.0.72容A容B容A容B容A容BtopmostLevel

析topmostLevelswapDepth ActionScript容

<<<<

focusGroupMask

< < <<
<
Scaleform 3.3.84
(ALL)
离 充 离
<
0 1 1 (button1) 0 2 (movieclip2)
0 1
DLH<LE <
DMH<ME <
<
M N
< <L M <KK< <L< < < <L
< <L M< <L N<KK< <L< <M< < < <L< <M
" " (parent movieclip)

Flash 覆
Scaleform Flash 双
ActionScript

<
topmostLevel

<< I <<
Scaleform 2.1.50

- 容
- topmostLevel
- 容 Scaleform 3.0.71 topmostLevel 关
 - Scaleform 3.0.72 双 容 A
容 B 容 A 容 B topmostLevel

析 topmostLevel swapDepth ActionScript 容

<
<
<

rendererString

<< I <<
Scaleform 2.2.55

MovieClip ActionScript

< <> ×

rendererFloat

<< I <<

Scaleform 2.2.55

MovieClip ActionScript

< <P <KK< < GG< <

<

disableBatching 属性

<

<

<

Scaleform : 4.0.17

容

<

<

focusGroupMask

< < <<

<

Scaleform 3.3.84

(ALL)

离 充 离

<

$\angle$

5 NetStream

Scaleform NetStream 覆

onMetaData 之 构

<
< < D E< < <

Scaleform 3.0.63

之 构 覆 Scaleform 容 覆
左

容 <之 构

1 < - 覆 容
容
- (1- , 2- , 6-5.1)
-
<-
(要)
-
2 < - 覆

<< I <
<
Scaleform 3.0.63
/
覆

< < < < D E <
 < < <
 < < D E<<
 < < <
 < < <
 < < D < = < < BB< < < LE<
 < < < L <

<< I <
 <
 Scaleform 3.0.63
 <

0

onSubtitle 之 构

<
 < < D E< <
 <
 Scaleform 3.0.63

之 构

< < < < D E <
 < < < < L <
 < < D E<<
 < < < = < ;
 < < <
 < < < D E<<
 < < < < <
 < < < < <
 < D < < LE<

< < M <
< <

setNumberOfFramePools

Scaleform 3.0.68

CPU 充 覆 结 覆 结 覆 充 1

覆 `NetStream.play()`

setReloadThresholdTime

 $\langle \quad \quad \quad \rangle$ D $\langle \quad \quad \quad \rangle$ E $\langle \quad \quad \quad \rangle$

Scaleform 3.0.68

Scaleform 覆 0.8

覆			Netstream 结
NetStream.setBufferTime()	2	1	1
充			

充 覆 结 覆

覆 `NetStream.play()`

6 扩展选择类

覆

Scaleform

ActionScript 1.0

DE

ActionScript 2.0

ActionScript 2.0

>

>

DE

<

alwaysEnableArrowKeys

< < <

Scaleform 1.2.34

< < Flash

>

<

> < < <

alwaysEnableKeyboardPress

< < <

Scaleform 3.0.63

onPress / onRelease 之

< <

>

> < < <

captureFocus()

< < D H< E< < <

Scaleform 1.2.34

按

双 Tab true 发

false 双 离

—

— / true 双

0

> > DE <KK< 双<

> > D E <

disableFocusAutoRelease

< < <

Scaleform 1.2.34

Flash

发 true

> > < < <

disableFocusKeys

< < <

Scaleform 2.2.58

TAB, Shift-TAB 发

> > < < <

DE<

disableFocusRolloverEvent

< < <

Scaleform 2.0.37

rollover/out 之

> <> < < <

<

modalClip

< < <

Scaleform 2.2.58

覆 覆 modal 覆 TAB,Shift-TAB 发
覆 离 tabable

> > < < <

< > > < < < <
 < <
 <
 DE<

moveFocus()

< < D < < < H< H<
 < < < < H<
 < E< < <
 <
 Scaleform : 2.2.58

离 TAB, Shift-TAB 发
 <

— 反 “up”, “down”, “left”, “right”, “tab”, “shifftab”
 — moveFocus
 null

— moveFocus
 < K<

— < K< 离 <
 /
 0

> > D> >E <<
 > > D> >H< E <
 > > D> >H< H< E <
 > > D> >H< H< E <

<

数

充

<

<

findFocus()

<

<

D
H<

< <

< H<

H<

< <<

< <

H<

< <

E< <

<

Scaleform

3.3.84

TAB Shift-TAB

K

—

tab

反
shifttab

发

发

发

发

充

<<<<<<<<<<

Null)

<<

—

findFocus

"null"

幕

发

"false"

"true"

—

findFocus

"null"

" undefined"

—

moveFocus 离

K

K

离

<<<<<<<I<

< < <

>

> D>

>E <<

<

要

setModalClip()

 $E <$

TAB Shift-TAB

充离

 $I <$

getModalClip()

<

 $I <$

setControllerFocusGroup()

< <<

 $E < \infty$

0

双小

< DMHME

< DMHLE

0 1

双

<
< <

> > DLHLE <<
> > DMHME <<
> > DNHME <<

true ---

getControllerFocusGroup()

< < < D < < E< < <

Scaleform 3.3.84

I<

getFocusArray()

< < D < < E< < <

Scaleform 3.3.84

/ /

<

getFocusBitmask()

< < D < < E< < <

Scaleform 3.3.84

/ /

<

I<

getControllerMaskByFocusGroup()

<

<

< D

<

E<

Scaleform 3.3.84

<

I<

numFocusGroups

< <

<

<

Scaleform 3.3.84

0 3

numFocusGroups 2

Scaleform	TextField	Flash 8	充	TextField	建
Flash 9	充	TextField	双		IME 容
			间		

7.1

返

autoFit

<< I <<

Scaleform 2.0.39

on/off

false

appendText ()

< < D E <<

Scaleform 2.0.37

newText +=

<G <

析

DE<

appendHtml ()

< < D E <<

Scaleform 2.0.37

newHtml HTML +=

<G < htmlText += HTML 数 HTML

容 HTML newHtml HTML 容 +=

析

DE<

caretIndex

<< I <<

Scaleform 2.0.37

排

0

DE 双

拥 DE -1


0

DE<

getCharBoundaries ()

< < D E <

Scaleform 2.0.37

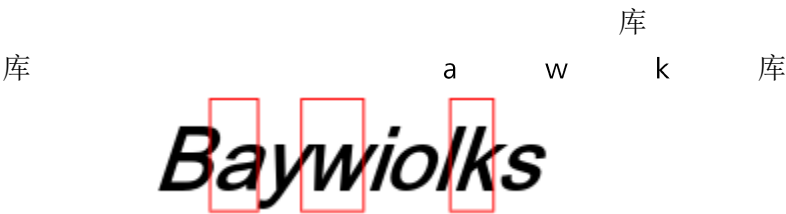

— 0 1

flash.geom.Rectangle — x y
容 0 0 容

DE<

<
getExactCharBoundaries ()

< < D E <

Scaleform 2.0.37

库

()
a w k

*Baywio*ks

- 0 1

flash.geom.Rectangle - x y
容 0 0 容

DE<
<

getCharIndexAtPoint ()

< < D H< E <

Scaleform 2.0.37

x y

<- x <<
<<<< <- y <<
<

Number - 0 1
-1

getFirstCharInParagraph ()

<	<	D	E	<
Scaleform	2.0.37			

	<-	0	1
<	<		
Number -			

getLineIndexAtPoint ()

<	<	D	H<	E	<
Scaleform	2.0.37				
	x	y			
	<-	x	<<		
<<<<	<-	y	<<		
<					
Number -			0	1	
	-1				

getLineLength()

< < D E <

Scaleform 2.0.37

<- 0 1

<

Number –

getLineMetrics()

< < D E <

Scaleform 2.0.43

容

< < <<

< < <<


幕

< < <<

< < <<

< < <<

< < <<

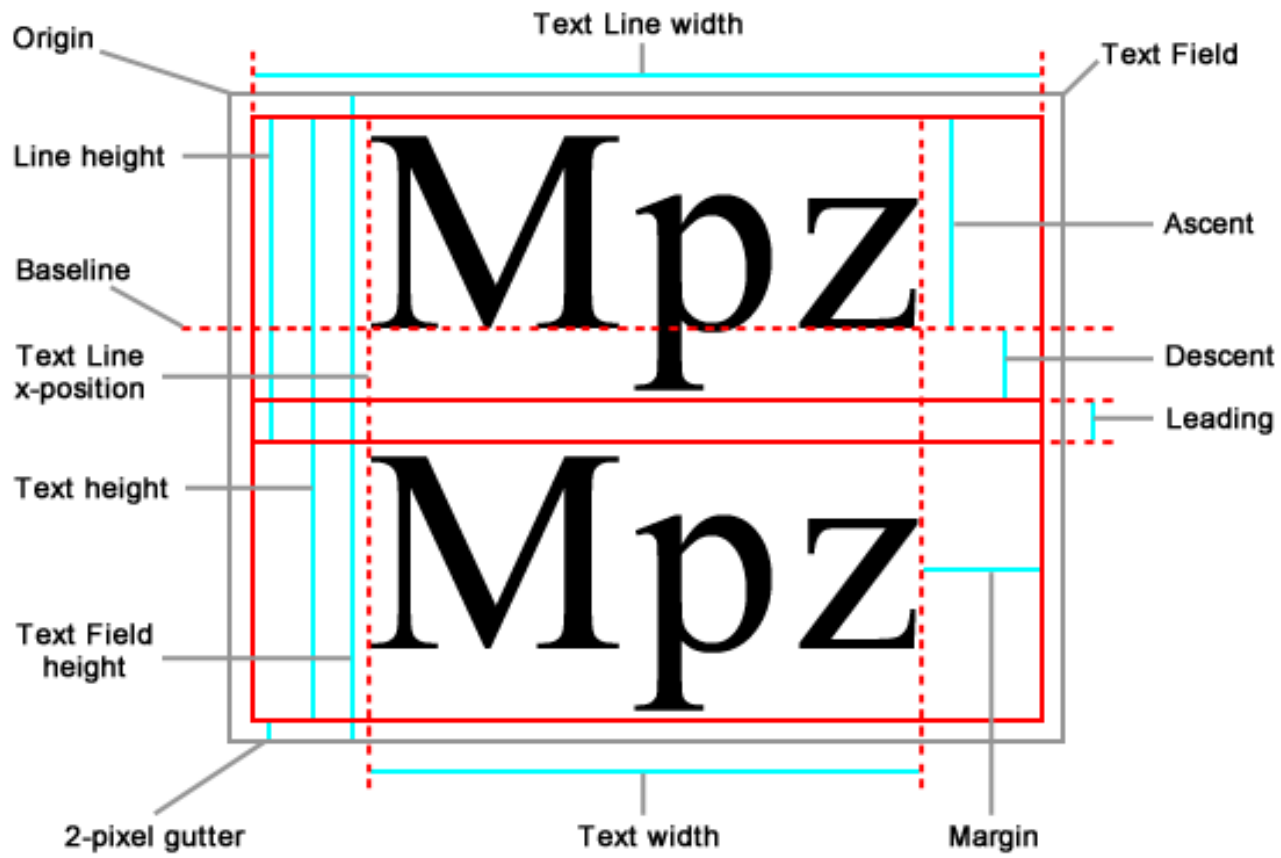

<-

0

1

<

Number – 容

et.LineOffset 0] g

<

<

D

E

<

Scaleform

2.0.37

<-

0

1

<

Number -

getLineText ()

<

<

D

E

<

Scaleform 2.0.43

<-

0

1

<

String –

hitTestDisable

<<

I

<<

Scaleform 1.2.32

之 容

false

noTranslate

<<

I

<<

Scaleform 1.2.34

true

false

numLines

<< I <<

Scaleform 2.0.43

topmostLevel

<< I <<

Scaleform 2.1.50

容 false

- 容 Scaleform 3.0.71 topmostLevel 关
- Scaleform 3.0.72 双 容 A topmostLevel
容 B 容 A 容 B

析 topmostLevel swapDepth ActionScript 容

< <
< <
<

focusGroupMask

< < <<

<
Scaleform 3.3.84

(ALL)
离 充 离

<


```

0      1      1 (button1)      0      2 (movieclip2)
0      1
<
M      N      < <L M <KK< <L< < < <L
< <L M< <L N<KK< <L< <M< < < <L< <M
"      "      (parent movieclip)
<

```

7.2

alwaysShowSelection

```

<<      I      <<
Scaleform      2.1.45
Scaleform      Scaleform      充      true
Scaleform      要
false
<
<
<
<

```

copyToClipboard ()

<	<	D	H<	H<
	E	<<		

Scaleform	2.1.45
-----------	--------

	-	true		
	-			双 <<
	-			双 <
		<		
		<		
		<		
	DE<			
	DE<			

<
cutToClipboard ()

<	<	D	H<	H<
	E	<<		

Scaleform	2.1.45
-----------	--------

	-	true		
		useRichTextClipboard		
	-			双 <<
	-			双
		<		
		<		
		<		
	DE<			
	DE<			

inactiveSelectionBkgColor

<< I <<

Scaleform 2.1.45

是 true
0xAA alpha [0,255] RR -
[0,255] BB - [0,255] GG - 线
alpha 0 alpha 0
Flash 是 双
0xFFFF0000 alpha 0xFF (255) 容 "backgroundColor" 0xFF0000

<
<
<
<

inactiveSelectionTextColor

<< I <<

Scaleform 2.1.45

true
0xRRGGBB AA alpha [0,255] RR - [0,255] BB
- [0,255] GG - 线 [0,255]
alpha 0 alpha 0
Flash 是 双
0xFFFF0000 alpha 0xFF (255) 容 "textColor" 0xFF0000

<

<
<
<
<

noAutoSelection

<< I <<

Scaleform 2.1.45

true

false

pasteFromClipboard ()

< < D H< H<
E <<

Scaleform 2.1.45

— true
useRichTextClipboard 双

—
双 <<

—
双 <

<
<
<
DE<
DE<

selectionBeginIndex

<< I <<

Scaleform 2.1.45

DE

双 双

DE

DE

-1

<

<

DE<

<

selectionEndIndex

<< I <<

Scaleform 2.1.45

DE

双 双

Selection.getEndIndex()

DE

-1

<

<

DE<

<

selectionBkgColor

<< I <<

Scaleform 2.1.45

是

0xRRGGBB

AA

alpha

[0,255] RR -

[0,255] BB -

[0,255] GG - 线

[0,255]

alpha 0 是 双
Flash 容
0xFFFF0000 alpha 0xFF (255) 0xFF0000
<
<
<
<

<< I <<

Diagram illustrating the structure of a 32-bit color value (ARGB) and its components:

- ARGB**: The full 32-bit color value, represented as `0xFFFF0000`.
- AA**: Alpha channel, represented as `[0,255]`.
- RR**: Red channel, represented as `[0,255]`.
- GG**: Green channel, represented as `[0,255]`.
- BB**: Blue channel, represented as `[0,255]`.
- Flash**: A label indicating a specific operation or state.
- 是**: A label indicating a specific operation or state.
- 双**: A label indicating a specific operation or state.
- 容**: A label indicating a specific operation or state.
- 0**: A label indicating a specific operation or state.
- 0xFF (255)**: A label indicating a specific operation or state.
- 0xFF0000**: A label indicating a specific operation or state.
- 0xFFFF0000**: A label indicating a specific operation or state.

Additional labels and symbols include:

- alpha**: A label indicating a specific operation or state.
- 0**: A label indicating a specific operation or state.
- Flash**: A label indicating a specific operation or state.
- 是**: A label indicating a specific operation or state.
- 双**: A label indicating a specific operation or state.
- 容**: A label indicating a specific operation or state.
- 0**: A label indicating a specific operation or state.
- 0xFF (255)**: A label indicating a specific operation or state.
- 0xFF0000**: A label indicating a specific operation or state.
- 0xFFFF0000**: A label indicating a specific operation or state.

Comparison symbols (**<**) are used to indicate relationships between the components.

<< I <<

双 左 容 Scaleform

7.3

容

容

fontScaleFactor

<< I <<

Scaleform

1.0

textAutoSize

<< I <<

Scaleform

textAutoSize

双

5pt

textAutoSize


wwerwqwe2q2e2e2eww|

[wwerwqwe2q2e2e2ewwdfsd fsd fsd fsd fsd fsd fsd](#)

verticalAlign

<< I <<

Scaleform 2.0.43

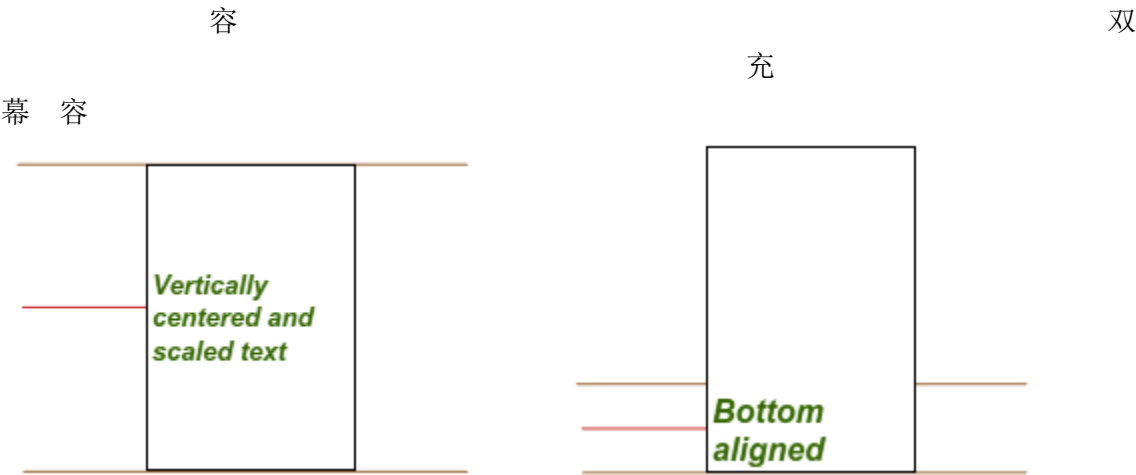

<
<


verticalAutoSize

<< I <<

Scaleform 2.0.43



幕

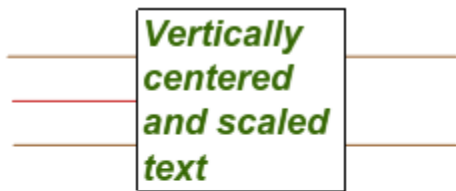

<

7.4 HTML

Scaleform HTML

** ALPHA**

ALPHA="#xx"

alpha	00	FF	0-255	0	255	COLOR
容 ALPHA	HTML					

Web

```
( "http://", "file://"
```

HTML		myImage
------	-------	---------

C < < > <
 <>

CIMLC C NON K > <

C < C <> CNL<> COL<>

IMG

JPEG GIF PNG SWF

"img://"

Gfx::ImageCreator::

LoadImage

一排

一排

容

baseline

- baseline 容

容

离

— 排

覆

反

Flash Player

SWF

覆

– left right

排

容

- left right

SWF

Flash

Flash

SWF

覆

Flash 双



IMG

SWF

覆

7.5 间

双间 blur knockout

blurX, blurY

<< I <<
<< I <<

Scaleform 2.0.41

blur 0 15.9()

0

<

<

blurStrength

<< I <<

Scaleform 2.0.41

blur 建 0 15.9

0

<

<

<

shadowAlpha

<< I <<

Scaleform 2.0.41

间 alpha 0.00 1.00 0.25 25% <

< <

shadowAngle

<< I <<

Scaleform 2.0.41

间 DropShadowFilter 0 360° ()

45

<

<

shadowBlurX, shadowBlurY

<< I <<

<< I <<

Scaleform 2.0.41

blur 0 15.9()

0

<

<

shadowColor

<< I <<

Scaleform 1.1.31

间 0xRRGGBB RR -
[0..255] BB - [0..255] GG - 线 [0..255]

<
<
shadowDistance

<< I <<

Scaleform 2.0.41

间 离 DropShadowFilter 双

<
<
<
shadowHideObject

<< I <<

Scaleform 2.0.41

间

shadowKnockOut

<< I <<

Scaleform 2.0.41

容 是

shadowQuality

<< I <<

Scaleform 2.0.41

间 Flash 双 1 2 1 2

<
shadowStrength

<< I <<

Scaleform 2.0.41

间 建 0-15.9

0

<
<

<
shadowStyle

<< I <<

Scaleform 1.1.31

容 间

< <> L H I M Q I M P H M N M P H M N L H L > <
< <L L L L L

s 间 t 双
无 t t 0 0
间 建
间

<
<

7.6

setImageSubstitutions ()

< D E< < <
< D E< < <
< D E< < <<

Scaleform 2.0.38

排 SWF 反 排
SWF

- 1.
- 2. Windows Macintosh 引
- 3. ActionScript 反 myImage
- 4. OK

BitmapData ActionScript

< < <
< < < < D> >E
(< ; 反 -
)

双 ID

容

< < <

< < <
小

< < <
小

< < <

Y 离幕 w/o

< < <

ID updateImageSubstitution

容 双 容
D E
D E

充
D E

ActionScript 容
ActionScript

— 容 要
— 容 要 <<
— <

< DE<

< M< <	D> M>E <<
< N< <	D> N>E <<
< O< <	D> O>E <<

= 反 smile1

$$\langle \quad \quad \quad D \quad \quad H \langle \quad \quad E \langle \quad \quad \langle$$

Scaleform 2.0.38

— ID 容
 ID 双
 — 数 null <

< DE<

<

<

<

< D> E>H< OE <<

排 onEnterFrame 构 setInterval 数 数

$$\begin{array}{ccccccc}
< & & & < < L < & & & \\
< & M < < & & & & D> & M > E < \\
< & N < < & & & & D> & N > E < \\
< & & & & & & & \\
& & & < < & & DE<< & \\
< & & & & & & & \\
<<<< < D & < A< ML< < LE<< & & & \\
<<<< < & & & & & & \\
<<<<<<< < D & < A< NL< < LE<< & & &
\end{array}$$

```

<<<<<< <
<<<<<<<<<
<<<<<<<<<
<<<<<< <
<<<<<< <<
<<<<<< <
<<<<<<<<<
<<<<<<<<<
<<<<<< <
<<< <
<<<GG <
<

```

```

D> E>H< ME <
D> IE>H< NE <

```

```

D> E>H< M E <
D> IE>H N E <

```

7.7 IME

IME

disableIME

<< I <<

Scaleform 2.1.50

true IME

false

getIMECompositionStringStyle ()

< < D E <

Scaleform 2.1.50

IME 容
cateforyName 容

categoryName:String – IME <
<

容 - 引 <

<

<

<

setIMECompositionStringStyle ()

< < D H< E <

Scaleform 2.1.50

IME

> > -
> > -
> > -
> > -
> > -

容

< < <

是 < < <

< < <

< < <

<
<
<

<
<

<

[0..255] GG-线 0xRRGGBB RR- [0..255] BB-
[0..255] [0..255]

<- IME 要
- 容 要

< <

8 扩展 TextFormat 类

TextFormat

alpha

<< I <<

Scaleform 2.0.41

alpha

0-100% Flash

alpha

< < C C <

9 扩展 Stage 类

visibleRect 覆	safeRect 要	Scaleform originalRect 双	建 是 onResize
AS 1.0	AS 2.0	AS 2.0	AS 2.0

visibleRect

AS 1.0	AS 2.0	AS 2.0
Scaleform	2.2.56	AS 2.0
覆容	topLeft	容 Viewport
<	<	

safeRect

AS 1.0	AS 2.0	AS 2.0
Scaleform	2.2.56	AS 2.0
双		
<	<	
<		
<		
<		
<		

<
<
<

originalRect

<< I <<

Scaleform 2.2.56

SWF 轨 SWF Flash Studio Document properties
轨 600px 400px { 0, 0, {600, 400} }

<
<

onResize 之 构

< < D E< <

Scaleform 2.2.56

onResize 之 构 覆
双

<

translateToScreen()

< < D E <

Scaleform 3.3.84

Stage 无 小

<- x y Object flash.geom.Point
Object
<

- 无 小

10

Flash容

Unicode建

UnicodeFlash

['a', 'z', 'á']容

UnicodeFlash

['á', 'z', 'a']z

['a', 'á', 'z']K

Scaleform

:< < < C CH< C CH< C C <
< M< < DE <KK< < C CH< C CH< C C <
< < < D E <KK< < C CH< C CH< C C <
< < < D < < E <KK< C CH< C H< C C <

<
< < < C CH< C CH< C C <
< < < D < < E <KK< <
C CH< C CH< C C <

充

Scaleform 3.0.65

< <

11 String

localeCompare()

双 0 双 充 双

要 充

Unicode

< D < H< E< < <

Scaleform 3.0.65

- -

< <

12 覆

Flash
覆 容

覆 容
NetStream 容

NetStream 容
双覆

Scaleform

clipRect

< << I <

Scaleform 3.0.70

覆 容 覆

< < < DMLH<NLH<MLLH<MLLE <

13 3Di Extensions

Scaleform 3Di 充 Scaleform AS2 3Di ActionScript

Scaleform 3.2.82

_z

容 Z 0

_zscale

Z 发 容 100

_xrotation

容 X 发 0

_yrotation

容 Y 发 0

_matrix3d

16 4 x 4 容 3D NULL
3D 容 2D

_perspfov

容 覆覆 Field Of View) > 0 < 180 容 级
FOV 55

数 ActionScript True

14 全局扩展

noInvisibleAdvance

< < <

Scaleform 2.1.52

Flash 覆 覆 SWF
ActionScript 双
Scaleform Flash

 $\angle$

<

Imecommand()

$$D \quad H < \quad E < < <$$

Scaleform 2.1.50

fscommand	Scaleform IME	Scaleform 充
-----------	---------------	-------------

getIMECandidateListStyle()

< < D E <

Scaleform 2.1.50

IME 容

Object –

<

setIMECandidateListStyle()

< < D E<
Scaleform 2.1.50

容

容

<< < < <L Q <
<< < <L <
<< < < <NL <
<< < < <L LLMPOL <
<< <L N Q <
<<< < <L MNONQ <
<<<L N Q <
<< <L <
< <L LLMPOL <
<< <NL <

<
< < <

< < <

< < <

< < <
是

< < <

< < <
是

< < <

是

< < <

< < <

是

< < <

[0,255] GG - 线 0xRRGGBB RR - [0,255] BB -
[0,255]

< <

15

之

Key

D E<
D E<
D E<
D E<

Key

D E<

Key

< 之

Selection

D H< E<
D E<
D D E<
D E<
D H< H< E<
D E<

Selection

D H< H< E<

Selection

之

MovieClip/Button/TextField

D H< E<
D H< E<
D H< E<
D H< E<
D H< E<
D H< E<
D E<

7. ext4: 4/10/16

之

System.capabilities

—