

Autodesk® Scaleform®

Scaleform 4.4 AS2 Extensions Reference

Scaleform 4.4

ActionScript 2.0

: Artem Bolgar, Prasad Silva
: 4.03
: 2012 9 17

Except as otherwise permitted by Autodesk, Inc., this publication, or parts thereof, may not be reproduced in any form, by any method, for any purpose.

Certain materials included in this publication are reprinted with the permission of the copyright holder.

The following are registered trademarks or trademarks of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and other countries: 123D, 3ds Max, Algor, Alias, AliasStudio, ATC, AutoCAD LT, AutoCAD, Autodesk, the Autodesk logo, Autodesk 123D, Autodesk CAM 360, Autodesk Homestyler, Autodesk Inventor, Autodesk MapGuide, Autodesk Streamline, AutoLISP, AutoSketch, AutoSnap, AutoTrack, Backburner, Backdraft, Beast, BIM 360, Burn, Buzzsaw, CADmep, CAiCE, CAMduct, CFdesign, Civil 3D, Cleaner, Combustion, Communication Specification, Configurator 360™, Constructware, Content Explorer, Creative Bridge, Dancing Baby (image), DesignCenter, DesignKids, DesignStudio, Discreet, DWF, DWG, DWG (design/logo), DWG Extreme, DWG TrueConvert, DWG TrueView, DWGX, DXF, Ecotect, ESTmep, Evolver, FABmep, Face Robot, FBX, Fempro, Fire, Flame, Flare, Flint, FMDesktop, ForceEffect, FormIt, Freewheel, Fusion 360, Glue, Green Building Studio, Heidi, Homestyler, HumanIK, i-drop, ImageModeler, Incinerator, Inferno, InfraWorks, InfraWorks 360, Instructables, Instructables (stylized robot design/logo), Inventor, Inventor HSM, Inventor LT, Kynapse, Kynogon, LandXplorer, Lustre, MatchMover, Maya, Maya LT, Mechanical Desktop, MIMI, Mockup 360, Moldflow Plastics Advisers, Moldflow Plastics Insight, Moldflow, Moondust, MotionBuilder, Movimento, MPA (design/logo), MPA, MPI (design/logo), MPX (design/logo), MPX, Mudbox, Navisworks, ObjectARX, ObjectDBX, Opticore, Pipeplus, Pixlr, Pixlr-o-matic, Productstream, Publisher 360, RasterDWG, RealDWG, ReCap, ReCap 360, Remote, Revit LT, Revit, RiverCAD, Robot, Scaleform, Showcase, Showcase 360 ShowMotion, Sim 360, SketchBook, Smoke, Socialcam, Softimage, Sparks, SteeringWheels, Stitcher, Stone, StormNET, TinkerBox, ToolClip, Topobase, Toxik, TrustedDWG, T-Splines, ViewCube, Visual LISP, Visual, VRED, Wire, Wiretap, WiretapCentral, XSI.

All other brand names, product names or trademarks belong to their respective holders.

THIS PUBLICATION AND THE INFORMATION CONTAINED HEREIN IS MADE AVAILABLE BY AUTODESK, INC. "AS IS." AUTODESK, INC. DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE REGARDING THESE MATERIALS.

Autodesk Scaleform :

ActionScript Extensions Reference (ActionScript
)

Scaleform Corporation

6305 Ivy Lane, Suite 310

Greenbelt, MD 20770, USA

<http://www.scaleform.com/>

info@scaleform.com

(301) 446-3200

Fax (301) 446-3199

1		1
2	Mouse	2
2.1		2
2.2	Button	2
2.3	Mouse	4
2.4		6
2.5	Mouse ActionScript	8
3	Button	11
4	MovieClip	13
5	NetStream	17
6	Selection	20
7	TextField	28
7.1		28
7.2		36
7.3		42
7.4	HTML	45
7.5		46
7.6		50
7.7	IME	53
8	TextFormat	56
9	Stage	57
10	Array	59
11	String	60
12	Video	61
13	3Di	62
14		63
15		66

Autodesk Scaleform SDK™
PC
Scaleform Adobe Flash Studio

Flash®

Flash Web

Scaleform ActionScript

IME

Scaleform Player

`_global.gfxExtensions`

`true`

`_global.gfxExtensions = true;`

FLA
Scaleform Player

Flash

Flash® Player

Scaleform

Scaleform
SDK
Player

Scaleform Player
Scaleform

Scaleform

API

Scaleform

API

Mouse			Scaleform
	(	16	)
	Mouse		Scaleform
	Mouse		Flash
Mouse			

```

Wii
Scaleform 4.0      4
Gfx::Movie::SetMouseCursorCount(unsigned n)
    Gfx::MouseEvent      Gfx::Movie::HandleEvent
    Scaleform             Gfx::MouseEvent
Gfx::MouseEventCursorEvent

```

onRollOver	onRollOut	onDragOver	onDragOut	onPress	onRelease	onReleaseOutside
Button		Scaleform			1	2

onPress		1
1	:	

```

mc.onPress = function(mouseIdx:Number)
{
    if (mouseIndex == 0)
        . . .
    else if (mouseIndex == 1)
        . . .
    . . .
}

```

onPress	onRelease	2		
			NUMERIC	
			-1	0

```

mc.onPress = function(mouseIdx:Number, keyboardOrMouse:Number)

```

```

{
    if (keyboardOrMouse == 0)
        . . .
    else
        . . .
    . . .
}

2                onRollOver/Out        onDragOver/Out
                rollover/dragover
                onRollOver/onRollOut
onDragOver/onDragOut        onRollOver/onDragOver
                onRollOut/onDragOut

2
onRollOver/onRollOut        onDragOver/onDragOut        (
    )
    onRollOver/onDragOver        2                0                2
2                onRollOver/onRollOut        1                2
                onRollOut/onDragOut        1
2                onRollOut/onDragOut        0
2

2                onRollOver/onRollOut
onDragOver/onDragOut        2

mc.onRollOver = function(mouseIdx:Number, nestingIdx:Number)
{
    // nestingIdx == 0 の時だけロールオーバー アニメーションを行う
    if (nestingIdx == 0)
        doOverAnimation();
    . . .
}
mc.onRollOut = function(mouseIdx:Number, nestingIdx:Number)
{
    // nestingIdx == 0 の時だけロールアウト アニメーションを行う
    if (nestingIdx == 0)
        doOutAnimation();
    . . .
}

on(rollOver) on(rollOut)

```

onPress onRelease

Button Events

- onPressAux
- onReleaseAux
- onReleaseOutsideAux
- onDragOver
- onDragOut

index != 0

0

```
mc.onPressAux = function(mouseIdx:Number, keyboardOrMouse:Number, buttonIdx:Number)
{
    if (buttonIdx == 1)    // Right mouse button
        . . .
    . . .
}
```

ActionScript

Flash

Mouse.addListener
:

- onMouseMove = function() { }
- onMouseDown = function() { }
- onMouseUp = function() { }
- onMouseWheel = function(delta : Number, targetPath : String) { }

Flash

onMouseDown

onMouseUp

(
 _global.gfxExtensions true) Scaleform

:

- `onMouseDown = function(button : Number, [targetPath : String],
[mouseIdx : Number], [x : Number], [y : Number] ,
[dbClick : Boolean]) { }`
- `onMouseUp = function(button : Number, [targetPath : String],
[mouseIdx : Number], [x : Number], [y : Number]) { }`

1

Scaleform

1

2

3

16

Flash

:

```
var mouseListener:Object = new Object;
```

```
mouseListener.onMouseDown = function(button, target)
```

```
{
    trace("mouseDown - button '" + button +
        "' target = '" + target + "'");
}
```

```
mouseListener.onMouseUp = function(button, target)
```

```
{
    trace("mouseUp - button '" + button +
        "' target = '" + target + "'");
}
```

```
Mouse.addListener(mouseListener);
```

```

        mouseDown/Up        button    target    2
        button              Mouse["LEFT"] Mouse["RIGHT"]
Mouse["MIDDLE"]
(Mouse["LEFT"]             button
Mouse.LEFT                 ActionScript 2.0
                           ) 2
                           target

```

'undefined'

Flash

'undefined'

'undefined'

Flash Player

- `onMouseMove = function([mouseIdx : Number],
[x : Number],[y : Number]) { }`
- `onMouseDown = function(button : Number, [targetPath : String],`

```

        [mouseIdx : Number], [x : Number], [y : Number] ,
        [dbClick : Boolean]) { }
    ▪ onMouseUp = function(button : Number, [targetPath : String],
        [mouseIdx : Number], [x : Number], [y : Number]) { }
    ▪ onMouseWheel = function(delta : Number, targetPath : String,
        [mouseIdx : Number], [x : Number], [y : Number]) { }

```

mouseIdx

```

x    y    (_root    )
onMouseDown    dbClick
                'true'

```

```

Flash    :
    ▪    -
    ▪    - useHandCursor    true
    ▪    |    -

```

```

Flash    Scaleform
C++ API    ActionScript Mouse
C++    Gfx::StateBag::SetUserEventHandler
                                FxPlayer.cpp

```

```

                                ActionScript
                                SDK
Mouse.flg/swf
    Mouse    'Cursor_M'
    "arrow" "ibeam"    "hand"
                                1
                                _x    _y

```

```

Scaleform    Mouse.setCursortype
                cursortype    mouseIndex
                Mouse    cursortype
                                Mouse

```

(Mouse["ARROW"] Mouse["HAND"] Mouse["IBeam"])

Mouse

```
_global.gfxExtensions = 1;
//
Mouse.hide();

var mouseListener:Object = new Object;
mouseListener.onMouseMove = function(mouseIdx, x,y)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    if (x == undefined)
    {
        x = _xmouse;
        y = _ymouse;
    }
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));

    cmc._x = x;
    cmc._y = y;
}
Mouse.addListener(mouseListener);

Mouse["setCursorType"] = function(cursorType, mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    switch(cursorType)
    {
        case Mouse["HAND"]:
            cmc.Cursor.gotoAndPlay("hand");
            break;
        case Mouse["ARROW"]:
            cmc.Cursor.gotoAndPlay("arrow");
            break;
        case Mouse["IBeam"]:
            cmc.Cursor.gotoAndPlay("ibeam");
            break;
        default: return;
    }
}
```

```

// Mouse.show と Mouse.hide
//
ASSetPropFlags(Mouse, "show,hide", 0, 7);

Mouse.show = function(mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    cmc._visible = true;
}
Mouse.hide = function(mouseIdx)
{
    if (mouseIdx == undefined)
        mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
    cmc._visible = false;
}

```

Mouse ActionScript

ActionScript 1.0

Mouse.setCursorType(...)

ActionScript 2.0

ActionScript 2.0

Mouse["setCursorType"](..)

Scaleform

```
public function getButtonsState(mouseIndex : Number) : Number
```

Scaleform : 2.2

パラメータ

mouseIndex : Number -

```

public function getTopMostEntity([mouseIndex : Number]) : Object
public function getTopMostEntity(testAll : Boolean,
                                [mouseIndex : Number]) : Object
public function getTopMostEntity(x : Number, y : Number) : Object
public function getTopMostEntity(x : Number, y : Number, testAll: Boolean) : Object

```

Scaleform :1.2.34

2.2

(onPress onMouseDown onRollOver)

MovieClip.hitTest

```

hitTest x y
getTopMostEntity x y
Mouse.getTopMostEntity(x, y).hitTest(x, y,

```

true) == true

パラメータ

```

mouseIndex : Number -
testAll : Boolean -
                (true)

```

(false)

```

getTopMostEntity 'true'
x : Number, y :Number -

```

例:

```

var listenerObj = new Object;

listenerObj.onMouseMove = function()
{
    var target = Mouse["getTopMostEntity"]();
    trace("Mouse moved, target = "+target);
}

Mouse.addListener(listenerObj);

var target = Mouse["getTopMostEntity"](480, 10);
trace("The character at the (480, 10) is " + target);

```

```

public function getPosition(mouseIndex : Number) : flash.geom.Point

```

Scaleform : 2.2

`flash.geom.Point` `_root`

パラメータ

`mouseIndex : Number` -

`public function setCursorType(cursorType : Number, [mouseIndex : Number]) : void`

Scaleform : 1.2.32

`cursorType`

パラメータ

`cursorType :Number` - `Mouse.ARROW` `Mouse.HAND` `Mouse.IBEAM`

`mouseIndex :Number` -

hitTestDisable:Boolean [read-write]

Scaleform : 2.1.51

true MovieClip.hitTest

false

:
TextField.hitTestDisable
MovieClip.hitTestDisable

topmostLevel:Boolean [read-write]

Scaleform : 2.1.50

true

false

"topmostLevel"

- Scaleform3.0.71
true

"topmostLevel"

topmost

- Scaleform3.0.72

;

topmost

A

B

topmost

A

B

"topmostLevel"

true

"topmostLevel"

SwapDepth

ActionScript

:
TextField.topmostLevel
MovieClip.topmostLevel

focusGroupMask : Number

Scaleform : 3.3.84

setControllerFocusGroup

	button1	0	movieclip2
0	1		

```
Selection.setControllerFocusGroup(0, 0);  
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0  
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

focusGroupMask


```
public hitTest(x:Number, y:Number, [shapeFlag:Boolean],
               [ignoreInvisibleChildren:Boolean]):Boolean
```

Scaleform : 2.1.51

```

3          hitTest          1          x, y
          hitTest          Flash
"true"    (          _visible    false
  _alpha          )
パラメータ
          ignoreInvisibleChildren:Boolean - true

```

```
hitTestDisable:Boolean [read-write]
```

Scaleform : 1.2.32

```
true          MovieClip.hitTest
```

```
false
```

```

:
TextField.hitTestDisable
Button.hitTestDisable

```

```
noAdvance : Boolean
```

Scaleform : 2.1.52

```
true
```

```

          (          "true"          Flash
          Flash
          ActionScript
          Scaleform
          :

```

`_global.noInvisibleAdvance`

`topmostLevel:Boolean` [read-write]

Scaleform : 2.1.50

`true`

`false`

`"topmostLevel"`

- **Scaleform3.0.71** `"topmostLevel"`
`true` `topmost`
- **Scaleform3.0.72** ;
`A` `topmost` `B` `topmost`
`"topmostLevel"` `true` `A` `B`

`"topmostLevel"`

`SwapDepth`

ActionScript

`:`

`TextField.topmostLevel`

`Button.topmostLevel`

`rendererString:String` [read-write]

Scaleform : 2.2.55

MovieClip

ActionScript

例:

`myMovieInstance.rendererString = "SHADER_Blur"`

rendererFloat:Number [read-write]

Scaleform : 2.2.55

MovieClip
ActionScript

例:

```
myMovieInstance.rendererFloat = 4; // 例えば、C++では列挙値です
```

disableBatching:Boolean

Scaleform : 4.0.17

focusGroupMask : Number

Scaleform version: 3.3.84

setControllerFocusGroup

	button1		movieclip2
0	1	0	

```
Selection.setControllerFocusGroup(0, 0);  
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0  
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

focusGroupMask

Scaleform NetStream

```
onMetaData = function(info:Object) { }
```

Scaleform : 3.0.63

Scaleform 2

onMetaData 2

1. audioTracks -

```
audioTracks :
  channelsNumber - (1- 2-
    6 - 5.1 )
  totalSamples -
  trackIndex -
  NetStream.audioTrack (
  )
  sampleRate -
```

2. subtitleTracksNumber -

audioTrack:Number [read-write]

Scaleform : 3.0.63

/

例:

```
var ns:NetStream = new NetStream(nc);
var audioTracks;

ns.onMetaData = function(info:Object)
{
```

```

audioTracks = info.audioTracks;
}

if (audioTracks != undefined && audioTracks.length > 0)
ns.audioTrack = audioTracks[0].trackIndex;

```

subtitleTrack: Number [read-write]

Scaleform : 3.0.63

0

```
onSubtitle = function(msg:String) {}
```

Scaleform : 3.0.63

例:

```

var ns:NetStream = new NetStream(nc);
var subtitlesNumber = 0;

ns.onMetaData = function(info:Object)
{
    subtitlesNumber = info.subtitleTracksNumber;
}

ns.onSubtitle = function(msg:String)
{
    sbTextField.text = msg;
}
if (subtitlesNumber > 0)
    ns.subtitleTrack = 1;

```

```
public function setNumberOfFramePools(pools : Number) : Void
```

Scaleform : 3.0.68

“frame pools”

CPU

1

NetStream.play()call

```
public function setReloadThresholdTime(reloadTime : Number) : Void
```

Scaleform : 3.0.68

Scaleform

0.8

NetStream

NetStream.setBufferTime()

2

1

1

/

NetStream.play()

Selection

Scaleform Selection

Selection.captureFocus()

ActionScript 2.0

ActionScript 2.0

: Selection["captureFocus"]()

Selection

ActionScript 1.0

alwaysEnableArrowKeys : Boolean

Scaleform : 1.2.34

"_focusrect"

false

(

)

"_focusrect = false;"

Flash

alwaysEnableArrowKeys

"true"

例:

Selection["alwaysEnableArrowKeys"] = true;

alwaysEnableKeyPress : Boolean

Scaleform : 3.0.63

"_focusrect"

false

Enter

onPress / onRelease

(

)

"_focusrect = false;"

Flash

alwaysEnableKeyPress

"true"

例:

Selection["alwaysEnableKeyPress"] = true;


```
public function captureFocus([doCapture:Boolean, controllerIdx:Number]) : void
```

Scaleform : 1.2.34

```
doCapture      true      (      ) captureFocus  
Tab
```

```
doCapture      false      captureFocus
```

パラメータ

doCapture:Boolean -

true

、captureFocus

controllerIdx:Number -

0

例:

```
Selection["captureFocus"] (); // "true"を渡すのと同じです  
Selection["captureFocus"] (false);
```

disableFocusAutoRelease : Boolean

Scaleform : 1.2.34

```
      (      Flash  
)  
(      )  
true
```

例:

```
Selection["disableFocusAutoRelease"] = true;
```

disableFocusKeys : Boolean

Scaleform : 2.2.58

(Tab Shift-Tab)

例:

```
Selection["disableFocusKeys"] = true;

:
moveFocus()
```

disableFocusRolloverEvent : Boolean

Scaleform : 2.0.37

rollover/out

rollover/rollout true

例:

```
Selection["disableFocusRolloverEvent "] = true;
```

modalClip : MovieClip

Scaleform : 2.2.58

(Tab Shift-Tab
Tab)

例:

```
Selection["modalClip"] = _root.mc;
...
Selection["modalClip"] = undefined;

:
disableFocusKeys
moveFocus()
```

```
public function moveFocus(keyToSimulate : String [, startFromMovie:Object,
    includeFocusEnabledChars : Boolean = False, controllerIdx :
    Number]) : Object
```

Scaleform : 2.2.58

(Tab Shift-Tab)

disableFocusKeys

modalClip

パラメータ

keyToSimulate:String - “up” “down” “left” “right” “tab” “shifttab”

startFromMovie:Object - moveFocus

null

3

includeFocusEnabledChars:Boolean - moveFocus focusEnabled
tabEnabled / tabIndex

false

tabEnabled / tabIndex

controllerIdx:Number -

0

例:

```
Selection["moveFocus"] ("up");
Selection["moveFocus"] ("tab", _root.mc);
Selection["moveFocus"] ("tab", _root.mc, true);
Selection["moveFocus"] ("tab", null, true);
```

戻り値

undefined

```
:
disableFocusKeys
modalClip
```

```
public function findFocus(keyToSimulate : String [, parentMovie:Object, loop :
    Boolean, startFromMovie:Object, includeFocusEnabledChars : Boolean,
    controllerIndex : Number]) : Object
```

Scaleform : 3.3.84

TAB Shift TAB

disableFocusKeys setModalClip/getModalClip

```
keyToSimulate:String - up" "down" "left"
                        "right" "tab" "shifttab"
parentMovie -
                NULL
loop - Boolean
                down findFocus null false
                true
startFromMovie:Object - findFocus
                        NULL
includeFocusEnabledChars:Boolean - focusEnabled
                                    tabEnabled/tabIndex
                                    moveFocus
                                    false
                                    tabEnabled/tabIndex
controllerIndex -
                を組み合わせて
                複数コントローラのフォーカスをサポート
var a = Selection["findFocus"] ("up");
                null
```

```
disableFocusKeys
setModalClip
getModalClip
```

```
public function setModalClip(modalClip : Object, controllerIndex : Number)
```

Scaleform : 3.3.84

TAB Shift TAB

```
modalClip      -
controllerIndex -
```

```
public function getModalClip(controllerIndex : Number) : Object
```

Scaleform : 3.3.84

```
controllerIndex -
```

```
public function setControllerFocusGroup (controllerIndex : Number, focusGroupId :
                                         Number) : Boolean
```

Scaleform : 3.3.84

```
controllerIndex
0
```

2

		setControllerFocusGroup (1,1)	1
		setControllerFocusGroup (1,0)	
0	1		

controllerIndex	-
focusGroupIdX	-

```
Selection["setControllerFocusGroup"] (0,0);
Selection["setControllerFocusGroup"] (1,1);
Selection["setControllerFocusGroup"] (2,1);
```

true

```
public function getControllerFocusGroup (controllerIndex : Number) : Number
```

Scaleform : 3.3.84

controllerIndex	-
-----------------	---

```
public function getFocusArray(mc : Object) : Array
```

Scaleform : 3.3.84

mc	-
----	---

```
public function getFocusBitmask(mc : Object) : Number
```

Scaleform : 3.3.84

mc -

```
public function getControllerMaskByFocusGroup (focusGroupIdx : Number) : Number
```

Scaleform : 3.3.84

focusGroupIdx -

```
numFocusGroups : Number
```

Scaleform : 3.3.84

```
setControllerFocusGroup  
0 3 numFocusGroups 2
```

Scaleform	TextField	Flash 8
TextField		
Flash 9	TextField	
	IME	(
	)	

autoFit:Boolean [read-write]

Scaleform : 2.0.39

/

false

public function appendText(newText:String):void

Scaleform : 2.0.37

newText

(+=) (、 my_txt.text +=

appendText)

パラメータ

newText:String -

:

appendHtml()


```
public function getCharBoundaries(charIndex:Number): flash.geom.Rectangle
```

Scaleform : 2.0.37

‘a’ ‘w’ ‘k’):

パラメータ

charIndex:Number – (0
1)

戻り値

flash.geom.Rectangle – x y
(0,0)

:
getExactCharBoundaries()

```
public function getExactCharBoundaries(charIndex:Number): flash.geom.Rectangle
```

Scaleform : 2.0.37

```
charIndex:Number – ( 0
1 )
```

戻り値

```
flash.geom.Rectangle – x y
(0,0)
```

```
:
getCharBoundaries()
```

```
public function getCharIndexAtPoint(x:Number, y:Number): Number
```

Scaleform : 2.0.37

x y

パラメータ

```
x:Number – その文字の x 座標
y:Number – その文字の y 座標
```

戻り値

```
Number – ( 0 1
-1 )
```

```
public function getFirstCharInParagraph(charIndex:Number): Number
```

Scaleform : 2.0.37

charIndex

パラメータ

```
charIndex:Number – ( 0
1 )
```

戻り値

```
Number –
```

```
public function getLineIndexAtPoint(x:Number, y:Number): Number
```

Scaleform : 2.0.37

x y

パラメータ

x:Number - その行の x 座標

y:Number - その行の y 座標

戻り値

Number - (0 1) -1

```
public function getLineLength(lineIndex:Number): Number
```

Scaleform : 2.0.37

パラメータ

lineIndex:Number - (0 1)

戻り値

Number -

```
public function getLineMetrics(lineIndex:Number): Object
```

Scaleform : 2.0.43

:

ascent : Number


descent : Number

height : Number ()

leading : Number

width : Number ()

x : Number
x

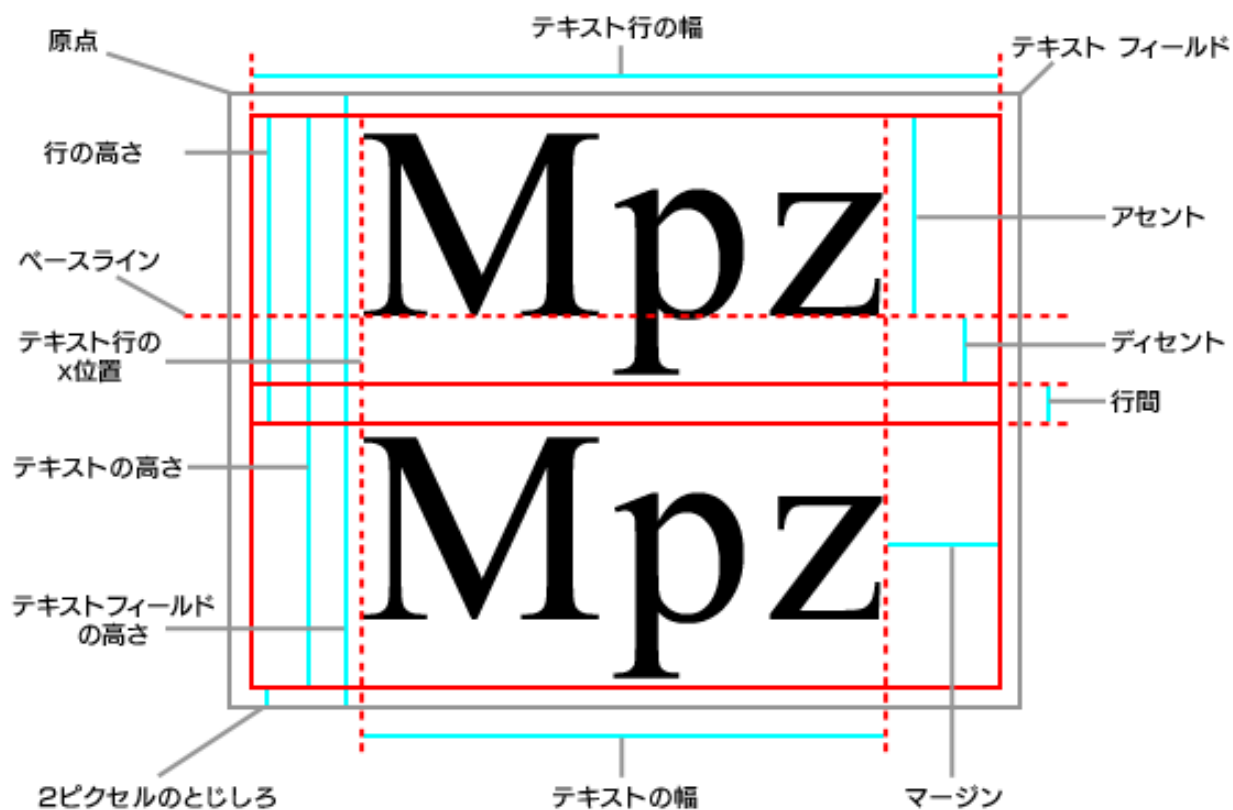

パラメータ
lineIndex: Number - (0
1)

戻り値
Number -

```
public function getLineOffset(lineIndex:Number):Number
```

Scaleform : 2.0.37

lineIndex

パラメータ

lineIndex:Number – (0
1)

戻り値

Number –

```
public function getLineText(lineIndex:Number):String
```

Scaleform : 2.0.43

lineIndex

パラメータ

lineIndex:Number – (0
1)

戻り値

String –

```
hitTestDisable:Boolean [read-write]
```

Scaleform : 1.2.32

true MovieClip.hitTest

false

noTranslate:Boolean [read-write]

Scaleform : 1.2.34

true 、 GfxTranslator::Translate

false 。

numLines:Number [read-only]

Scaleform : 2.0.43

wordWrap

true

topmostLevel:Boolean [read-write]

Scaleform : 2.1.50

true

false

"topmostLevel"

- Scaleform3.0.71 "topmostLevel"
true

;

- Scaleform3.0.72 topmost

A B
A B

topmost

"topmostLevel" true

"topmostLevel"

SwapDepth

ActionScript

:

```
MovieClip.topmostLevel
Button.topmostLevel
```

```
focusGroupMask : Number
```

Scaleform : 3.3.84

```
setControllerFocusGroup
```

	button1	0	movieclip2
0	1		

```
Selection.setControllerFocusGroup(0, 0);
Selection.setControllerFocusGroup(1, 1);
```

```
button1.focusGroupMask = 0x1; // bit 0 - focus group 0
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

```
focusGroupMask
```

```
alwaysShowSelection:Boolean [read-write]
```

Scaleform : 2.1.45

```

Scaleform
    true
Scaleform
    (
    )
false
```



```

:
selectionBkgColor
selectionTextColor
inactiveSelectionBkgColor
inactiveSelectionTextColor

```

```

public function copyToClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endTime:Number]):void

```

Scaleform : 2.1.45

パラメータ

```

richTextClipboard:Boolean = true
                                useRichTextClipboard

startIndex:Number =
                                selectionBeginIndex
endTime:Number =
                                selectionEndIndex

:
useRichTextClipboard
selectionBeginIndex
selectionEndIndex
cutToClipboard()
pasteFromClipboard()

```

```

public function cutToClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endTime:Number]):void

```

Scaleform : 2.1.45

パラメータ

```

richTextClipboard:Boolean = true
                                useRichTextClipboard

```

startIndex:Number –

selectionBeginIndex

endIndex:Number –

selectionEndIndex

:

useRichTextClipboard

selectionBeginIndex

selectionEndIndex

copyToClipboard()

pasteFromClipboard()

inactiveSelectionBkgColor:Number [read-write]

Scaleform : 2.1.45

alwaysShowSelection
true 0xAARRGGBB
16 16 [0...255] RR
AA 16 [0...255] BB
GG 16 [0...255]
“0”
“0”
Flash
0xFFFF0000 (0xFF(255))
“backgroundColor”
0xFF0000
。

関連項目:

alwaysShowSelection

inactiveSelectionTextColor

selectionBkgColor

selectionTextColor

inactiveSelectionTextColor:Number [read-write]

Scaleform : 2.1.45

alwaysShowSelection
true 0xAARRGGBB
AA 16 [0..255] RR

```

GG          16      [0..255] BB          16      [0..255]
          16      [0..255]
          "0"
          "0"
Flash
)          0xFFFF0000 (          0xFF(255)
          "textColor"          0xFF0000

:
alwaysShowSelection
inactiveSelectionBkgColor
selectionBkgColor
selectionTextColor

```

```
noAutoSelection:Boolean [read-write]
```

Scaleform : 2.1.45

```
true
```

```
false
```

```
public function pasteFromClipboard([richTextClipboard:Boolean], [startIndex:Number],
[endTime:Number]):void
```

Scaleform : 2.1.45

パラメータ

```
richTextClipboard - true
```

```
useRichTextClipboard
```

```
startIndex:Number -
```

```
selectionBeginIndex
```

```
endTime:Number -
```

```
selectionEndIndex
```

```

:
useRichTextClipboard
selectionBeginIndex
selectionEndIndex
copyToClipboard()
cutToClipboard()

```

selectionBeginIndex: Number [read-only]

Scaleform : 2.1.45

```

                                caretIndex
Selection.getBeginIndex()
selectionBeginIndex
Selection.getBeginIndex()      -1

:
caretIndex
selectionEndIndex
Selection.getBeginIndex()

```

selectionEndIndex: Number [read-only]

Scaleform : 2.1.45

```

                                caretIndex
Selection.getEndIndex()
selectionEndIndex
Selection.getEndIndex()      -1

:
caretIndex
selectionBeginIndex
Selection.getEndIndex()

```

selectionBkgColor: Number [read-write]

Scaleform : 2.1.45

0xAARRGGBB
16 16 [0..255] RR [0..255] GG
16 16 [0..255] BB [0..255]
"0"
"0"
Flash
0xFFFF0000 (0xFF(255))
"backgroundColor"
0xFF0000
:
inactiveSelectionTextColor
inactiveSelectionBkgColor
selectionTextColor

selectionTextColor: Number [read-write]

Scaleform : 2.1.45

0xAARRGGBB
16 16 [0..255] RR [0..255]
16 16 [0..255] BB [0..255]
GG
"0"
"0"
Flash
0xFFFF0000 (0xFF(255) 0xFF0000)
"textColor"
:
inactiveSelectionBkgColor
inactiveSelectionBkgColor
selectionBkgColor

```
useRichTextClipboard:Boolean [read-write]
```

Scaleform : 2.1.45

```
Scaleform & true  
(  
, useRichTextClipboard true  
false
```

```
( ) Scaleform
```

```
fontScaleFactor:Number [read-write]
```

Scaleform : 2.0.43

```
fontScaleFactor
```

```
1.0
```

```
textAutoSize:String [read-write]
```

Scaleform : 2.0.43

```
textAutoSize  
"none" "shrink" "fit" ("shrink" "fit")  
( 5 pt )
```

textAutoSize "fit"

"shrink"



"none"



verticalAlign:String [read-write]

Scaleform : 2.0.43

"none" ("top" "none") "bottom" "center" "bottom" "center"

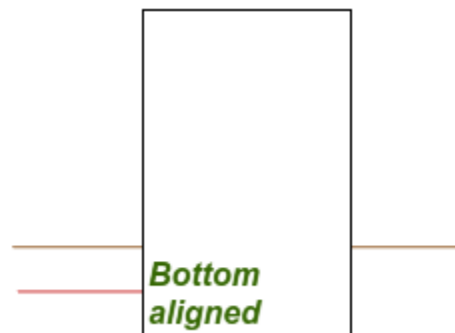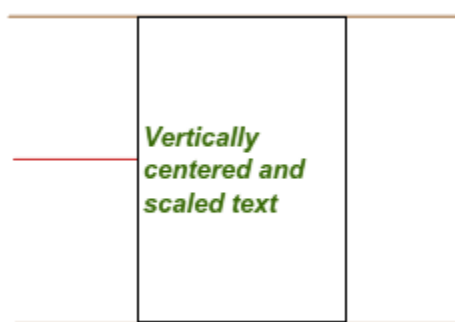

"none"

:
verticalAutoSize
TextField.align

Scaleform : 2.0.43

```

) "top" "bottom" "center" verticalAutoSize "none" (
)

verticalAutoSize "top" wordWrap true
(
) TextField.autoSize



verticalAutoSize "center"

( 1

)

verticalAutoSize "bottom"

( 2
)
```

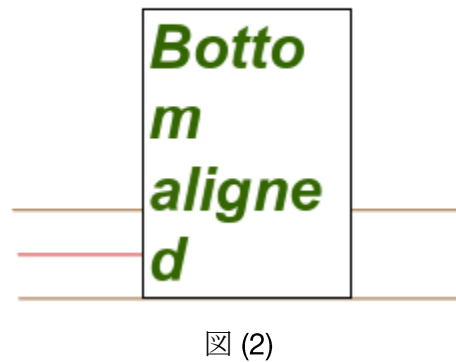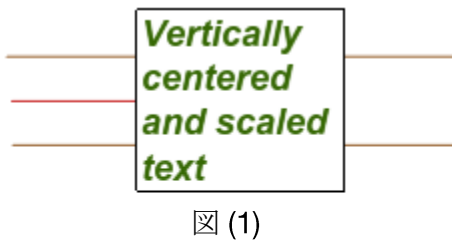

```

        "none"
        :
verticalAlign
TextField.autoSize

```


Scaleform HTML

ALPHA="#xx"

ALPHA 255 00 FF (0 255) COLOR 0
HTML

Scaleform

Scaleform

Web

("http://" "file://") 5.6

"myImage"

HTML :

```
t.htmlText = "<p align='right'>abra<img src='myImage' width='20' height='30'
align='baseline' vspace='-10'>bed232</p>";
```

IMG :

src -

JPEG GIF PNG SWF
ID

img://

Scaleform::ImageCreator:: LoadImage

width -

height -

align -

"baseline"

vspace - "baseline"

:

id – (Flash Player SWF)

align –

hspace –

SWF IMG
Flash
Flash SWF
IMG

Flash SWF

()

blurX:Number [read-write]
blurY:Number [read-write]

Scaleform : 2.0.41

() 0 15.9 ()

0

:
blurStrength

blurStrength:Number [read-write]

Scaleform : 2.0.41

0 15.9 ()

0

:
blurX
blurY

shadowAlpha:Number [read-write]

Scaleform : 2.0.41

0.00 1.00 25

25%

:
shadowColor

shadowAngle:Number [read-write]

Scaleform : 2.0.41

) DropShadowFilter 0 360° (45

:
DropShadowFilter

:Number [read-write]

shadowBlurY:Number [read-write]

Scaleform : 2.0.41

() 0 15.9 ()

0

:

shadowStrength

shadowColor: Number [read-write]

Scaleform : 1.1.31

(shadowStyle)
0xRRGGBB RR 16
[0..255] BB 16
[0..255] GG 16
:
shadowStyle

shadowDistance: Number [read-write]

Scaleform : 2.0.41

DropShadowFilter

:
DropShadowFilter

shadowHideObject: Boolean [read-write]

Scaleform : 2.0.41

true
false ()

shadowKnockOut: Boolean [read-write]

Scaleform : 2.0.41

(true)
false ()

shadowQuality:Number [read-write]

Scaleform : 2.0.41

Flash

1 2

1

2

shadowStrength:Number [read-write]

Scaleform : 2.0.41

0 15.9 ()

0

:

shadowBlurX

shadowBlurY

shadowStyle:String [read-write]

Scaleform : 1.1.31

shadowColor

shadowStyle

:

field.shadowStyle = "s{0,-1.5}{-1.4,1.2}{1.4,1.2}t{0,0}";

field.shadowColor = 0xff0000;

"s" shadowColor
"t" TextField.textColor
"s" "t"

1

"t"
"t{0,0}"

```

:
shadowColor
TextField.textColor

```

```

public setImageSubstitutions(substInfoArr:Array) : void
public setImageSubstitutions(substInfo:Object) : void
public setImageSubstitutions(null) : void

```

Scaleform : 2.0.38

SWF

SWF

:

- 1.
2. (Windows) control-
- (Macintosh) []
3. [ActionScript] []
- (myImage) []
4. [OK]

BitmapData

ActionScript :

```

import flash.display.BitmapData;
var imageBmp:BitmapData = BitmapData.loadBitmap("myImage");

: (import flash.display.BitmapData;
flash.display.BitmapData)
"undefined" !

```

ID

Object :

subString:String

15

image : BitmapData

width : Number

()

height : Number

()

baseLineY : Number

Y ()

id : String

"updateImageSubstitution"

ID

"substInfoArr"

"substInfo"

setImageSubstitutions(substInfo:Object)

setImageSubstitutions(substInfoArr:Array)

setImageSubstitutions

setImageSubstitutions(null)

setImageSubstitutions

ActionScript

ActionScript

パラメータ

substInfoArr:Array -

()

substInfo:Object -

()

null -

•

•

例:

```
var b1 = BitmapData.loadBitmap("smile1");
var b2 = BitmapData.loadBitmap("smile2");
var b3 = BitmapData.loadBitmap("smile3");
var a = new Array;
a[0] = { subString:"="), image:b1, baseLineY:35, width:20, height:20, id:"sm=)" };
a[1] = { subString:"-:-)", image:b2, baseLineY:20, id:"sm:-:-)" };
a[2] = { subString:":\\\\", image:b3, baseLineY:35, height:100 };
a[3] = { subString:"-:\\\\", image:b1 };
t.setImageSubstitutions(a);
```

```
"smile1"      "=)"
```

```
public updateImageSubstitution(id:String, image:BitmapData) : void
```

Scaleform : 2.0.38

setImageSubstitutions

パラメータ

```
id:String -
```

ID

setImageSubstitutions

id

```
image:BitmapData -
```

null

```
: setImageSubstitutions()
```

例:

```
t.updateImageSubstitution("sm=", b3);
```

onEnterFrame

```
setInterval(() => {
  // ...
  .updateImageSubstitution(
    // ...
  )
}, 1000);
```

```
var phase = 0;
var b1a = BitmapData.loadBitmap("smile1a");
```



```

var b2a = BitmapData.loadBitmap("smile2a");

onEnterFrame = function()
{
    if (phase % 10 == 0)
    {
        if (phase % 20 == 0)
        {
            _root.t.updateImageSubstitution("sm=", b1);
            _root.t.updateImageSubstitution("sm:-)", b2);
        }
        else
        {
            _root.t.updateImageSubstitution("sm=", b1a);
            _root.t.updateImageSubstitution("sm:-)", b2a);
        }
    }
    ++phase;
}

```

IME

disableIME:Boolean [read-write]

Scaleform のバージョン: 2.1.50 以降

true IME

false

```
public function getIMECompositionStringStyle(categoryName:String): Object
```

Scaleform : 2.1.50

IME

categoryName setIMECompositionStringStyle

パラメータ

categoryName:String – IME (setIMECompositionStringStyle
)

戻り値

Object – (setIMECompositionStringStyle
)

:
setIMECompositionStringStyle
disableIME

```
public function setIMECompositionStringStyle(categoryName:String,  
styleDescriptor:Object): Number
```

Scaleform : 2.1.50

IME

categoryName

:

"compositionSegment" –
"clauseSegment" –
"convertedSegment" –
"phraseLengthAdj" –
"lowConfSegment" –

styleDescriptor Object :

textColor : Number

backgroundColor : Number

underlineColor : Number

underlineStyle : String

:

"single"

"thick"

"dotted"

"ditheredSingle"

"ditheredThick"

16 0xRRGGBB
16 [0..255] BB
16 [0..255]

16 RR
[0..255] GG

パラメータ

categoryName:String - IME

(

)

styleDescriptor:Object -

(

)

:

getIMECompositionStringStyle

disableIME

TextFormat

alpha:Number [read-write]

Scaleform : 2.0.41

0 100 (%)

Flash TextFormat.color

:

TextFormat

HTML

Stage

Scaleform

“visibleRect” “safeRect” “originalRect”
“onResize”

ActionScript 1.0 Stage.visibleRect
ActionScript 2.0
2.0
Stage[“visibleRect”]..

ActionScript
:

visibleRect:flash.geom.Rectangle [read-only]

Scaleform : 2.2.56

topLeft

:
safeRect
originalRect

safeRect:flash.geom.Rectangle [read-only]

Scaleform : 2.2.56

GFX::Movie::SetSafeRect
“visibleRect”

:
visibleRect
originalRect

```
originalRect:flash.geom.Rectangle [read-only]
```

Scaleform : 2.2.56

```
Flash Studio [ SWF SWF
               { 0, 0, {600, 400} } (600px×400px)
:
visibleRect
safeRect
```

```
onResize = function([visibleRect:flash.geom.Rectangle]) {}
```

Scaleform : 2.2.56

```
onResize
Stage.visibleRect
:
visibleRect
```

```
public function translateToScreen(pt:Object): Point
```

Scaleform n: 3.3.84

```
Stage
pt:Object - X Y
Object flash.geom.Point
```

Flash	Array.sort	Array.sortOn	Unicode
	Unicode		(
	)	'z'	
'z', 'a']	Flash		['á',
'á']			['a', 'z',
			['a', 'á', 'z']

Scaleform	Array.sort/sortOn	1	Array.LOCALE
:			

```
var arr = ['á', 'z', 'a'];
var newArr1 = arr.sort(); // returns ['a', 'z', 'á']
var newArrLoc = arr.sort(Array.LOCALE); // returns ['a', 'á', 'z']
var newArrRev = arr.sort(Array.LOCALE | Array.DESCENDING); // ['z', 'á', 'a']
```

:

```
var arr = ['Á', 'z', 'a'];
var a = arr.sort(Array.LOCALE | Array.CASEINSENSITIVE); // returns ['a', 'Á', 'z']
```

Array.LOCALE

Unicode

Scaleform : 3.0.65

String.localeCompare

2

0

Array

Unicode

```
public localeCompare(other:String [, caseInsensitive:Boolean]) : Number
```

Scaleform : 3.0.65

パラメータ

```
other:String -  
caseInsensitive:Boolean -
```

```
Array.sort
```


Flash

Video

NetStream

Scaleform

Video

NetStream

`clipRect: flash.geom.Rectangle [read-write]`

Scaleform : 3.0.70

例:

```
video.clipRect = new flash.geom.Rectangle(10, 20, 100, 100);
```

3Di Scaleform AS2

3Di ActionScript

Scaleform : 3.2.82

$$Z \quad 0$$

Z	100
---	-----

X	0
---	---

Y 0

16		4 × 4		3D
	NULL		3D	2D

Field Of View	0	180
---------------	---	-----

55°

FOV

ActionScript

```
gfxExtensions    true
```



```
public function setIMECandidateListStyle(styleDescriptor:Object)
```

Scaleform : 2.1.50

styleDescriptor Object :

```
styleObject.textColor = 0x5EADFF;
styleObject.selectedTextColor = 0xFFFFFFFF;
styleObject.fontSize = 20;
styleObject.backgroundColor = 0x001430;
styleObject.selectedTextBackgroundColor = 0x2C5A99;
styleObject.indexBackgroundColor = 0x12325A;
styleObject.selectedIndexBackgroundColor = 0x2C5A99;
styleObject.readingWindowTextColor = 0xFFFFFFFF;
styleObject.readingWindowBackgroundColor = 0x001430;
styleObject.readingWindowFontSize = 20;
```

textColor : Number

selectedTextColor : Number

fontSize : Number

backgroundColor : Number

seletedTextBackgroundColor : Number

indexBackgroundColor : Number

selectedIndexBackgroundColor : Number

readingWindowTextColor : Number

readingWindowBackgroundColor : Number

readingWindowFontSize : Number

	0xRRGGBB		RR
16	[0..255] BB	16	[0..255] GG
16	[0..255]		

:
getIMECandidateListStyle
TextField.disableIME

```
Key.getCode(controllerIdx:Number)
Key.getAscii(controllerIdx:Number)
Key.isDown(controllerIdx:Number)
Key.isToggled(controllerIdx:Number)
```

Key

controllerIdx 0

```
Key.onKeyDown(controllerIdx:Number)
```

onKeyDown

Key

```
Selection.setFocus(ch:Object, controllerIdx:Number)
Selection.getFocus(controllerIdx:Number)
Selection.getBeginIndex(controllerIdx:Number)
Selection.getEndIndex(controllerIdx:Number)
Selection.setSelection(start:Number, end:Number, controllerIdx:Number)
Selection.getCaretIndex(controllerIdx:Number)
```

Selection

controllerIdx 0

```
Selection.onSetFocus(old:Object, new:Object, controllerIdx:Number)
```

onSetFocus

Selection

```
MovieClip.onSetFocus(old:Object, controllerIdx:Number)
MovieClip.onKillFocus(new:Object, controllerIdx:Number)
Button.onSetFocus(old:Object, controllerIdx:Number)
Button.onKillFocus(new:Object, controllerIdx:Number)
TextField.onSetFocus(old:Object, controllerIdx:Number)
TextField.onKillFocus(new:Object, controllerIdx:Number)
TextField.onChangeed(controllerIdx:Number)
```

MovieClip/Button/TextField

System.capabilities.numControllers —