Autodesk® Scaleform®

Autodesk®
GAMEWARE

#WVQFGUM‰ 5ECNGHQTO‰

Š #WVQFGUM +PE #NN TKIJVU TGUGTXGF

...

[1] k

í Ô **4**

~ F X : X V • **3**

..... 3

..... 3

..... 5

..... 7

..... 9

: X V • **13**

: X V • **15**

: X V • **19**

: X V • **23**

TextField : X V • **33**

..... 33

..... 43

..... 50

..... 53

..... 55

..... 59

..... 63

: X V • **66**

: X V • **67**

: X V • **70**

Ô ’ : X V • **71**

: X V • **72**

13 ´ V • **73**

: X V• 76
ïî ¦ “ ý „)š $— …Xg 77

í Ô

_global.gfxExtensions

```
_global.gfxExtensions = true;
```

~FX : X V•

)õ ïí R

œ „)š V•

```
mc.onPress = function(mouseIdx:Number)
{
       if (mouseIndex == 0)
              . . .
       else if (mouseIndex == 1)
              . . .
      . . .
}
```

```
mc.onPress = function(mouseIdx:Number, keyboardOrMouse:Number)
{
	if (keyboardOrMouse == 0)
		. . .
	else
		. . .
	. . .
}
```

```
mc.onRollOver = function(mouseIdx:Number, nestingIdx:Number)
{
	// do roll over animation only if nestingIdx == 0
	if (nestingIdx == 0)
		doOverAnimation();
	. . .
}
mc.onRollOut = function(mouseIdx:Number, nestingIdx:Number)
{
```

Mouse.addListener

- onMouseMove = function() { }
- onMouseDown = function() { }
- onMouseUp   = function() { }
- onMouseWheel = function(delta : Number, targetPath : String) { }

onMouseDown onMouseUp

_global.gfxExtensions

- onMouseDown = function(button : Number, [targetPath : String],
  [mouseIdx : Number], [x : Number], [y : Number],
  [dblClick : Boolean]) { }
- onMouseUp = function(button : Number, [targetPath : String],
  [mouseIdx : Number], [x : Number], [y : Number]) { }

```
var mouseListener:Object = new Object;

mouseListener.onMouseDown = function(button, target)
{
   trace("mouseDown - button '" + button +
        "'  target = '" + target + "'");
}
mouseListener.onMouseUp = function(button, target)
{
   trace("mouseUp - button '" + button +
        "'  target = '" + target + "'");
}
```

```
Mouse.addListener(mouseListener);
```

Mouse["LEFT"], Mouse["RIGHT"]

Mouse["MIDDLE"] Mouse["LEFT"]

Mouse.LEFT

- `onMouseMove = function([mouseIdx : Number], [x : Number], [y : Number]) { }`
- `onMouseDown = function(button : Number, [targetPath : String], [mouseIdx : Number], [x : Number], [y : Number], [dblClick : Boolean]) { }`
- `onMouseUp = function(button : Number, [targetPath : String], [mouseIdx : Number], [x : Number], [y : Number]) { }`
- `onMouseWheel = function(delta : Number, targetPath : String, [mouseIdx : Number], [x : Number], [y : Number]) { }`

mouseIdx

onMouseDown dblClick true

~FX ïí 3¾

-
-
-

GFx::StateBag::SetUserEventHandler

Mouse.setCursorType

```
_global.gfxExtensions = 1;
// Hide system cursor.
Mouse.hide();

var mouseListener:Object = new Object;
mouseListener.onMouseMove = function(mouseIdx, x,y)
{
    if (mouseIdx == undefined)
   mouseIdx = 0;
    if (x == undefined)
    {
   x = _xmouse;
       y = _ymouse;
```

```
    }
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));

    cmc._x = x;
    cmc._y = y;
}
Mouse.addListener(mouseListener);

Mouse["setCursorType"] = function(cursorType, mouseIdx)
{
   if (mouseIdx == undefined)
        mouseIdx = 0;
   var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
   switch(cursorType)
   {
      case Mouse["HAND"]:
         cmc.Cursor.gotoAndPlay("hand");
         break;
      case Mouse["ARROW"]:
         cmc.Cursor.gotoAndPlay("arrow");
         break;
      case Mouse["IBEAM"]:
         cmc.Cursor.gotoAndPlay("ibeam");
         break;
      default: return;
   }
}

// Override Mouse.show and Mouse.hide functions so
// that they affect our cursor.
ASSetPropFlags(Mouse, "show,hide", 0, 7);

Mouse.show = function(mouseIdx)
{
    if (mouseIdx == undefined)
       mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
     cmc._visible = true;
}
Mouse.hide = function(mouseIdx)
{
    if (mouseIdx == undefined)
       mouseIdx = 0;
    var cmc = eval("_root.Cursor_M"+(mouseIdx+1));
     cmc._visible = false;
}
```

~FX : X Ó X7{š V•

Mouse.setCursorType(…)

Mouse[“setCursorType”](..).

o 3 ¦ “
¦

public function getButtonsState(mouseIndex : Number) : Number

mouseIndex : Number

o 3 ¦ “
¦

public function getTopMostEntity([mouseIndex : Number]) : Object
public function getTopMostEntity(testAll : Boolean,
[mouseIndex : Number]) : Object
public function getTopMostEntity(x : Number, y : Number) : Object
public function getTopMostEntity(x : Number, y : Number, testAll: Boolean) : Object

MovieClip.hitTest hitTest

, getTopMostEntity

Mouse.getTopMostEntity(x, y).hitTest(x, y, true) == true.

mouseIndex : Number

testAll : Boolean

getTopMostEntity

x : Number, y : Number

É E

```
var listenerObj = new Object;
listenerObj.onMouseMove = function()
{
   var target = Mouse["getTopMostEntity"]();
   trace("Mouse moved, target = "+target);
}
Mouse.addListener(listenerObj);
var target = Mouse["getTopMostEntity"](480, 10);
trace("The character at the (480, 10) is " + target);
```

o 3 ¦ “
¦

public function getPosition(mouseIndex : Number) : flash.geom.Point

mouseIndex : Number

o 3 ¦ “
¦

public function setCursorType(cursorType : Number, [mouseIndex : Number]) : void

cursorType

```
cursorType : Number

mouseIndex : Number
```

: X V •

ú

hitTestDisable:Boolean [read-write]

MovieClip.hitTest

TextField.hitTestDisable
MovieClip.hitTestDisable

ú

topmostLevel:Boolean [read-write]

TextField.topmostLevel
MovieClip.topmostLevel

8 Ç ¨

¸•

setController

```
Selection.setControllerFocusGroup(0, 0);
Selection.setControllerFocusGroup(1, 1);

button1.focusGroupMask = 0x1; // bit 0 - focus group 0
movieclip2.focusGroupMask = 0x1 | 0x2 // bits 0 and 1 - focus groups 0 and 1
```

: X V•

¦ “

```
public hitTest(x:Number, y:Number, [shapeFlag:Boolean],
            [ignoreInvisibleChildren:Boolean]):Boolean
```

ignoreInvisibleChildren:Boolean

ú

```
hitTestDisable:Boolean  [read-write]
```

MovieClip.hitTest

TextField.hitTestDisable
Button.hitTestDisable

ú

```
noAdvance : Boolean
```

```
true
```

```
      _global.noInvisibleAdvance
```

TextField.topmostLevel
Button.topmostLevel

ú

rendererString:String [read-write]

myMovieInstance.rendererString = “SHADER_Blur”

ú

rendererFloat:Number [read-write]

myMovieInstance.rendererFloat = 4; // eg: C++ enum value

ú

disableBatching:Boolean

8 Ç ¨

: X V•

„) š $ —

```
onMetaData = function(info:Object) { }
```

```
onMetaData
 . audioTracks
       audioTracks
            channelsNumber
            totalSamples
            trackIndex                              NetStream.audioTrack
            sampleRate
  subtitleTracksNumber
```

ú

```
audioTrack:Number  [read-write]
```

É E

```
var ns:NetStream = new NetStream(nc);
var audioTracks;

ns.onMetaData = function(info:Object)
{
        audioTracks = info.audioTracks;
}

if (audioTracks != undefined && audioTracks.length > 0)
        ns.audioTrack = audioTracks[0].trackIndex;
```

ú

```
subtitleTrack:Number  [read-write]
```

„) š $ —

```
onSubtitle = function(msg:String) {}
```

```
var ns:NetStream = new NetStream(nc);
var subtitlesNumber = 0;

ns.onMetaData = function(info:Object)
{
        subtitlesNumber = info. subtitleTracksNumber;
 }

 ns.onSubtitle = function(msg:String)
 {
        sbTextField.text = msg;
 }
if (subtitlesNumber > 0)
      ns.subtitleTrack = 1;
```

6

```
public function setNumberOfFramePools(pools : Number) : Void
```

6

```
public function setReloadThresholdTime(reloadTime : Number) : Void
```

: X V•

Selection.captureFocus()

Selection[“captureFocus”]().

o 3 ú

alwaysEnableArrowKeys : Boolean

"_focusrect" false

"_focusrect = false;"

alwaysEnableArrowKeys "true"

Selection["alwaysEnableArrowKeys"] = true;

o 3 ú

alwaysEnableKeyboardPress : Boolean

"_focusrect"

"_focusrect = false;"

alwaysEnableKeyboardPress true

```
Selection["alwaysEnableKeyboardPress"] = true;
```

o 3 ¦ “
¦

```
public function captureFocus([doCapture:Boolean, controllerIdx:Number]) : void
```

doCapture captureFocus

doCapture captureFocus

doCapture:Boolean –

captureFocus

controllerIdx:Number

```
Selection["captureFocus"](); // same as passing "true"
Selection["captureFocus"](false);
```

o 3 ú

```
disableFocusAutoRelease : Boolean
```

```
Selection["disableFocusRolloverEvent "] = true;
```

o 3 ú

```
modalClip : MovieClip
```

```
Selection["modalClip"] = _root.mc;
...
Selection["modalClip"] = undefined;
```

```
disableFocusKeys
moveFocus()
```

¦ “

```
public function moveFocus(keyToSimmulate : String [, startFromMovie:Object,
                includeFocusEnabledChars : Boolean = false,
                controllerIdx :Number]) : Object
```

disableFocusKeys modalClip

keyToSimmulate:String

startFromMovie:Object

includeFocusEnabledChars:Boolean –focusEnabled

tabEnabled/tabIndex

tabEnabled/tabIndex

controllerIdx:Number

```
Selection["moveFocus"](“up”);
Selection["moveFocus"](“tab”, _root.mc);
Selection["moveFocus"](“tab”, _root.mc, true);
Selection["moveFocus"](“tab”, null, true);
```

W ,

disableFocusKeys
modalClip

o 3 “

```
public function findFocus(keyToSimmulate : String [, parentMovie:Object, loop :
                Boolean, startFromMovie:Object, includeFocusEnabledChars : Boolean,
                controllerIndex : Number]) : Object
```

°ÿò[

keyToSimulate:String

parentMovie

loop

startFromMovie:Object

includeFocusEnabledChars:Boolean

controllerIndex

```
var a = Selection["findFocus"]("up");
```

W

```
disableFocusKeys
setModalClip
getModalClip
```

o 3 ¦ “
¦

```
public function setModalClip(modalClip : Object, controllerIndex : Number)
```

°ÿò[

```
modalClip
controllerIndex
```

o 3 ¦ “
¦

```
public function getModalClip(controllerIndex : Number) : Object
```

°ÿò[

```
controllerIndex
```

W

o 3 ¦ “

public function setControllerFocusGroup (controllerIndex : Number, focusGroupIdx : Number) : Boolean

controllerIndex

setControllerFocusGroup (1,1

setControllerFocusGroup (1,0)

° ÿ ò [

controllerIndex

focusGroupIdx

```
Selection["setControllerFocusGroup"](0,0);
Selection["setControllerFocusGroup"](1,1);
Selection["setControllerFocusGroup"](2,1);
```

W

o 3 ¦ “

```
public function getControllerFocusGroup (controllerIndex : Number) : Number
```

°ÿò[

controllerIndex

W

o3 ¦ “

```
public function getFocusArray(mc : Object) : Array
```

°ÿò[

mc

W

o3 ¦ “

```
public function getFocusBitmask(mc : Object) : Number
```

° ÿ ò [

mc

W

o 3 ¦ “

public function getControllerMaskByFocusGroup (focusGroupIdx : Number) : Number

setControllerFocusGroup

° ÿ ò [

focusGroupIdx

W

8 Ç ¨

numFocusGroups : Number

setControllerFocusGroup

TextField : X V •

≠

ú

```
autoFit:Boolean  [read-write]
```

¦ “

```
public function appendText(newText:String):void
```

```
newText
```

(+=) my_txt.text += appendingText

newText:String –

appendHtml()

¦ “
¦

public function appendHtml(newHtml:String):void

htmlText txt.htmlText += moreHtml

htmlText

newHtml:String

appendText()

ú

caretIndex:Number [read-only]

Selection.getCaretIndex() caretIndex

Selection.getCaretIndex()

Selection.getCaretIndex()

¦ “

public function getCharBoundaries(charIndex:Number): flash.geom.Rectangle

charIndex:Number

W ,

flash.geom.Rectangle -

getExactCharBoundaries()

¦ “

public function getExactCharBoundaries(charIndex:Number): flash.geom.Rectangle

getCharBoundaries()

charIndex:Number -

W ,

getCharBoundaries()

x:Number

y:Number

W,

¦ “

public function getLineLength(lineIndex:Number): Number

lineIndex:Number –

W,

¦ “

public function getLineMetrics(lineIndex:Number): Object

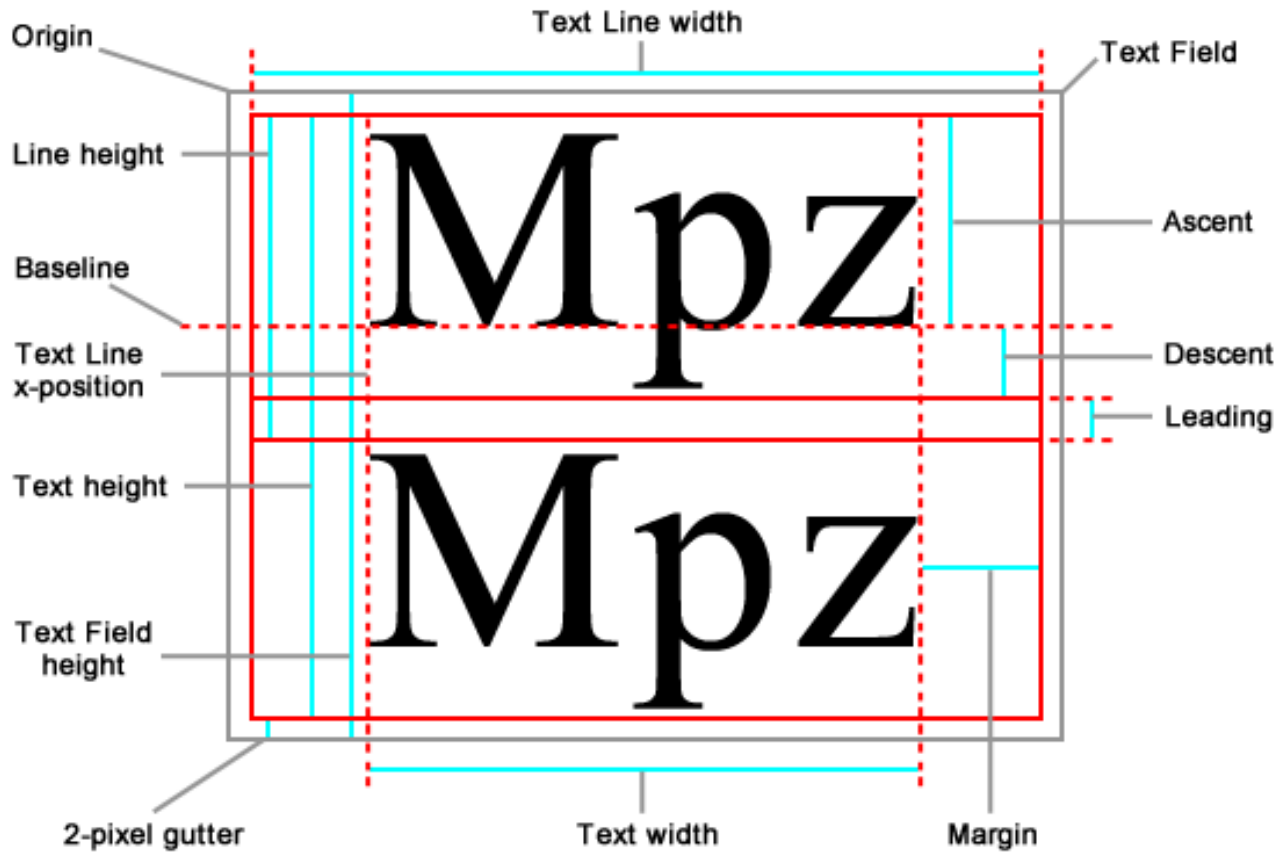

lineIndex:Number

W ,

¦ “

public function getLineOffset(lineIndex:Number): Number

lineIndex

lineIndex:Number –

W ,

¦ “

public function getLineText(lineIndex:Number): String

lineIndex

lineIndex:Number

W ,

ú

hitTestDisable:Boolean [read-write]

true MovieClip.hitTest

ú

noTranslate:Boolean [read-write]

true GFxTranslator::Translate

ú

numLines:Number [read-only]

wordWrap true

ú

topmostLevel:Boolean [read-write]

true

“topmostLevel “

•

ú

alwaysShowSelection:Boolean [read-write]

selectionBkgColor
selectionTextColor
inactiveSelectionBkgColor
inactiveSelectionTextColor

¦ “
¦

public function copyToClipboard([richClipboard:Boolean], [startIndex:Number], [endIndex:Number]):void

richClipboard:Boolean

useRichTextClipboard

startIndex:Number –

selectionBeginIndex

endIndex:Number –

selectionEndIndex

useRichTextClipboard
selectionBeginIndex
selectionEndIndex
cutToClipboard()
pasteFromClipboard()

¦ “

public function cutToClipboard([richClipboard:Boolean], [startIndex:Number], [endIndex:Number]):void

richClipboard:Boolean –

useRichTextClipboard

startIndex:Number –

selectionBeginIndex

endIndex:Number –

selectionEndIndex

useRichTextClipboard
selectionBeginIndex
selectionEndIndex
copyToClipboard()
pasteFromClipboard()

ú

inactiveSelectionBkgColor:Number [read-write]

alwaysShowSelection

alwaysShowSelection
inactiveSelectionTextColor
selectionBkgColor
selectionTextColor

ú

inactiveSelectionTextColor:Number [read-write]

alwaysShowSelection

alwaysShowSelection

inactiveSelectionBkgColor
selectionBkgColor
selectionTextColor

ú

noAutoSelection:Boolean [read-write]

¦ “
¦

public function pasteFromClipboard([richClipboard:Boolean], [startIndex:Number], [endIndex:Number]):void

richClipboard:Boolean –

useRichTextClipboard

startIndex:Number –

selectionBeginIndex

endIndex:Number –

selectionEndIndex

useRichTextClipboard
selectionBeginIndex
selectionEndIndex
copyToClipboard()
cutToClipboard()

ú

selectionBeginIndex:Number [read-only]

Selection.getBeginIndex() selectionBeginIndex

Selection.getBeginIndex()

caretIndex
selectionEndIndex
Selection.getBeginIndex()

ú

selectionEndIndex:Number [read-only]

caretIndex

Selection.getEndIndex() selectionEndIndex

Selection.getEndIndex()

caretIndex
selectionBeginIndex
Selection.getEndIndex()

ú

selectionBkgColor:Number [read-write]

alwaysShowSelection

inactiveSelectionTextColor
inactiveSelectionBkgColor
selectionTextColor

ú

selectionTextColor:Number [read-write]

alwaysShowSelection

inactiveSelectionBkgColor
inactiveSelectionBkgColor
selectionBkgColor

ú

useRichTextClipboard:Boolean [read-write]

useRichTextClipboard true

false

fXš 7 ý º.

ú

fontScaleFactor:Number [read-write]

fontScaleFactor

ú

textAutoSize:String [read-write]

textAutoSize

“none”, “shrink” “fit” “shrink “fit

fit

shrink”

none

ú

verticalAlign:String [read-write]

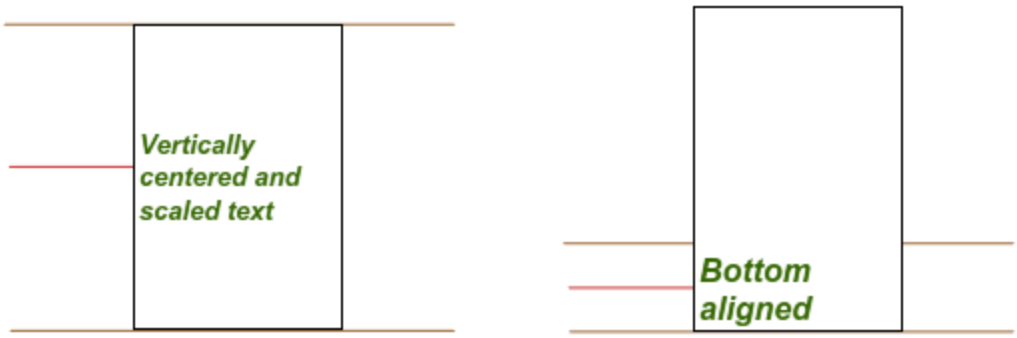

none

verticalAutoSize
TextField.align

ú

verticalAutoSize:String [read-write]

none” ( ), “top”,
“bottom”, “center” verticalAutoSize none

verticalAutoSize wordWrap true

TextFieldautoSize

verticalAutoSize center”

verticalAutoSize

none

verticalAlign
TextField.autoSize

V •

P ú

P

```
t.htmlText = "<p align='right'>abra<img src='myImage' width='20' height='30'
             align='baseline' vspace='-10'>bed232</p>";
```

src

width

height

align

baseline

vspace –"baseline"

id

align

hspace

g Ò ¼ ê

ú

```
blurX:Number  [read-write]
blurY:Number  [read-write]
```

blurStrength

ú

```
blurStrength:Number  [read-write]
```

blurX
blurY

ú

```
shadowAlpha:Number  [read-write]
```

shadowColor

ú

shadowAngle:Number [read-write]

DropShadowFilter

DropShadowFilter

ú

shadowBlurX:Number [read-write]
shadowBlurY:Number [read-write]

shadowStrength

ú

shadowColor:Number [read-write]

shadowStyle

ú

shadowDistance:Number [read-write]

DropShadowFilter

ú

shadowHideObject:Boolean [read-write]

ú

shadowKnockOut:Boolean [read-write]

(true

false

ú

shadowQuality:Number [read-write]

ú

shadowStrength:Number [read-write]

:

shadowBlurX
shadowBlurY

ú

shadowStyle:String [read-write]

shadowColor shadowStyle

```
field.shadowStyle = "s{0,-1.5}{-1.4,1.2}{1.4,1.2}t{0,0}";
field.shadowColor = 0xff0000;
```

shadowColor

TextField.textColor

shadowColor
TextField.textColor

„ ò é Ž

¦ “

```
public setImageSubstitutions(substInfoArr:Array) : void
public setImageSubstitutions(substInfo:Object) : void
public setImageSubstitutions(null) : void
```

BitmapData

```
import flash.display.BitmapData;
var imageBmp:BitmapData = BitmapData.loadBitmap("myImage");
```

ì import flash.display.BitmapData;

flash.display.BitmapData

subString:String

image : BitmapData

width : Number

height : Number

baseLineY : Number

id : String

"substInfoArr" “substInfo”

setImageSubstitutions(substInfo:Object)

setImageSubstitutions(substInfoArr:Array)

setImageSubstitutions

setImageSubstitutions(null)

setImageSubstitutions

substInfoArr:Array –

substInfo:Object –

null –

updateImageSubstitution()

```
var b1 = BitmapData.loadBitmap("smile1");
var b2 = BitmapData.loadBitmap("smile2");
var b3 = BitmapData.loadBitmap("smile3");
var a = new Array;
a[0] = { subString:"=)", image:b1, baseLineY:35, width:20, height:20, id:"sm=)" };
a[1] = { subString":-)", image:b2, baseLineY:20, id:"sm:-)" };
a[2] = { subString":\\", image:b3, baseLineY:35, height:100 };
a[3] = { subString":-\\", image:b1 };
t.setImageSubstitutions(a);
```

| “

```
public updateImageSubstitution(id:String, image:BitmapData) : void
```

setImageSubstitutions

id:String – setImageSubstitutions

image:BitmapData –

setImageSubstitutions()

```
t.updateImageSubstitution("sm=)", b3);
```

updateImageSubstitution

```
var phase = 0;
var b1a = BitmapData.loadBitmap("smile1a");
var b2a = BitmapData.loadBitmap("smile2a");

onEnterFrame = function()
{
   if (phase % 10 == 0)
   {
      if (phase % 20 == 0)
      {
         _root.t.updateImageSubstitution("sm=)", b1);
         _root.t.updateImageSubstitution("sm:-)", b2);
      }
      else
      {
         _root.t.updateImageSubstitution("sm=)", b1a);
         _root.t.updateImageSubstitution("sm:-)",b2a);
      }
   }
   ++phase;
}
```

R

ú

```
disableIME:Boolean  [read-write]
```

¦ “

```
public function getIMECompositionStringStyle(categoryName:String): Object
```

categoryName

setIMECompositionStringStyle

categoryName:String (setIMECompositionStringStyle

W ,

\

setIMECompositionStringStyle
disableIME

¦ “
¦

public function setIMECompositionStringStyle(categoryName:String,
styleDescriptor:Object): Number

. categoryName

"compositionSegment"

"clauseSegment"

convertedSegment"

"phraseLengthAdj"

"lowConfSegment"

styleDescriptor

textColor : Number

backgroundColor : Number

underlineColor : Number

underlineStyle : String

"single"
"thick"
"dotted"
"ditheredSingle"
"ditheredThick"

categoryName:String

styleDescriptor:Object

getIMECompositionStringStyle
disableIME

: X V•

ú

alpha:Number [read-write]

TextFormat.color

TextFormat
HTML <FONT ALPHA='xx'>

: X V•

Stage.visibleRect

Stage[“visibleRect”]..

ú

visibleRect:flash.geom.Rectangle [read-only]

safeRect
originalRect

ú

safeRect:flash.geom.Rectangle [read-only]

GFx::Movie::SetSafeRect

visibleRect

visibleRect

originalRect

ú

originalRect:flash.geom.Rectangle [read-only]

visibleRect
safeRect

„) š $ —

onResize = function([visibleRect:flash.geom.Rectangle]) {}

Stage.visibleRect

```
    pt:Object
```

W

: X V•

8ù‡ º º.

Array.sort Array.sortOn

Array.sort/sortOn

Array.LOCALE

```
var arr = [‘á’, ‘z’, ‘a’];
var newArr1 = arr.sort(); // returns [‘a’, ‘z’, ‘á’]
var newArrLoc = arr.sort(Array.LOCALE); // returns [‘a’, ‘á’, ‘z’]
var newArrRev = arr.sort(Array.LOCALE | Array.DESCENDING); // [‘z’, ‘á’, ‘a’]
```

```
var arr = [‘Á’, ‘z’, ‘a’];
var a = arr.sort(Array.LOCALE | Array.CASEINSENSITIVE); // returns [‘a’, ‘Á’, ‘z’]
```

Array.LOCALE

String.localeCompare

Ô’ : X V•

¦ “

public localeCompare(other:String [, caseInsensitive:Boolean]) : Number

other:String –

caseInsensitive:Boolean –

Array.sort

13 ´ V •

ú

noInvisibleAdvance : Boolean

MovieClip.noAdvance

6

imecommand(command:String, parameters:String) : Void

6

public function getIMECompositionStringStyle(categoryName:String): Object

setIMECandidateListStyle

W ,

setIMECandidateListStyle
TextField.disableIME

6

```
public function setIMECandidateListStyle(styleDescriptor:Object)
```

```
styleDescriptor

      styleObject.textColor                          = 0x5EADFF;
      styleObject.selectedTextColor           = 0xFFFFFF;
      styleObject.fontSize                           = 20;
      styleObject.backgroundColor                    = 0x001430;
      styleObject.selectedTextBackgroundColor  = 0x2C5A99;
      styleObject.indexBackgroundColor         = 0x12325A;
      styleObject.selectedIndexBackgroundColor       = 0x2C5A99;
      styleObject.readingWindowTextColor       = 0xFFFFFF;
      styleObject.readingWindowBackgroundColor = 0x001430;
      styleObject.readingWindowFontSize        = 20;

textColor : Number


selectedTextColor : Number


fontSize : Number


backgroundColor : Number


seletedTextBackgroundColor : Number
```

indexBackgroundColor : Number

selectedIndexBackgroundColor : Number

readingWindowTextColor : Number

readingWindowBackgroundColor : Number

readingWindowFontSize : Number

getIMECandidateListStyle
TextField.disableIME

: X V •

ï î ¦ “ ý „) š $ — … X g

: X

```
Key.getCode(controllerIdx:Number)
Key.getAscii(controllerIdx:Number)
Key.isDown(controllerIdx:Number)
Key.isToggled(controllerIdx:Number)
```

```
controllerIdx
```

```
Key.onKeyDown(controllerIdx:Number)
```

: X

```
Selection.setFocus(ch:Object, controllerIdx:Number)
Selection.getFocus(controllerIdx:Number)
Selection.getBeginIndex(controllerIdx:Number)
Selection.getEndIndex(controllerIdx:Number)
Selection.setSelection(start:Number, end:Number, controllerIdx:Number)
Selection.getCaretIndex(controllerIdx:Number)
```

```
Selection.onSetFocus(old:Object, new:Object, controllerIdx:Number)
```

```
MovieClip.onSetFocus(old:Object, controllerIdx:Number)
MovieClip.onKillFocus(new:Object, controllerIdx:Number)
Button.onSetFocus(old:Object, controllerIdx:Number)
Button.onKillFocus(new:Object, controllerIdx:Number)
TextField.onSetFocus(old:Object, controllerIdx:Number)
TextField.onKillFocus(new:Object, controllerIdx:Number)
TextField.onChanged(controllerIdx:Number)
```

```
System.capabilities.numControllers
```