


WEB SERVER



SALAM SUKSES TKJ CLUB

<http://www.tkjclub.net/tkj>

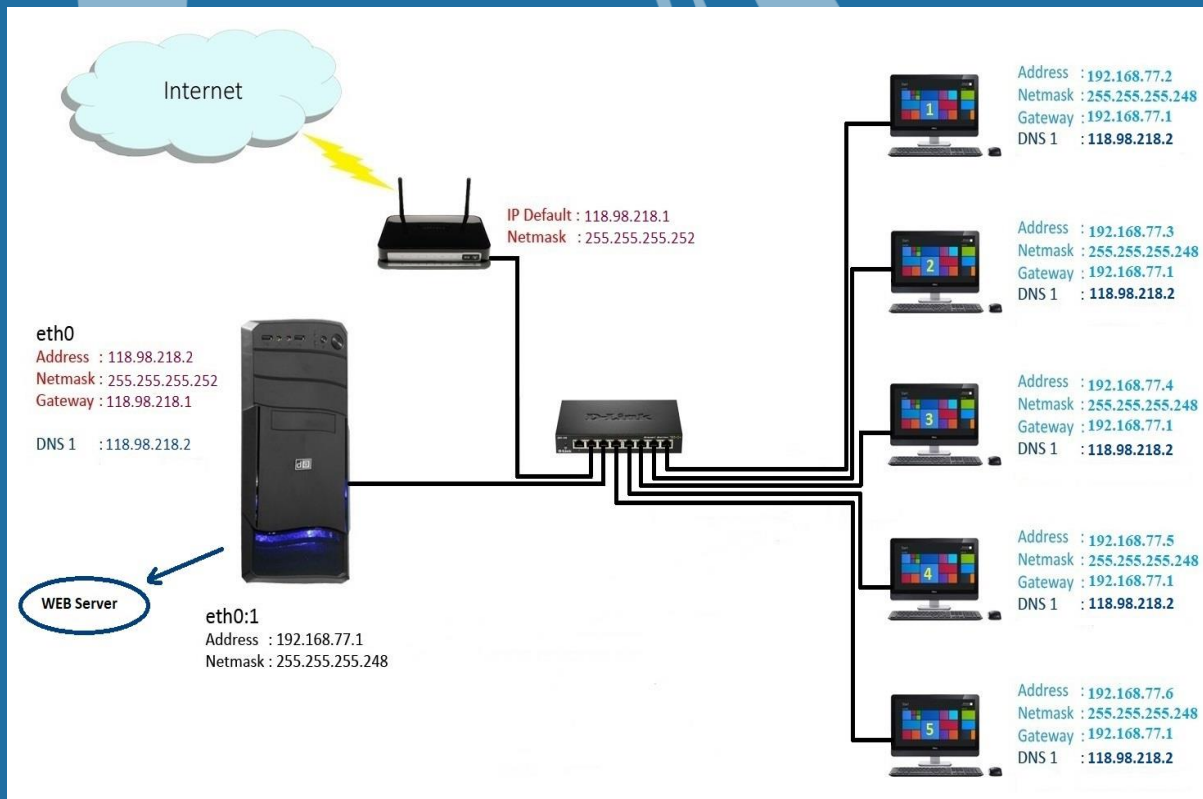

debian 10

Created by : M. Asriadi

A. Pengertian Web Server

Web Server adalah software yang memberikan layanan yang berbasis data dan berfungsi menerima permintaan HTTP (HyperText Transfer Protocol) pada client yang dikenali.

B. Fungsi Web Server

Web Server berfungsi untuk mentransfer data atau berkas atas permintaan client melalui HTTP/HTTPS karena dalam sebuah Web ada berkas text, gambar, video, dll.

C. Perbedaan HTTP dan HTTPS

- HTTP (HyperText Transfer Protocol) adalah protocol jaringan dan aplikasi untuk sistem informasi terdistribusi.
- HTTPS (HyperText Transfer Protocol Secure) adalah protocol yang sama dengan HTTP, namun yang membedakan adalah HTTPS menggunakan sistem pengaman.

D. Script Web Server

>>> Pastikan konfigurasi Routing dan DNS Server telah selesai dan berhasil.

```
# apt-cdrom add
>> masukkan DVD-3

# apt-get update
# apt-get install -y apache2
# apt-get install -y mysql*
# apt-get install -y php7.3*
# apt --fix-broken install
# apt-get install -y php7.3-zip php7.3-curl
# nano /etc/ssh/sshd_config
```

Cari script **#PermitRootLogin prohibit-password** kemudian ubah script menjadi **PermitRootLogin yes** "jangan lupa hapus tanda pagarnya (#)"

Save dengan Ctrl + X >> tekan Y >> tekan Enter


```
# /etc/init.d/ssh restart
>> Buka aplikasi WinSCP, kemudian copy file phpMyAdmin dari Client (sebelah kiri) ke Server (sebelah kanan) dalam directory /var/www/html

# apt-get install -y unzip
# cd /var/www/html
# unzip php >> lalu tekan Tab pada keyboard kemudian Enter
# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
# chmod 755 -R /var/www/html/phpmyadmin
# mysqladmin -u root password 12345678
# /etc/init.d/mysql restart
# apt-get install -y nmap
# nmap localhost
```

>> Buka browser, lalu ketik **namadomain** pada address bar. Jika berhasil, maka akan muncul tampilan “Apache2 Debian Default Page”

>> Buka tab baru, lalu ketik **namadomain/phpmyadmin** pada address bar. Jika berhasil, maka akan muncul tampilan login “phpMyAdmin” dan pastikan berhasil Login.


E. Topologi

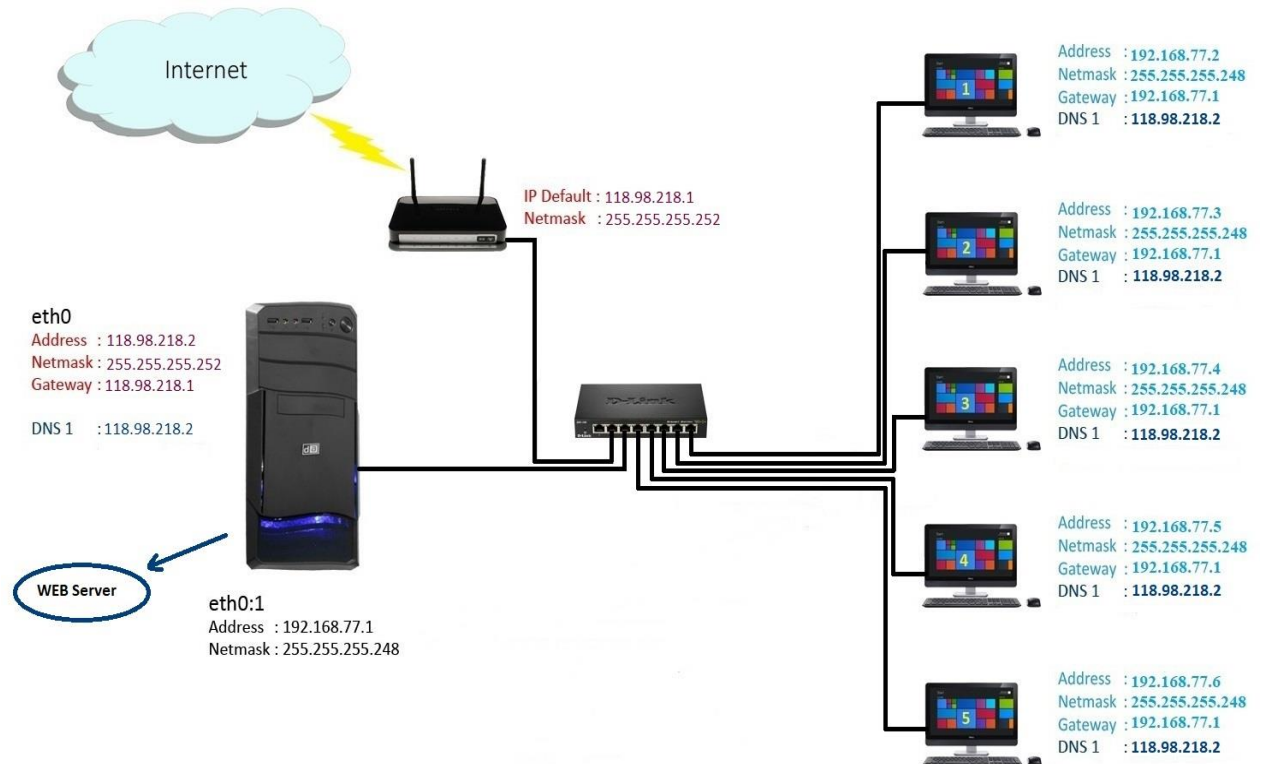


F. Langkah-Langkah Konfigurasi Web Server

1. Pastikan konfigurasi Router Server dan DNS Server telah selesai dan berhasil.
2. Masukkan atau tambahkan DVD-3 Debian terlebih dahulu. Ketikkan perintah berikut:


```
# apt-cdrom add
```

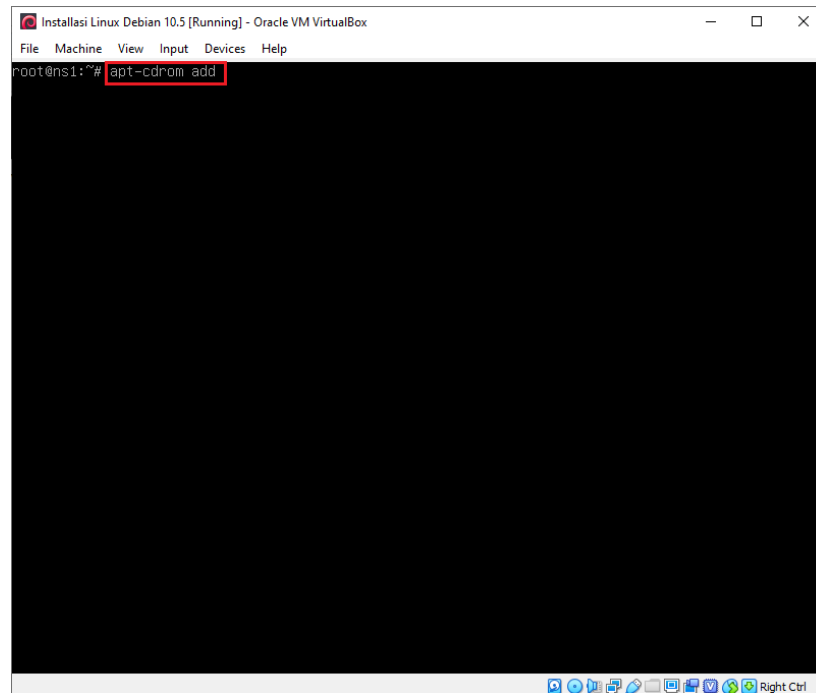


3. Klik **Devices** >> **Optical Drives** >> lalu pilih **debian-10.5.0-i386-DVD-3.iso**.

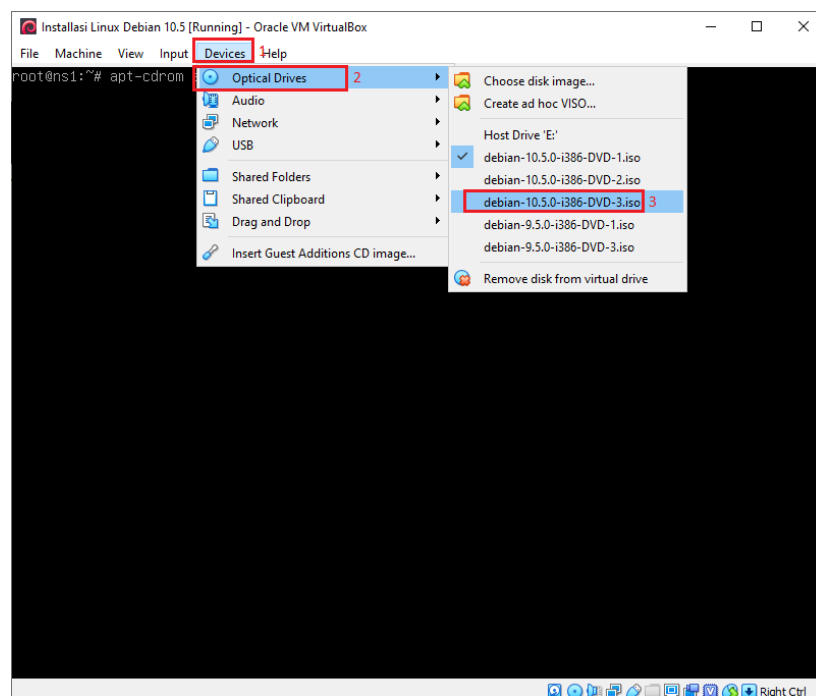

4. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

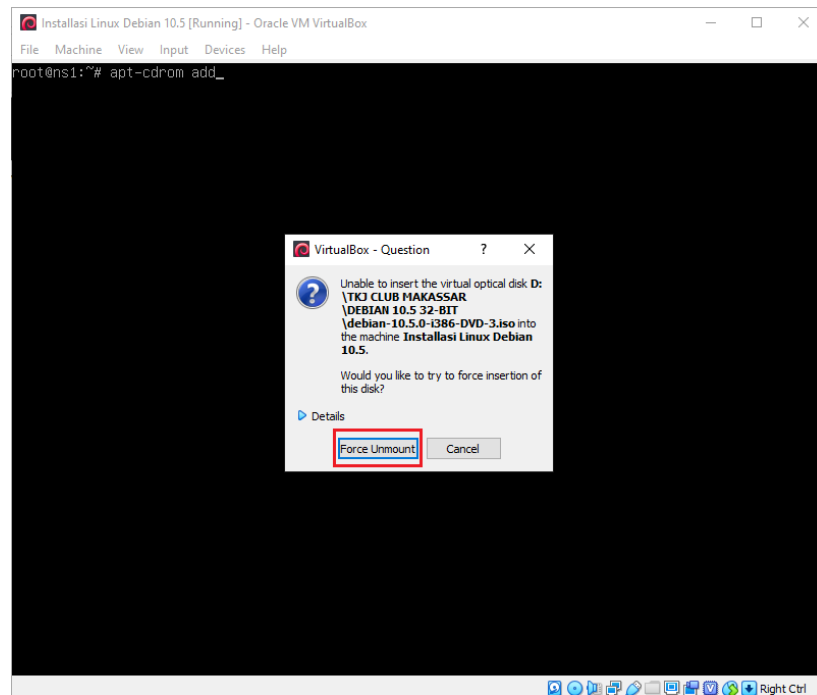


5. Lalu tekan Enter.

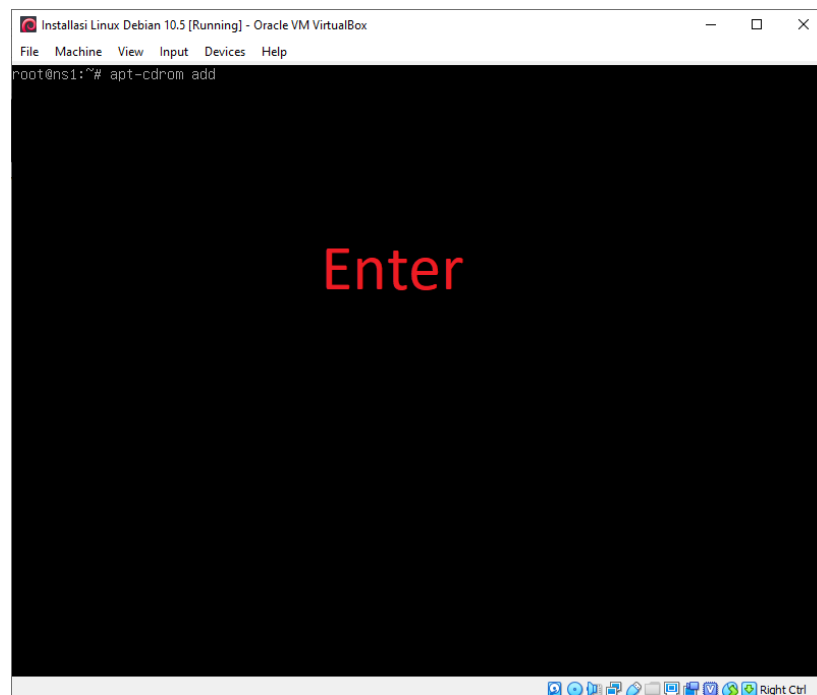

6. Setelah memasukkan DVD, selanjutnya update. Masukkan perintah berikut :


apt-get update >>lalu tekan Enter

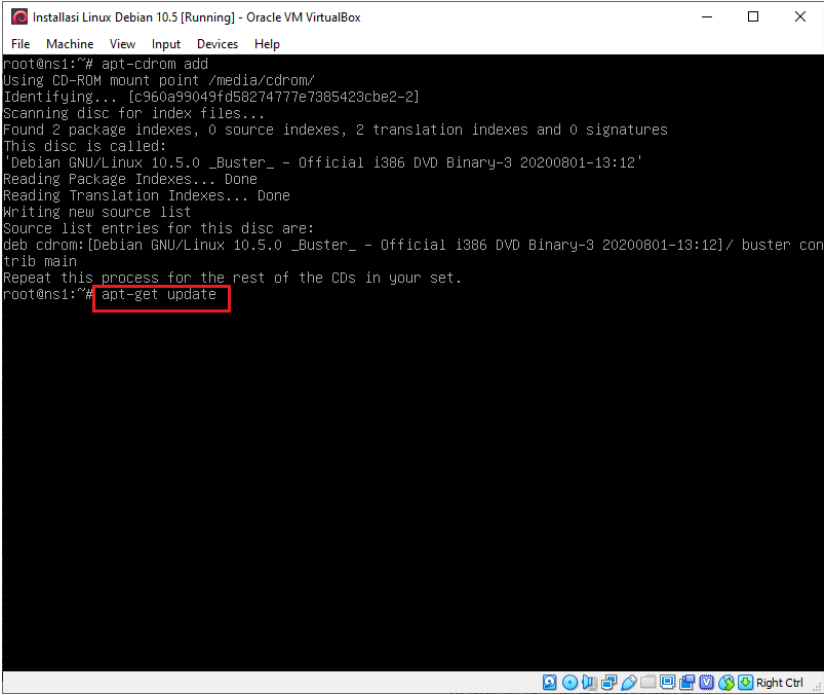

```
root@ns1:~# apt-cdrom add
Using CD-ROM mount point /media/cdrom/
Identifying... [c960a99049fd58274777e7385423cbe2-2]
Scanning disc for index files...
Found 2 package indexes, 0 source indexes, 2 translation indexes and 0 signatures
This disc is called:
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12'
Reading Package Indexes... Done
Reading Translation Indexes... Done
Writing new source list
Source list entries for this disc are:
deb cdrom:[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12]/ buster con
trib main
Repeat this process for the rest of the CDs in your set.
root@ns1:~# apt-get update
```

7. Selanjutnya Install paket **Apache2** yang merupakan aplikasi WEB Servernya dengan perintah:


apt-get install -y apache2 >> lalu tekan Enter

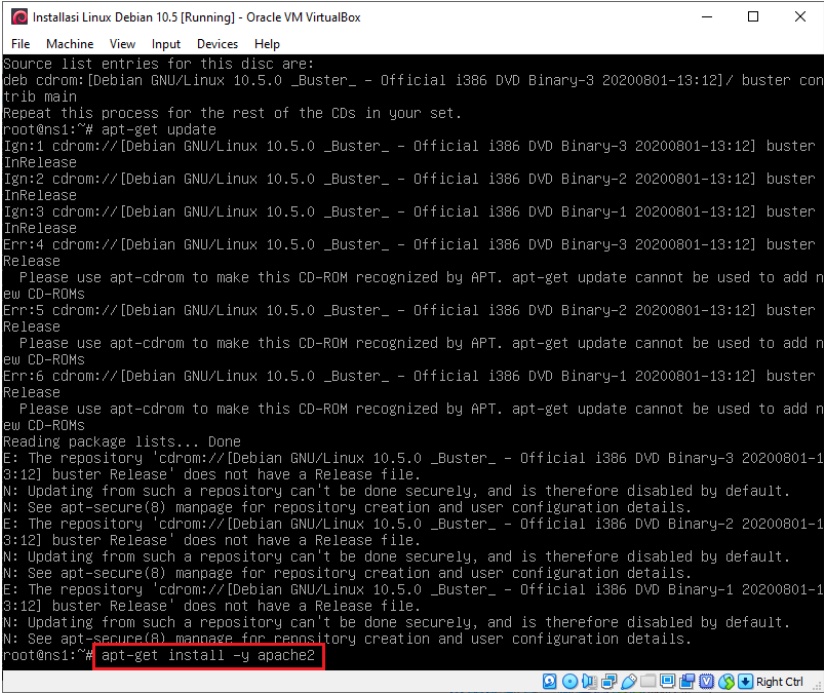


```
Source list entries for this disc are:
deb cdrom:[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12]/ buster con
trib main
Repeat this process for the rest of the CDs in your set.
root@ns1:~# apt-get update
Ign:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12] buster
InRelease
Ign:2 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster
InRelease
Ign:3 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster
InRelease
Err:4 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12] buster
Release
Please use apt-cdrom to make this CD-ROM recognized by APT. apt-get update cannot be used to add n
ew CD-ROMs
Err:5 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster
Release
Please use apt-cdrom to make this CD-ROM recognized by APT. apt-get update cannot be used to add n
ew CD-ROMs
Err:6 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster
Release
Please use apt-cdrom to make this CD-ROM recognized by APT. apt-get update cannot be used to add n
ew CD-ROMs
Reading package lists... Done
E: The repository 'cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-1
3:12] buster Release' does not have a Release file.
N: Updating from such a repository can't be done securely, and is therefore disabled by default.
N: See apt-secure(8) manpage for repository creation and user configuration details.
E: The repository 'cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-1
3:12] buster Release' does not have a Release file.
N: Updating from such a repository can't be done securely, and is therefore disabled by default.
N: See apt-secure(8) manpage for repository creation and user configuration details.
E: The repository 'cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-1
3:12] buster Release' does not have a Release file.
N: Updating from such a repository can't be done securely, and is therefore disabled by default.
N: See apt-secure(8) manpage for repository creation and user configuration details.
root@ns1:~# apt-get install -y apache2
```

8. Jika tampil seperti gambar di bawah, jangan dulu di Enter. Masukkan terlebih dahulu DVD sesuai yang di minta. Masukkan DVD Binary-1 sesuai permintaan.


9. Klik Devices >> Optical Drives >> lalu pilih debian-10.5.0-i386-DVD-1.iso.

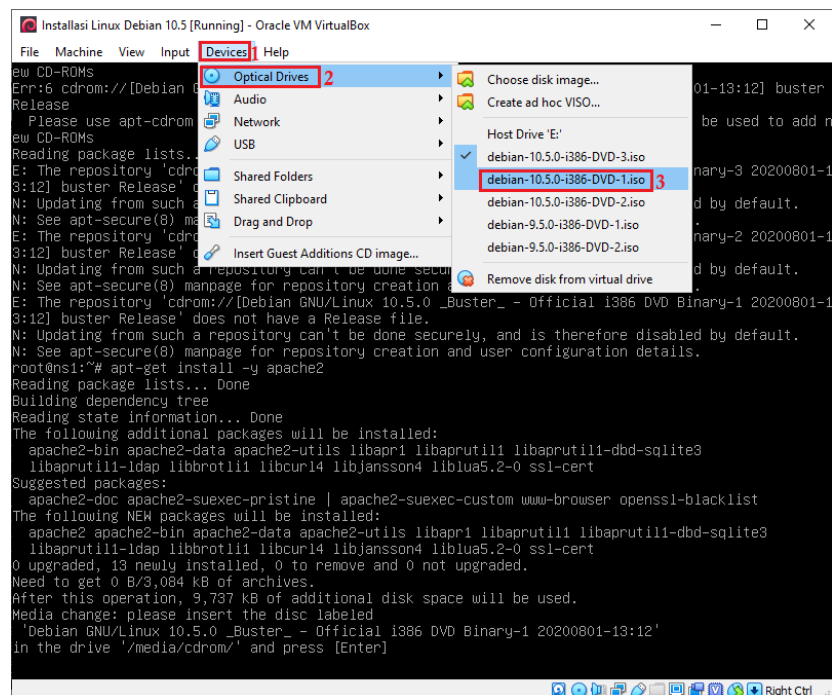

10. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

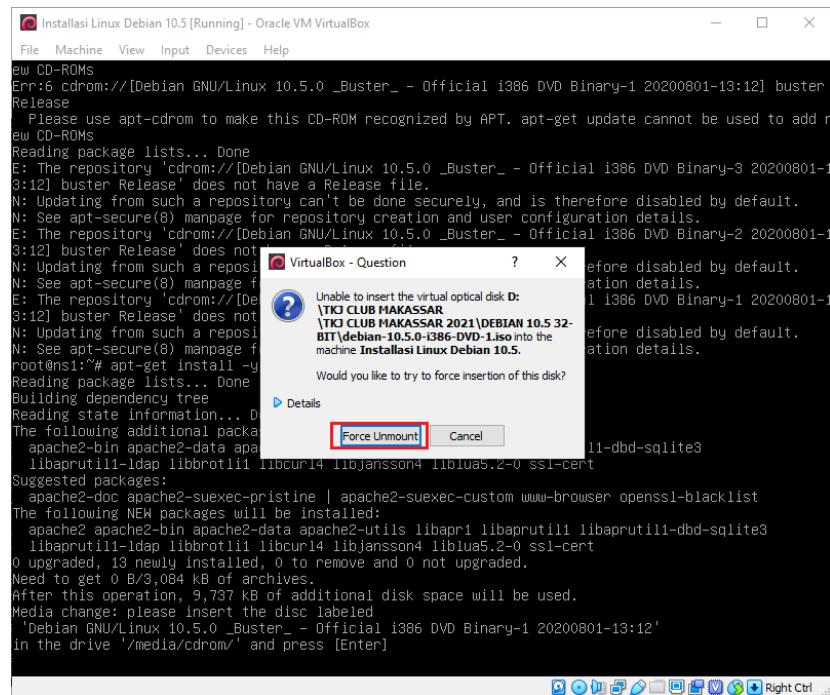


11. Lalu tekan Enter.

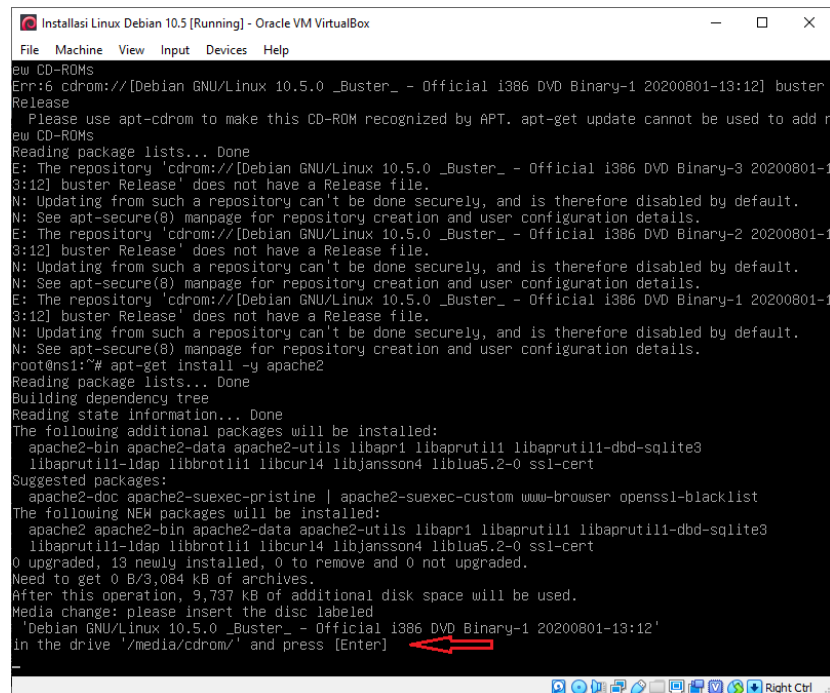


12. Selanjutnya Install paket **Mysql** yang merupakan aplikasi Data Base dengan perintah:

apt-get install -y mysql* >> lalu tekan Enter

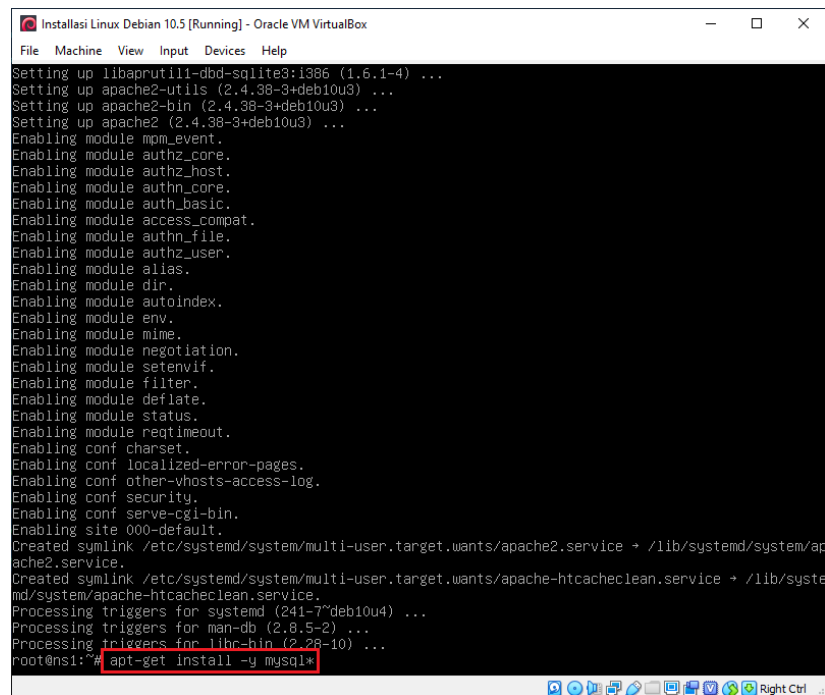


```
Setting up libaprutil1-dbd-sqlite3:1386 (1.6.1-4) ...
Setting up apache2-utils (2.4.38-3+deb10u3) ...
Setting up apache2-bin (2.4.38-3+deb10u3) ...
Setting up apache2 (2.4.38-3+deb10u3) ...
Enabling module mpm_event.
Enabling module authz_core.
Enabling module authz_host.
Enabling module authn_core.
Enabling module auth_basic.
Enabling module access_compat.
Enabling module authn_file.
Enabling module authz_user.
Enabling module alias.
Enabling module dir.
Enabling module autoindex.
Enabling module env.
Enabling module mime.
Enabling module negotiation.
Enabling module setenvif.
Enabling module filter.
Enabling module deflate.
Enabling module status.
Enabling module reqtimeout.
Enabling conf charset.
Enabling conf localized-error-pages.
Enabling conf other-vhosts-access-log.
Enabling conf security.
Enabling conf serve-cgi-bin.
Enabling site 000-default.
Created symlink /etc/systemd/system/multi-user.target.wants/apache2.service + /lib/systemd/system/ap
ache2.service.
Created symlink /etc/systemd/system/multi-user.target.wants/apache-htcacheclean.service + /lib/syste
md/system/apache-htcacheclean.service.
Processing triggers for systemd (241-7~deb10u4) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
root@ns1:~# apt-get install -y mysql*
```

13. Jika tampil seperti gambar di bawah, jangan dulu di Enter. Masukkan terlebih dahulu DVD sesuai yang di minta. Masukkan DVD Binary-2 sesuai permintaan.

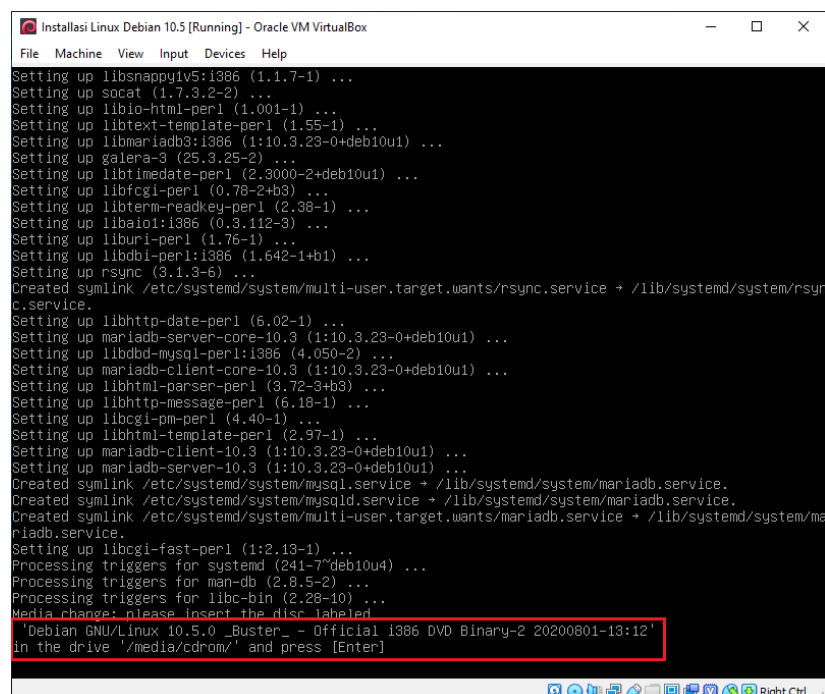


```
Setting up libsnappy1v5:i386 (1.1.7-1) ...
Setting up socat (1.7.3.2-2) ...
Setting up libio-html-perl (1.001-1) ...
Setting up libtext-template-perl (1.55-1) ...
Setting up libmariadb3:i386 (1:10.3.23-0+deb10u1) ...
Setting up galera-3 (25.3.25-2) ...
Setting up libtimedate-perl (2.3000-2+deb10u1) ...
Setting up libfcgi-perl (0.78-2+b3) ...
Setting up libterm-readkey-perl (2.38-1) ...
Setting up libaio1:i386 (0.3.112-3) ...
Setting up liburi-perl (1.76-1) ...
Setting up libdbi-perl:i386 (1.642-1+b1) ...
Setting up rsysync (3.1.3-6) ...
Created symlink /etc/systemd/system/multi-user.target.wants/rsync.service + /lib/systemd/system/rsyn
c.service.
Setting up libhttp-date-perl (6.02-1) ...
Setting up mariadb-server-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libdbd-mysql-perl:i386 (4.050-2) ...
Setting up mariadb-client-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libhtml-parser-perl (3.72-3+b3) ...
Setting up libhttp-message-perl (6.18-1) ...
Setting up libcgi-pm-perl (4.40-1) ...
Setting up libhtml-template-perl (2.97-1) ...
Setting up mariadb-client-10.3 (1:10.3.23-0+deb10u1) ...
Setting up mariadb-server-10.3 (1:10.3.23-0+deb10u1) ...
Created symlink /etc/systemd/system/mysql.service + /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service + /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service + /lib/systemd/system/mar
iadb.service.
Setting up libcgi-fast-perl (1:2.13-1) ...
Processing triggers for systemd (241-7~deb10u4) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
Media checker: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]
```

14. Klik **Devices** >> **Optical Drives** >> lalu pilih **debian-10.5.0-i386-DVD-2.iso**.

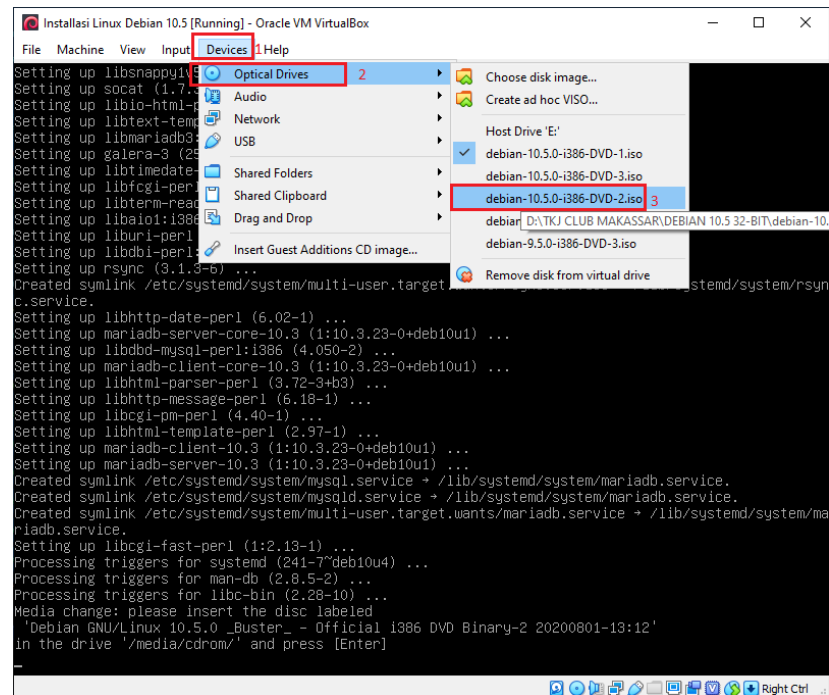

15. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

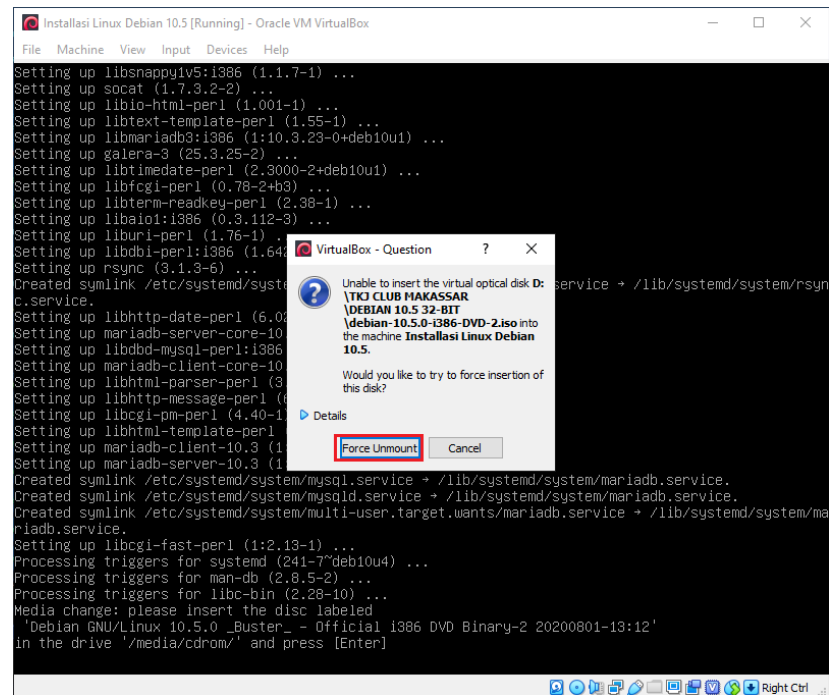

16. Lalu tekan Enter.

```

Setting up libsnappy1v5:i386 (1.1.7-1) ...
Setting up socat (1.7.3.2-2) ...
Setting up libio-html-perl (1.001-1) ...
Setting up libtext-template-perl (1.55-1) ...
Setting up libmariadb3:i386 (1:10.3.23-0+deb10u1) ...
Setting up galera-3 (25.3.25-2) ...
Setting up libtimedate-perl (2.3000-2+deb10u1) ...
Setting up libfcgi-perl (0.78-2+b3) ...
Setting up libterm-readkey-perl (2.38-1) ...
Setting up libaio1:i386 (0.3.112-3) ...
Setting up liburi-perl (1.76-1) ...
Setting up libdbi-perl:i386 (1.642-1+b1) ...
Setting up rsync (3.1.3-6) ...
Created symlink /etc/systemd/system/multi-user.target.wants/rsync.service → /lib/systemd/system/rsync.service.
Setting up libhttp-date-perl (6.02-1) ...
Setting up mariadb-server-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libdbd-mysql-perl:i386 (4.050-2) ...
Setting up mariadb-client-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libhtml-parser-perl (3.72-3+b3) ...
Setting up libhttp-message-perl (6.18-1) ...
Setting up libcgi-pm-perl (4.40-1) ...
Setting up libhtml-template-perl (2.97-1) ...
Setting up mariadb-client-10.3 (1:10.3.23-0+deb10u1) ...
Setting up mariadb-server-10.3 (1:10.3.23-0+deb10u1) ...
Created symlink /etc/systemd/system/mysql.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /lib/systemd/system/mariadb.service.
Setting up libcgi-fast-perl (1:2.13-1) ...
Processing triggers for systemd (241-7~deb10u4) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

```

17. Jika tampil lagi seperti gambar di bawah, jangan dulu di Enter. Masukkan lagi DVD sesuai yang di minta. Masukkan DVD Binary-3 sesuai permintaan.


```

Created symlink /etc/systemd/system/multi-user.target.wants/rsync.service → /lib/systemd/system/rsync.service.
Setting up libhttp-date-perl (6.02-1) ...
Setting up mariadb-server-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libdbd-mysql-perl:i386 (4.050-2) ...
Setting up mariadb-client-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libhtml-parser-perl (3.72-3+b3) ...
Setting up libhttp-message-perl (6.18-1) ...
Setting up libcgi-pm-perl (4.40-1) ...
Setting up libhtml-template-perl (2.97-1) ...
Setting up mariadb-client-10.3 (1:10.3.23-0+deb10u1) ...
Setting up mariadb-server-10.3 (1:10.3.23-0+deb10u1) ...
Created symlink /etc/systemd/system/mysql.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /lib/systemd/system/mariadb.service.
Setting up libcgi-fast-perl (1:2.13-1) ...
Processing triggers for systemd (241-7~deb10u4) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]


Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster/
main i386 default-mysql-server all 1.0.5 [3,540 B]
Ign:2 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12] buster/
main i386 mysqldtuner all 1.7.13-1
Selecting previously unselected package default-mysql-server.
(Reading database ... 30622 files and directories currently installed.)
Preparing to unpack .../default-mysql-server_1.0.5_all.deb ...
Unpacking default-mysql-server (1.0.5) ...
Setting up default-mysql-server (1.0.5) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

```

18. Klik **Devices** >> **Optical Drives** >> lalu pilih **debian-10.5.0-i386-DVD-3.iso**.

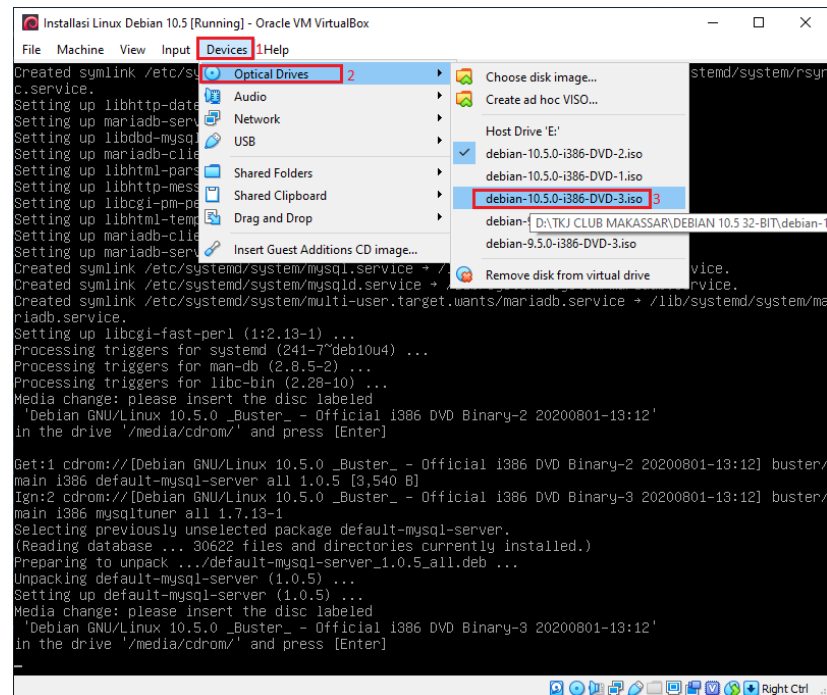

19. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

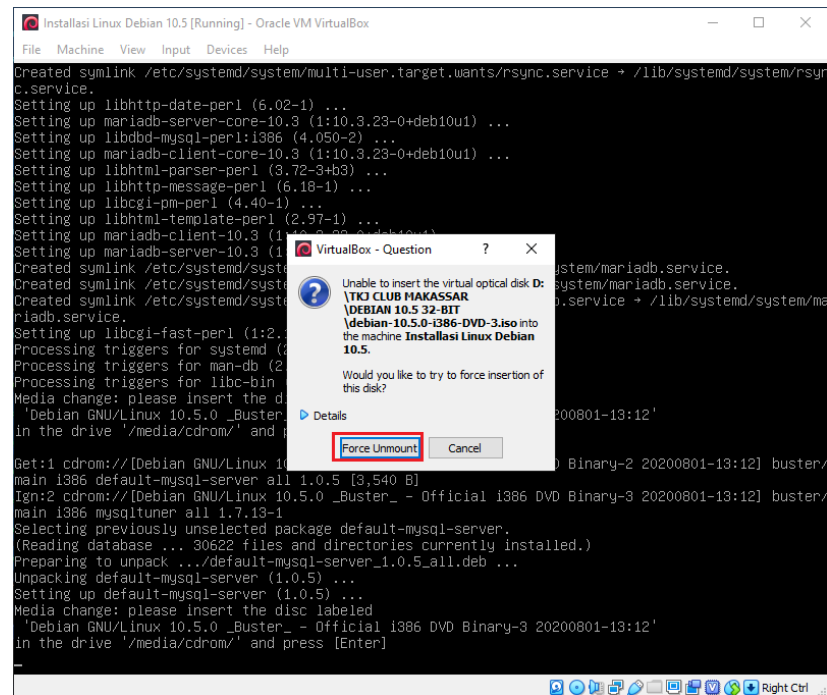

20. Lalu Tekan Enter.

```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Created symlink /etc/systemd/system/multi-user.target.wants/rsync.service → /lib/systemd/system/rsync.service.
Setting up libhttp-date-perl (6.02-1) ...
Setting up mariadb-server-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libdbd-mysql-perl:i386 (4.050-2) ...
Setting up mariadb-client-core-10.3 (1:10.3.23-0+deb10u1) ...
Setting up libhtml-parser-perl (3.72-3+b3) ...
Setting up libhttp-message-perl (6.18-1) ...
Setting up libcgi-pm-perl (4.40-1) ...
Setting up libhtml-template-perl (2.97-1) ...
Setting up mariadb-client-10.3 (1:10.3.23-0+deb10u1) ...
Setting up mariadb-server-10.3 (1:10.3.23-0+deb10u1) ...
Created symlink /etc/systemd/system/mysql.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /lib/systemd/system/mariadb.service.
Setting up libcgi-fast-perl (1:2.13-1) ...
Processing triggers for systemd (241-7~deb10u4) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster/
main i386 default-mysql-server all 1.0.5 [3,540 B]
Ign:2 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12] buster/
main i386 mysqltuner all 1.7.13-1
Selecting previously unselected package default-mysql-server.
(Reading database ... 30622 files and directories currently installed.)
Preparing to unpack .../default-mysql-server_1.0.5_all.deb ...
Unpacking default-mysql-server (1.0.5) ...
Setting up default-mysql-server (1.0.5) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]
```

21. Selanjutnya Install paket PHP yang merupakan aplikasi untuk menampilkan konten dengan perintah:

apt-get install -y php7.3*


>> lalu tekan Enter

```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Created symlink /etc/systemd/system/mysqld.service → /lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /lib/systemd/system/mariadb.service.
Setting up libcgi-fast-perl (1:2.13-1) ...
Processing triggers for systemd (241-7~deb10u4) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster/
main i386 default-mysql-server all 1.0.5 [3,540 B]
Ign:2 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12] buster/
main i386 mysqltuner all 1.7.13-1
Selecting previously unselected package default-mysql-server.
(Reading database ... 30622 files and directories currently installed.)
Preparing to unpack .../default-mysql-server_1.0.5_all.deb ...
Unpacking default-mysql-server (1.0.5) ...
Setting up default-mysql-server (1.0.5) ...
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]


Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-3 20200801-13:12] buster/
main i386 mysqltuner all 1.7.13-1 [125 kB]
Selecting previously unselected package mysqltuner.
(Reading database ... 30625 files and directories currently installed.)
Preparing to unpack .../mysqltuner_1.7.13-1_all.deb ...
Unpacking mysqltuner (1.7.13-1) ...
Setting up mysqltuner (1.7.13-1) ...
Processing triggers for man-db (2.8.5-2) ...
W: APT had planned for dpkg to do more than it reported back (144 vs 146).
Affected packages:
W: APT had planned for dpkg to do more than it reported back (148 vs 151).
Affected packages:
root@ns1:~# apt-get install -y php7.3*
```

22. Jika tampil seperti gambar di bawah, jangan dulu di Enter. Masukkan terlebih dahulu DVD sesuai yang di minta. Masukkan DVD Binary-1 sesuai permintaan.

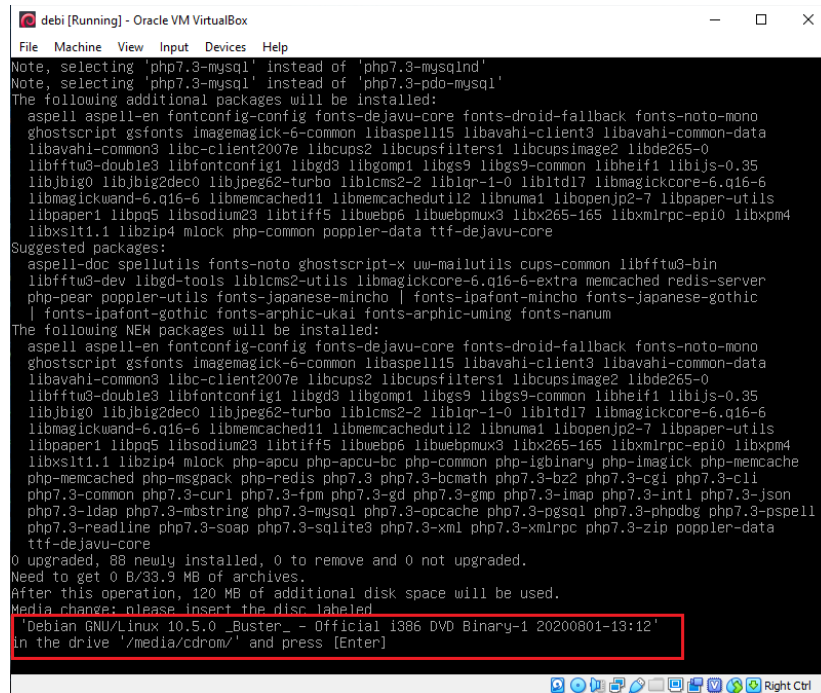


```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Note, selecting 'php7.3-mysql' instead of 'php7.3-mysqldb'
Note, selecting 'php7.3-mysql' instead of 'php7.3-pdo-mysql'
The following additional packages will be installed:
aspell aspell-en fontconfig-config fonts-dejavu-core fonts-droid-fallback fonts-noto-mono
ghostscript gsfnts imagemagick-6-common libaspell15 libavahi-client3 libavahi-common-data
libavahi-common3 libc-client2007e libcups2 libcupsfilters1 libcupsimage2 libde265-0
libfftw3-double3 libfontconfig1 libgd3 libgomp1 libgs9 libgs9-common libheif1 libijs-0.35
libjbig0 libjbig2dec0 libjpeg62-turbo liblcms2-2 liblqr-1-0 libltdl7 libmagickcore-6.q16-6
libmagickwand-6.q16-6 libmemcached11 libmemcachedutil12 libnuma1 libopenjp2-7 libpaper-utils
libpaper1 libpq5 libsodium23 libtiff5 libwebp6 libwebpmux3 libx265-165 libxmlrpc-epi0 libxpm4
libxslt1.1 libzip4 mlock php-common poppler-data ttf-dejavu-core
Suggested packages:
aspell-doc spellutils fonts-noto-ghostscript-x uu-mailutils cups-common libfftw3-bin
libfftw3-dev libgd-tools liblcms2-utils libmagickcore-6.q16-6-extra memcached redis-server
php-pear poppler-utils fonts-japanese-mincho | fonts-ipafont-mincho fonts-japanese-gothic
| fonts-ipafont-gothic fonts-arphic-ukai fonts-arphic-uming fonts-nanum
The following NEW packages will be installed:
aspell aspell-en fontconfig-config fonts-dejavu-core fonts-droid-fallback fonts-noto-mono
ghostscript gsfnts imagemagick-6-common libaspell15 libavahi-client3 libavahi-common-data
libavahi-common3 libc-client2007e libcups2 libcupsfilters1 libcupsimage2 libde265-0
libfftw3-double3 libfontconfig1 libgd3 libgomp1 libgs9 libgs9-common libheif1 libijs-0.35
libjbig0 libjbig2dec0 libjpeg62-turbo liblcms2-2 liblqr-1-0 libltdl7 libmagickcore-6.q16-6
libmagickwand-6.q16-6 libmemcached11 libmemcachedutil12 libnuma1 libopenjp2-7 libpaper-utils
libpaper1 libpq5 libsodium23 libtiff5 libwebp6 libwebpmux3 libx265-165 libxmlrpc-epi0 libxpm4
libxslt1.1 libzip4 mlock php-apcu php-apcu-bc php-common php-igbinary php-imagick php-memcache
php-memcached php-msgpack php-redis php7.3 php7.3-bcmath php7.3-bz2 php7.3-cgi php7.3-cli
php7.3-common php7.3-curl php7.3-fpm php7.3-gd php7.3-gmp php7.3-imap php7.3-intl php7.3-json
php7.3-ldap php7.3-mbstring php7.3-mysql php7.3-openssl php7.3-pgsql php7.3-phpdbg php7.3-pspell
php7.3-readline php7.3-soap php7.3-sqlite3 php7.3-xml php7.3-xmlrpc php7.3-zip poppler-data
ttf-dejavu-core
0 upgraded, 88 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/33.9 MB of archives.
After this operation, 120 MB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]
```


23. Klik Devices >> Optical Drives >> lalu pilih debian-10.5.0-i386-DVD-1.iso.

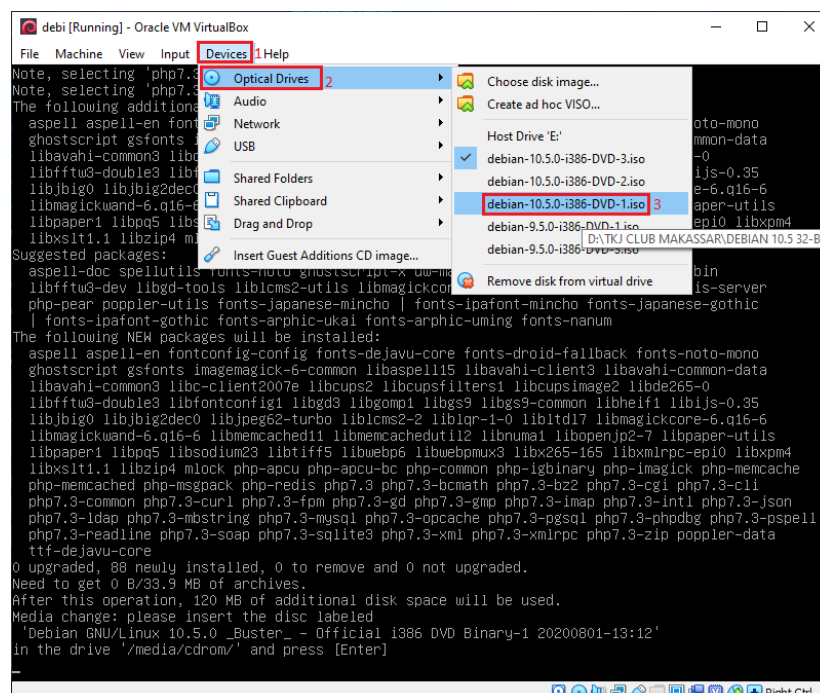

24. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

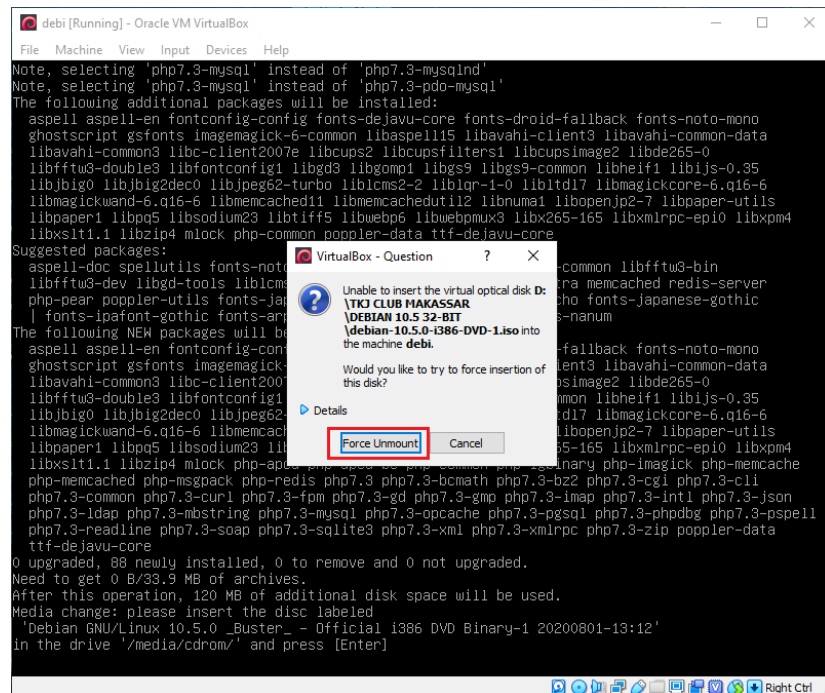


25. Lalu tekan Enter.

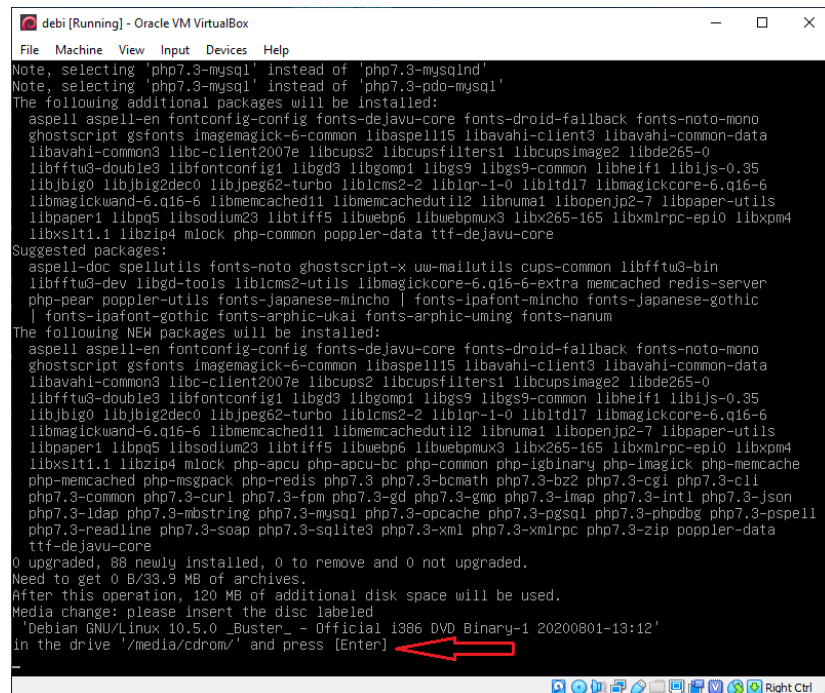

26. Masukkan perintah berikut untuk mengatasi broken pada paket-paket di Web Server.


apt --fix-broken install >> lalu tekan Enter

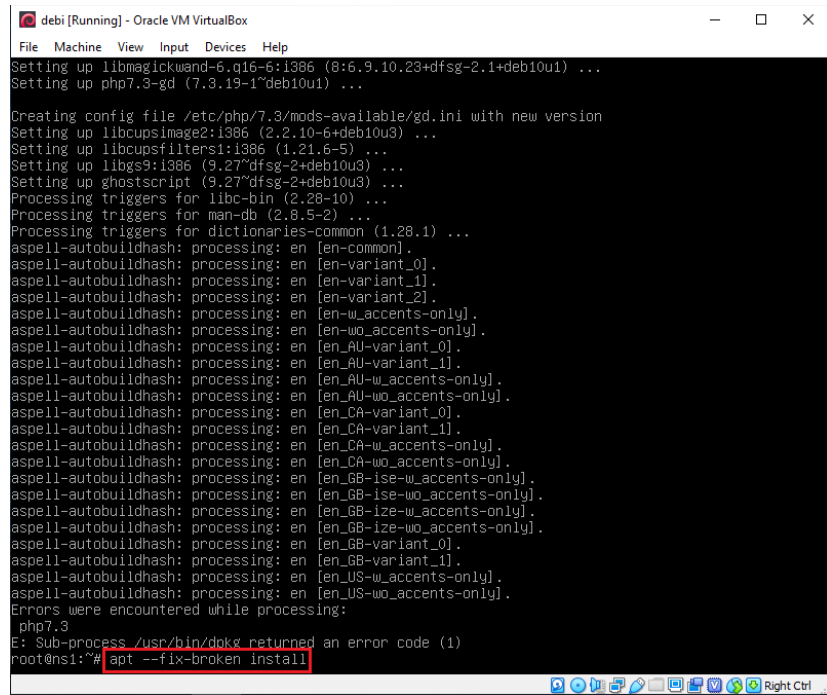

```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Setting up libmagickwand-6.q16-6:i386 (8:6.9.10.23+dfsg-2.1+deb10u1) ...
Setting up php7.3-gd (7.3.19-1+deb10u1) ...

Creating config file /etc/php/7.3/mods-available/gd.ini with new version
Setting up libcurl4-openssl-dev:amd64 (7.64.0-13+deb10u3) ...
Setting up libcurl3-gnutls:i386 (7.64.0-13+deb10u3) ...
Setting up libcurl3:i386 (7.64.0-13+deb10u3) ...
Setting up ghostscript (9.27~dfsg-2+deb10u3) ...
Processing triggers for libc-bin (2.28-10) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for dictionaries-common (1.28.1) ...
aspell-autobuildhash: processing: en [en-common].
aspell-autobuildhash: processing: en [en-variant_0].
aspell-autobuildhash: processing: en [en-variant_1].
aspell-autobuildhash: processing: en [en-variant_2].
aspell-autobuildhash: processing: en [en-w_accents-only].
aspell-autobuildhash: processing: en [en-wo_accents-only].
aspell-autobuildhash: processing: en [en_AU-variant_0].
aspell-autobuildhash: processing: en [en_AU-variant_1].
aspell-autobuildhash: processing: en [en_AU-w_accents-only].
aspell-autobuildhash: processing: en [en_AU-wo_accents-only].
aspell-autobuildhash: processing: en [en_CA-variant_0].
aspell-autobuildhash: processing: en [en_CA-variant_1].
aspell-autobuildhash: processing: en [en_CA-w_accents-only].
aspell-autobuildhash: processing: en [en_CA-wo_accents-only].
aspell-autobuildhash: processing: en [en_GB-ise-w_accents-only].
aspell-autobuildhash: processing: en [en_GB-ise-wo_accents-only].
aspell-autobuildhash: processing: en [en_GB-ize-w_accents-only].
aspell-autobuildhash: processing: en [en_GB-ize-wo_accents-only].
aspell-autobuildhash: processing: en [en_GB-variant_0].
aspell-autobuildhash: processing: en [en_GB-variant_1].
aspell-autobuildhash: processing: en [en_US-w_accents-only].
aspell-autobuildhash: processing: en [en_US-wo_accents-only].
Errors were encountered while processing:
 php7.3
E: Sub-process /usr/bin/dpkg returned an error code (1)
root@ns1:~# apt --fix-broken install
```


27. Jika muncul seperti gambar di bawah tekan tombol Y lalu Enter.

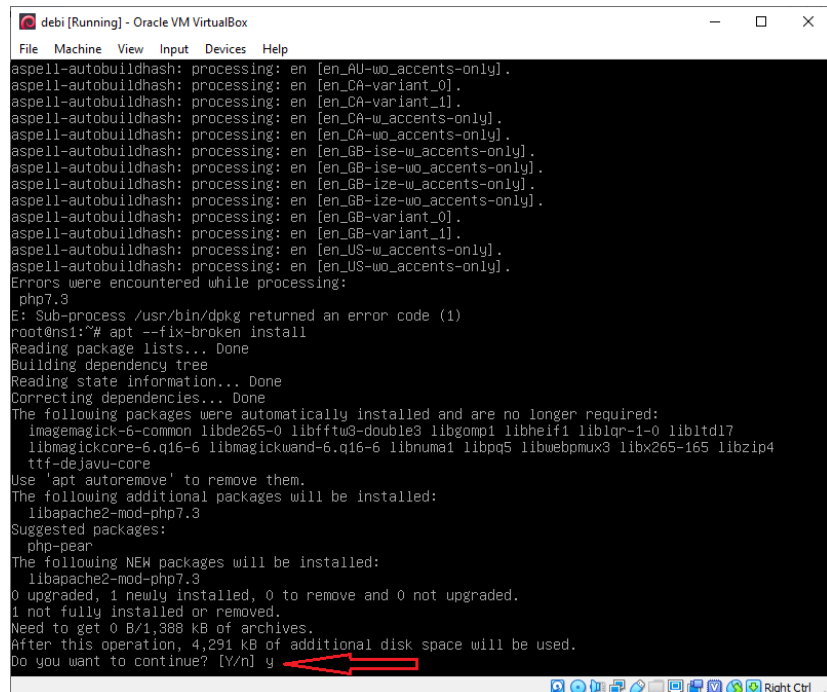

```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
aspell-autobuildhash: processing: en [en_AU-wo_accents-only].
aspell-autobuildhash: processing: en [en_CA-variant_0].
aspell-autobuildhash: processing: en [en_CA-variant_1].
aspell-autobuildhash: processing: en [en_CA-w_accents-only].
aspell-autobuildhash: processing: en [en_CA-wo_accents-only].
aspell-autobuildhash: processing: en [en_GB-ise-w_accents-only].
aspell-autobuildhash: processing: en [en_GB-ise-wo_accents-only].
aspell-autobuildhash: processing: en [en_GB-ize-w_accents-only].
aspell-autobuildhash: processing: en [en_GB-ize-wo_accents-only].
aspell-autobuildhash: processing: en [en_GB-variant_0].
aspell-autobuildhash: processing: en [en_GB-variant_1].
aspell-autobuildhash: processing: en [en_US-w_accents-only].
aspell-autobuildhash: processing: en [en_US-wo_accents-only].
Errors were encountered while processing:
 php7.3
E: Sub-process /usr/bin/dpkg returned an error code (1)
root@ns1:~# apt --fix-broken install
Reading package lists... Done
Building dependency tree
Reading state information... Done
Correcting dependencies... Done
The following packages were automatically installed and are no longer required:
  imagemagick-6-common libde265-0 libfftw3-double3 libgomp1 libhelfi1 liblqr-1-0 libltdl7
  libmagickcore-6.q16-6 libmagickwand-6.q16-6 libnuma1 libpq5 libwebp-mux3 libx265-165 libzip4
  ttf-dejavu-core
Use 'apt autoremove' to remove them.
The following additional packages will be installed:
  libapache2-mod-php7.3
Suggested packages:
  php-pear
The following NEW packages will be installed:
  libapache2-mod-php7.3
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/1,388 kB of archives.
After this operation, 4,291 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
```


28. Selanjutnya install paket phpnya lagi yaitu **php7.3-zip** dan **php7.3-curl**. Nah paket yang akan di install kali ini adalah paket pendukung Aplikasi Opencart. Sebenarnya boleh tidak di lakukan penginstallan paket ini, jika tidak di butuhkan. Misalnya membuat atau membangun konten web toko online seperti aplikasi Web Opencart.


apt-get install -y php7.3-zip php7.3-curl >>lalu tekan Enter

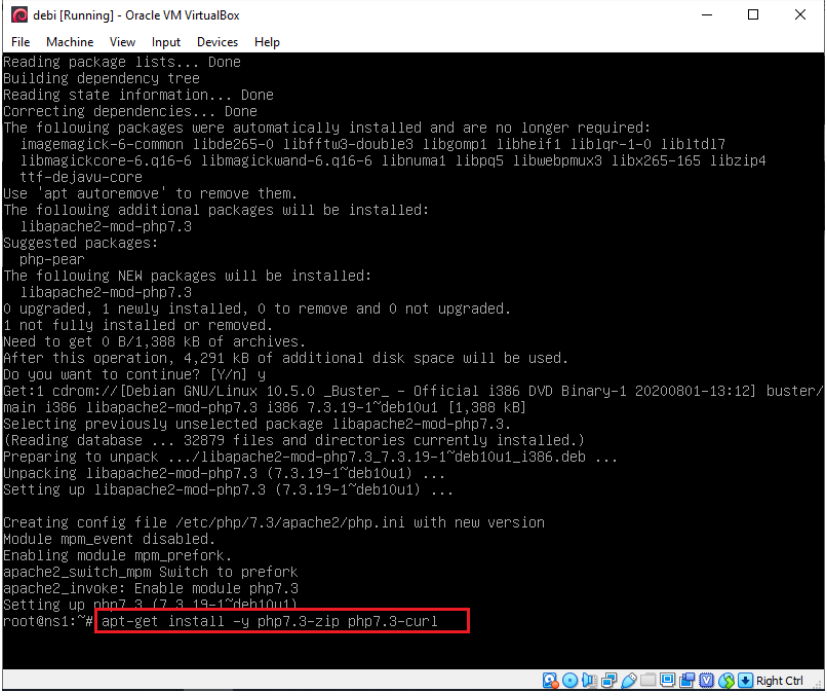

```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Reading package lists... Done
Building dependency tree
Reading state information... Done
Correcting dependencies... Done
The following packages were automatically installed and are no longer required:
  imagemagick-6-common libde265-0 libfftw3-double3 libgomp1 libhelf1 liblqr-1-0 libltdl7
  libmagickcore-6.q16-6 libmagickwand-6.q16-6 libnuma1 libpq5 libwebpmux3 libx265-165 libzip4
  ttf-dejavu-core
Use 'apt autoremove' to remove them.
The following additional packages will be installed:
  libapache2-mod-php7.3
Suggested packages:
  php-pear
The following NEW packages will be installed:
  libapache2-mod-php7.3
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/1,388 kB of archives.
After this operation, 4,291 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster/
main i386 libapache2-mod-php7.3 i386 7.3.19-1~deb10u1 [1,388 kB]
Selecting previously unselected package libapache2-mod-php7.3.
(Reading database ... 32879 files and directories currently installed.)
Preparing to unpack .../libapache2-mod-php7.3_7.3.19-1~deb10u1_i386.deb ...
Unpacking libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...
Setting up libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...

Creating config file /etc/php/7.3/apache2/php.ini with new version
Module mpm_event disabled.
Enabling module mpm_prefork.
apache2_switch_mpm Switch to prefork
apache2_invoke: Enable module php7.3
Setting up php7.3 (7.3.19-1~deb10u1) ...
root@ns1:~# apt-get install -y php7.3-zip php7.3-curl
```


29. Jika tampil seperti gambar di bawah, jangan dulu di Enter. Masukkan terlebih dahulu DVD sesuai yang di minta. Masukkan DVD Binary-2 sesuai permintaan.

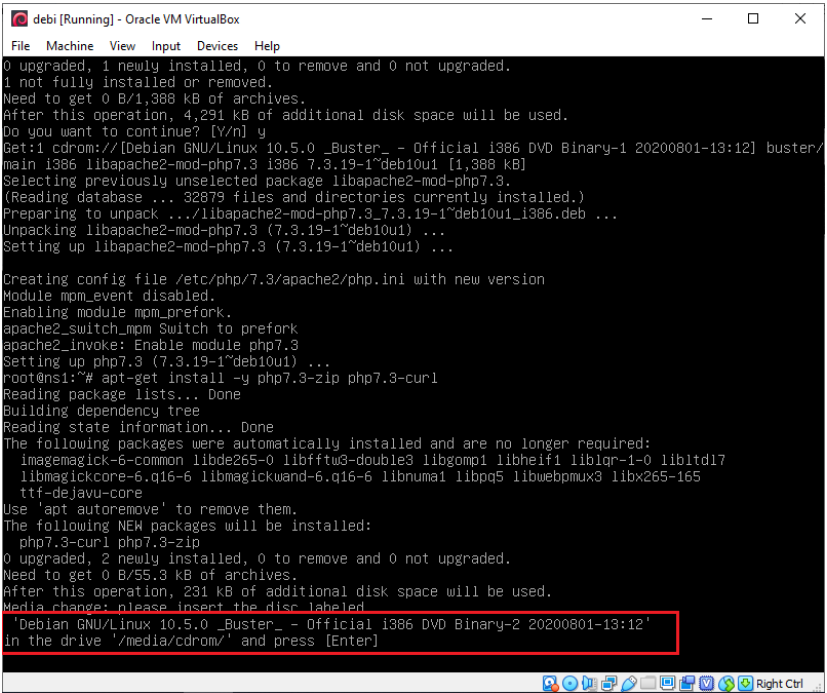


```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
1 not fully installed or removed.
Need to get 0 B/1,388 kB of archives.
After this operation, 4,291 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster/
main i386 libapache2-mod-php7.3 i386 7.3.19-1~deb10u1 [1,388 kB]
Selecting previously unselected package libapache2-mod-php7.3.
(Reading database ... 32879 files and directories currently installed.)
Preparing to unpack .../libapache2-mod-php7.3_7.3.19-1~deb10u1_i386.deb ...
Unpacking libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...
Setting up libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...

Creating config file /etc/php/7.3/apache2/php.ini with new version
Module mpm_event disabled.
Enabling module mpm_prefork.
apache2_switch_mpm Switch to prefork
apache2_invoke: Enable module php7.3
Setting up php7.3 (7.3.19-1~deb10u1) ...
root@ns1:~# apt-get install -y php7.3-zip php7.3-curl
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  imagemagick-6-common libde265-0 libfftw3-double3 libgomp1 libhelf1 liblqr-1-0 libltdl7
  libmagickcore-6.q16-6 libmagickwand-6.q16-6 libnuma1 libpq5 libwebpmux3 libx265-165
  ttf-dejavu-core
Use 'apt autoremove' to remove them.
The following NEW packages will be installed:
  php7.3-curl php7.3-zip
0 upgraded, 2 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/55.3 kB of archives.
After this operation, 231 kB of additional disk space will be used.
Media checker: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]
```

30. Klik **Devices** >> **Optical Drives** >> lalu pilih **debian-10.5.0-i386-DVD-2.iso**.

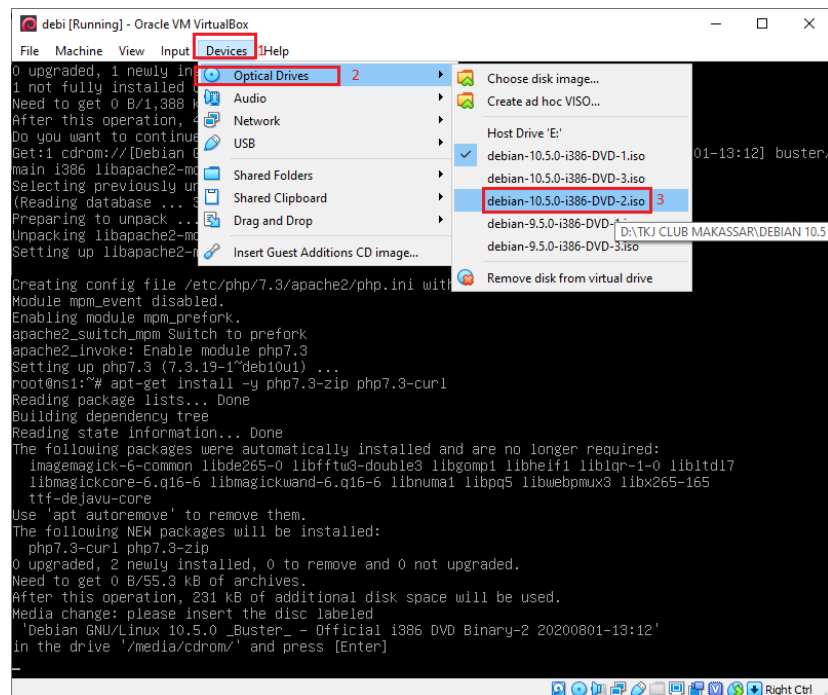

31. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

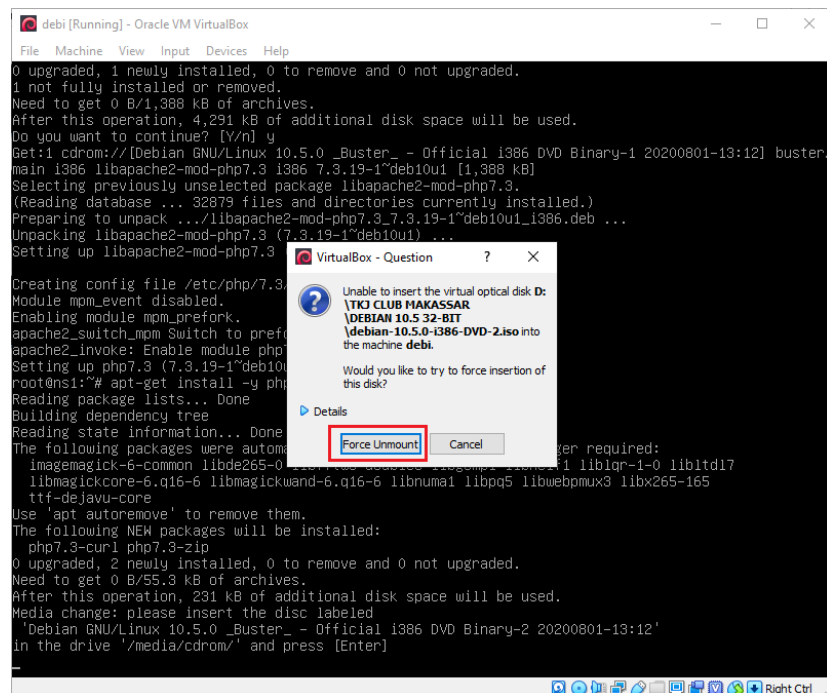

32. Lalu tekan Enter

```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
1 not fully installed or removed.
Need to get 0 B/1,388 kB of archives.
After this operation, 4,291 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster/
main i386 libapache2-mod-php7.3 i386 7.3.19-1~deb10u1 [1,388 kB]
Selecting previously unselected package libapache2-mod-php7.3.
(Reading database ... 32879 files and directories currently installed.)
Preparing to unpack .../libapache2-mod-php7.3_7.3.19-1~deb10u1_i386.deb ...
Unpacking libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...
Setting up libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...

Creating config file /etc/php/7.3/apache2/php.ini with new version
Module mpm_event disabled.
Enabling module mpm_prefork.
apache2_switch_mpm Switch to prefork
apache2_invoke: Enable module php7.3
Setting up php7.3 (7.3.19-1~deb10u1) ...
root@ns1:~# apt-get install -y php7.3-zip php7.3-curl
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  imagemagick-6-common libde265-0 libfftw3-double3 libgomp1 libheif1 liblqr-1-0 libltdl7
  libmagickcore-6.q16-6 libmagickwand-6.q16-6 libnuma1 libpq5 libwebp-mux3 libx265-165
  ttf-dejavu-core
Use 'apt autoremove' to remove them.
The following NEW packages will be installed:
  php7.3-curl php7.3-zip
0 upgraded, 2 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/55.3 kB of archives.
After this operation, 231 kB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]
```

33. Selanjutnya edit file **sshd_config** untuk memberikan izin mengakses port 22, agar bisa menggunakan aplikasi remot kontrol seperti WinSCP, PuTTY, FileZilla, dll. Ketikkan perintah berikut :

nano /etc/ssh/sshd_config >>lalu tekan Enter


```
debi [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
root@ns1:~# apt-get install -y php7.3-zip php7.3-curl
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following packages were automatically installed and are no longer required:
  imagemagick-6-common libde265-0 libfftw3-double3 libgomp1 libheif1 liblqr-1-0 libltdl7
  libmagickcore-6.q16-6 libmagickwand-6.q16-6 libnuma1 libpq5 libwebp-mux3 libx265-165
  ttf-dejavu-core
Use 'apt autoremove' to remove them.
The following NEW packages will be installed:
  php7.3-curl php7.3-zip
0 upgraded, 2 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/55.3 kB of archives.
After this operation, 231 kB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster/
main i386 php7.3-curl i386 7.3.19-1~deb10u1 [32.7 kB]
Get:2 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-2 20200801-13:12] buster/
main i386 php7.3-zip i386 7.3.19-1~deb10u1 [22.7 kB]
Selecting previously unselected package php7.3-curl.
(Reading database ... 32890 files and directories currently installed.)
Preparing to unpack .../php7.3-curl_7.3.19-1~deb10u1_i386.deb ...
Unpacking php7.3-curl (7.3.19-1~deb10u1) ...
Selecting previously unselected package php7.3-zip.
Preparing to unpack .../php7.3-zip_7.3.19-1~deb10u1_i386.deb ...
Unpacking php7.3-zip (7.3.19-1~deb10u1) ...
Setting up php7.3-zip (7.3.19-1~deb10u1) ...

Creating config file /etc/php/7.3/mods-available/zip.ini with new version
Setting up php7.3-curl (7.3.19-1~deb10u1) ...

Creating config file /etc/php/7.3/mods-available/curl.ini with new version
Processing triggers for libapache2-mod-php7.3 (7.3.19-1~deb10u1) ...
root@ns1:~# nano /etc/ssh/sshd_config
```

34. Maka akan tampil seperti tampilan di bawah.

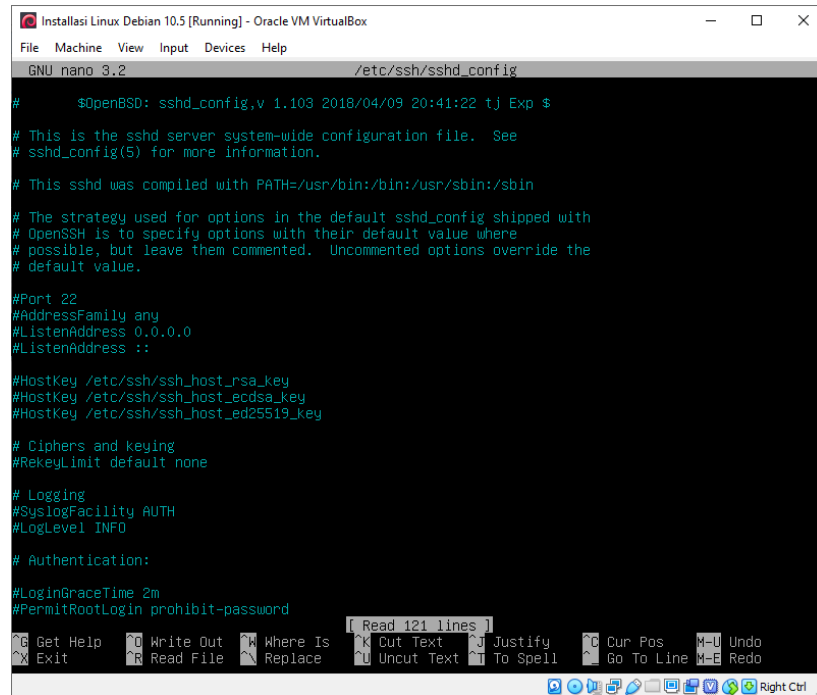

The screenshot shows a terminal window titled "Instalasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox". The terminal is running the GNU nano 3.2 editor, editing the file /etc/ssh/sshd_config. The file content is as follows:

```
# $OpenBSD: sshd_config,v 1.103 2018/04/09 20:41:22 tj Exp $

# This is the sshd server system-wide configuration file. See
# sshd_config(5) for more information.

# This sshd was compiled with PATH=/usr/bin:/bin:/usr/sbin:/sbin

# The strategy used for options in the default sshd_config shipped with
# OpenSSH is to specify options with their default value where
# possible, but leave them commented. Uncommented options override the
# default value.

#Port 22
#AddressFamily any
#ListenAddress 0.0.0.0
#ListenAddress ::

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none


# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
#PermitRootLogin prohibit-password
```

The terminal window also shows a menu bar with options like Get Help, Write Out, Where Is, Cut Text, Justify, Cur Pos, M-U, Undo, Exit, Read File, Replace, Uncut Text, To Spell, Go To Line, M-E, Redo, and a status bar at the bottom with icons and "Right Ctrl".

35. Kemudian cari script **#PermitRootLogin prohibit-password**.

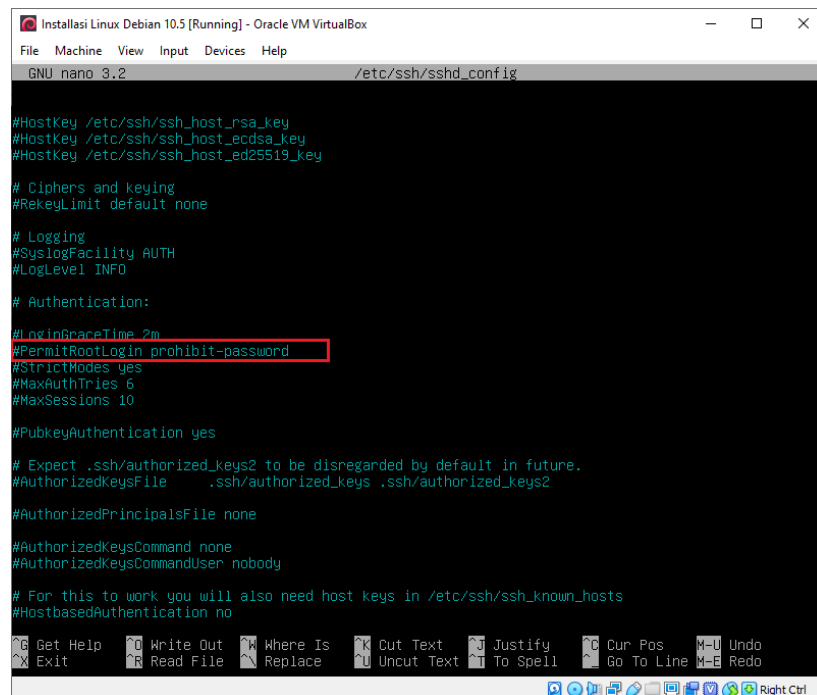

The screenshot shows the same terminal window as before, but now the line **#PermitRootLogin prohibit-password** is highlighted with a red box. The file content is as follows:

```
#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
#PermitRootLogin prohibit-password
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

#PubkeyAuthentication yes

# Expect .ssh/authorized_keys2 to be disregarded by default in future.
#AuthorizedKeysFile .ssh/authorized_keys .ssh/authorized_keys2

#AuthorizedPrincipalsFile none


#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody

# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no
```

The terminal window also shows the same menu bar and status bar as before.

36. Ubah script berikut :

#PermitRootLogin prohibit-password menjadi **PermitRootLogin yes**

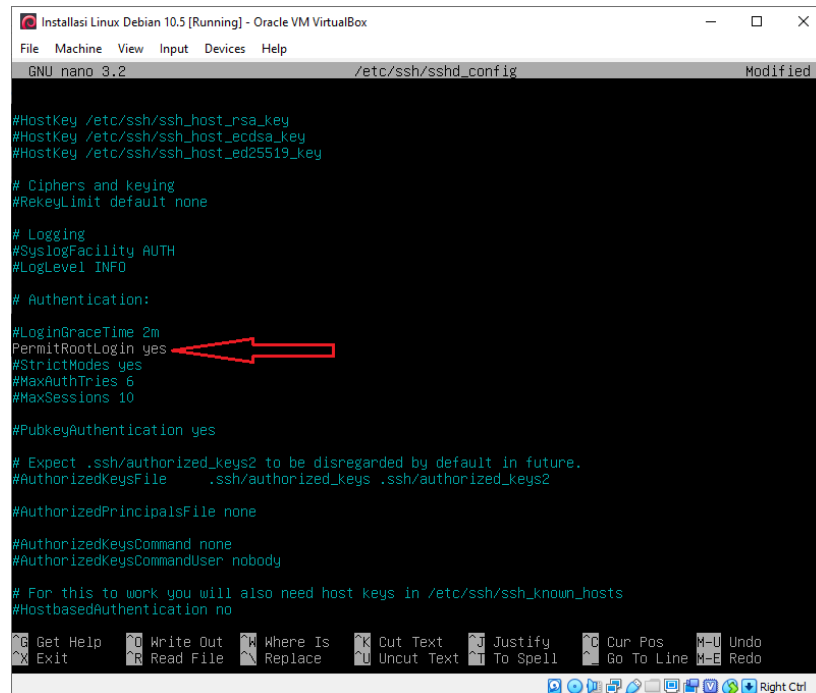

```
GNU nano 3.2 /etc/ssh/sshd_config Modified

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:
#LoginGraceTime 2m
PermitRootLogin yes
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

#PubkeyAuthentication yes

# Expect .ssh/authorized_keys2 to be disregarded by default in future.
#AuthorizedKeysFile .ssh/authorized_keys .ssh/authorized_keys2

#AuthorizedPrincipalsFile none

#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody


# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no

Get Help Write Out Where Is Cut Text Justify Cur Pos M-U Undo
Exit Read File Replace Uncut Text T To Spell Go To Line M-E Redo
Right Ctrl
```

37. Lalu save dengan cara menekan tombol kombinasi **Ctrl + X** lalu tekan tombol **Y** kemudian **Enter**.

38. Selanjutnya, restart **ssh** menggunakan perintah berikut :

/etc/init.d/ssh restart >> *lalu tekan Enter*

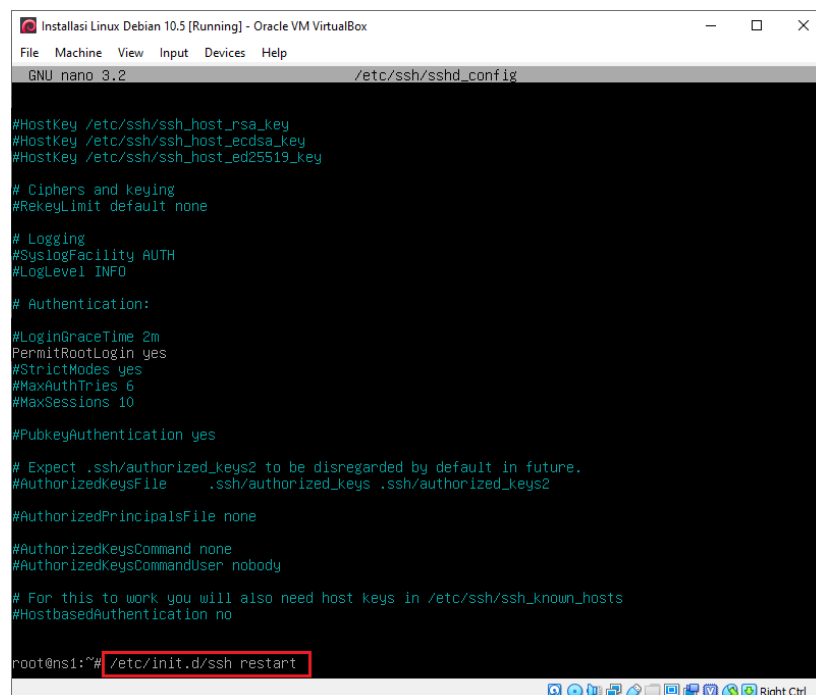

```
GNU nano 3.2 /etc/ssh/sshd_config Modified

#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:
#LoginGraceTime 2m
PermitRootLogin yes
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

#PubkeyAuthentication yes

# Expect .ssh/authorized_keys2 to be disregarded by default in future.
#AuthorizedKeysFile .ssh/authorized_keys .ssh/authorized_keys2


#AuthorizedPrincipalsFile none

#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody

# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no

root@ns1:~# /etc/init.d/ssh restart
```

39. Pastikan hasilnya **OK**.

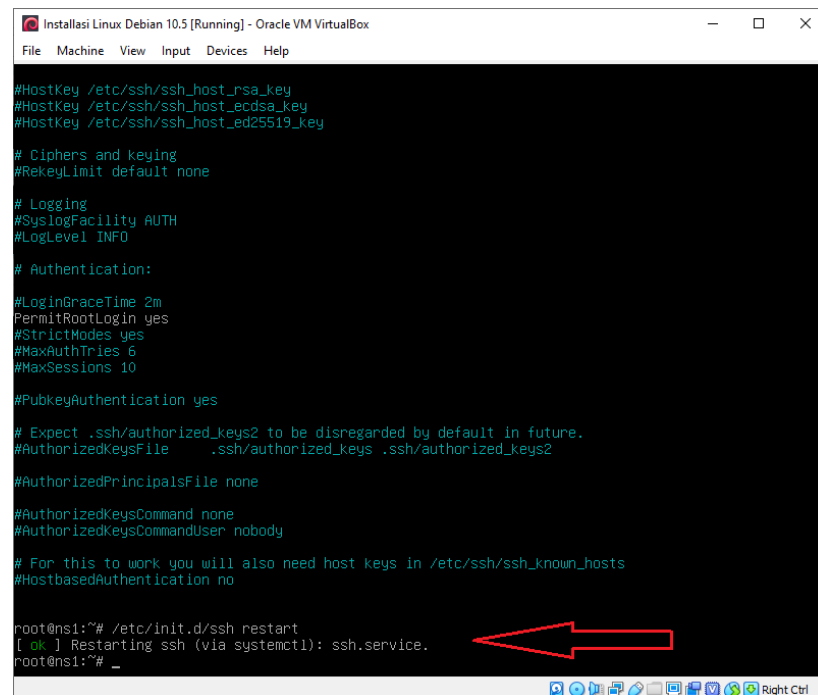

```
#HostKey /etc/ssh/ssh_host_rsa_key
#HostKey /etc/ssh/ssh_host_ecdsa_key
#HostKey /etc/ssh/ssh_host_ed25519_key

# Ciphers and keying
#RekeyLimit default none

# Logging
#SyslogFacility AUTH
#LogLevel INFO

# Authentication:

#LoginGraceTime 2m
PermitRootLogin yes
#StrictModes yes
#MaxAuthTries 6
#MaxSessions 10

#PubkeyAuthentication yes

# Expect .ssh/authorized_keys2 to be disregarded by default in future.
#AuthorizedKeysFile .ssh/authorized_keys .ssh/authorized_keys2


#AuthorizedPrincipalsFile none

#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody


# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no

root@ns1:~# /etc/init.d/ssh restart
[ OK ] Restarting ssh (via systemctl): ssh.service.
root@ns1:~# _
```

40. Selanjutnya, cari aplikasi **WinSCP**, lalu **buka/open**.

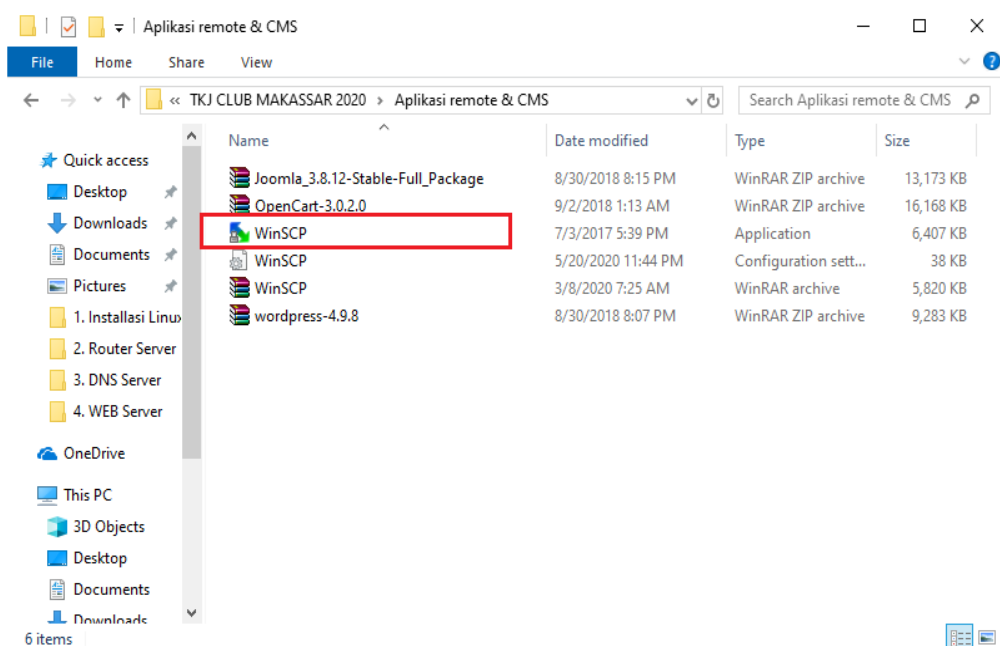

41. Maka akan muncul tampilan seperti berikut.

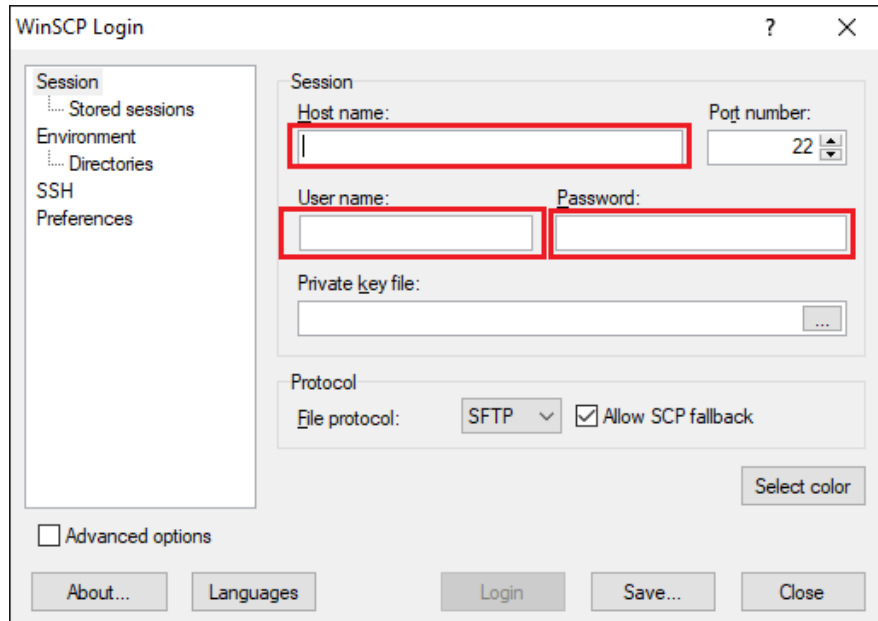


The WinSCP Login dialog box is shown with the following fields and options:

- Session:**
 - Host name: (empty text box)
 - Port number: 22 (spin box)
 - User name: (empty text box)
 - Password: (empty text box)
 - Private key file: (empty text box with browse button)
- Protocol:**
 - File protocol: SFTP (dropdown menu)
 - ☒ Allow SCP fallback
- Buttons:** About..., Languages, Login, Save..., Close
- Advanced options:** ☐ Advanced options
- Select color:** (button)

42. Kemudian isi **Host name**, **User name** dan **Password** berikut :

- **Host name** : IP WAN>NamaDomain
- **User name** : **root**
- **Password** : password rootnya

43. Setelah itu klik **Login**.

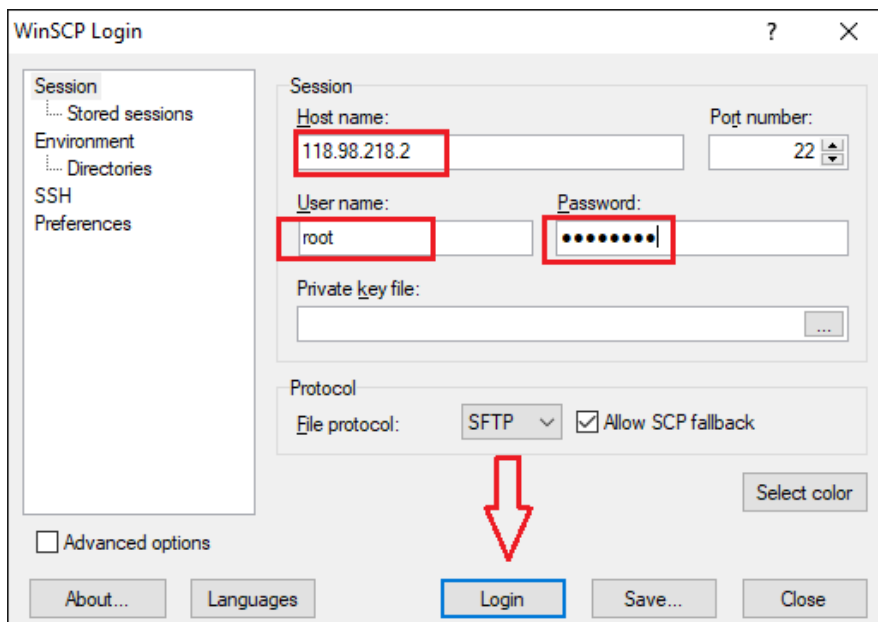


The WinSCP Login dialog box is shown with the following fields and options:

- Session:**
 - Host name: 118.98.218.2
 - Port number: 22
 - User name: root
 - Password: (masked with dots)
 - Private key file: (empty text box with browse button)
- Protocol:**
 - File protocol: SFTP
 - ☒ Allow SCP fallback
- Buttons:** About..., Languages, Login, Save..., Close
- Advanced options:** ☐ Advanced options
- Select color:** (button)


A red arrow points to the **Login** button.

44. Maka akan muncul tampilan seperti gambar di bawah. Klik **Update/yes**.

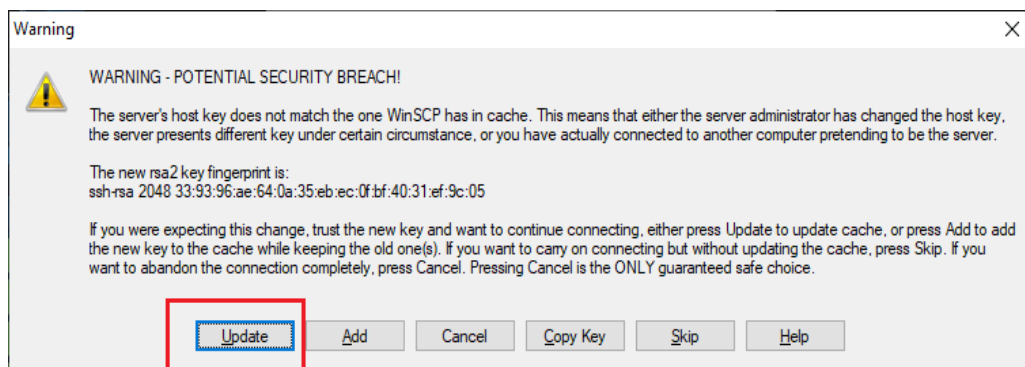


45. Perhatikan gambar di bawah. Di sini ada 2 bagian, yang sebelah kiri adalah partisi Windows sedangkan yang sebelah kanan adalah partisi linux.


46. Klik tanda ▼ seperti gambar di bawah.

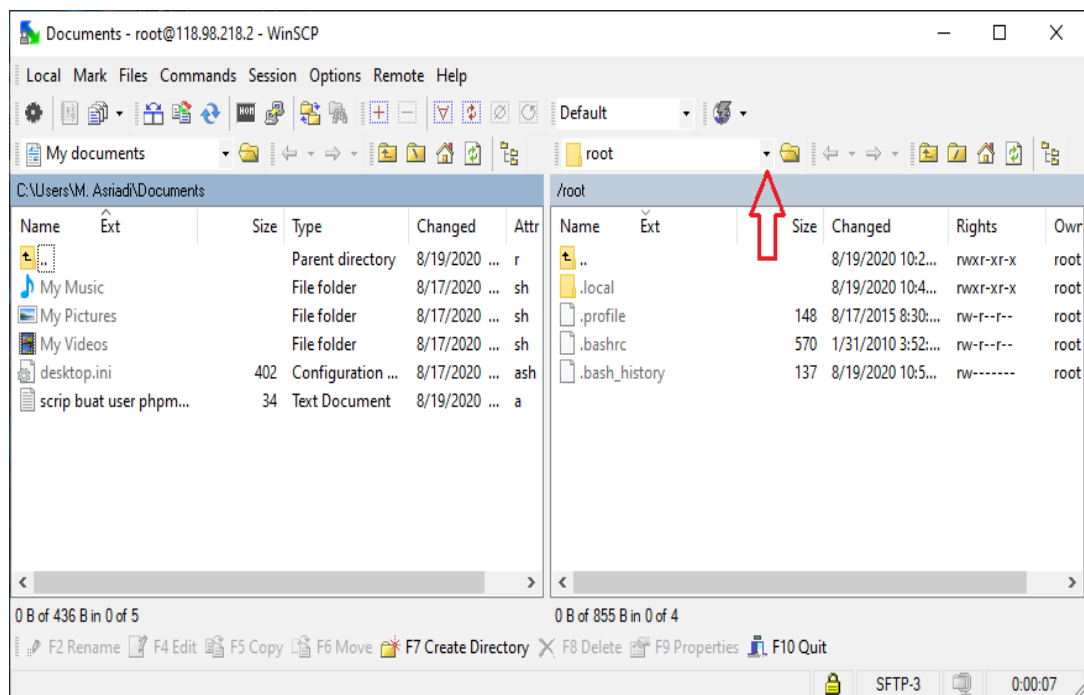


47. Klik `/<root>`.

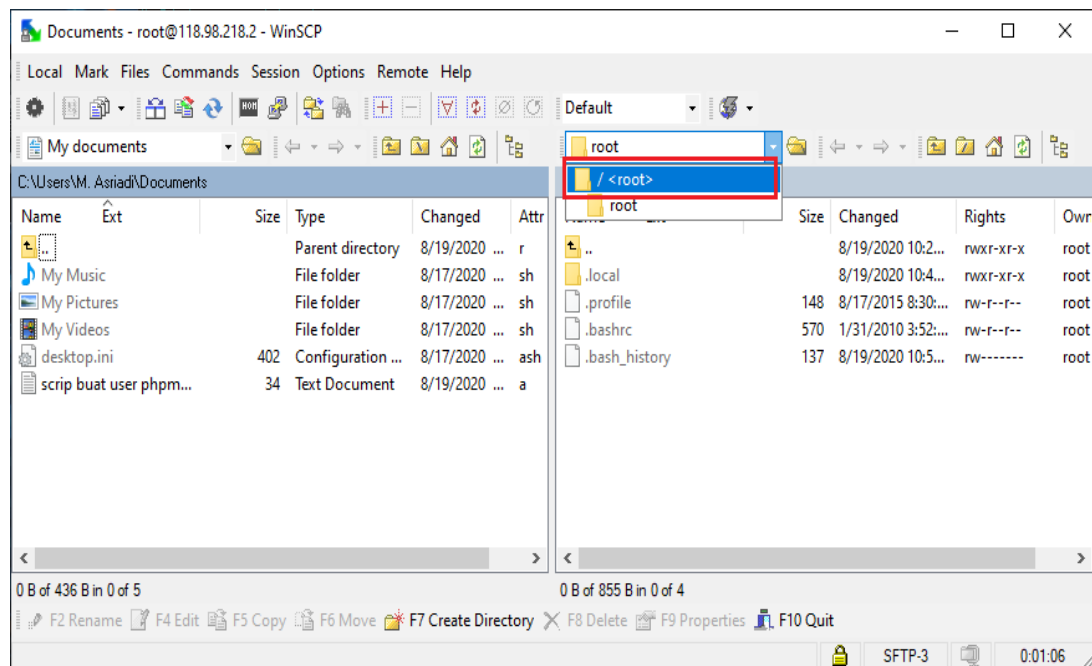


48. Klik Directory/Folder `var`.

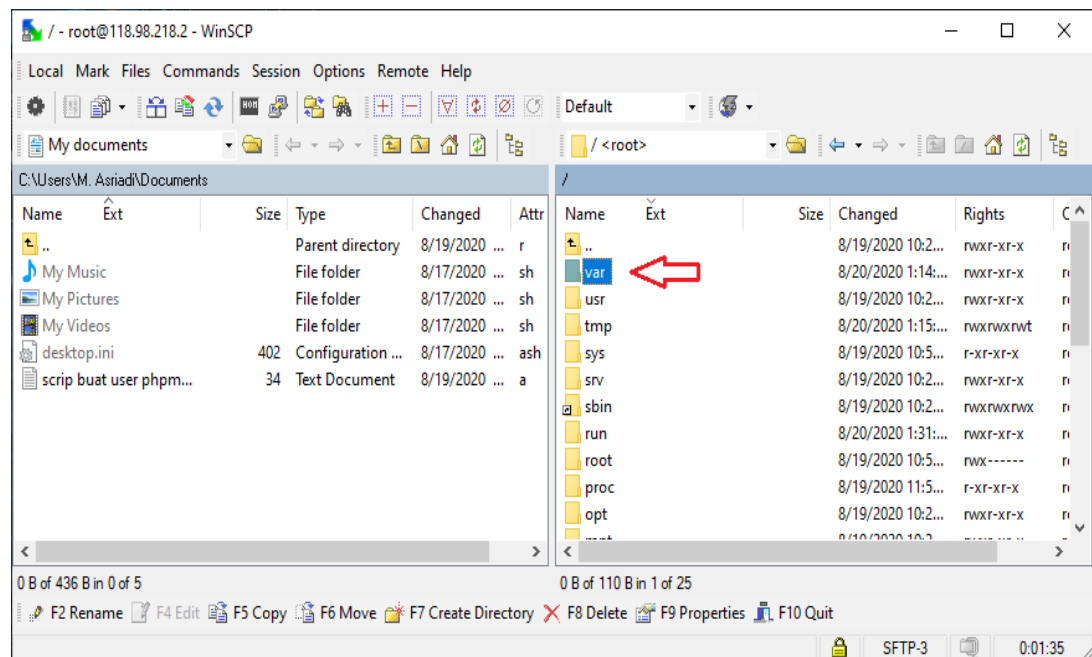


49. Kemudian klik Directory/Folder **www**.

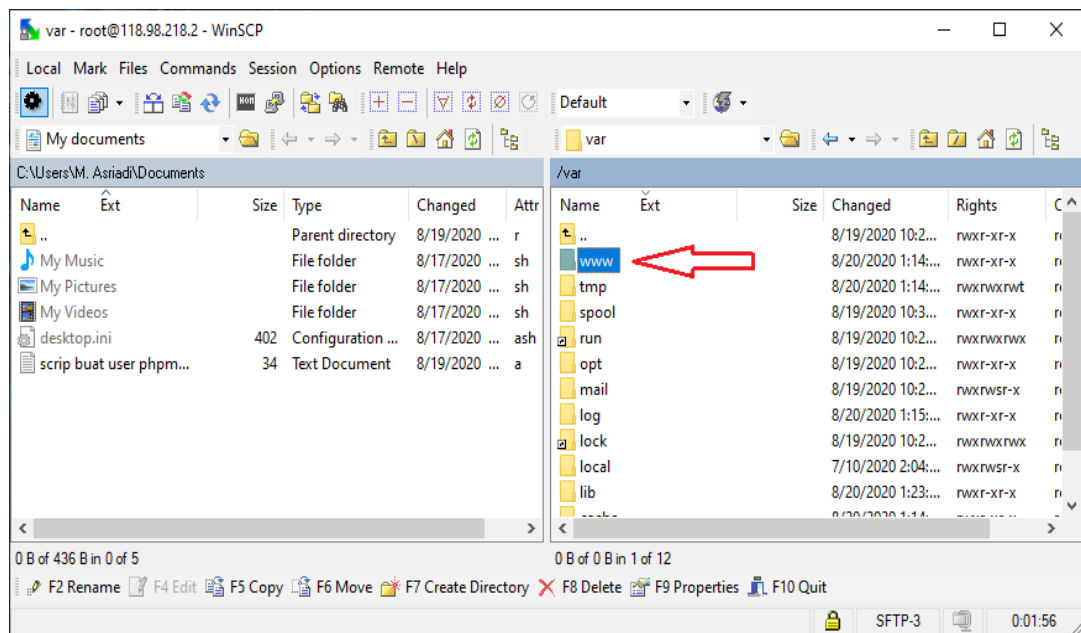


50. Lalu klik Directory/Folder **html**.

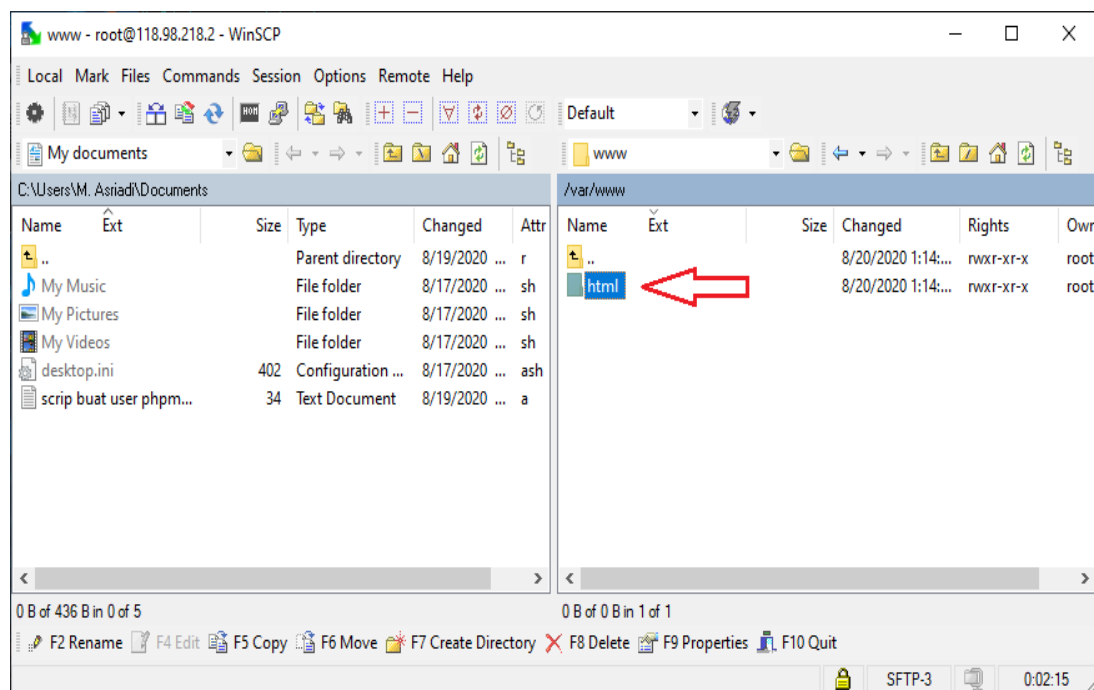


51. Pastikan seperti gambar di bawah.

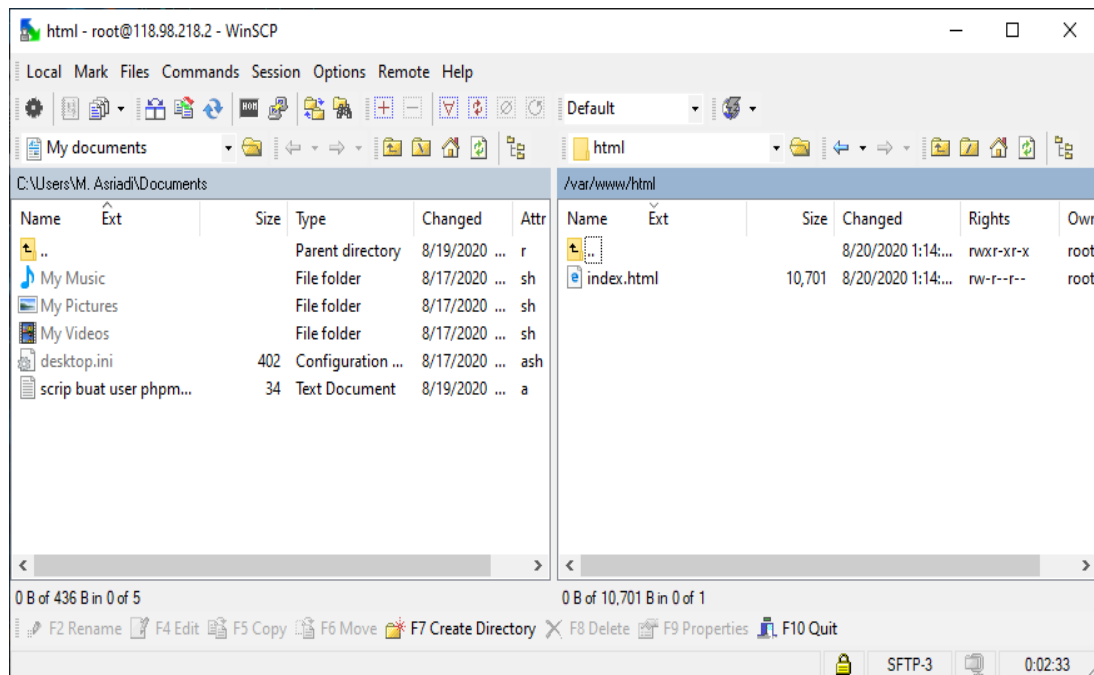


52. Klik tanda ▼ seperti gambar di bawah untuk mencari file aplikasi **phpMyAdmin** yang nantinya akan di salin ke partisi Linux .

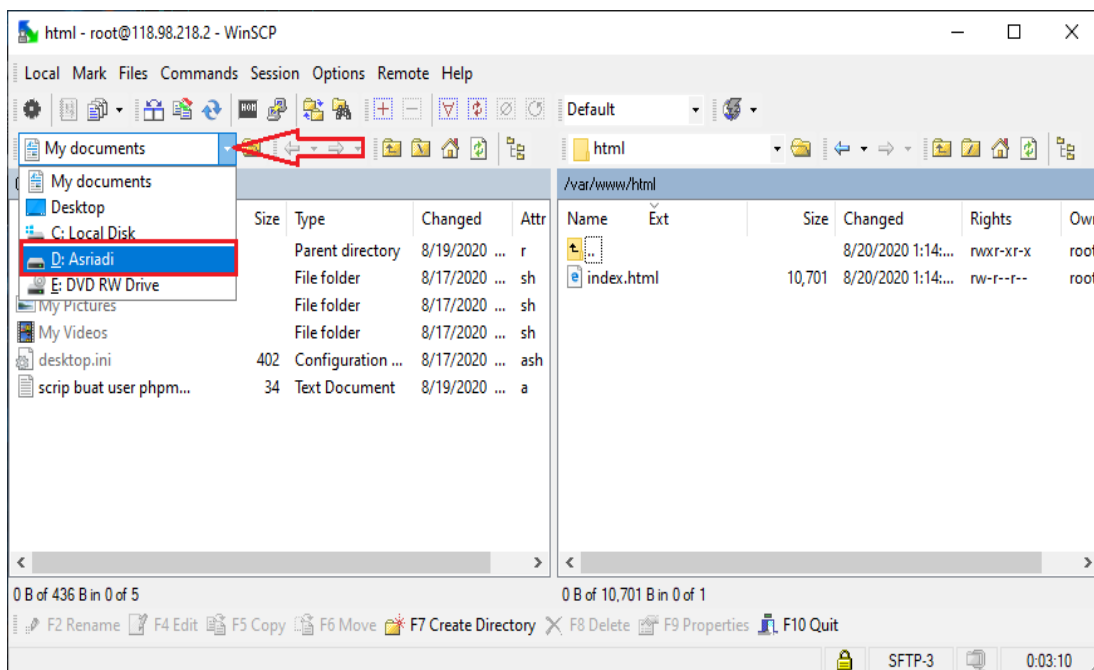


53. Pastikan sudah menyediakan sebelumnya file aplikasi **phpMyAdmin** di komputer atau laptop.

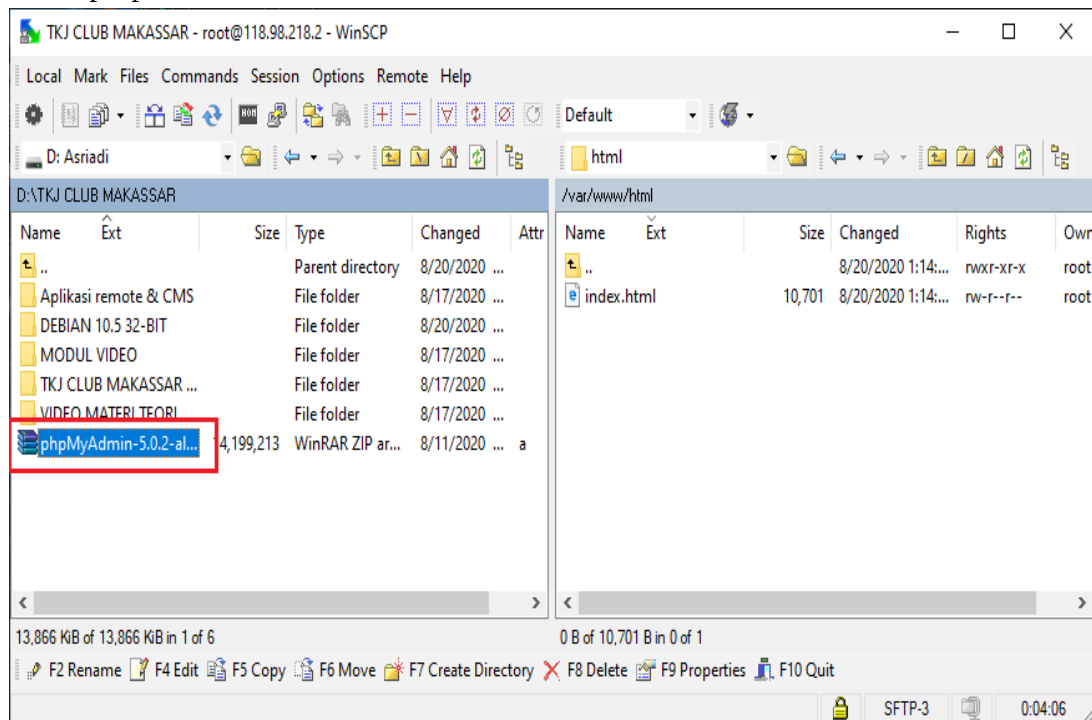


54. Lalu salina tau copy file **phpMyAdmin** ke dalam directory/folder **var/www/html** pada partisi Linux.

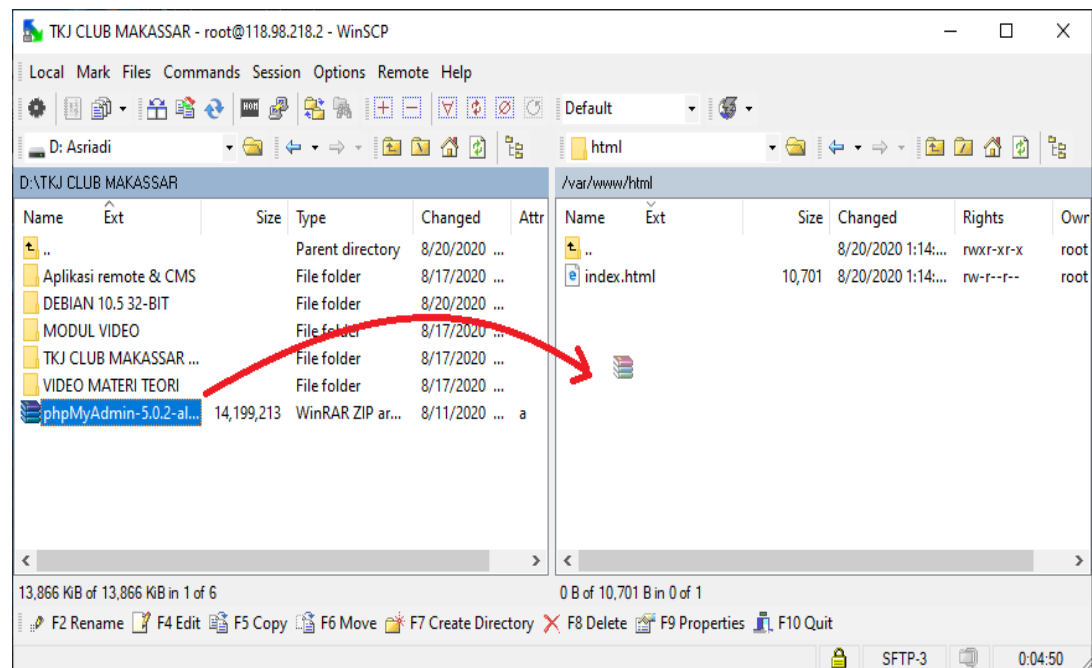


55. Jika tampil seperti gambar di bawah, klik **Copy**.

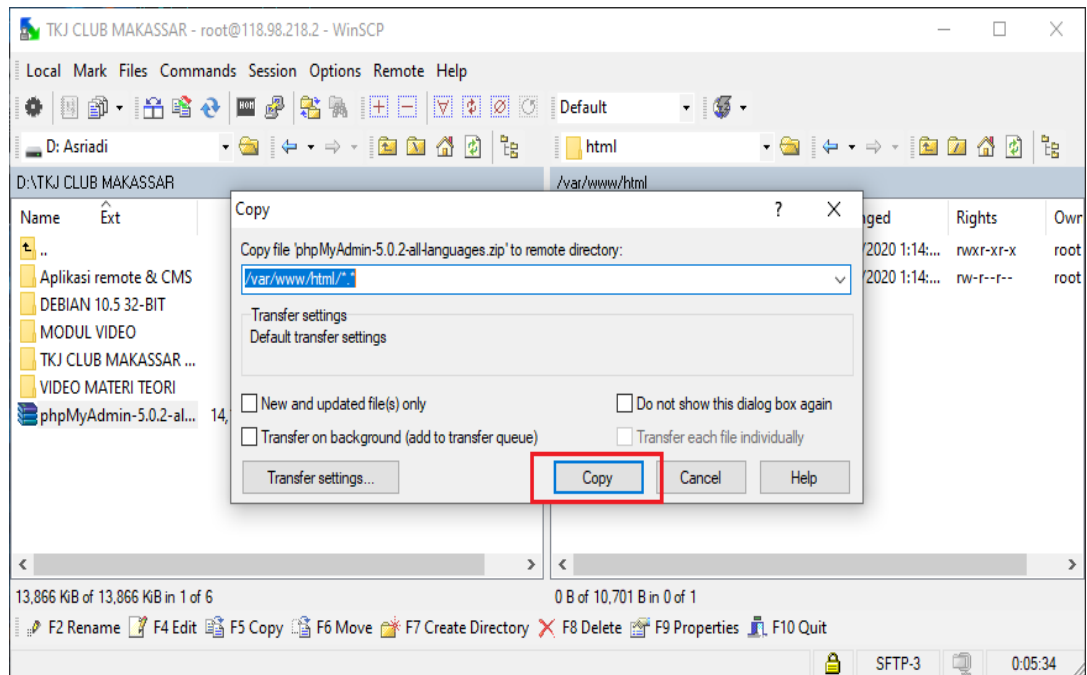

56. Tunggu sampai proses penyalinannya selesai.

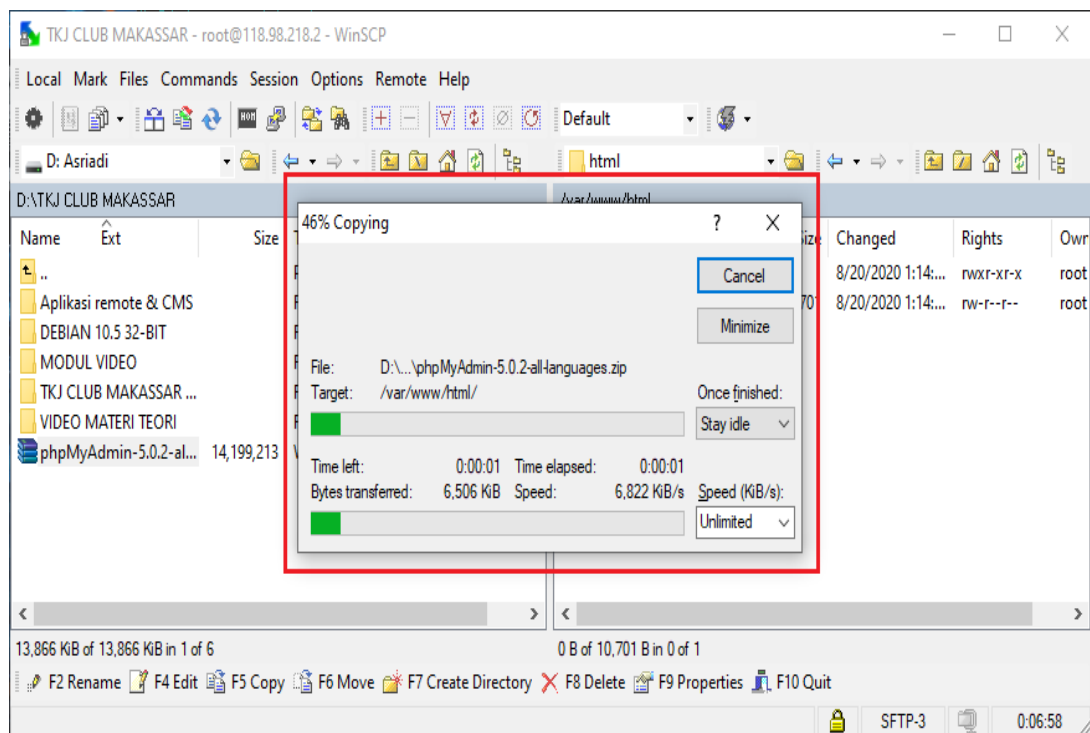


57. Pastikan file aplikasi **phpMyAdmin** telah tercopy.

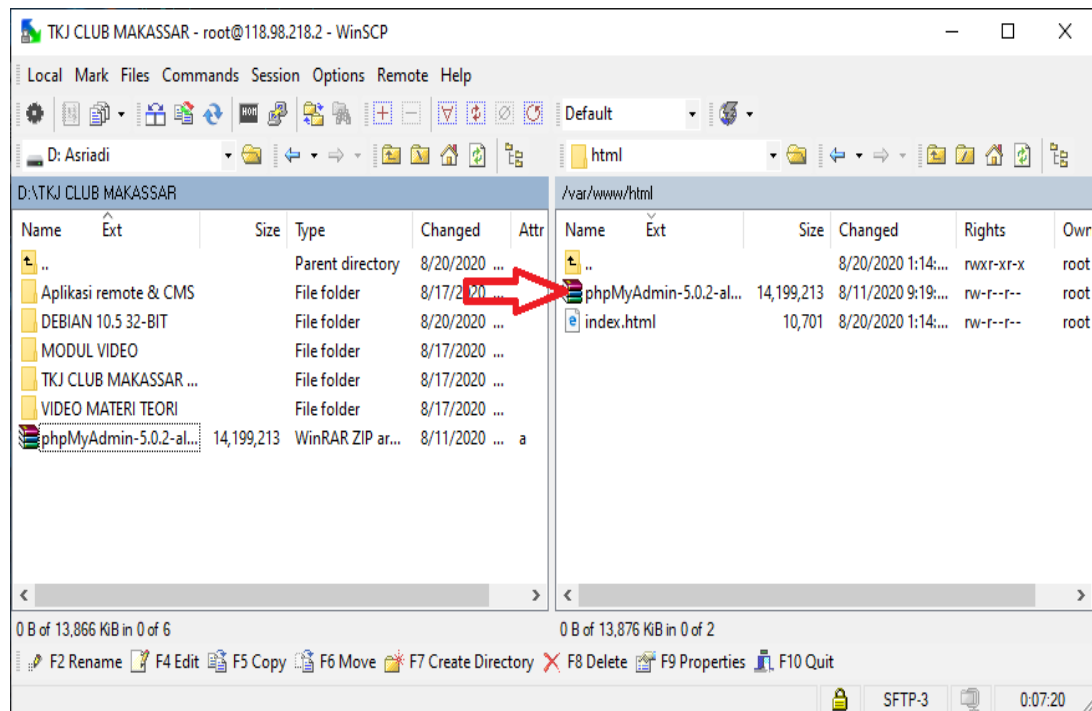


58. Selanjutnya install paket aplikasi **unzip** yang di gunakan untuk meng-Extract file **phpMyAdmin**. Masukkan perintah berikut :

apt-get install -y unzip >> lalu tekan Enter

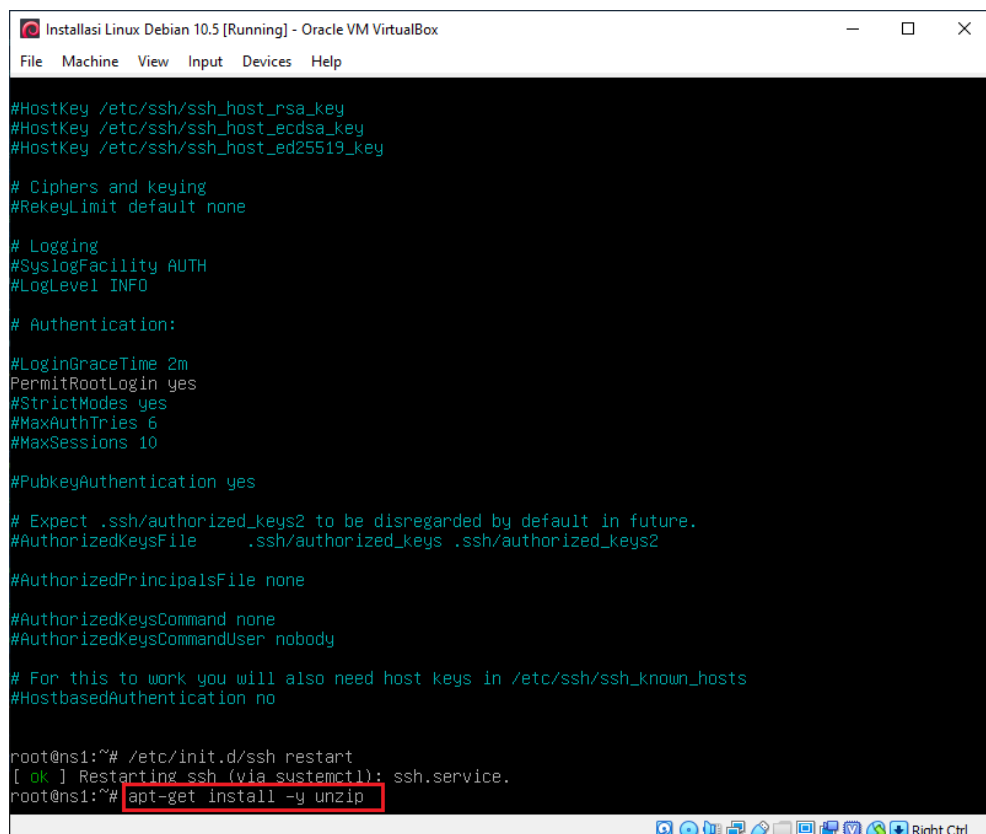


59. Jika tampil seperti gambar di bawah, jangan dulu di Enter. Masukkan terlebih dahulu DVD sesuai yang di minta. Masukkan DVD Binary-1 sesuai permintaan.

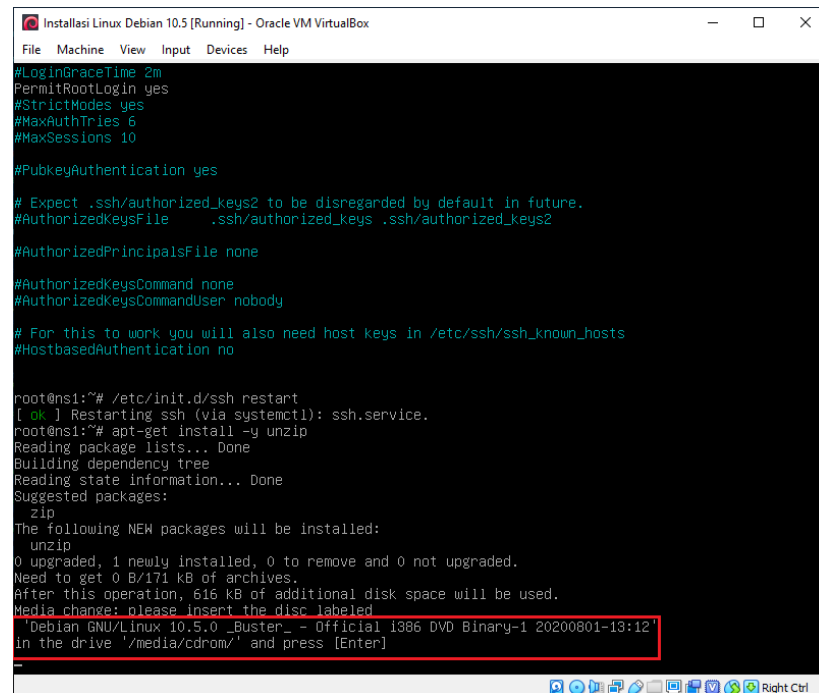


```
root@ns1:~# /etc/init.d/ssh restart
[ ok ] Restarting ssh (via systemctl): ssh.service.
root@ns1:~# apt-get install -y unzip
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  zip
The following NEW packages will be installed:
  unzip
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/171 kB of archives.
After this operation, 616 kB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]
```


60. Klik Devices >> Optical Drives >> lalu pilih debian-10.5.0-i386-DVD-1.iso.

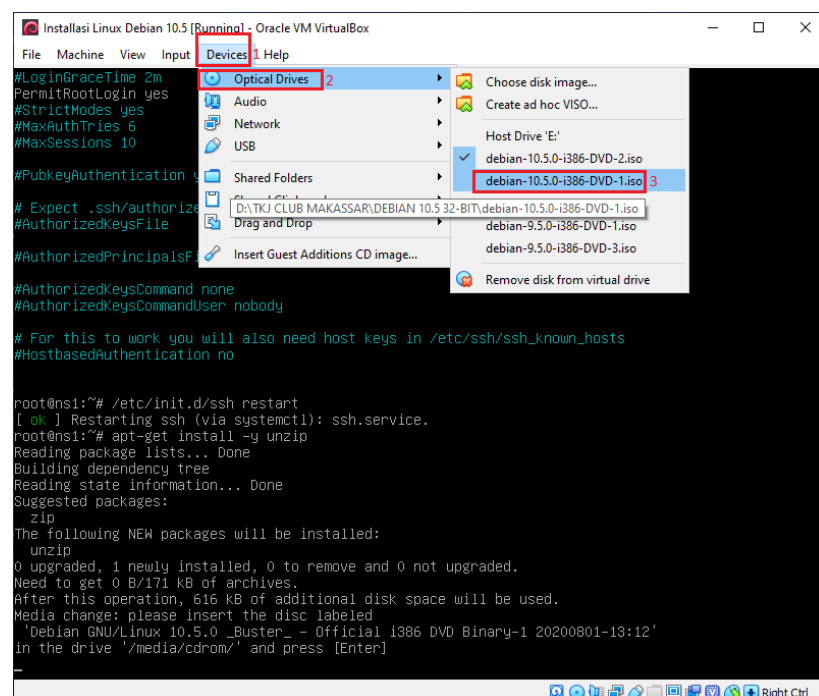

61. Jika tampil seperti gambar di bawah. Klik **Force Unmount**.

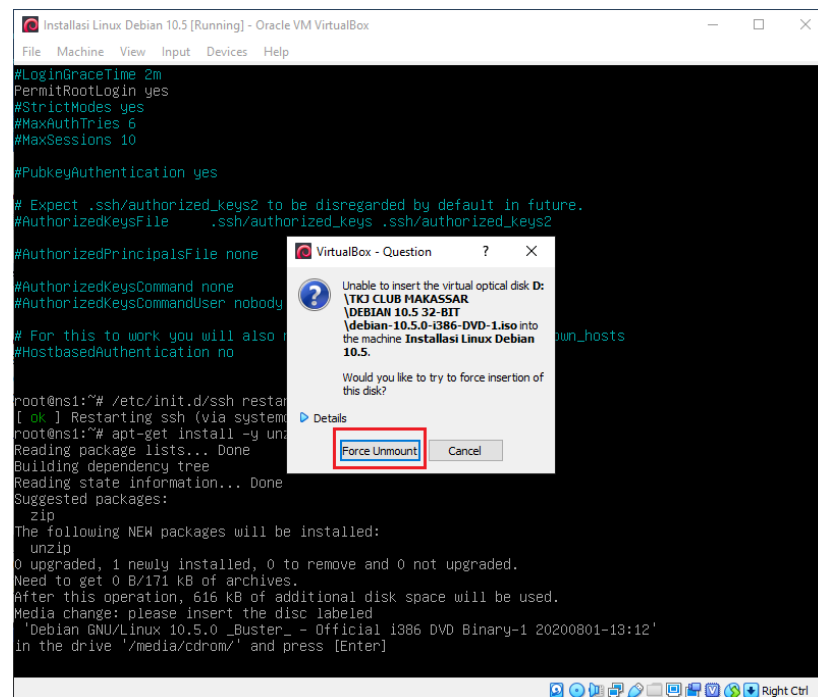


62. Lalu tekan Enter.

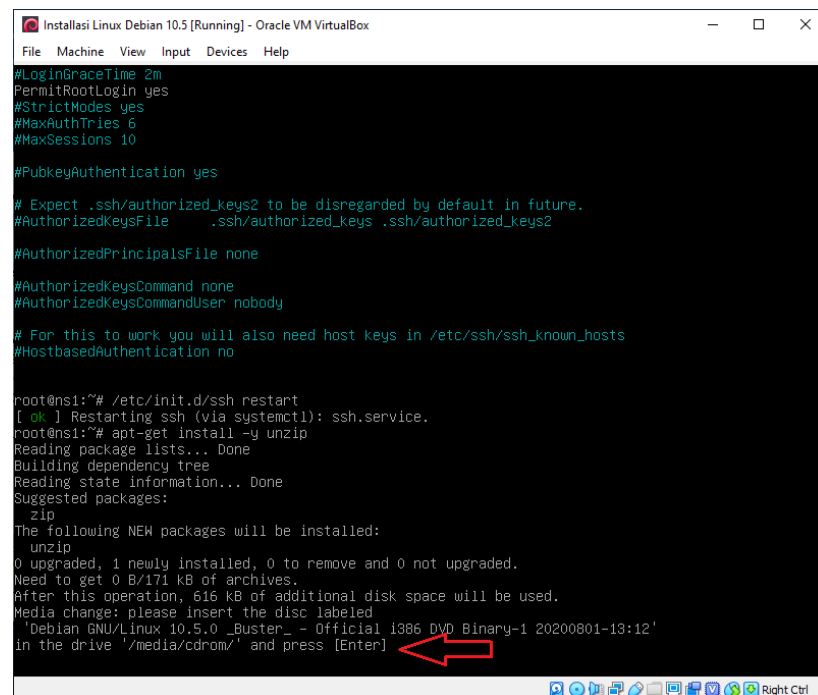

63. Setelah selesai menginstall pakatnya, Langkah selanjutnya yaitu pindah ke directory **html** dengan cara masukkan perintah berikut :

cd /var/www/html >> *lalu tekan Enter*

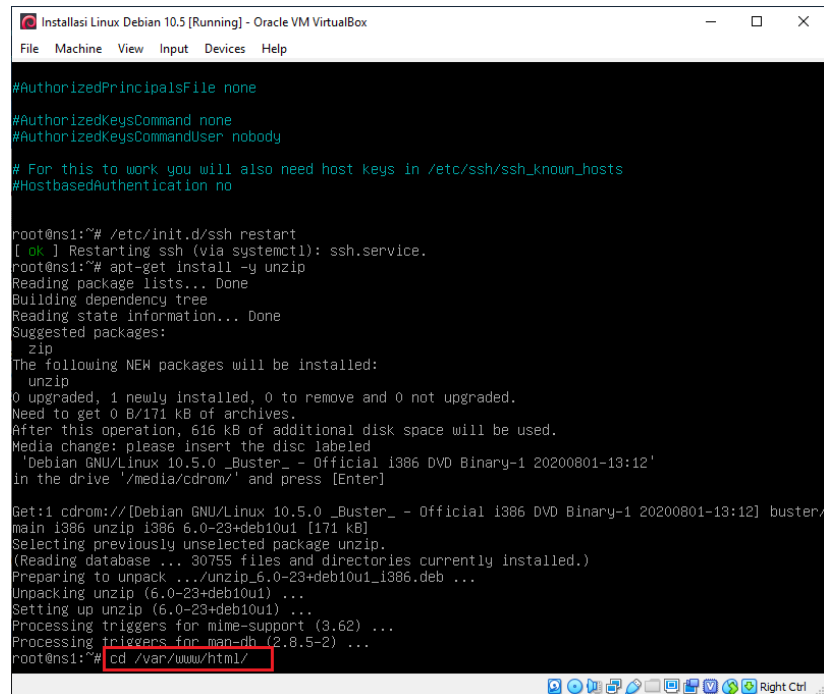

```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help

#AuthorizedPrincipalsFile none
#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody


# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no

root@ns1:~# /etc/init.d/ssh restart
[ OK ] Restarting ssh (via systemctl): ssh.service.
root@ns1:~# apt-get install -y unzip
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  zip
The following NEW packages will be installed:
  unzip
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/171 kB of archives.
After this operation, 616 kB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster/
main i386 unzip i386 6.0-23+deb10u1 [171 kB]
Selecting previously unselected package unzip.
(Reading database ... 30755 files and directories currently installed.)
Preparing to unpack .../unzip_6.0-23+deb10u1_i386.deb ...
Unpacking unzip (6.0-23+deb10u1) ...
Setting up unzip (6.0-23+deb10u1) ...
Processing triggers for mime-support (3.62) ...
Processing triggers for man-db (2.8.5-2) ...
root@ns1:~# cd /var/www/html/
```

64. Masukkan perintah berikut untuk meng-Extract atau meng-Unzip file aplikasi **phpMyAdmin**.

unzip php ➡ *tekan tombol Tab*

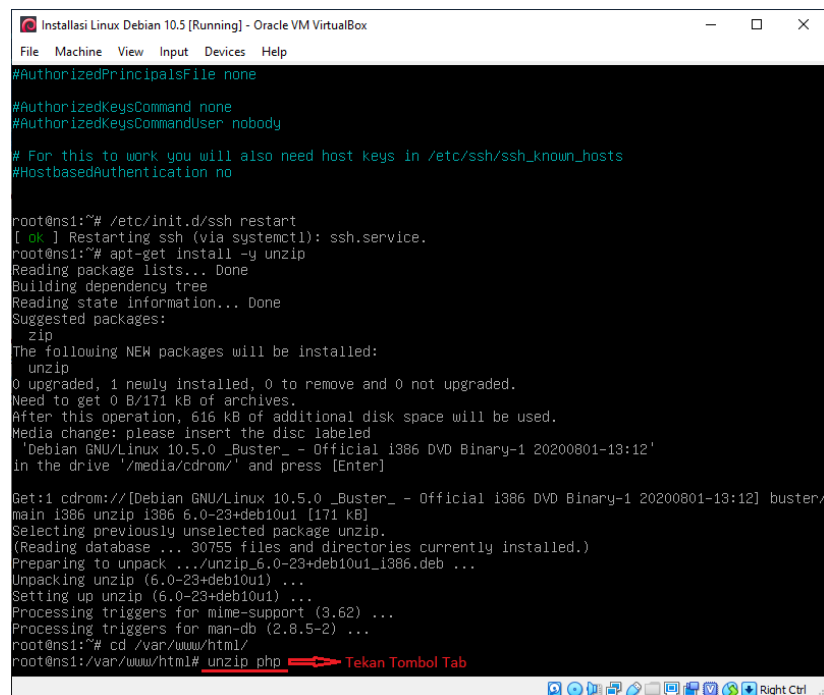

```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help


#AuthorizedPrincipalsFile none
#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody

# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no

root@ns1:~# /etc/init.d/ssh restart
[ OK ] Restarting ssh (via systemctl): ssh.service.
root@ns1:~# apt-get install -y unzip
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  zip
The following NEW packages will be installed:
  unzip
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/171 kB of archives.
After this operation, 616 kB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster/
main i386 unzip i386 6.0-23+deb10u1 [171 kB]
Selecting previously unselected package unzip.
(Reading database ... 30755 files and directories currently installed.)
Preparing to unpack .../unzip_6.0-23+deb10u1_i386.deb ...
Unpacking unzip (6.0-23+deb10u1) ...
Setting up unzip (6.0-23+deb10u1) ...
Processing triggers for mime-support (3.62) ...
Processing triggers for man-db (2.8.5-2) ...
root@ns1:~# cd /var/www/html/
root@ns1:/var/www/html# unzip php ➡ Tekan Tombol Tab
```

65. Setelah menekan tombol **Tab**, pastikan muncul kelanjutan nama filenya seperti gambar di bawah. Kalau sudah benar lalu Enter. “*Tunggu sampai proses unzipnya selesai*”.

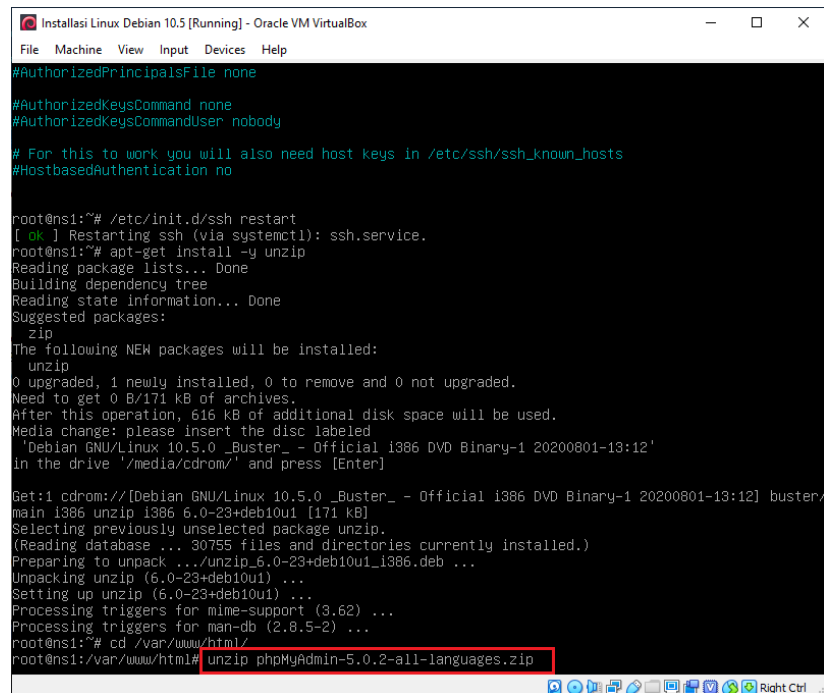

```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help

#AuthorizedPrincipalsFile none

#AuthorizedKeysCommand none
#AuthorizedKeysCommandUser nobody


# For this to work you will also need host keys in /etc/ssh/ssh_known_hosts
#HostbasedAuthentication no

root@ns1:~# /etc/init.d/ssh restart
[ OK ] Restarting ssh (via systemctl): ssh.service.
root@ns1:~# apt-get install -y unzip
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  zip
The following NEW packages will be installed:
  unzip
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/171 kB of archives.
After this operation, 616 kB of additional disk space will be used.
Media change: please insert the disc labeled
'Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12'
in the drive '/media/cdrom/' and press [Enter]

Get:1 cdrom://[Debian GNU/Linux 10.5.0 _Buster_ - Official i386 DVD Binary-1 20200801-13:12] buster/
main i386 unzip i386 6.0-23+deb10u1 [171 kB]
Selecting previously unselected package unzip.
(Reading database ... 30755 files and directories currently installed.)
Preparing to unpack .../unzip_6.0-23+deb10u1_i386.deb ...
Unpacking unzip (6.0-23+deb10u1) ...
Setting up unzip (6.0-23+deb10u1) ...
Processing triggers for mime-support (3.62) ...
Processing triggers for man-db (2.8.5-2) ...
root@ns1:~# cd /var/www/html/
root@ns1:/var/www/html# unzip phpMyAdmin-5.0.2-all-languages.zip
```

66. Langkah selanjutnya yaitu mengubah nama Folder/Directory dari **phpMyAdmin-5.0.2-all-languages** menjadi **phpmyadmin**. Menggunakan perintah berikut :

mv phpMyAdmin-5.0.2-all-languages phpmyadmin >>lalu Enter

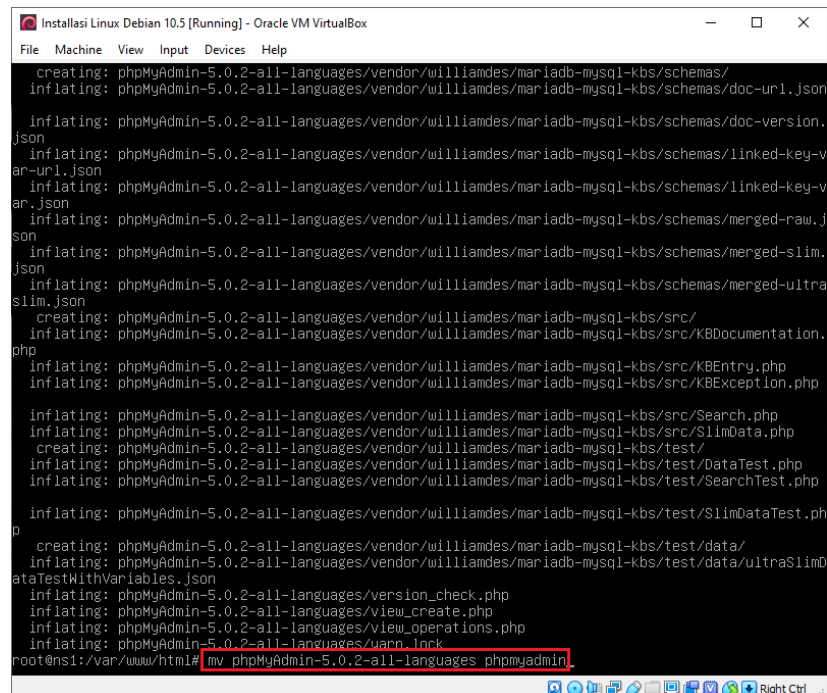

```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help


creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/doc-un1.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/doc-version.
json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar-un1.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-raw.j
son
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-slim.
json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-ultra
slim.json
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBDocumentation.
php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBEntry.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBException.php

inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/Search.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/SlimData.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/DataTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SearchTest.php

inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SlimDataTest.ph
p
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/ultraSlimD
ataTestWithVariables.json
inflating: phpMyAdmin-5.0.2-all-languages/version_check.php
inflating: phpMyAdmin-5.0.2-all-languages/view_create.php
inflating: phpMyAdmin-5.0.2-all-languages/view_operations.php
inflating: phpMyAdmin-5.0.2-all-languages/upgrade_lock
root@ns1:/var/www/html# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
```

67. Selanjutnya memberikan izin akses pada folder/directory **phpmyadmin**. menggunakan perintah berikut :

```
# chmod 755 -R /var/www/html/phpmyadmin >>lalu Enter
```

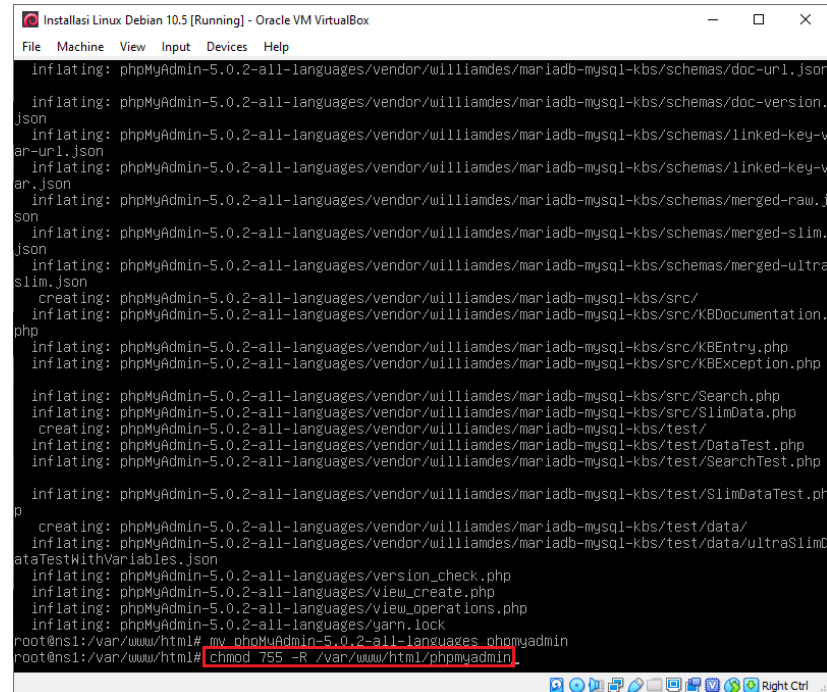


```
Installing Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help

inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/doc-url1.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/doc-version.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-value-url1.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-value-url2.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-raw.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-slim.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-ultra-slim.json
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBDocumentation.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBEntry.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBException.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/Search.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/SlimData.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/DataTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SearchTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SlimDataTest.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/ultraSlimDataTestWithVariables.json
inflating: phpMyAdmin-5.0.2-all-languages/version_check.php
inflating: phpMyAdmin-5.0.2-all-languages/view_create.php
inflating: phpMyAdmin-5.0.2-all-languages/view_operations.php
inflating: phpMyAdmin-5.0.2-all-languages/yarn.lock
root@ns1:/var/www/html# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
root@ns1:/var/www/html# chmod 755 -R /var/www/html/phpmyadmin
```

68. Selanjutnya membuat user admin yang di gunakan untuk login di phpMyAdmin. ketikkan perintah berikut :

```
# mysqladmin -u root password 12345678 >>lalu Enter
```

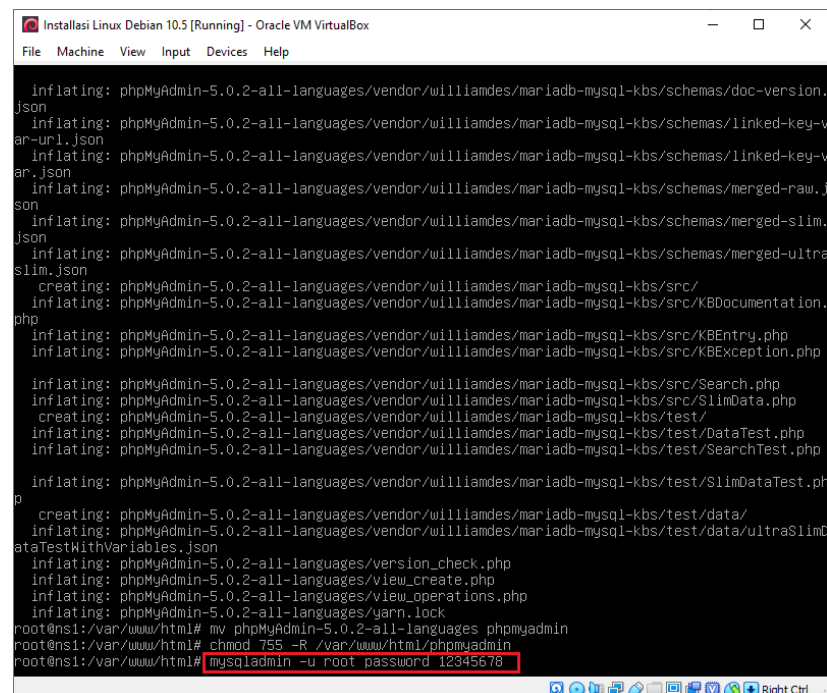

```
Installing Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help

inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/doc-version.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-value-url1.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-value-url2.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-raw.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-slim.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-ultra-slim.json
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBDocumentation.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBEntry.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBException.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/Search.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/SlimData.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/DataTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SearchTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SlimDataTest.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/ultraSlimDataTestWithVariables.json
inflating: phpMyAdmin-5.0.2-all-languages/version_check.php
inflating: phpMyAdmin-5.0.2-all-languages/view_create.php
inflating: phpMyAdmin-5.0.2-all-languages/view_operations.php
inflating: phpMyAdmin-5.0.2-all-languages/yarn.lock
root@ns1:/var/www/html# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
root@ns1:/var/www/html# chmod 755 -R /var/www/html/phpmyadmin
root@ns1:/var/www/html# mysqladmin -u root password 12345678
```

69. Kemudian restart **mysql**. Ketikkan perintah berikut

/etc/init.d/mysql restart >>lalu tekan *Enter*


```
Instalasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/doc-version.
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar-url.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-raw.j
son
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-slim.
json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-ultra
slim.json
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBDocumentation.
php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBEntry.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBException.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/Search.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/SlimData.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/DataTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SearchTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SlimDataTest.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/ultraSlim0
ataTestWithVariables.json
inflating: phpMyAdmin-5.0.2-all-languages/version_check.php
inflating: phpMyAdmin-5.0.2-all-languages/view_create.php
inflating: phpMyAdmin-5.0.2-all-languages/view_operations.php
inflating: phpMyAdmin-5.0.2-all-languages/yarn.lock
root@ns1:/var/www/html# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
root@ns1:/var/www/html# chmod 755 -R /var/www/html/phpmyadmin
root@ns1:/var/www/html# mysqladmin -u root password 12345678
root@ns1:/var/www/html# /etc/init.d/mysql restart
```

70. Pastikan hasilnya OK.

```
Instalasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar-url.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-raw.j
son
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-slim.
json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-ultra
slim.json
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBDocumentation.
php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBEntry.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBException.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/Search.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/SlimData.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/DataTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SearchTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SlimDataTest.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/ultraSlim0
ataTestWithVariables.json
inflating: phpMyAdmin-5.0.2-all-languages/version_check.php
inflating: phpMyAdmin-5.0.2-all-languages/view_create.php
inflating: phpMyAdmin-5.0.2-all-languages/view_operations.php
inflating: phpMyAdmin-5.0.2-all-languages/yarn.lock
root@ns1:/var/www/html# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
root@ns1:/var/www/html# chmod 755 -R /var/www/html/phpmyadmin
root@ns1:/var/www/html# mysqladmin -u root password 12345678
root@ns1:/var/www/html# /etc/init.d/mysql restart
[ OK ] Restarting mysql (via systemctl): mysql.service.
root@ns1:/var/www/html#
```

71. Install lagi paket aplikasi **nmap** agar bisa menggunakan perintah **nmap** yang berfungsi untuk mengecek port aplikasi yang aktif atau yang terpasang di system operasi. Ketikkan perintah berikut :

apt-get install -y nmap >>lalu tekan Enter

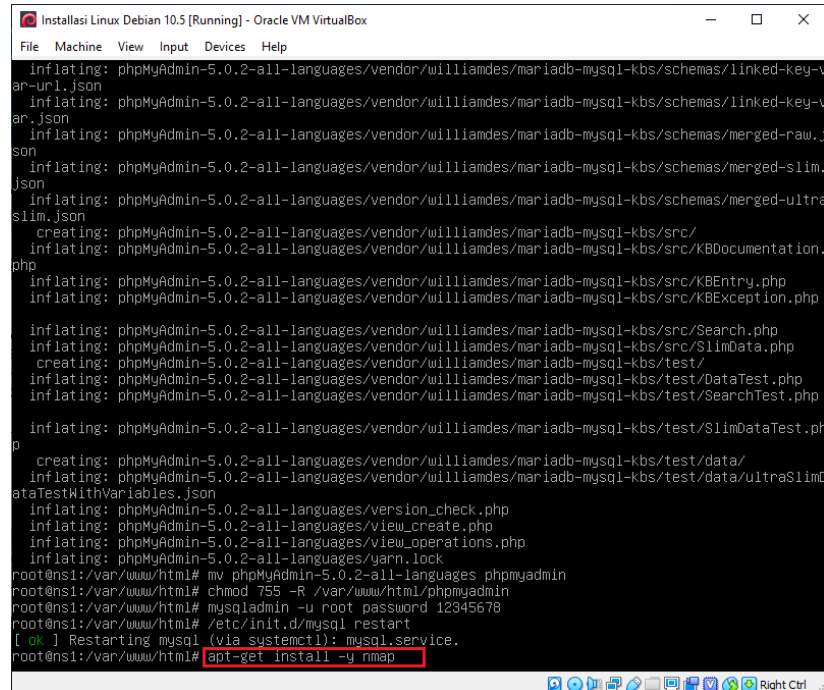


```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar-url.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/linked-key-v
ar.json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-raw.j
son
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-slim.
json
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/schemas/merged-ultra
slim.json
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBDocumentation.
php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBEntry.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/KBException.php

inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/Search.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/src/SlimData.php
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/DataTest.php
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SearchTest.php

inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/SlimDataTest.php
p
creating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/
inflating: phpMyAdmin-5.0.2-all-languages/vendor/williamdes/mariadb-mysql-kbs/test/data/ultraSlimD
ataTestWithVariables.json
inflating: phpMyAdmin-5.0.2-all-languages/version_check.php
inflating: phpMyAdmin-5.0.2-all-languages/view_create.php
inflating: phpMyAdmin-5.0.2-all-languages/view_operations.php
inflating: phpMyAdmin-5.0.2-all-languages/yarn.lock
root@ns1:/var/www/html# mv phpMyAdmin-5.0.2-all-languages phpmyadmin
root@ns1:/var/www/html# chmod 755 -R /var/www/html/phpmyadmin
root@ns1:/var/www/html# mysqladmin -u root password 12345678
root@ns1:/var/www/html# /etc/init.d/mysql restart
[ OK ] Restarting mysql (via systemctl): mysql.service.
root@ns1:/var/www/html# apt-get install -y nmap
```

72. Masukkan perintah berikut untuk mengecek port aplikasi yang aktif :


nmap localhost >>lalu tekan Enter

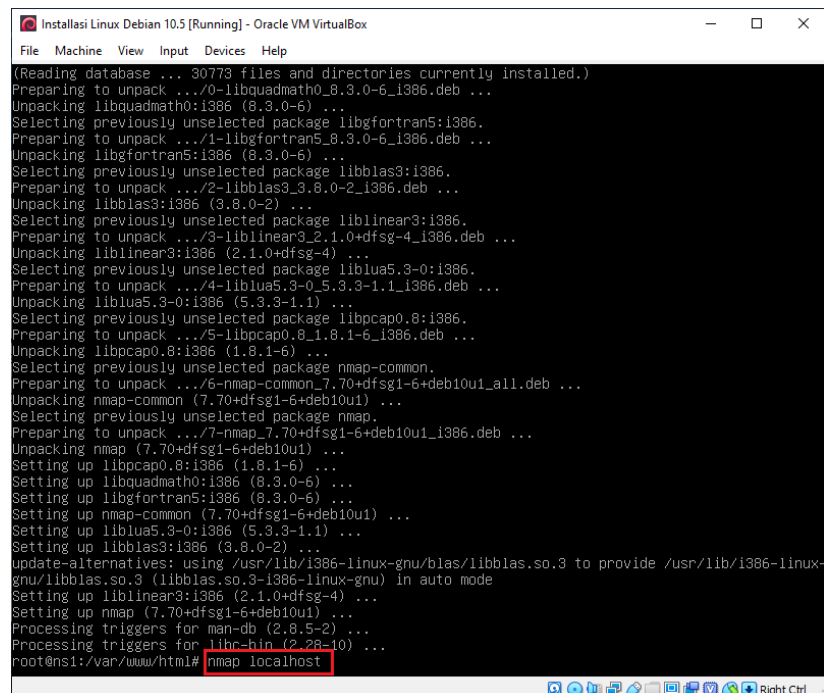

```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
(Reading database ... 30773 files and directories currently installed.)
Preparing to unpack .../0-libquadmath0_8.3.0-6_i386.deb ...
Unpacking libquadmath0:i386 (8.3.0-6) ...
Selecting previously unselected package libgfortran5:i386.
Preparing to unpack .../1-libgfortran5_8.3.0-6_i386.deb ...
Unpacking libgfortran5:i386 (8.3.0-6) ...
Selecting previously unselected package libblas3:i386.
Preparing to unpack .../2-libblas3_3.8.0-2_i386.deb ...
Unpacking libblas3:i386 (3.8.0-2) ...
Selecting previously unselected package liblinear3:i386.
Preparing to unpack .../3-liblinear3_2.1.0+dfsg-4_i386.deb ...
Unpacking liblinear3:i386 (2.1.0+dfsg-4) ...
Selecting previously unselected package liblua5.3-0:i386.
Preparing to unpack .../4-liblua5.3-0_5.3.3-1.1_i386.deb ...
Unpacking liblua5.3-0:i386 (5.3.3-1.1) ...
Selecting previously unselected package libpcap0.8:i386.
Preparing to unpack .../5-libpcap0.8_1.8.1-6_i386.deb ...
Unpacking libpcap0.8:i386 (1.8.1-6) ...
Selecting previously unselected package nmap-common.
Preparing to unpack .../6-nmap-common_7.70+dfsg1-6+deb10u1_all.deb ...
Unpacking nmap-common (7.70+dfsg1-6+deb10u1) ...
Selecting previously unselected package nmap.
Preparing to unpack .../7-nmap_7.70+dfsg1-6+deb10u1_i386.deb ...
Unpacking nmap (7.70+dfsg1-6+deb10u1) ...
Setting up libpcap0.8:i386 (1.8.1-6) ...
Setting up libquadmath0:i386 (8.3.0-6) ...
Setting up libgfortran5:i386 (8.3.0-6) ...
Setting up nmap-common (7.70+dfsg1-6+deb10u1) ...
Setting up liblua5.3-0:i386 (5.3.3-1.1) ...
Setting up libblas3:i386 (3.8.0-2) ...
update-alternatives: using /usr/lib/i386-linux-gnu/blas/libblas.so.3 to provide /usr/lib/i386-linux-
gnu/libblas.so.3 (libblas.so.3-i386-linux-gnu) in auto mode
Setting up liblinear3:i386 (2.1.0+dfsg-4) ...
Setting up nmap (7.70+dfsg1-6+deb10u1) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
root@ns1:/var/www/html# nmap localhost
```

73. Perhatikan gambar di bawah,. Pastikan port aplikasi paket yang telah di install terdaftar.


- http port 80 >>Apache2
- mysql port336 >>MySql

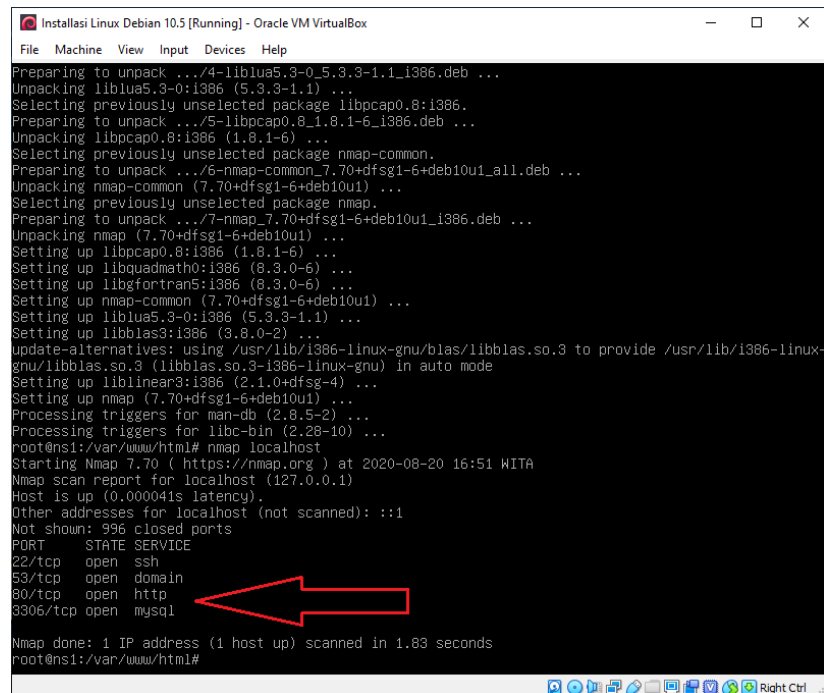


```
Installasi Linux Debian 10.5 [Running] - Oracle VM VirtualBox
File Machine View Input Devices Help
Preparing to unpack .../4-liblua5.3-0_5.3.3-1.1_i386.deb ...
Unpacking liblua5.3-0:i386 (5.3.3-1.1) ...
Selecting previously unselected package libpcap0.8:i386.
Preparing to unpack .../5-libpcap0.8_1.8.1-6_i386.deb ...
Unpacking libpcap0.8:i386 (1.8.1-6) ...
Selecting previously unselected package nmap-common.
Preparing to unpack .../6-nmap-common_7.70+dfsg1-6+deb10u1_all.deb ...
Unpacking nmap-common (7.70+dfsg1-6+deb10u1) ...
Selecting previously unselected package nmap.
Preparing to unpack .../7-nmap_7.70+dfsg1-6+deb10u1_i386.deb ...
Unpacking nmap (7.70+dfsg1-6+deb10u1) ...
Setting up libpcap0.8:i386 (1.8.1-6) ...
Setting up libquadmath0:i386 (8.3.0-6) ...
Setting up libgfortran5:i386 (8.3.0-6) ...
Setting up nmap-common (7.70+dfsg1-6+deb10u1) ...
Setting up liblua5.3-0:i386 (5.3.3-1.1) ...
Setting up libblas3:i386 (3.8.0-2) ...
update-alternatives: using /usr/lib/i386-linux-gnu/blas/libblas.so.3 to provide /usr/lib/i386-linux-
gnu/libblas.so.3 (libblas.so.3-i386-linux-gnu) in auto mode
Setting up liblinear3:i386 (2.1.0+dfsg-4) ...
Setting up nmap (7.70+dfsg1-6+deb10u1) ...
Processing triggers for man-db (2.8.5-2) ...
Processing triggers for libc-bin (2.28-10) ...
root@ns1:/var/www/html# nmap localhost
Starting Nmap 7.70 ( https://nmap.org ) at 2020-08-20 16:51 WITA
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000041s latency).
Other addresses for localhost (not scanned): ::1
Not shown: 996 closed ports
PORT      STATE SERVICE
22/tcp    open  ssh
53/tcp    open  domain
80/tcp    open  http
3306/tcp  open  mysql

Nmap done: 1 IP address (1 host up) scanned in 1.83 seconds
root@ns1:/var/www/html#
```


74. Buka browser, kemudian ketikkan di URL nama domain **tkjclub.info**.

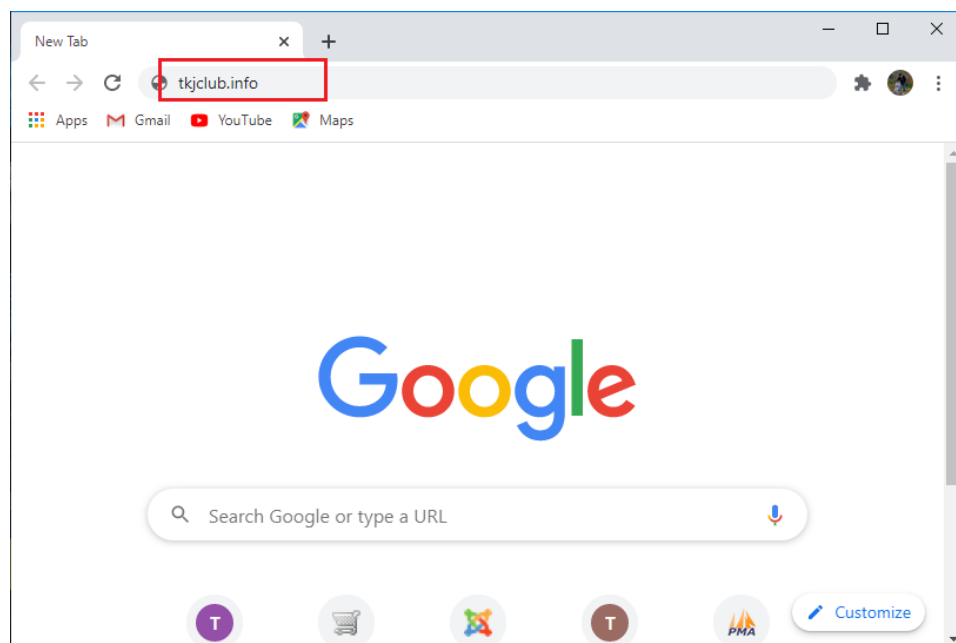


75. Jika tampilannya seperti gambar di bawah, maka konfigurasi apache telah berhasil.

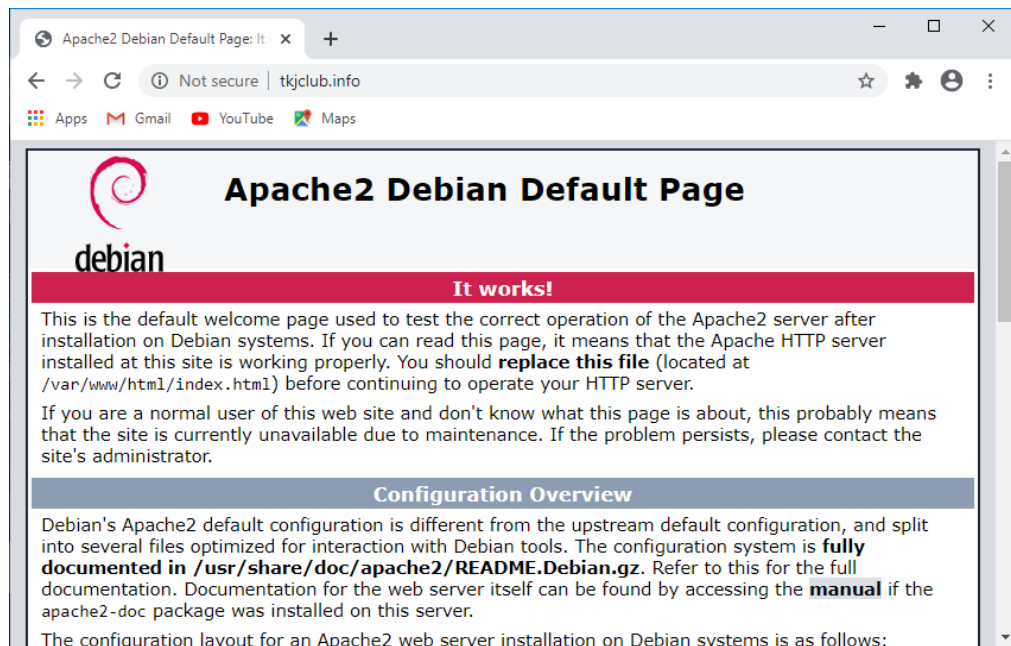

76. Kemudian buka tab baru, lalu masukan **tkjclub.info/phpmyadmin**.

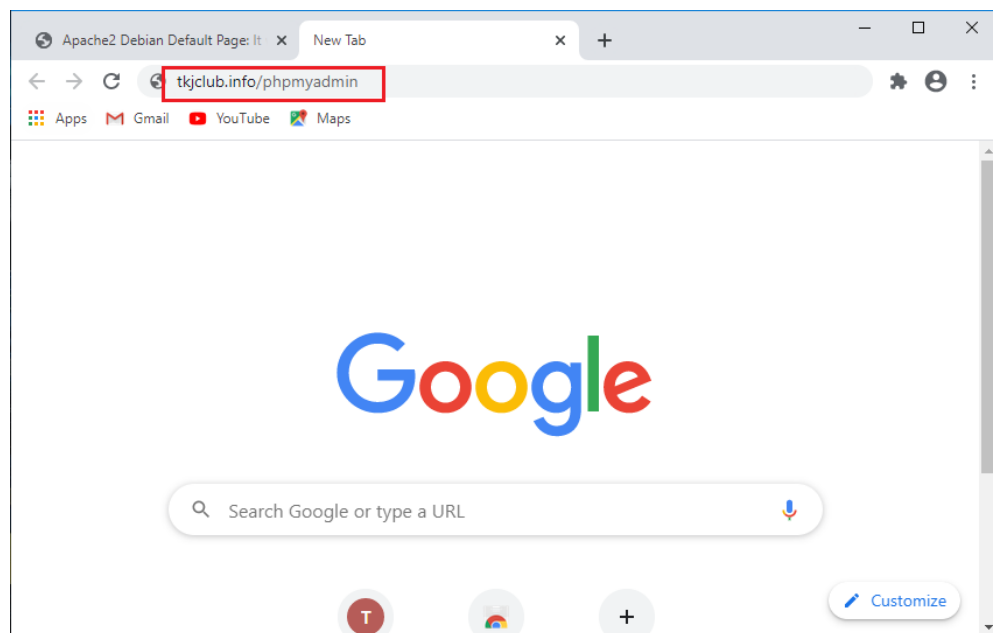


77. Pastikan tampil menu login seperti gambar di bawah.

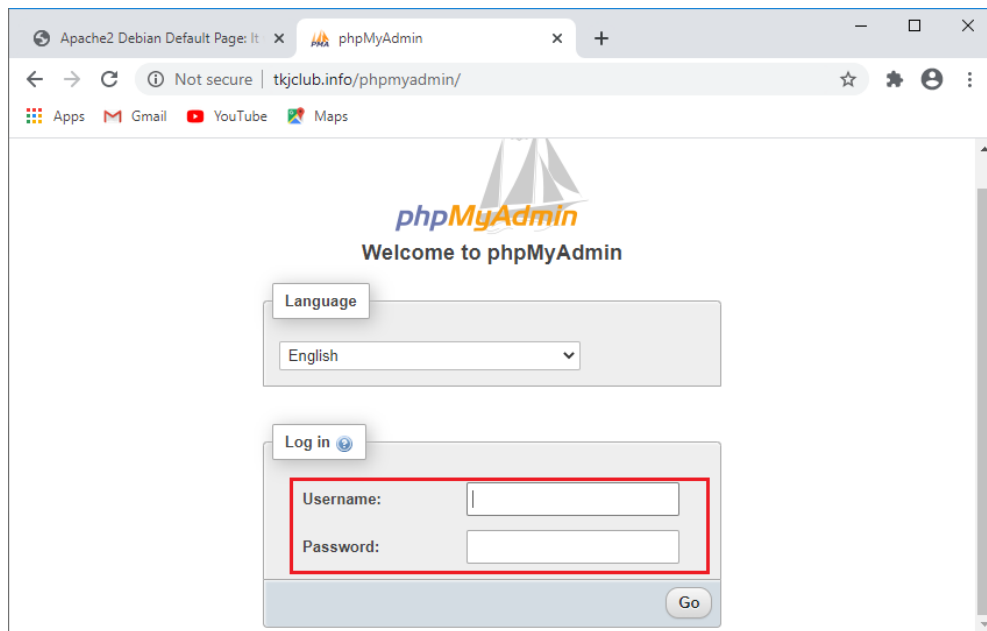


78. Login menggunakan user administrator dan passwordnya.

- **Username** : root
- **Password** : 12345678

79. Lalu klik Go.

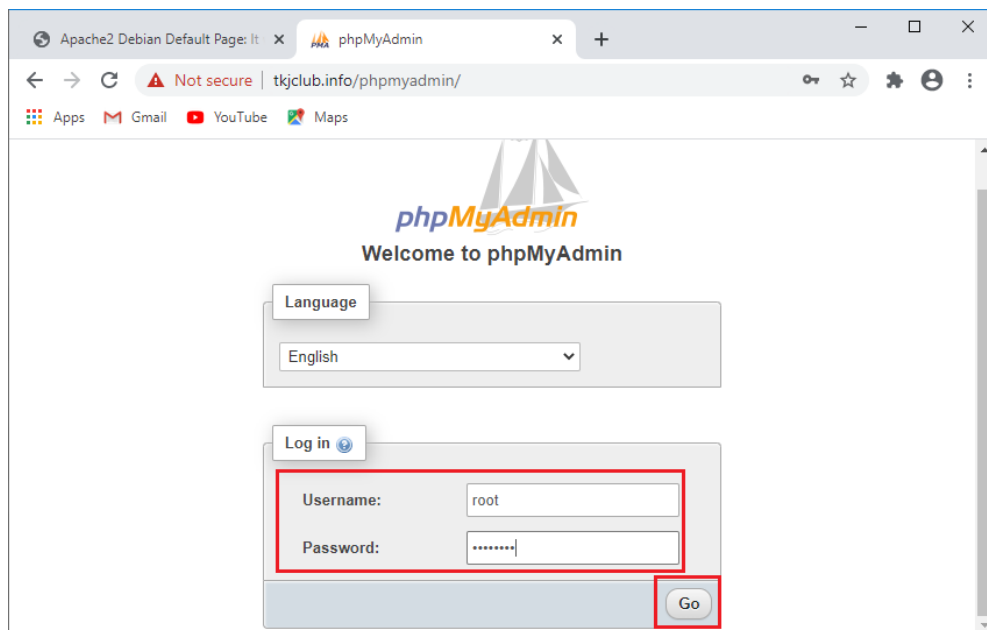

80. Jika tampilannya seperti gambar di bawah maka konfigurasi database dan phpMyAdmin telah berhasil.

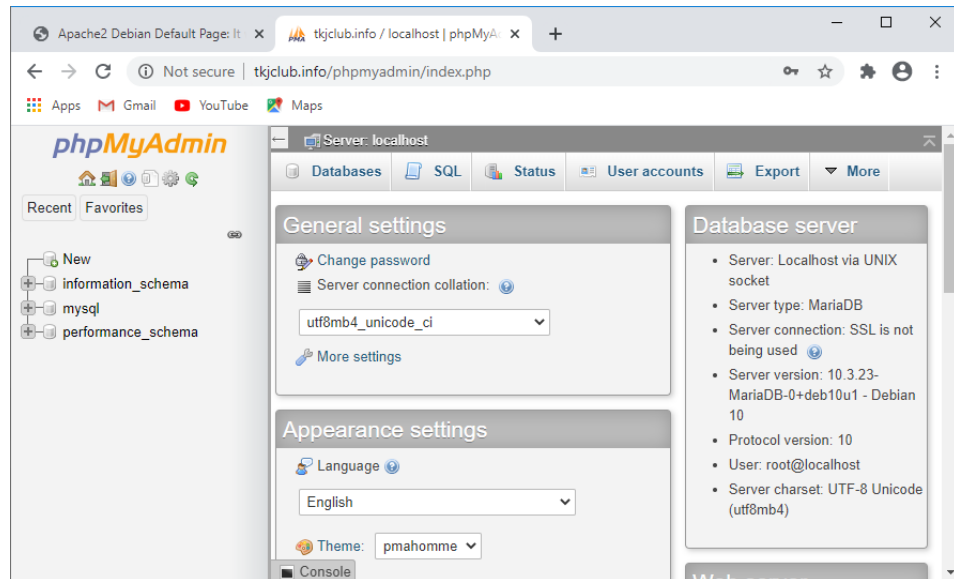

81. Jika seluruh step di atas sudah di lakukan, maka konfigurasi WEB Server telah selesai dan berhasil.

******SALAM SUKSES TKJ CLUB******