


# Docker Networks


# Basic setup

`docker run nginx`

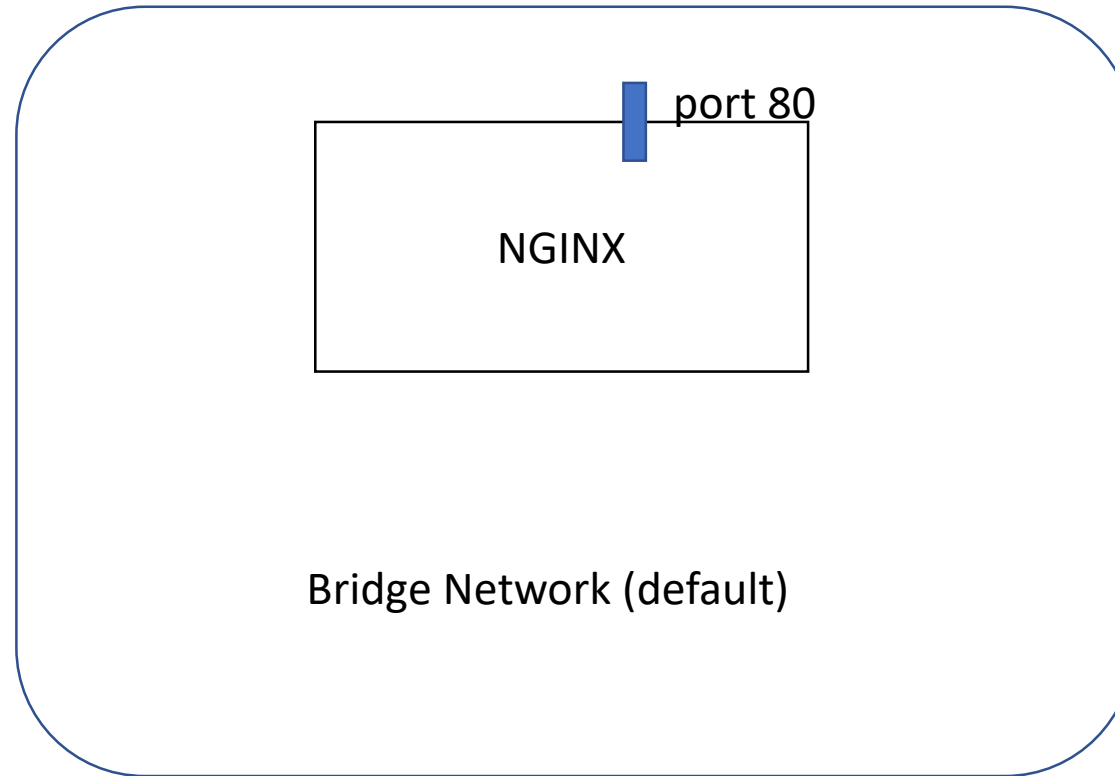


# Basic setup

```
docker run -p 80:80 nginx
```

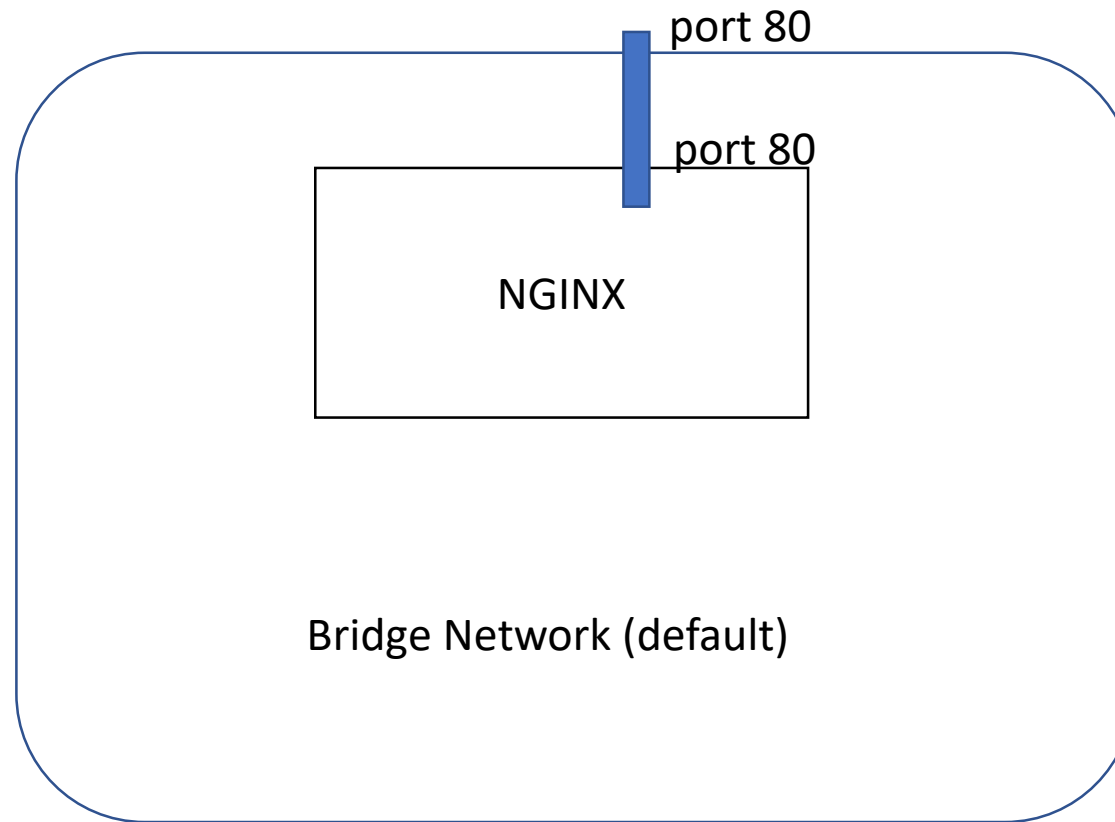

# Multiple Containers

```
docker run -p 80:80 nginx  
docker run redis
```

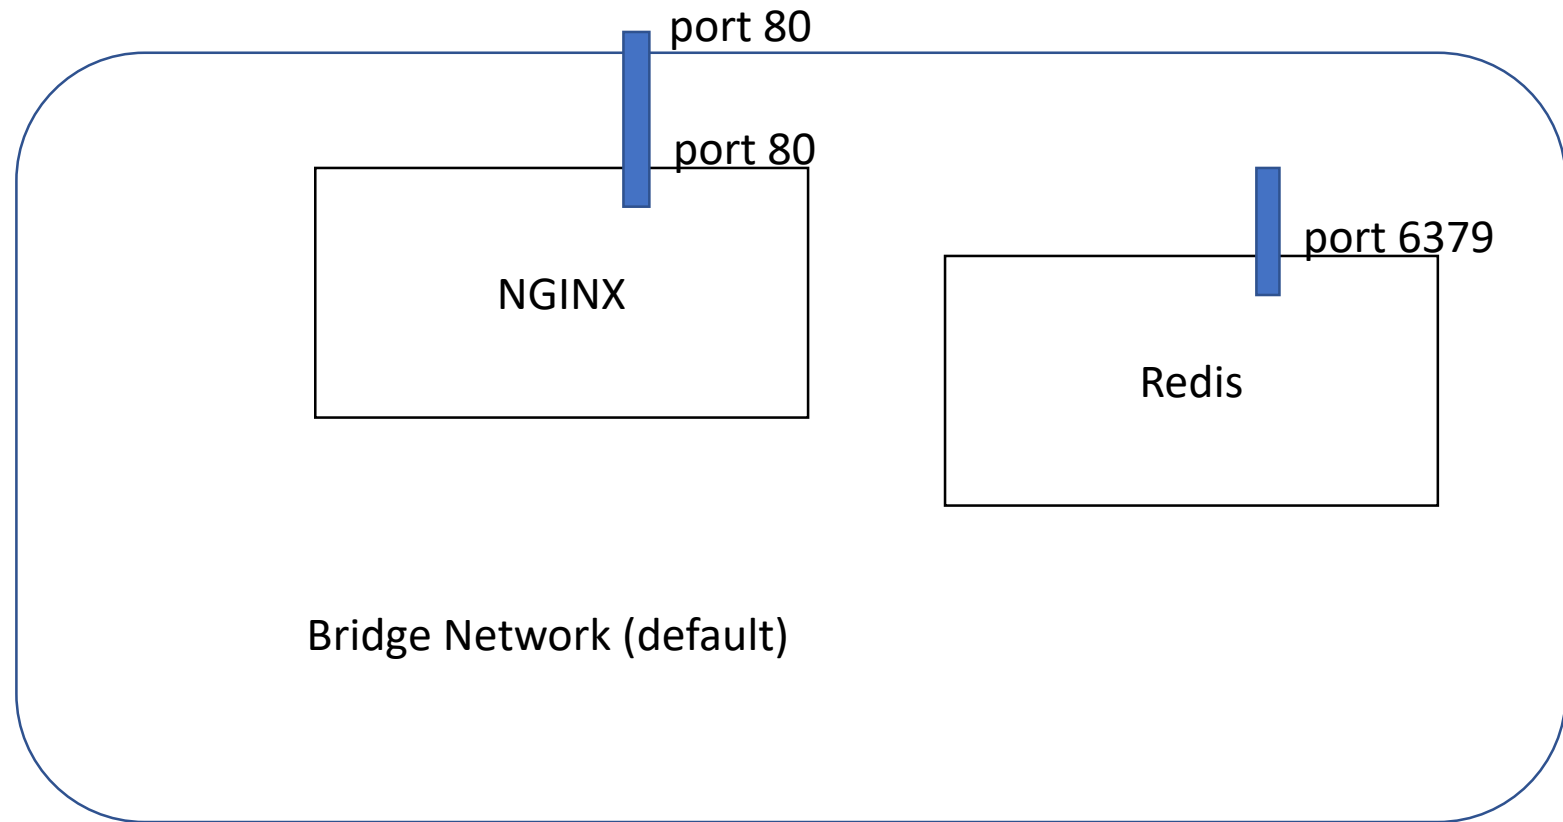


# Custom Networks

- Allow you to refer to other containers by the name you give them with the `--name` value in `docker run`
  - The default bridge network only lets you refer to other docker containers by their IP address


# Custom Network

```
docker run --network customNet -p 80:80 myGoServer
```

```
docker run --network customNet --name rServe redis
```

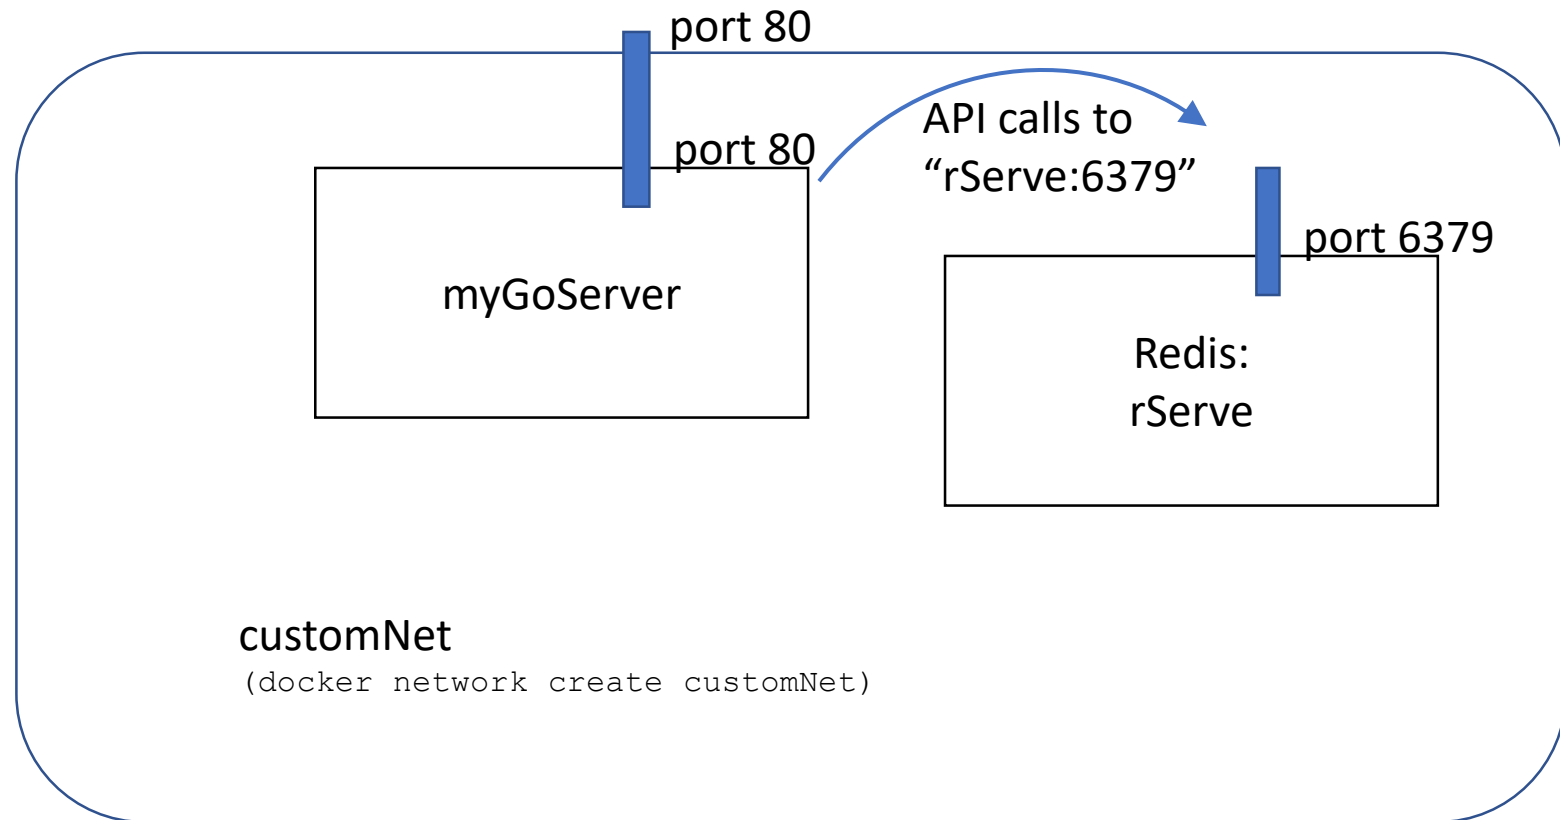

# Communication w/ browser (ignoring HMAC signing)

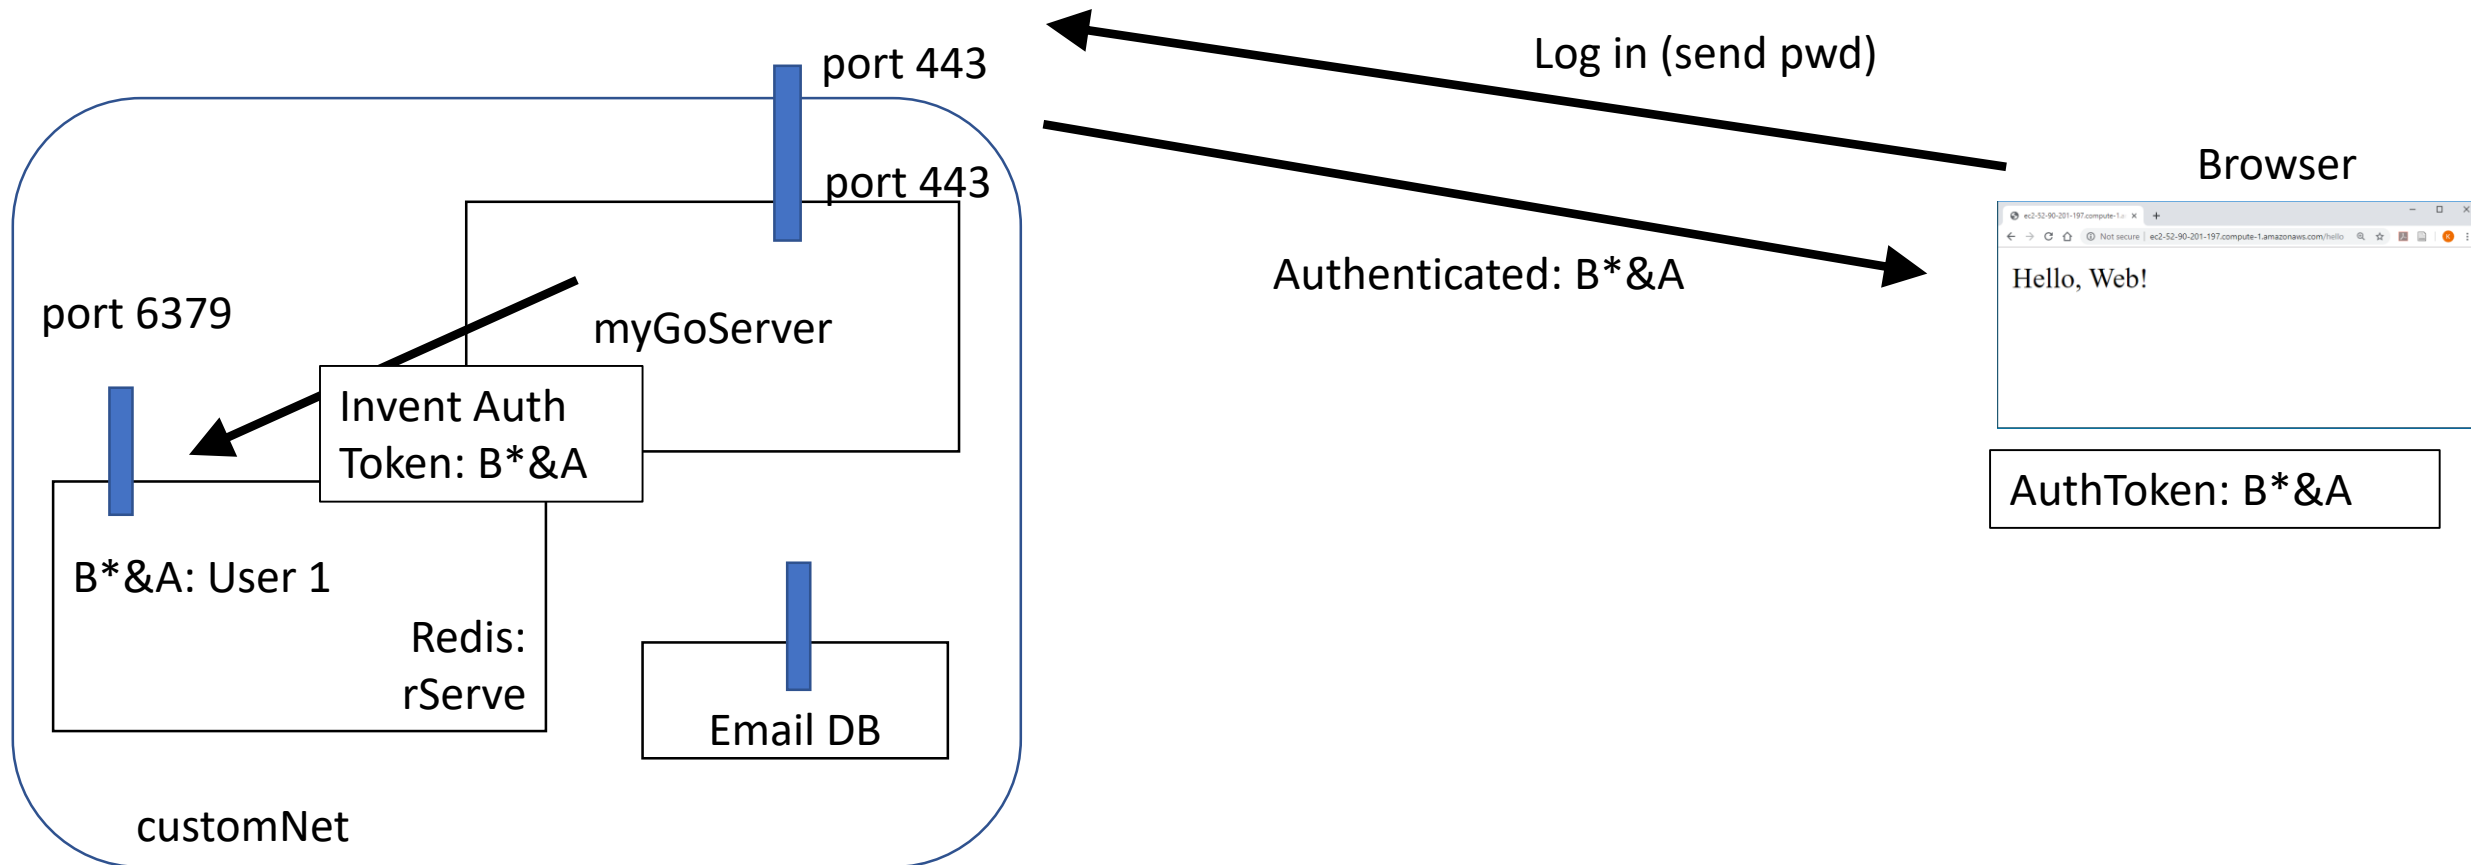

# Communication w/ browser (ignoring HMAC signing)

