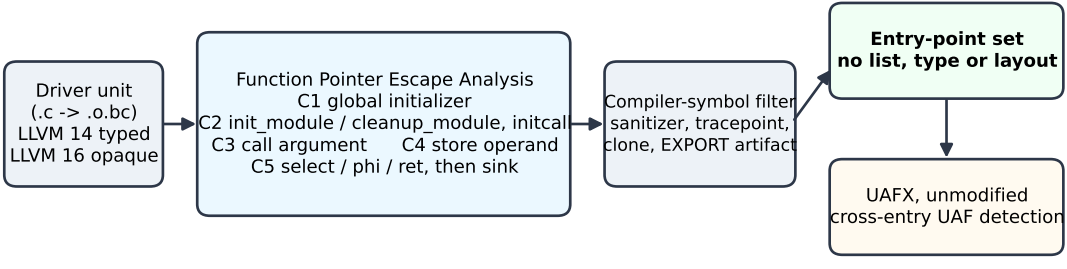

Escape-as-entry: a function can be called from outside only if its address leaves the unit, and that act is observable in IR independent of struct names, field indices and pointer types.