


Task3: Introduction to Flags and Switches


A majority of commands allow for arguments to be provided. These arguments are identified by a hyphen (-) and a certain keyword known as flags or switches.

When using a command, it will perform its default behaviour. For example, **ls** lists the contents of the working directory. However, hidden files are not shown. We can use flags and switches to extend the behaviour of commands.

- **ls** informs us that there is only one folder named "folder1" as highlighted in the screenshot below.

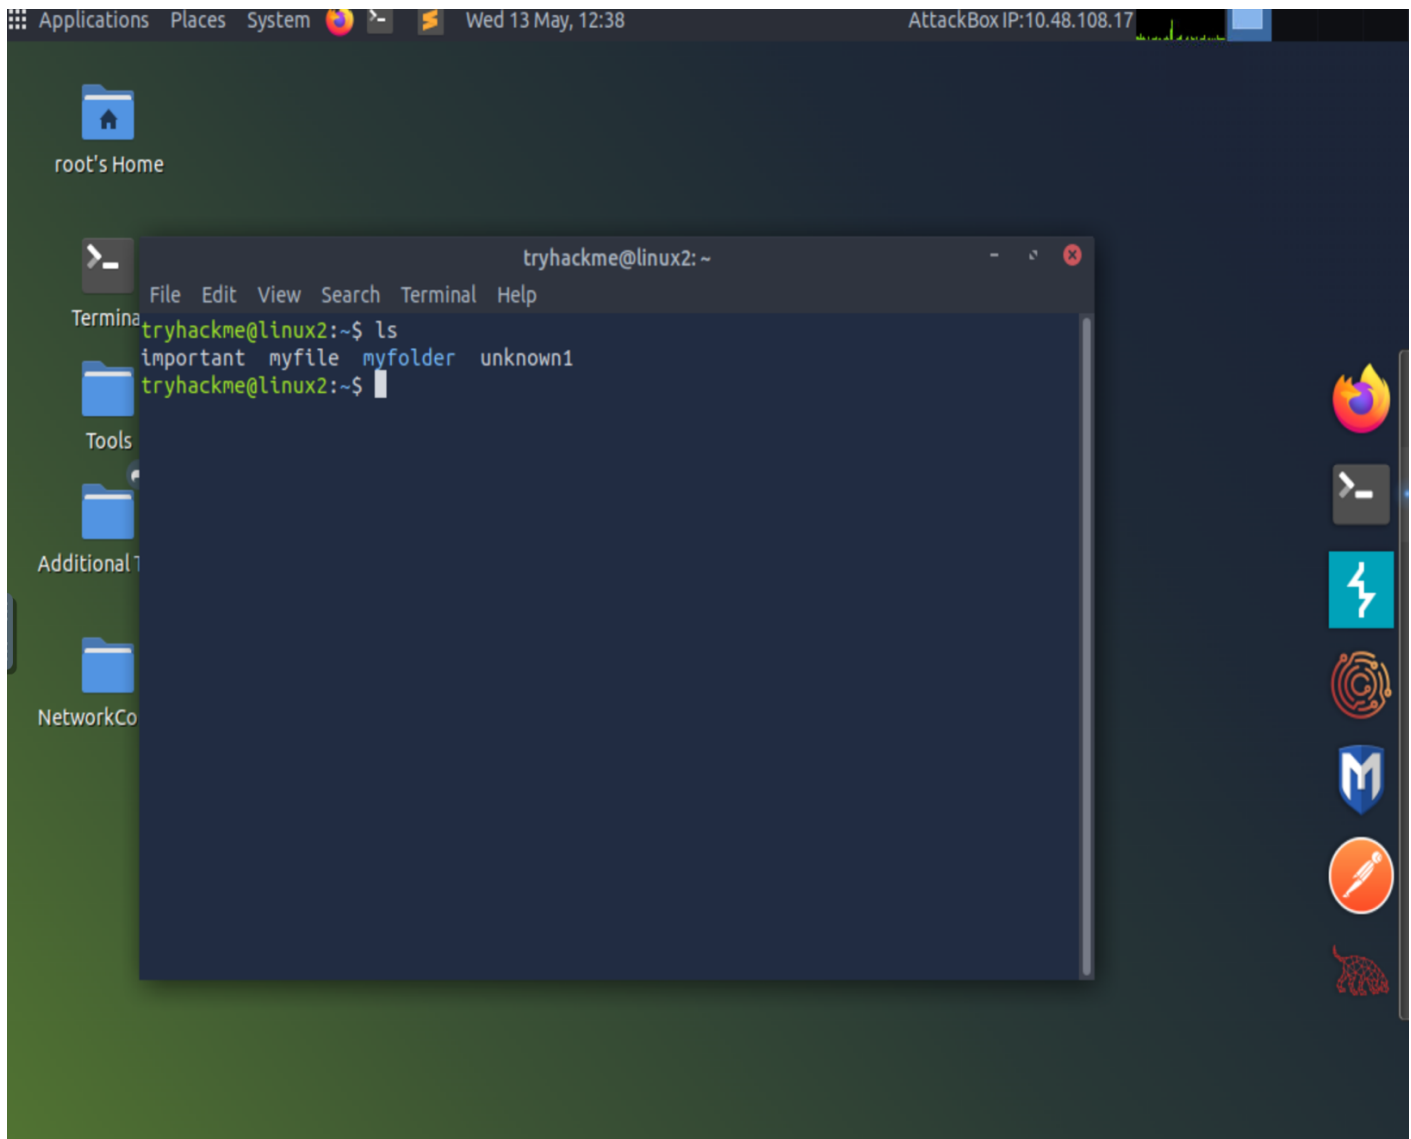

".hiddenfolder". Files and folders with "." are hidden files.

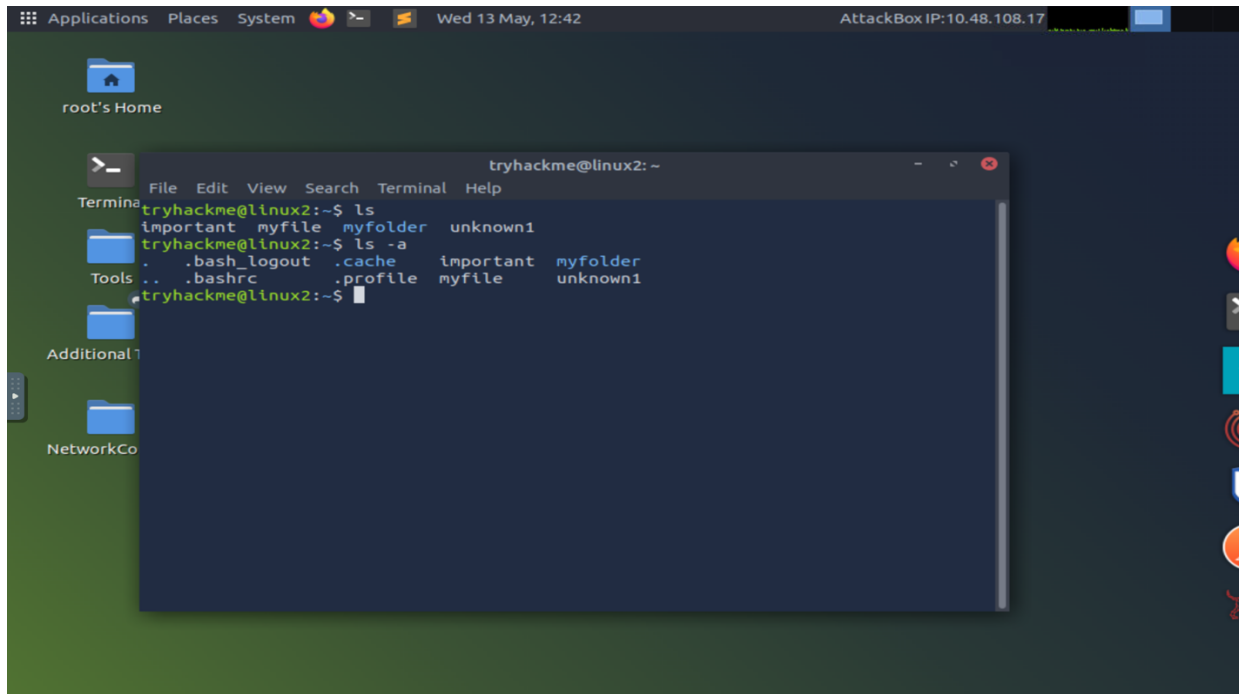

- **--help** option-option will list the possible options that the command accepts, provide a brief description .

