


## ZOMATO 3-Tier Architecture

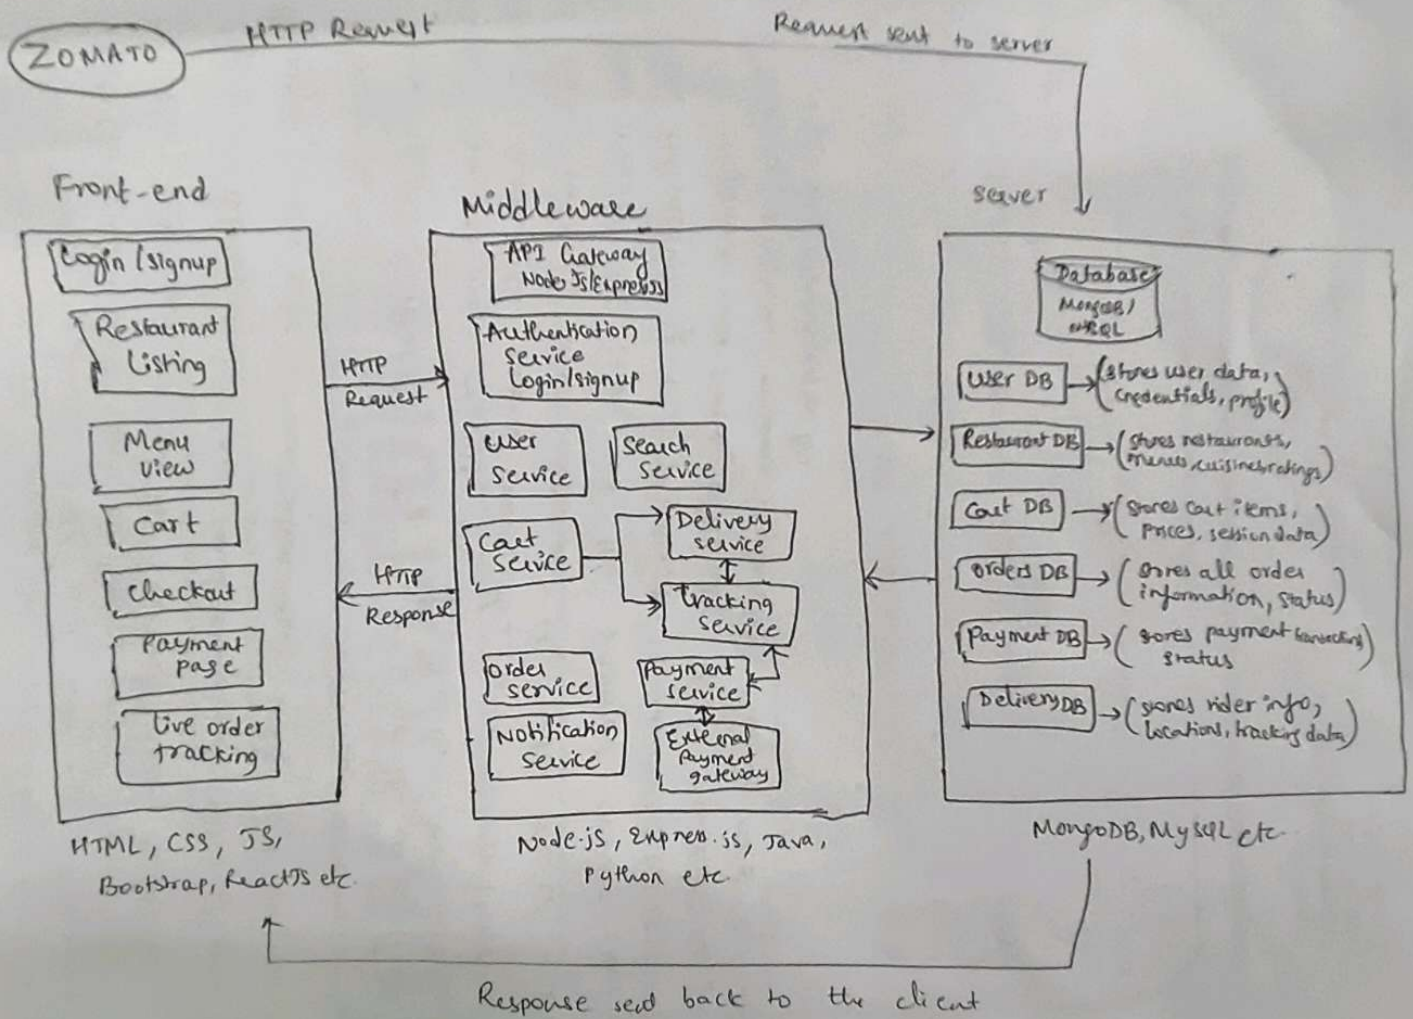

A 3-tier architecture for zomato-like application consists of the presentation layer, application layer and data layer. The presentation layer (frontend) allows user to login, browse restaurants, add items to the cart, and proceed to checkout using web or mobile interfaces. The application layer (middleware) processes these requests through services like authentication, cart, order and payment and connect with external payment gateways. The data layer (backend) stores all information such as user details, restaurant data, orders and payment records in databases like MongoDB or MySQL. During the ordering process, the user selects items, adds them to cart, and checks out; the order service validates and creates the order and the payment service completes the transaction. If the payment is successful, the order is confirmed and stored; otherwise, it is marked as failed. This architecture ensures scalability, security and efficient system management.