


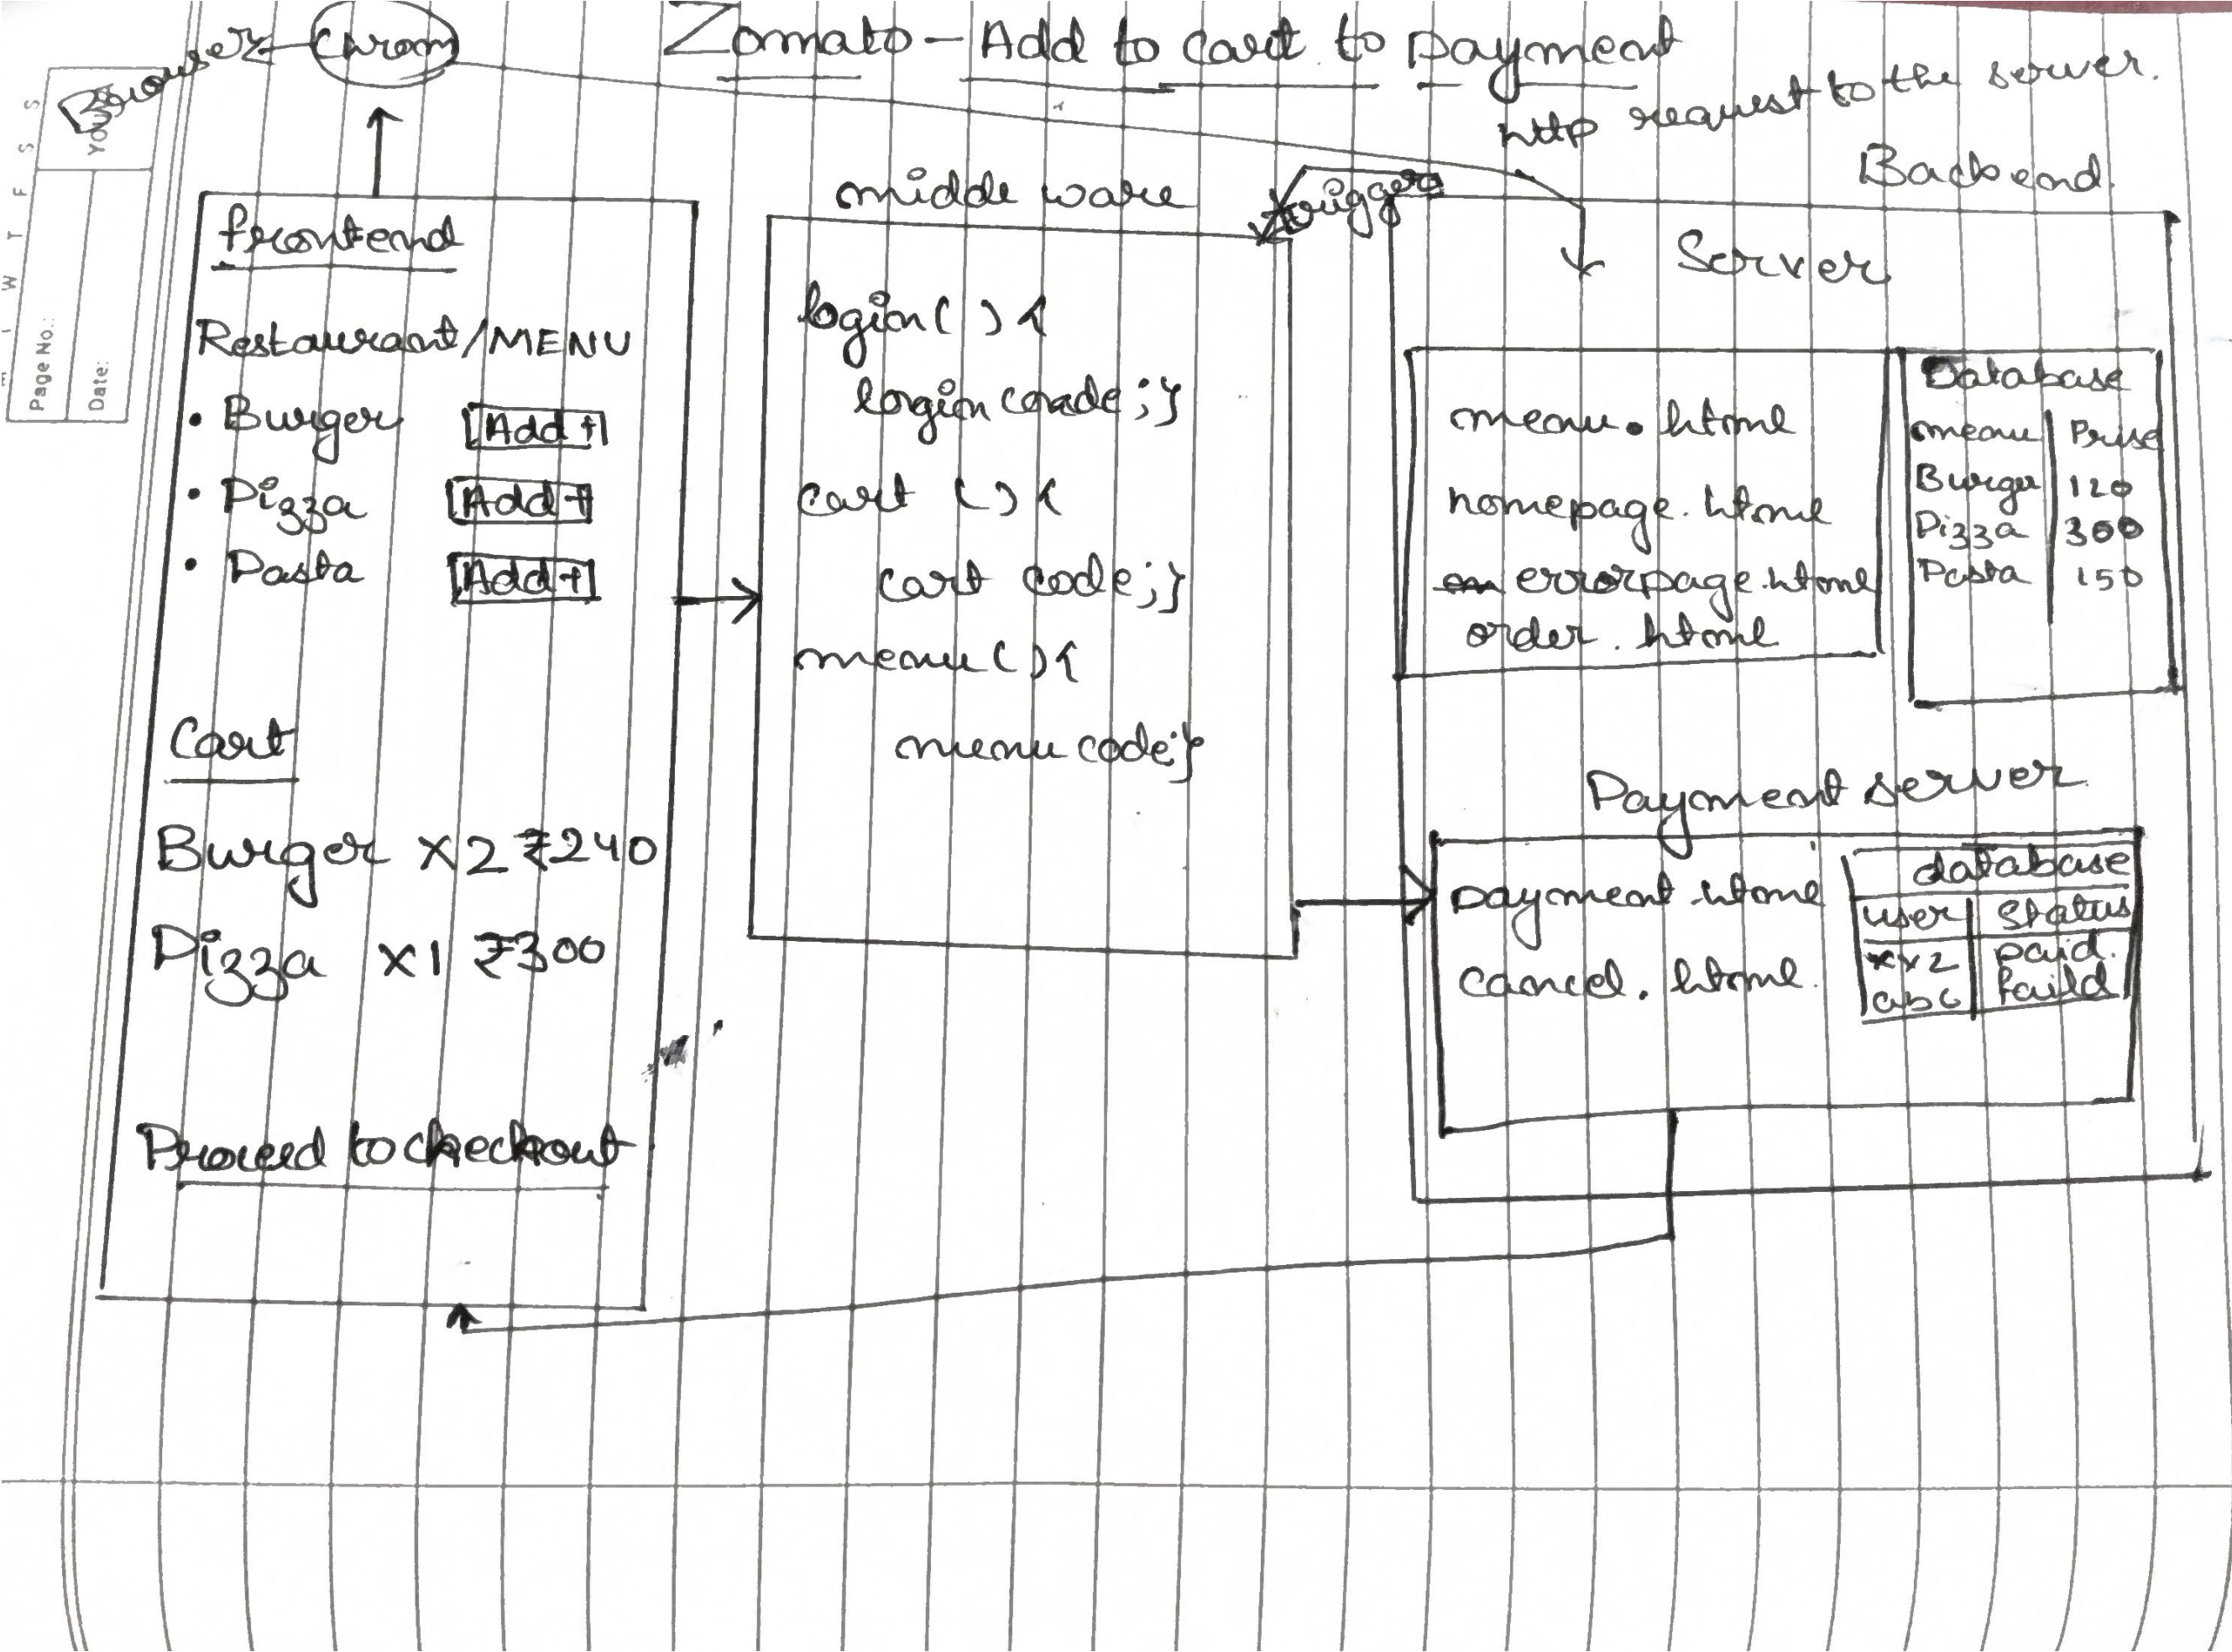

Front-end (Homepage)

(1) Add to cart

→ User will select the food items and add it to the cart.

(2) Cart update

→ The selected food will add to the cart and adding the price.

(3) Proceed to checkout

→ Proceed for payment.

Back-end (server)

(1) From front-end (Homepage) the browser will give a http request to the server about the details.

(2) In server it will check the details, if the details are valid then it will give trigger to the middle ware otherwise it will error page.

(3)

middle-ware

→ In middle-ware all the logics are available for ex. login() function, menu() function, payment() function.

→ When the server sends a trigger to the middle-ware then the logic will run.

→ For Backend (payment)

→ From middle-ware payment code will run for the check-out.

→ In payment, there is a data-base with attributes like username and status.

→ So, according to data-base it will proceed.