


Pipeline (top to bottom)

The choices you make

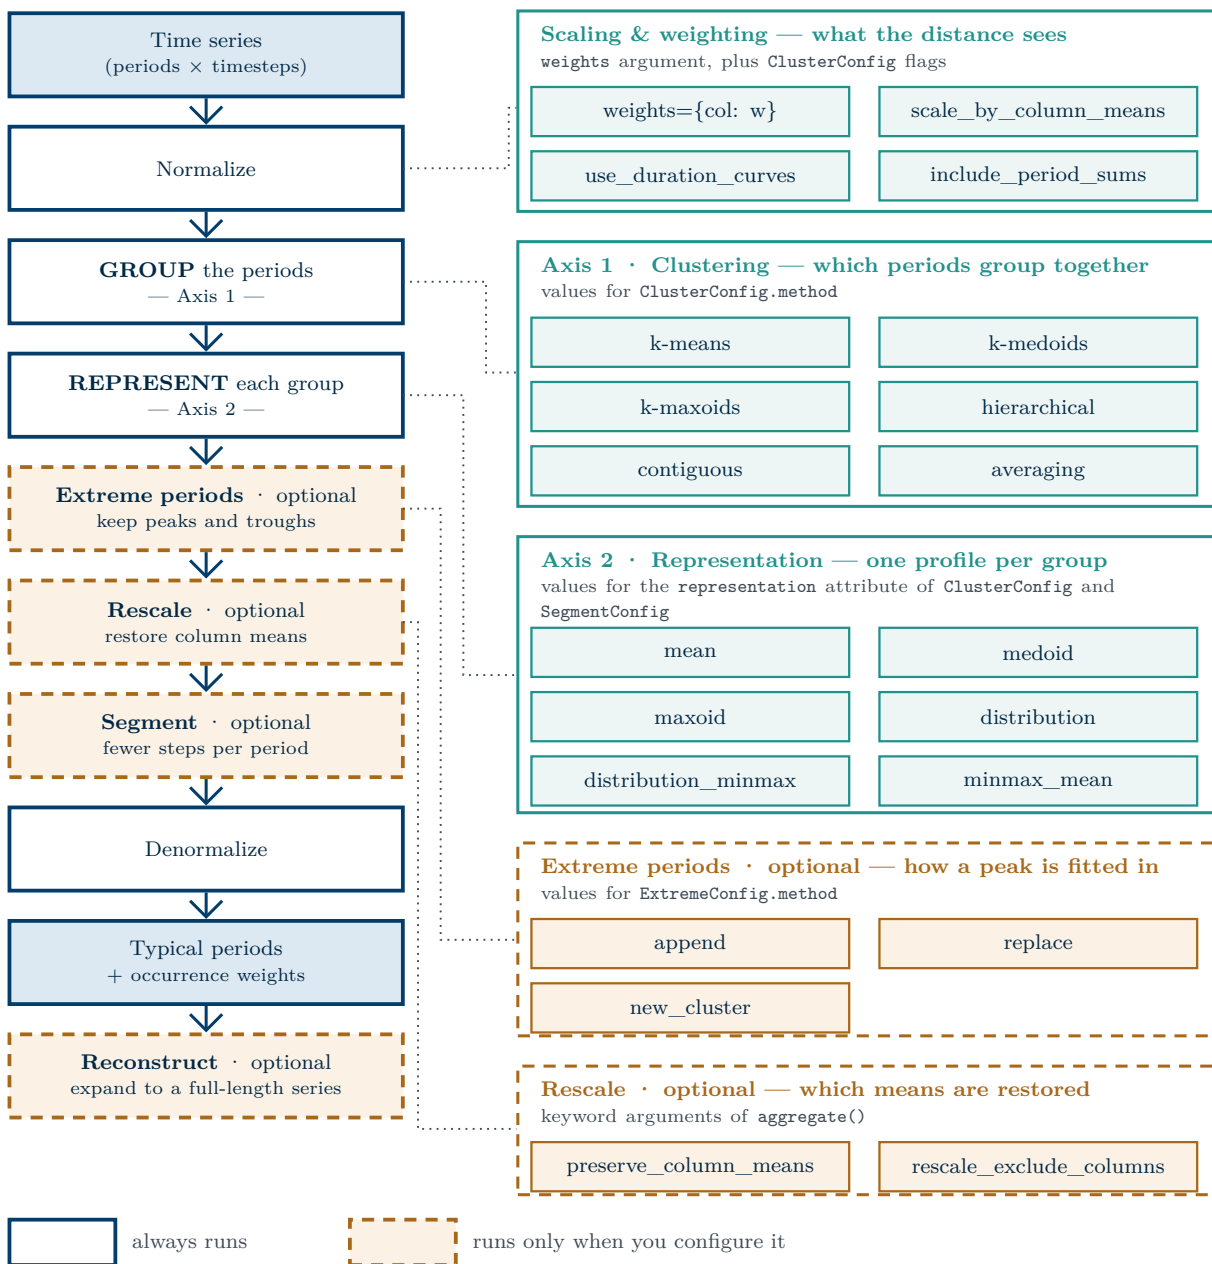

Reading it. Grouping (Axis 1) and representation (Axis 2) are chosen independently and recombine freely — any clustering method pairs with any representation. Downsampling is deliberately absent: coarsen the input with `df.resample(...)` before handing it to `tsam`.