

# Humpback Whale Identification: a Kaggle competition

Fabian Glöckle, Jochen Sautter, Ben Wilhelm


## The Challenge

- 40 years of scientific whale monitoring generated a large collection of images of tail flukes of Humpback whales
- 25,000 images were assigned to >4,000 individual whales by researchers
- Try to recognize the whales by their flukes with a deep learning model



## Statistics

- Sparse and unevenly distributed data base:
- 9,500 labeled images of 4,500 whales as training data
  - 2,000 whales, where only one image is available
  - 1,000 whales with 2 images
- 15.000 images as test data
- Images differ largely in
  - shape
  - resolution and quality
  - color / grayscale

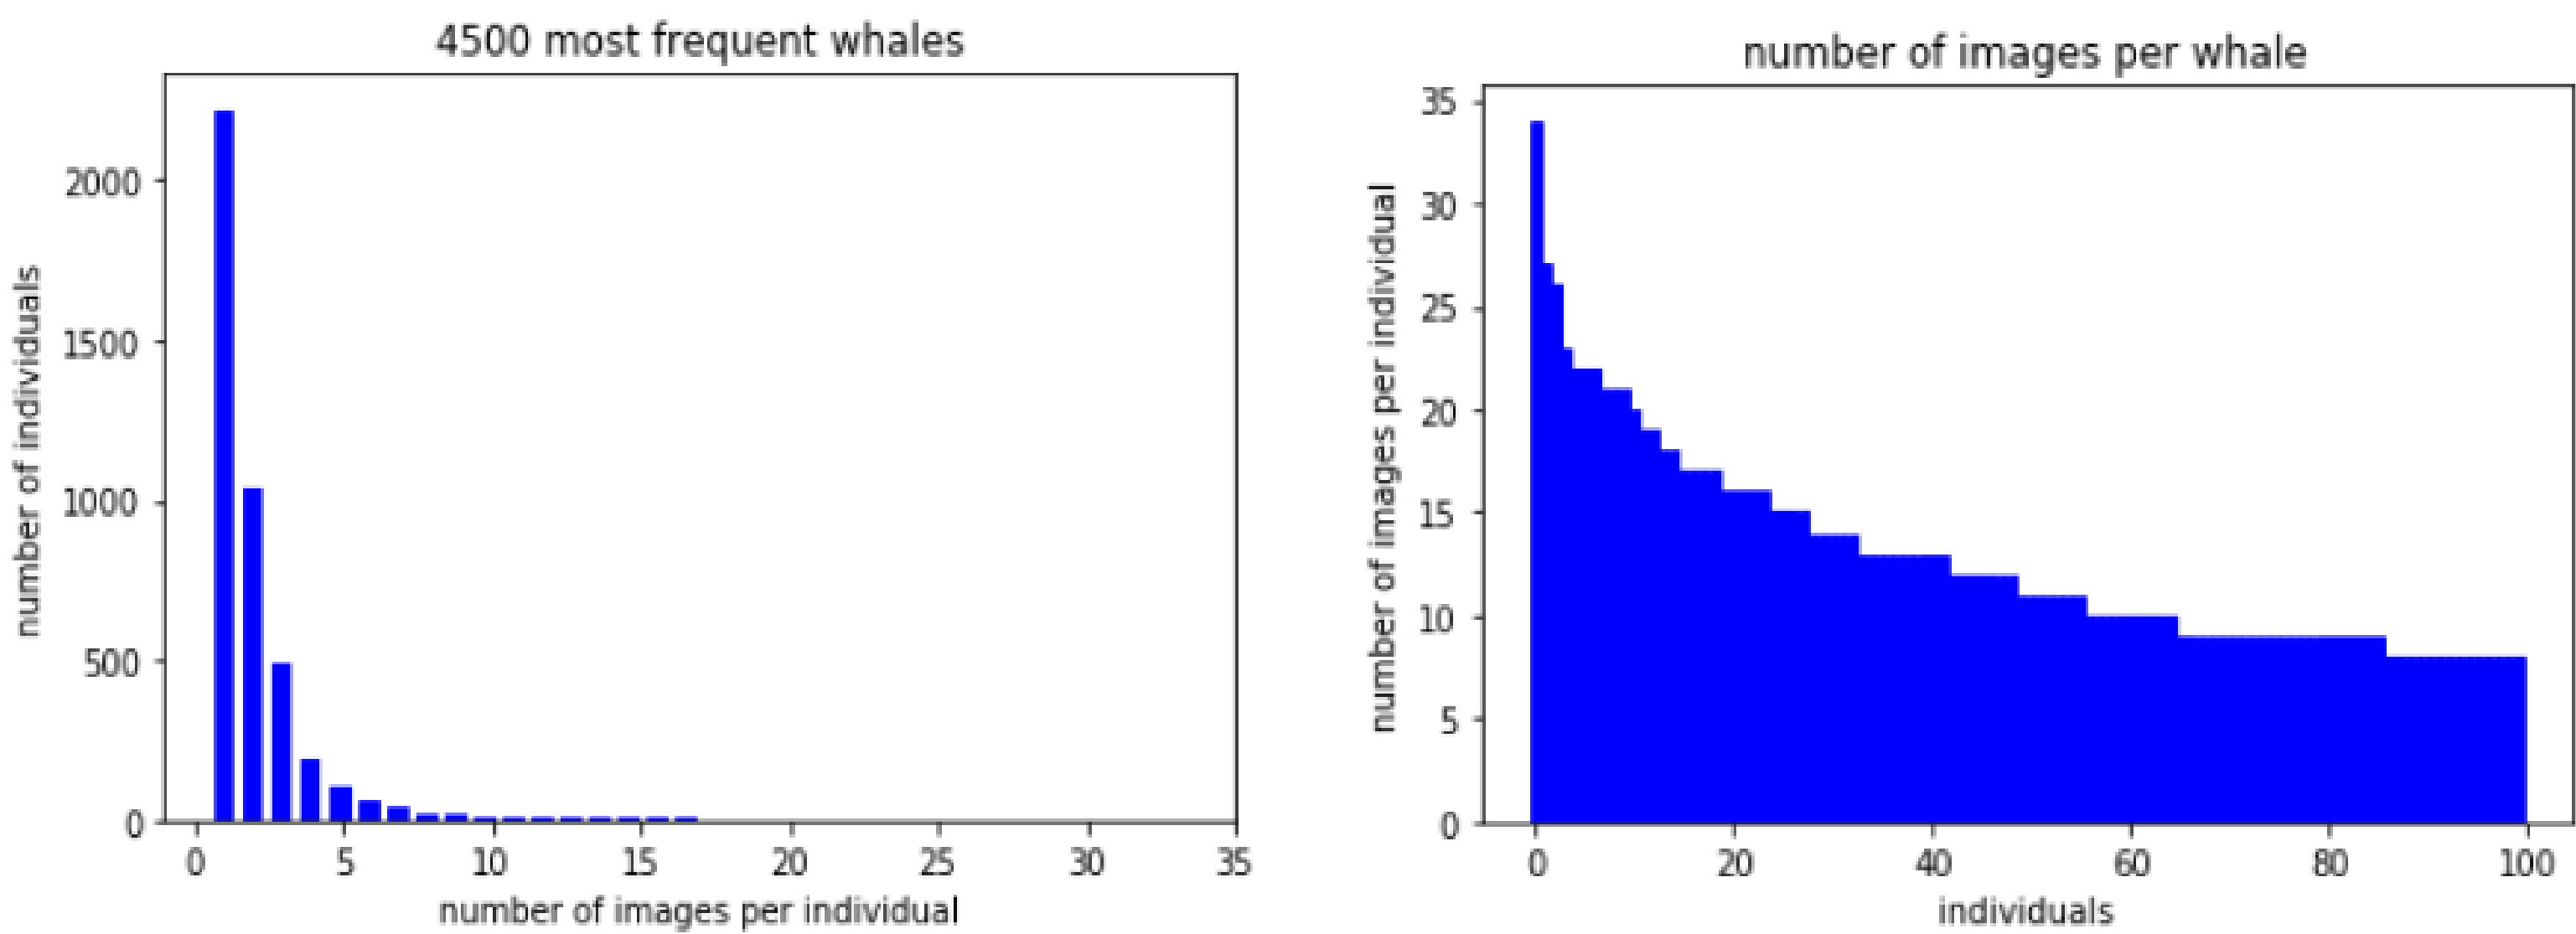

## Our Approach

- Use large CNNs pretrained on image-net Database as provided by Keras
- “Freeze” parameters of pretrained cnn base-models, and train on our classification task with 2-3 additional dense layers
- Models: InceptionV3, Xception, ResNet50, MobileNet, InceptionResNetV2
- After training of dense layers “unfreeze” some of the top layer-blocks of the cnn base-model and train more epochs
- Use Data Augmentation: shifting, stretching, rotating
- Optimize hyper parameter configuration using “HyperbandSter” framework

#<	name	>	< Range	>	<Default>	<Log>	<Type>
	["base_model",		["InceptionV3",		"InceptionV3",	None,	"cat"]
	["num_dense_layers",		[2, 3],		2,	False,	"int"]
	["num_dense_units_0",		[100, 1000],		300,	True,	"int"]
	["num_dense_units_1",		[50, 500],		200,	True,	"int"]
	["num_dense_units_2",		[10, 300],		100,	True,	"int"]
	["activation",		["relu", "tanh"],		"relu",	None,	"cat"]
	["optimizer",		["Adam", "SGD", "RMSProp"],		"SGD",	None,	"cat"]
	["learning_rate",		[0.0001, 0.01],		0.001,	True,	"float"]
	["cnn_learning_rate",		[0.00001, 0.001],		0.0001,	True,	"float"]
	["cnn_unlock_epoch",		[10, 30],		20,	False,	"int"]
	["unfreeze_percentage",		[0.0, 0.3],		0.1,	False,	"float"]
	["batch_size",		[16, 64],		32,	True,	"int"]

## Results

