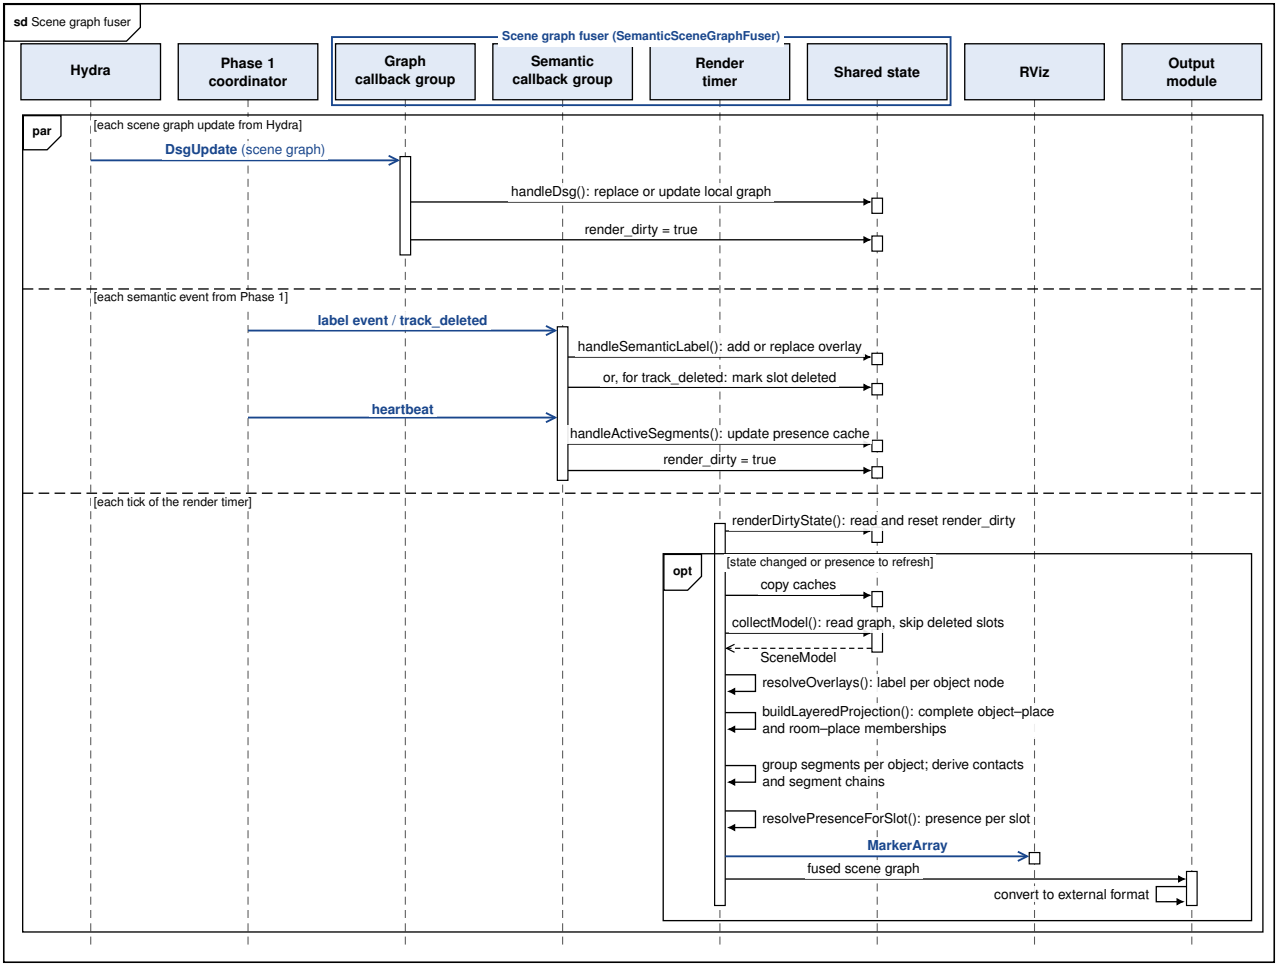
sd Scene graph fuser
Scene graph fuser (SemanticSceneGraphFuser)
Hydra
Phase 1 coordinator
Graph callback group
Semantic callback group
Render timer
Shared state
RViz
Output module
par
[each scene graph update from Hydra]
DsgUpdate (scene graph)
handleDsg(): replace or update local graph
render_dirty = true
[each semantic event from Phase 1]
label event / track_deleted
handleSemanticLabel(): add or replace overlay
or, for track_deleted: mark slot deleted
heartbeat
handleActiveSegments(): update presence cache
render_dirty = true
[each tick of the render timer]
renderDirtyState(): read and reset render_dirty
opt
[state changed or presence to refresh]
copy caches
collectModel(): read graph, skip deleted slots
SceneModel
resolveOverlays(): label per object node
buildLayeredProjection(): complete object–place and room–place memberships
group segments per object; derive contacts and segment chains
resolvePresenceForSlot(): presence per slot
MarkerArray
fused scene graph
convert to external format