


SEARCHING IN AN ARRAY

Linear Search: This Algorithm is used to search for a element in an array.

CONCEPT

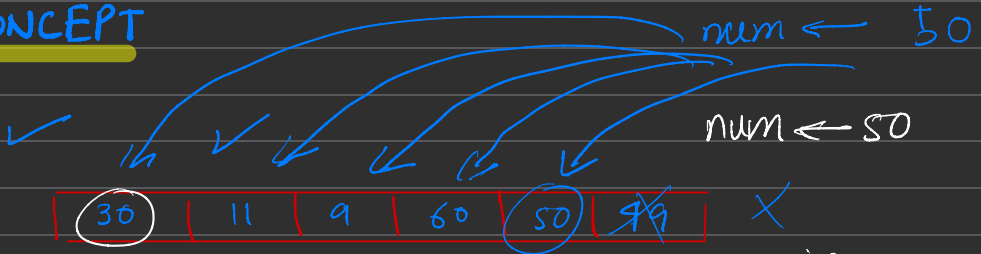

CODE

```
FOR i ← 1 to 6
```

```
    IF array[i] = num
```

```
        OUTPUT "FOUND VALUE"
```

```
        BREAK —
```

```
ELSE
```

```
    OUTPUT "Number Not Found"
```

```
DECLARE userList[1:5]: STRING
DECLARE userInput: STRING
```

```
userList[1] ← "Aima"
userList[2] ← "Aimen"
userList[3] ← "Maneeka"
userList[4] ← "Aishba"
userList[5] ← "Sir Fahd" Khadi
```

1	2	3	4	5
Aima	Aimen	Maneeka	Aishba	Sir Fahd

```
OUTPUT "Enter a username"
INPUT userInput → Aimen
```

```
FOR i ← 1 to 5
```

```
IF userInput = userList[i]
  OUTPUT "UserName Found"
```

```
ELSE OUTPUT NOT
```

1	2	3
31	25	61

DECLARE listnum [1: 3] : INT

DECLARE Rvalue : INT

R ← 25

listnum [1] ← 31

listnum [2] ← 25

listnum [3] ← 61

FOR i ← 1: 3

IF listnum[i] = Rvalue THEN
 OUTPUT "Found"
 OUTPUT i

ELSE "NOT Found"

FOUND

2