


WHILE LOOPS

- specially used when you need to ^{no. of} can't
- used when the iterations are not well defined.
- used to perform a kind check before any / every iteration.

Structure

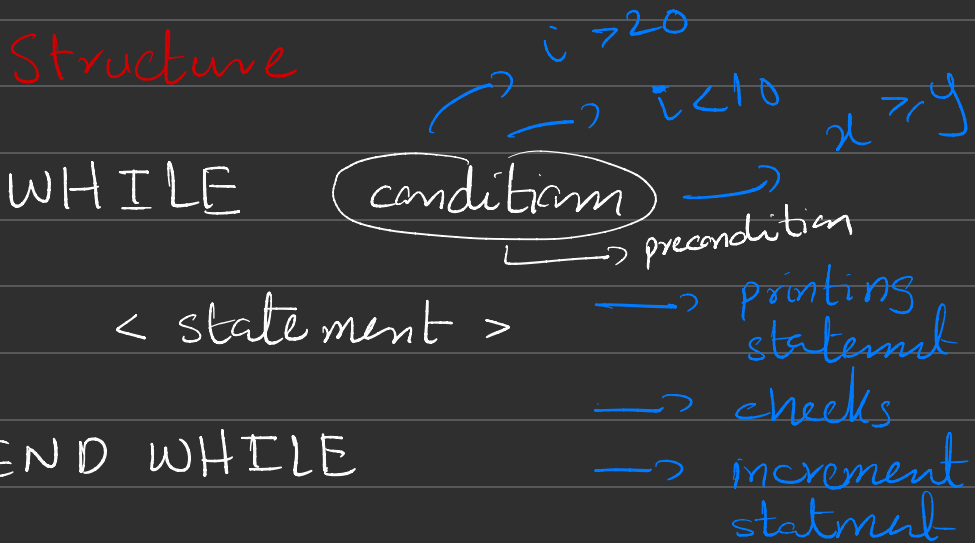

When to use:

- ① validating input from user
- ② looping until a sensor trigger.



Example

Q Print first 10 numbers using while

```
① DECLARE count ← 0 1
② WHILE count ≤ 10. 2
③   OUTPUT count      3
④   count ← count + 1 4 5 6 7 8 9 10
⑤ END WHILE           9
```

REPEAT UNTIL

A post check loop that runs atleast once:

Syntax

REPEAT

<statement>

UNTIL (condition) — post condition

When to use

- ① Asking user input atleast once
- ② Ensuring minimum one iterations.