

FILE HANDLING

- Computer Science Paper - 2

Defination: A file is a named area in secondary storage used to store data permanently.

Why files:

- Data stored in variable is temporary.
- Files provide persistent storage

Uses

- Saving user data
- Reading Information
- Data logging

FUNCTIONS And OPERATIONS

- ① `OPENFILE (fileVar, Filename, mode)`
- ② `READFILE (fileVar, variable)`
  stores all file
- ③ `WRITEFILE (fileVar, data)`
- ④ `CLOSEFILE (fileVar)`

MODE ① READ → Opens file for Reading
② WRITE → Open file for writing
③ APPEND → Add new data to the file

EXAMPLE

```
OPENFILE (myFile, "data.txt" "READ")  
READFILE (myFile, line)  
WRITEFILE (myFile, "Hello")  
CLOSEFILE (myFile)
```

```
WHILE NOT EOF (myFile)  
    READFILE (myFile, line)  
    OUTPUT line  
END WHILE
```

Example 2 writing User Input to the file

```
- OPENFILE (myFile, "marks.txt", "WRITE")  
  - FOR i ← 1 to 5  
    INPUT Marks  
    - WRITEFILE (myFile, Marks)  
  NEXT i  
CLOSEFILE (myFile)
```


```
← OPENFILE (inFile, "input.txt", READ)  
OPENFILE (outFile, "output.txt", WRITE)  
  WHILE NOT EOF (inFile)  
    - READFILE (inFile, data)  
    - WRITEFILE (outFile, data)  
  END WHILE  
CLOSEFILE (inFile)  
CLOSEFILE (outFile)
```

```
OPENFILE (f, "name.txt", "READ")  
  count ← 0  
  WHILE NOT EOF(f)  
    READFILE(f, name)  
    count ← count + 1  
  ENDWHILE  
CLOSEFILE(f).
```

FILE HANDLING

Q What are the keywords used to open or close a file in a pseudocode?

open → OPENFILE
close → CLOSEFILE

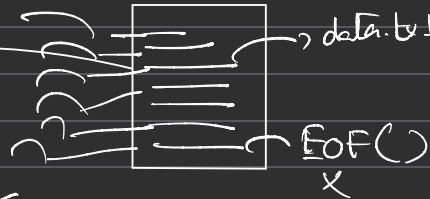

Example:

```
OPENFILE(myFile, "data.txt", READ)
WHILE NOT EOF(myFile)
    READFILE(myFile, line)
    OUTPUT LINE
```

PRINT
ON THE
SCREEN

END WHILE

CLOSEFILE(myFile)

WRITE MODE
READ MODE

FILE FUNCTIONS

- ① OPENFILE (fileVariable, filename, Permission, mode)
- ② CLOSEFILE (fileVariable)
- ③ READFILE (fileVariable, filename, READ)
- ④ WRITEFILE (fileVariable, filename, WRITE)
- ⑤ EOF() → TELL where & when this file ENDS.