


Compressed SPJA H2D Ablation: End-to-End Runtime

Compressed pipeline with timed H2D Compressed pipeline without timed H2D

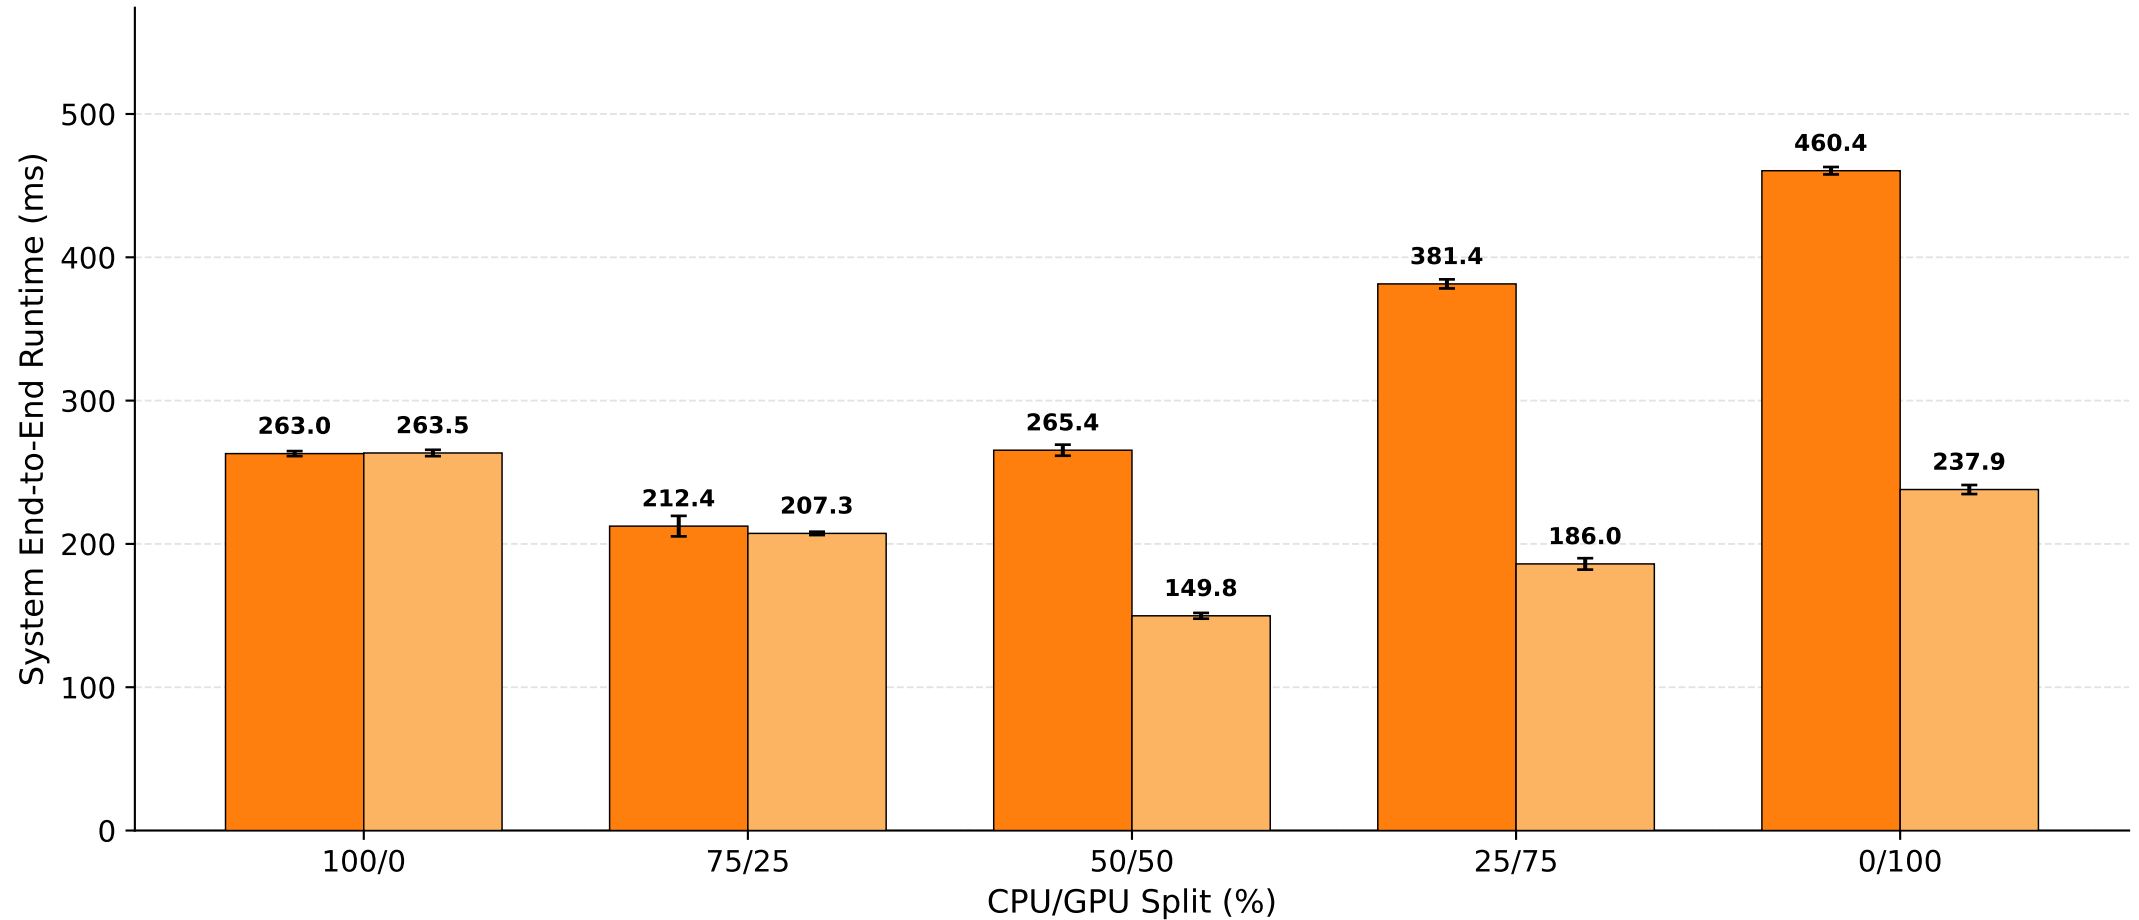

Independent H2D experiment: both modes use LZ4/nvCOMP. WITHOUT_H2D preloads only the GPU-owned compressed bytes; CPU work, nvCOMP, SPJA, reduction, synchronization, and scalar D2H remain timed.