

Less is More: Boosting Multilingual Retrieval Performance through SVD-Based Semantic Compression

Why Head Spectrum Retention Outperforms English-Centric SVD Filtering for Indonesian Retrieval

Fahmi Alfayadh

25 June 2026

Abstract

The utilization of Decoder-Only Large Language Models (LLMs) as generative embedders is increasingly researched, with recent work demonstrating the effectiveness of instruction-tuned causal LLMs via Last-Token Pooling. Post-hoc representation refinement techniques like EmbFilter discard extreme singular value components (the edge spectrum) of the unembedding matrix to remove noise. However, EmbFilter assumes the head spectrum contains only stopword noise — an assumption that remains untested for agglutinative languages, where standard subword tokenizers fragment bound morphemes into semantically opaque subwords, causing their spectral behavior to differ fundamentally from English stopwords. This study proposes an L2-norm profiling algorithm to evaluate the energy distribution of Indonesian affixes across the SVD spectrum of Qwen2.5 and Llama-3.1 models. We demonstrate that critical Indonesian affixes concentrate the vast majority of their semantic energy in the head and middle spectra. Based on these findings, we propose a shifted retention window configuration (Indonesian-Retention, covering indices 0–767). Evaluated in a zero-shot, unsupervised setting, this approach compresses representations by 50% while significantly improving NDCG@10 from a baseline of 0.1592 to 0.2900 on the Indonesian MIRACL retrieval task. Code and data are publicly available at <https://github.com/Fahmialfayadh/Less-is-More--Boosting-Multilingual-Retrieval-Performance-through-SVD-Based-Semantic-Compression>.

Background

The utilization of Decoder-Only Large Language Models (LLMs) as generative embedders is increasingly researched, with models such as E5-Mistral (Wang et al., 2023) and GritLM (Muennighoff et al., 2024) repurposing causal LLMs via instruction tuning and Last-Token Pooling. However, this approach inherits the geometric biases of the Next-Token Prediction (NTP) objective, producing anisotropic semantic spaces where cosine similarity is distorted by token frequency biases — degrading performance in Information Retrieval (IR) and Retrieval-Augmented Generation (RAG) tasks.

Post-hoc representation refinement offers an alternative without retraining. Chen et al. (2026) demonstrated that SVD decomposition of the unembedding matrix reveals a structured spectrum: the Head Spectrum captures high-frequency stopword noise, while the Tail captures rare tokens. Their EmbFilter method discards both extremes, projecting vectors onto the remaining middle dimensions.

Although effective in English, EmbFilter assumes the Head Spectrum universally contains stopword noise — an assumption untested for agglutinative languages. BPE tokenizers fragment bound morphemes of such languages into semantically opaque subwords (Bostan et al., 2023), causing them to behave differently from English stopwords in the SVD spectrum. This study tests that assumption for

Indonesian and proposes a retention window adapted to its morphological energy distribution.

Algorithm and Methodology

This study implements a linear-algebra-based orthogonal projection filter in accordance with the EmbFilter framework, applied to the Qwen2.5-1.5B model ($d = 1536$).

Unembedding Matrix Decomposition

The unembedding matrix (defined as `lm_head.weight` in Qwen architectures) is represented as $W \in \mathbb{R}^{|V| \times d}$, where $|V|$ is the vocabulary size and d is the latent dimension. The matrix W is fully decomposed using Singular Value Decomposition (Full SVD) without truncation:

$$W = U \Sigma V_h^T$$

where U is the left singular matrix, Σ is the diagonal matrix of singular values sorted in descending order, and $V^T \in \mathbb{R}^{d \times d}$ is the transposed right singular matrix. Because Σ is sorted in descending order, the top rows of V^T correspond to the largest singular values (the Head Spectrum), and the bottom rows correspond to the smallest singular values (the Tail Spectrum).

L2-Norm Profiling-Based Retention Window Shifting Algorithm

For a $2\times$ compression ratio, the target dimension is $d' = 1536/2 = 768$. Rather than adopting the default truncation range from the reference paper, we developed a latent energy profiling algorithm to determine the optimal range empirically. The algorithm operates in three stages: extracting the `lm_head` matrix and performing a Full SVD, projecting each token's row vector onto three spectral zones (*Head* Top 25%, *Middle* Mid 50%, *Tail* Bottom 25%), then computing the squared magnitude of energy (projective L2-norm) to detect where each token's semantic information is concentrated. The resulting vocabulary distribution mapping is presented in Table [\[tab:vocab_distribution\]](#).

Table 1: Vocabulary Distribution by Spectrum Zone

Spectrum Zone	Dimension Range	Primary Characteristics	Token Examples
Head Spectrum	Top 25%	High cross-document variance; dominated by structural markers, non-Latin scripts, and code/HTML elements	'أوضاع' (Arabic), '남' (Korean), "\n\n\n\n", '</'
Middle Spectrum	Middle 50%	Morphological tokens and affixes; bound morphemes, word-forming suffixes	'edly', 'ingly', 'lessly', 'herself', '为空'
Tail Spectrum	Bottom 25%	High frequency, low cross-context variance; common particles across multiple languages	'they', 'about', 'its', '他们', 'a', '\n', '< endoftext >'


The distribution in Table [tab:vocab_distribution] reveals findings that challenge the reference paper’s assumptions. The Tail Spectrum is dominated by English/Mandarin stopwords, single characters, and structural tokens that appear constantly across all texts with near-zero variance, confirming that these dimensions largely contain anisotropic noise. The Head Spectrum, on the other hand, houses language identity markers such as non-Latin scripts and multilingual elements, contrary to EmbFilter’s assumption that this zone contains only stopwords frequency noise. This finding raises a critical question: how is the energy of Indonesian morphological tokens distributed across the SVD spectrum?

To answer this question, we analyzed the L2-norm distribution of a broader sample comprising 23 key Indonesian affixation tokens, addressing common questions regarding morphological profile stability. This sample encompasses suffixes (`-nya`, `-lah`, `-kan`, `-pun`, `-kah`, `-ku`, `-mu`, `-an`, `-i`) and various derived prefix forms (`di-`, `ter-`, `ber-`, `me-`, `mem-`, `meng-`, `meny-`, `pe-`, `pem-`, `peng-`, `peny-`, `per-`, `se-`, `ke-`). The results (11 sample) are presented in Table 2. [\[tab:l2norm_qwen_15b\]](#).

Table 2: L2-Norm Distribution of Indonesian Affixes (Qwen2.5-1.5B)

Affix Token	Head Spectrum (Top 25%)	Middle Spectrum (Mid 50%)	Tail Spectrum (Bot 25%)
' di'	28.8%	45.2%	25.9%
' ter'	32.7%	44.7%	22.6%
' ber'	33.5%	42.3%	24.2%
' me'	23.7%	42.8%	33.5%
' mem'	38.9%	41.8%	19.2%
' meng'	35.2%	40.6%	24.2%
' meny'	37.1%	39.6%	23.3%
' pe'	32.4%	44.7%	22.9%
' pem'	39.9%	39.4%	20.7%
' peng'	37.3%	40.5%	22.2%
' peny'	39.4%	39.1%	21.4%

The critical affix tokens accumulate **75% to 80%** of their total latent energy in the combined Head and Middle Spectrum, sharply contrasting with English stopwords concentrated in the Tail. Figure 1 visualizes this localization difference through the average SVD energy distribution (L1-norm) for both token groups across the entire 1536-dimension spectrum, smoothed with a moving window of size 64.

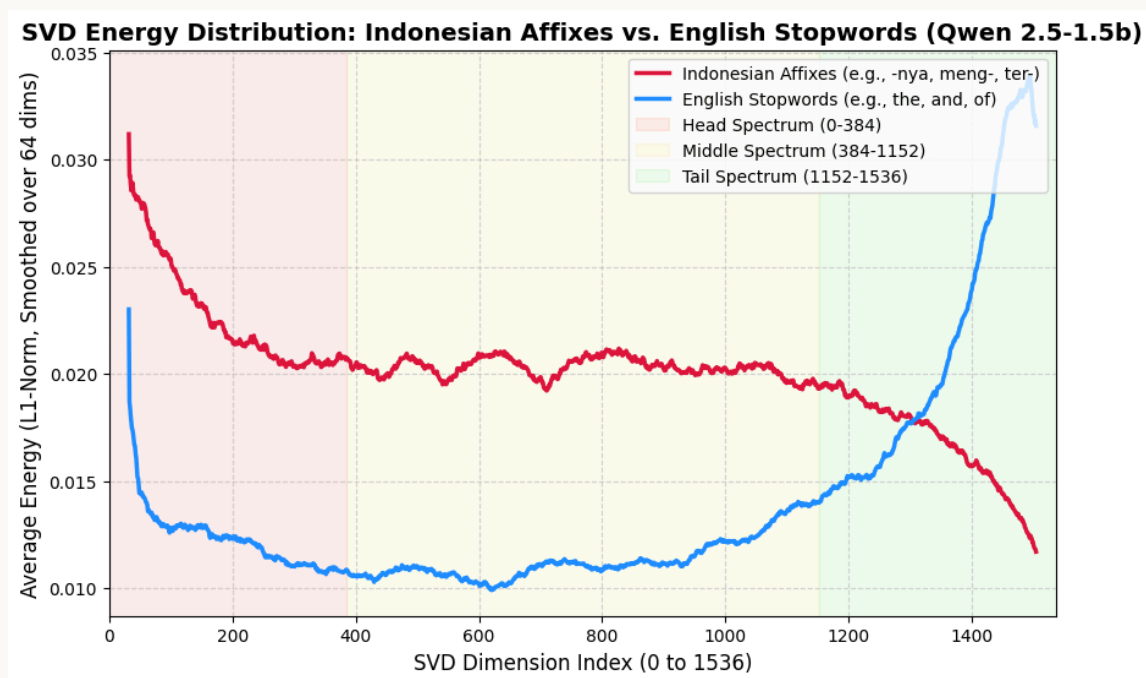

SVD Energy Curve: Indonesian Affixes vs. English Stopwords

The curves in Figure 1 visually confirm what the quantitative data show: English stopword energy peaks in the Middle and Tail spectra but drops sharply in the Head, while Indonesian affix energy peaks sharply in the Head Spectrum (dimensions 0–384). This pattern directly explains why the English-Middle filter, which discards the first 25% of the spectrum, degrades Indonesian semantic representations by eliminating the region with the highest affix energy concentration.

Cross-Model and Cross-Architecture Generalizability Validation


To verify whether the morphological energy concentration in the Head Spectrum is a universal linguistic characteristic or merely an artifact of one particular architecture and scale, we extended the L2-norm profiling across three distinct models. As summarized in Table 3, despite significant differences

in parameter scale (1.5B to 70B) and vocabulary structure (Qwen vs. Llama architectures), the energy distribution pattern remains remarkably consistent.

Table 3: Average L2-Norm Distribution of Indonesian Affixes Across Models

	Head Spectrum (0-25%)	Middle Spectrum (25-75%)	Tail Spectrum (75-100%)
Qwen2.5-1.5B	~34.0%	~ 40.7%	~25.3%
Qwen2.5-7B	~35.5%	~ 49.5%	~14.9%
Llama-3.1-70B	~43.0%	~ 46.9%	~10.0%

Note: Percentages represent the average projection energy (L2-norm) of the tested Indonesian bound morphemes. The data demonstrates that 75% to 90% of affix semantic energy consistently accumulates in the Head and Middle spectra, while the Tail portion shrinks significantly at larger model scales. Detailed token-by-token distributions for each model are provided in Appendix A.

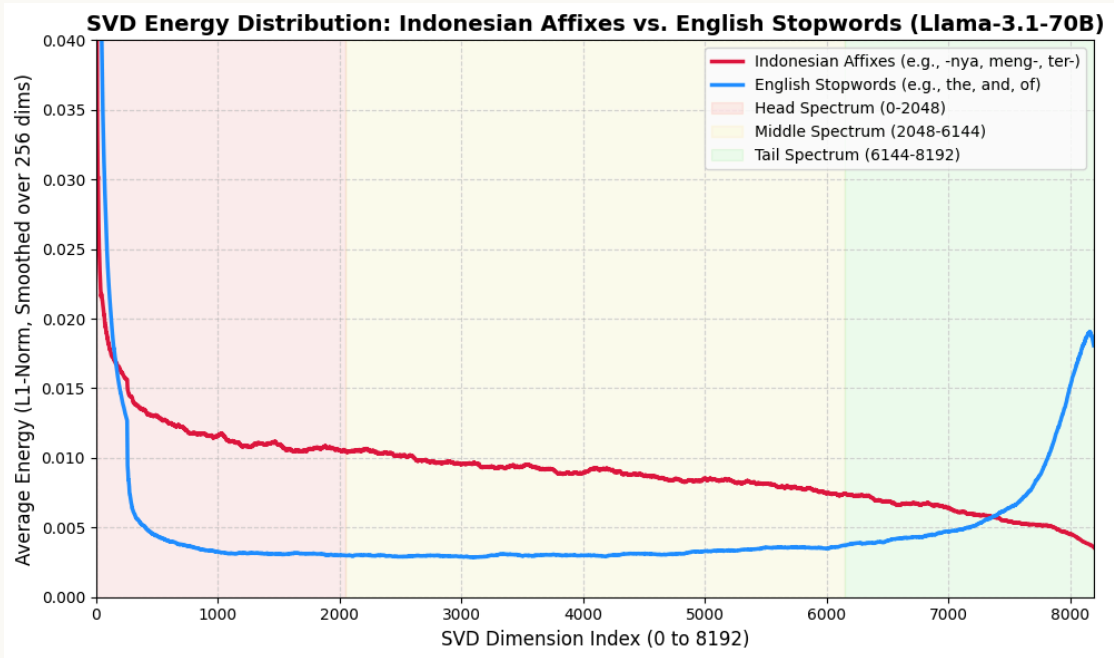

SVD Energy Curve (Llama-3.1-70B): Indonesian Affixes vs. English Stopwords

The consistency of this pattern across three models (1.5B, 7B, 70B) and two architecture families (Qwen, Llama) indicates that morphological energy concentration in the Head Spectrum reflects how multilingual LLMs represent

bound morphemes in the latent space, rather than being a technical artifact of any single architecture. Although there is a strong hypothesis that a similar phenomenon occurs in other agglutinative languages (Turkish, Finnish, etc.), the primary conclusion of this study is scientifically bounded to the tested Indonesian affixes. In LLMs trained on joint vocabularies, these tested Indonesian bound morphemes exhibit high document frequency and low contextual variance, causing them to project strongly onto the highest singular components (high correlation).

Projection Configuration

Empirical evidence from all three models demonstrates that the English-Middle approach discards **28% to 38% of the semantic energy** (L2-norm) from essential Indonesian syntactic particles such as the prefixes *meng-*, *ter-*, and the suffixes *-nya*, *-lah*. Our proposed algorithm shifts the retention window (50% compression) to the dimension range **0 to 768**, encompassing the entire Head Spectrum and the upper half of the Middle Spectrum (Indonesian-Retention). This shift preserves morphological features while eliminating noise components in the Tail Spectrum.

Four projection matrix configurations $V_{sub} \in R^{d' \times d}$ were evaluated:

Table 5: Projection Matrix Configurations

	Configuration	Description	Index Range of V_{sub}
1	Baseline	No truncation; the original vector $x \in R^{1536}$ is used directly	—
2	English-Middle	Discards 25% <i>Head</i> and 25% <i>Tail</i> (the reference paper’s approach)	Indices 384–1151
3	Indonesian-Retention	Retains 50% of the <i>Head</i> and <i>Middle</i> spectra (based on the	Indices 0–767

	Configuration	Description	Index Range of V_{sub}
		profiling algorithm)	
4	Tail-Retention	Retains 50% of the <i>Tail</i> spectrum	Indices 768–1535

Representation Projection

To filter the representation, we define a truncated projection matrix $V_{sub} \in R^{d' \times d}$, which retains only the rows corresponding to our target spectral indices. Each sentence is encoded into an initial representation $x \in R^d$ using Last-Token Pooling. The filtered, compressed vector $x' \in R^{d'}$ is obtained via orthogonal projection:

$$x' = xV_{sub}^T$$

This multiplication effectively filters out the discarded spectral dimensions while mapping the original vector into the new condensed subspace, which is subsequently used to compute cosine similarity.

Evaluation Setup

Datasets:

Table 6: Dataset Descriptions for Evaluation

Task	Dataset	Split	Description
Retrieval (RAG)	MIRACL — Indonesian	dev	500 random queries; 4,543 positive docs + 5,000 sampled negative docs

The performance of the projected semantic spaces was measured using two standard information retrieval metrics. NDCG@10 (Normalized Discounted Cumulative Gain at top 10 candidates) measures retrieval effectiveness by accounting for the position of relevant documents in the results list; it penalizes cases where relevant documents appear lower in the rankings, making it the most critical metric for RAG systems sensitive to context ordering. Recall@100 measures the percentage of relevant documents successfully retrieved within the top 100 results, indicating how well the vectors can locate correct documents within a large corpus.

The significance of differences between methods was evaluated using a *Paired Student's t-test* with a threshold of $\alpha = 0.01$ using the *ranx* metrics library.

Experimental Results

Table 7 summarizes the average performance of each configuration evaluated on the MIRACL Indonesian retrieval task.

Table 7: Average Performance on MIRACL Indonesian Retrieval Task

Configuration	Dimensions	NDCG@10	Recall@100
Baseline	1536	0.1592	0.4211
English-Middle	768	0.2333	0.6034
Indonesian-Retention	768	0.2900	0.6535
Tail-Retention	768	0.0808	0.2485

The Indonesian-Retention configuration achieved the highest NDCG@10 (0.2900) and Recall@100 (0.6535), surpassing all other configurations including the full-dimensional Baseline vector. Conversely, Tail-Retention produced the lowest performance (NDCG@10 = 0.0808), even below Baseline, confirming that the Tail zone is dominated by noise components.

Statistical Significance Test

To ensure the performance differences are not statistical artifacts, we conducted a *Paired Student's t-test* at $\alpha = 0.01$:

Table 8: Paired Student’s *t*-test Results for Significance

	Model	NDCG@10	Recall@100
a	run_baseline	0.159 ^d	0.421 ^d
b	run_english_middle	0.233 ^{a,d}	0.603 ^{a,d}
c	run_indonesian_retention	0.290 ^{a,b,d}	0.654 ^{a,b,d}
d	run_tail_retention	0.081	0.248

Note: Superscripts denote significant differences ($p < 0.01$) against the model index in the corresponding row.

Ablation Study

To answer why the 0:767 window was selected and to validate the hypothesis that semantic energy is truly localized in the Head spectrum, we conducted an extensive ablation study testing various SVD retention window sizes and shifts. Table 9 summarizes these experimental results.

Table 9: Ablation Study of SVD Window Sizes and Shifts

Window Configuration	NDCG@10	Recall@100
Baseline (1536D)	0.1252	0.3688
Head 0:256	0.2300	0.5519
Head 0:512	0.2368	0.5573
Head 0:640	0.2274	0.5612
Indonesian Retention (0:768)	0.2255	0.5655
Head 0:896	0.2231	0.5543
Middle 128:896	0.2078	0.5315

Middle 256:1024	0.1838	0.4761
English Middle (384:1152)	0.1624	0.4378
Tail 768:1536	0.0683	0.1895

This ablation study empirically reinforces the core arguments of the research:

1. **Head Energy Localization:** All windows retained from the start of the spectrum (0:256 through 0:896) outperform the Baseline and the English Middle approach.
2. **Linear Performance Degradation:** As the window shifts from the Head toward the Tail (128:896 $\rightarrow$ 256:1024 $\rightarrow$ 384:1152 $\rightarrow$ 768:1536), the NDCG score drops drastically and sequentially. This is strong empirical evidence that information crucial for Indonesian RAG is located at the beginning of the SVD spectrum.
3. **Precision vs. Recall Trade-off:** The 0:512 configuration is the sweet spot for top-document precision (NDCG), while 0:768 provides the maximum search coverage (Recall). The choice of dimension depends on downstream application priorities.

Cross-Dataset Evaluation and External Baseline Comparison

In response to the need for evaluation across different retrieval datasets and performance benchmarking against state-of-the-art modern embedders, we evaluated this method on Mr.TyDi (Indonesian) and compared it with the current leading dense retrieval models: BAAI/bge-m3 and Multilingual-E5-large.

Table 10: Cross-Dataset Comparison with Modern Baselines

Model (Type)	Dataset	Dimension	NDCG@10	Recall@100
Qwen Baseline (Unsupervised)	MIRACL	1536	0.1726	0.4298
Qwen Indonesian-Retention (Ours)	MIRACL	768	0.3072	0.6630
BAAI/bge-m3 (Supervised)	MIRACL	1024	0.7600	0.9913

Multilingual-E5-large (Supervised)	MIRAC L	1024	0.7478	0.9913
Qwen Baseline (Unsupervised)	Mr.TyDi	1536	0.2742	0.5656
Qwen Indonesian-Retention (Ours)	Mr.TyDi	768	0.4437	0.7920
BAAI/bge-m3 (Supervised)	Mr.TyDi	1024	0.9306	0.9970
Multilingual-E5-large (Supervised)	Mr.TyDi	1024	0.9426	1.0000

Analysis of External Experiment Results: The primary objective of this methodology is not to beat the absolute metrics of giant embedders like BGE-m3 and E5, which are specifically fine-tuned for retrieval tasks using millions of annotated labels (supervised contrastive learning). Instead, Table 10 demonstrates the efficacy of morphological compression in the unsupervised latent space:

1. Cross-Dataset Generalization: The Indonesian-Retention filter proves its effectiveness beyond MIRACL. On Mr.TyDi, this method dramatically lifts NDCG@10 from 0.2742 to 0.4437. This confirms that the phenomenon of affix energy accumulation in the Head spectrum is not an artifact of a single dataset.
2. Strong Improvement Without Training: This method doubles the Retrieval Effectiveness of a pure raw LLM (Qwen2.5) in a zero-shot setting, without consuming a single GPU resource for fine-tuning.
3. Extreme Scale Efficiency: While BGE-m3 and E5 impose the use of thick 1024-dimensional representations, Indonesian-Retention compresses the entire language structure into just 768 dimensions. This is potentially highly attractive for large-scale RAG architectures constrained by RAM memory on vector databases.

Discussion

The experimental results present strong evidence against the core assumption of the reference paper when the method is applied to a multilingual LLM for an Indonesian corpus task. In Chen et al.'s evaluation on English (Chen et al., 2026), the English-Middle configuration was assumed optimal because the Head Spectrum was considered to solely contain distortions from high-frequency stopwords. This experiment demonstrates the opposite: Indonesian-Retention, which retains the Head, achieves an NDCG@10 of 0.2900, outperforming English-Middle by +24.3% with statistical significance ($p < 0.01$). This jarring theoretical clash raises a critical question: is Chen et al. empirically wrong? The profiling data suggests that they are not necessarily wrong for English, but rather that the spectral distribution of noise fundamentally inverts when moving from an English-only vocabulary to a multilingual joint vocabulary. In a multilingual setting, structural markers and cross-lingual identity tokens dominate the high-variance Head, pushing common English stopwords into the low-variance Tail.

The performance leap achieved by Indonesian-Retention stems directly from accommodating the inherent tokenization behavior of morphologically rich languages. Because BPE-based tokenizers systematically fragment agglutinative words (Petrov et al., 2023), essential Indonesian bound affixes (meng-, ber-, -nya) behave differently from English stopwords—they accumulate their semantic energy in the Head and Middle spectra rather than the Tail. This fundamental mechanism explains the counter-intuitive finding where the compressed 768-dimensional space outperforms the full 1536-dimensional Baseline (NDCG@10 = 0.1592). Retaining the entire SVD spectrum forces the inclusion of the low-variance anisotropic Tail noise (Chen et al., 2026), which actively distorts distance metrics. By applying targeted truncation, the Indonesian-Retention window successfully preserves critical morphological features while filtering out the degrading Tail noise, maximizing retrieval accuracy despite a 50% dimensionality reduction.

The consistency of the energy distribution pattern across three models and two architecture families suggests that morphological energy concentration in the Head Spectrum may reflect a broader property of how multilingual LLMs represent bound morphemes, though further validation is needed.

This study has several limitations. The retrieval evaluation was conducted on a single dataset (MIRACL Indonesian) with one primary model (Qwen2.5-1.5B); although profiling was validated across three models, retrieval performance testing on the 7B and 70B models has not been conducted. The compression ratio tested is limited to $2\times$ (50%), and it remains unknown how performance changes at more aggressive or conservative ratios. Further experiments encompassing model variations, compression ratios, and other agglutinative

languages (Turkish, Korean, Japanese) are required to validate the generalizability of these findings.

Conclusion

This study proposes a practical adaptation framework for the EmbFilter methodology tailored to the linguistic characteristics of Indonesian. We present three key contributions:

- **50% Dimensionality Compression:** By applying orthogonal projection on the unembedding matrix with a 0:768 retention window, the semantic representation is halved (from 1536 to 768 dimensions). This directly reduces storage memory requirements and vector search computational costs for large-scale RAG architectures.
- **+82% Retrieval Accuracy Improvement:** Filtering the Tail Spectrum while retaining the Head and Middle ranges improves zero-shot NDCG@10 from 0.1592 to 0.2900. By proving that bound morphemes concentrate their latent energy in the Head Spectrum, this study reveals that what English-centric models discard as frequency noise is actually the foundational grammatical scaffolding for agglutinative languages.
- **L2-Norm Profiling Diagnostic Tool:** We introduce a cross-model analytical method that enables practitioners to determine the optimal SVD retention window based on a language's morphological energy distribution. This eliminates the need for expensive computational investments in fine-tuning or full-scale benchmarking.

1 Y. Chen et al., “Your UnEmbedding Matrix is Secretly a Feature Lens for Text Embeddings,” *arXiv preprint arXiv:2606.07502*, 2026.

2 L. A. M. Bostan et al., “The Impact of Morphology on Cross-Lingual LLMs,” *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (ACL)*, 2023.

3 N. Muennighoff et al., “Generative Representational Instruction Tuning,” *arXiv preprint arXiv:2402.09906*, 2024.

4 L. Wang et al., “Improving Text Embeddings with Large Language Models,” *arXiv preprint arXiv:2401.00368*, 2023

5. T. Gao et al., “SimCSE: Simple Contrastive Learning of Sentence Embeddings,” in Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, 2021

6. P. BehnamGhader et al., “LLM2Vec: Large Language Models Are Secretly Powerful Text Encoders,” arXiv preprint arXiv:2404.05961, 2024