

Modular Random Boolean Networks*

Rodrigo Poblanno-Balp†‡

Carlos Gershenson‡†

† Centro de Ciencias de la Complejidad, UNAM, México

‡ Instituto de Investigaciones en Matemáticas Aplicadas y en Sistemas, UNAM, México

March 21, 2011

Abstract

Random Boolean networks (RBNs) have been a popular model of genetic regulatory networks for more than four decades. However, most RBN studies have been made with random topologies, while real regulatory networks have been found to be modular. In this work, we extend classical RBNs to define modular RBNs. Statistical experiments and analytical results show that modularity has a strong effect on the properties of RBNs. In particular, modular RBNs have more attractors and are closer to criticality when chaotic dynamics would be expected, compared to classical RBNs.

1 Introduction

Random Boolean networks (RBN) have been a popular model of genetic regulatory networks (GRNs) [25, 26, 16]. Most studies have been made on RBNs with random topologies. Nevertheless, it has been found that topologies affect considerably the properties of RBNs. For example, Aldana studied RBNs with a scale-free topology [1], discovering important differences with random

*A preliminary version of this work was presented at the ALife XII conference in Odense, Denmark on August 20th, 2010. [36]

topologies. In this work, we study the effect of a modular topology in RBNs. We find that modularity changes the properties of RBNs. Given the fact that real GRNs are modular [38, 8, 37] and most RBN studies have been made over random topologies, it is important to understand the differences between random and modular topologies.

Modularity plays an important role in evolution [42, 14, 50], since separable functional systems are found at all scales of biological systems [48]. Modularity allows for changes to occur within modules without propagating to other regions and the combination of modules to explore new functions [13]. Thus, the study of modular RBNs is also relevant for understanding the evolution of GRNs.

In the next section, classic RBNs are reviewed, together with their dynamical properties and related work. Section 3 presents our model of modular RBNs. Methods and results of statistical experiments follow in Section 4. The discussion in Section 5 reflects on the results and provides an analytical confirmation. Several future research avenues are mentioned to conclude the paper.

2 Random Boolean Networks

Random Boolean Networks (RBNs) [25, 26, 16] consist of N nodes with a Boolean state, representing whether a gene is active (“on” or “one”) or inactive (“off” or “zero”). These states are determined by the states of K nodes which can be considered as inputs or links towards a node. Because of this, RBNs are also known as NK networks or Kauffman models [3]. The states of nodes are decided by lookup tables that specify for every 2^K possible combination of input states the future state of the node. RBNs are random in the sense that the connectivity (which nodes are inputs of which, see Figure 1) and functionality (lookup tables of each node, see Table 1) are chosen randomly when a network is generated, although these remain fixed as the network is updated each time step. RBNs are discrete dynamical networks (DDNs), since they have discrete values, number of states, and time [53]. They can also be seen as a generalization of Boolean cellular automata [52, 15], where each node has a different neighborhood and rule.

RBNs have 2^N possible network states, i.e. all possible combinations of Boolean node states.

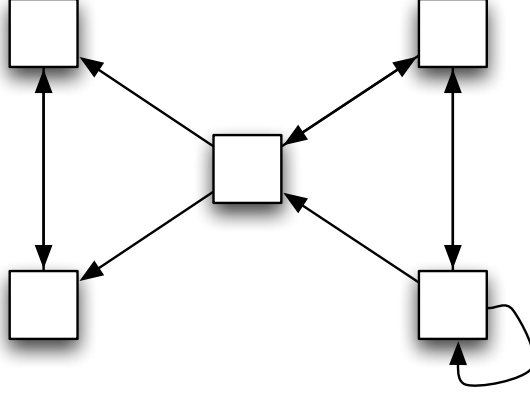


Figure 1: Topology of an example RBN with $N = 5$, $K = 2$. Each node has two inputs that determine its state. Since the topology is randomly generated, a node might have several outputs or none at all.

Table 1: Example lookup table to update a node z depending on the state of nodes x and y . Lookup tables include all possible combinations of inputs, i.e. 2^K rows. Different nodes will have different lookup tables, i.e. Boolean functions. In this example table, the function is the binary XNOR.

$x(t)$	$y(t)$	$z(t+1)$
0	0	1
0	1	0
1	0	0
1	1	1

Transitions between network states determine the state space of the RBN. In classic RBNs, the updating is deterministic and synchronous [15]. Since the number of states of the network is finite and the dynamics are deterministic, sooner or later a state will be repeated in theory (in practice, this can take longer than the age of the universe due to the immense state space). When this occurs, the network has reached an *attractor*, since the dynamics will remain in that subset of the state space. If the attractor consists of only one state, then it is called a *point* attractor (similar to a steady state), whereas an attractor consisting of several states is called a *cycle* attractor (similar to a limit cycle).

RBNs are dissipative systems, since each state has only one successor, while having the possibility of having several predecessor states (many states lead to one state), or no predecessor (a state can be reached only from initial conditions, a so called a “Garden of Eden” state). Figure 2 illustrates the state transitions of RBNs.

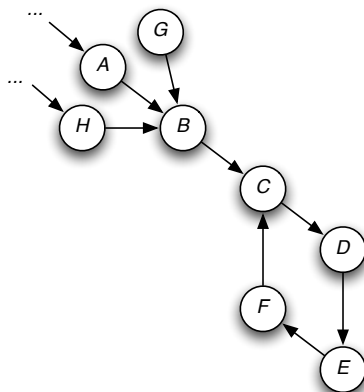


Figure 2: Example of state transitions. B is a successor state of A and a predecessor of C . States can have many predecessors (e.g. B), but only one successor. G is a Garden of Eden state since it has no predecessors. The attractor $C \rightarrow D \rightarrow E \rightarrow F \rightarrow C$ has a period four. [19]

Note that the topological network (with N nodes, each with a Boolean variable, i.e. one bit) is different from the state transition network (with 2^N nodes, each with N bits). One of the main avenues in RBN research is involved with studying how the topological network (structure) determines the properties of the state transition network (function).

2.1 Dynamical Regimes

RBNs have three dynamical regimes: *ordered*, *chaotic*, and *critical* [53, 16]. Typical dynamics of the three regimes can be seen in Figure 3. The ordered regime is characterized by little change, i.e. most nodes are static. The chaotic regime is characterized by large changes, i.e. most nodes are changing. This implies that RBNs in the ordered regime are robust to perturbations (of states, of connectivity, of node functionality). Since most nodes do not change, damage has a low probability of spreading through the network. On the contrary, RBNs in the chaotic regime are very fragile: since most nodes are changing, damage spreads easily, creating large avalanches that spread through the network. The critical regime balances the ordered and chaotic properties: the network is robust to damage, but it is not static. This balance has led people to argue that life and computation should be within or near the critical regime [30, 26, 9, 27]. In the ordered regime, there is robustness, but no possibility for dynamics, computation, and exploration of new configurations, i.e. evolution. In the chaotic regime, exploration is possible, but the configurations found are fragile, i.e. it is difficult to reach persisting patterns (memory). There is recent evidence that real GRNs are in or near the critical regime [5].

It has been found that the regimes of RBNs depend on several parameters and properties [19]. Still, two of the most salient parameters are the connectivity K and the probability p that there is a one on the last column of lookup tables. When $p = 0.5$ there is no probability bias. For $p = 0.5$, the ordered regime is found when $K < 2$, the chaotic regime when $K > 2$, and the critical regime when $K = 2$ [12]. The ordered and chaotic regimes are found in distinct phases, while the critical regime is found on the phase transition. Derrida and Pomeau found analytically the critical connectivity K_c ¹:

$$\langle K_c \rangle = \frac{1}{2p(1-p)} \quad (1)$$

This can be explained using the simple method of Luque and Solé [32]: Focussing on a single node i , the probability that a damage to it will percolate through the network can be calculated.

¹This result is for infinite-sized networks. In practice, for finite-sized networks, the precise criticality point may be slightly shifted.

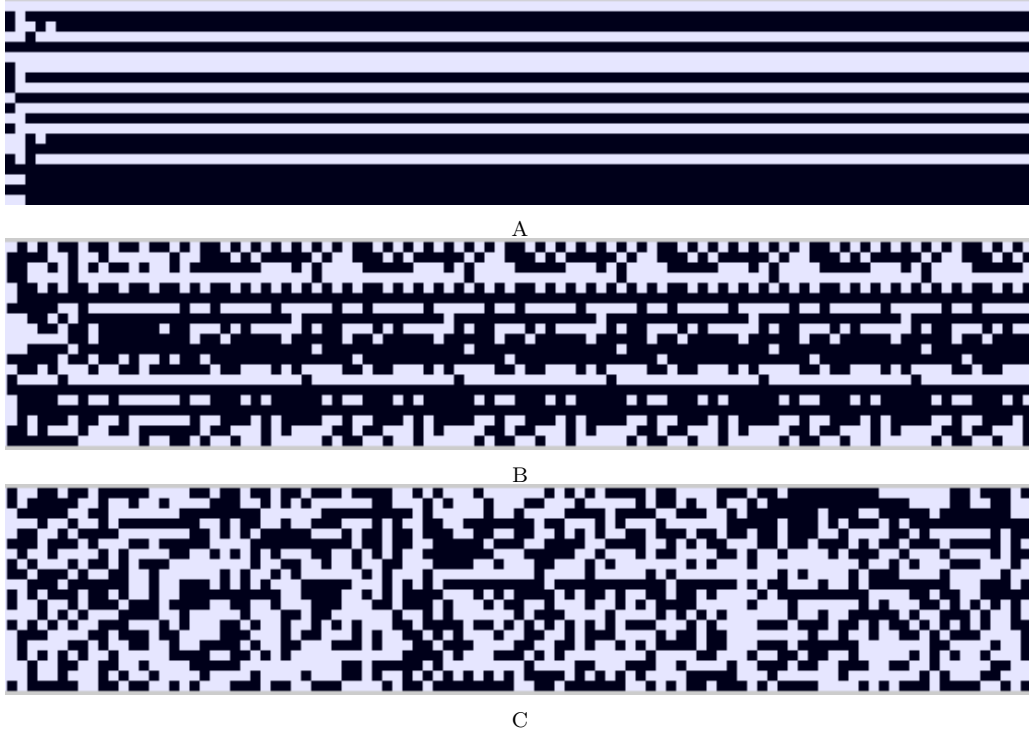


Figure 3: Dynamics for three RBN with $N = 20$ and $p = 0.5$: (A) $K = 1$ (ordered), (B) $K = 2$ (critical), and (C) $K = 5$ (chaotic). 100 time steps shown from a random initial condition (leftmost column, time flows to the right, the state of nodes in time is represented in rows, the RBN state at a particular timestep is represented in columns).

It can be seen that this probability will increase with K , as more outputs from a node will increase the chances of damage propagation. Focussing on a node j from the outputs of i , then there will be a probability p that $j = 1$. Thus, there will be a probability $1 - p$ that a damage in i will propagate to j . Complementarily, there will be a probability $1 - p$ that $j = 0$, with a probability p that a damage in i will propagate to j . If there are on average $\langle K \rangle$ nodes that i can affect, then we can expect damage to spread if $\langle K \rangle 2p(1 - p) \geq 1$ [32], which implies chaotic dynamics. This leads to the critical connectivity of Derrida and Pomeau [12], shown in equation 1.

2.2 Related Work

We briefly mention particular studies of coupled RBNs, which share similarities with the model of modular RBNs presented in the next section. A more detailed comparison can be found elsewhere [35].

Bastolla and Parisi [6] studied modularity within classical RBNs, i.e. functionally independent clusters, but not topological modularity.

There have been different studies where only two coupled RBNs are considered [22, 4, 24].

There are studies where RBNs are generated in cells of a 2D lattice, similar to a cellular automaton, where each RBN is weakly coupled with its von Neumann neighbors [45, 39, 11]. The goal is to model intercellular signaling in a tissue.

Our model is more general than previous models, since there is an arbitrary number of coupled networks, and this is not restricted to spatial neighbors. Moreover, it is a natural extension of the classic RBN model.

3 Modular Random Boolean Networks

We propose a general model of modular random Boolean networks (MRBNs) that extend naturally the classic RBN model. A MRBN consists of M modules, each of which is a RBN with N nodes and on average $\langle K \rangle$ (intramodular) inputs per node. Each module has additional $\langle L \rangle$ (intermodular) inputs on average that link random nodes from different modules. These L intermodular connections

can be seen as “weak links” [10] between modules. Weak links have been shown to offer stability in networks [10]. Figure 4 shows an example MRBN.

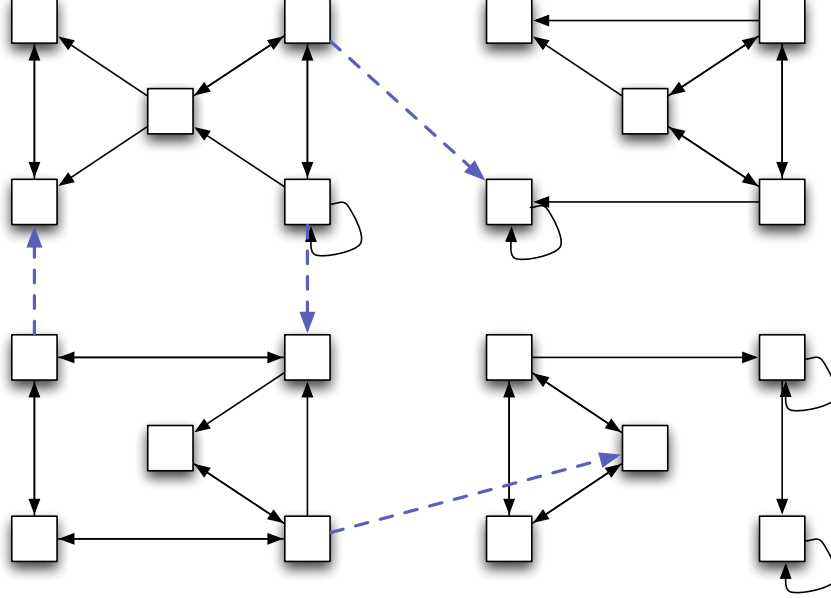


Figure 4: Topology of a example MRBN with $N = 5$, $M = 4$, $K = 2$, $L = 1$. Each module is similar to the example RBN shown in Figure 1, with one additional input per module (dashed arrows). Modules can have several or no outputs.

Thus, the total number of nodes N_T of a MRBN is given by

$$N_T = N \cdot M \quad (2)$$

and the total number of links T is given by

$$T = M \cdot (\langle K \rangle \cdot N + \langle L \rangle) \quad (3)$$

since each of the M modules has $\langle L \rangle$ inputs and N nodes with $\langle K \rangle$ intramodular inputs.

The total average number of inputs per node $\langle K_T \rangle$ is given by

$$\langle K_T \rangle = \frac{T}{N_T} = \langle K \rangle + \frac{\langle L \rangle}{N} \quad (4)$$

In the exploration of the space of possible MRBNs, the following measures are useful:

To study the relationship between number of nodes and modules, the node-to-module ratio μ is simply

$$\mu = \frac{N}{M} \quad (5)$$

To study the relationship between internal (K) and external (L) links, the probability κ that a link is *intramodular* is given by

$$\kappa = \frac{\langle K \rangle}{\langle K_T \rangle} \quad (6)$$

while the probability λ that a link is *intermodular* is the complement of κ :

$$\lambda = 1 - \kappa \quad (7)$$

4 Experiments

The open software laboratory RBNLab [18] was extended to explore the properties of MRBNs. RBNLab and its Java source code are available at <http://rbn.sourceforge.net>.

For all experiments, $p = 0.5$ and a total number of nodes $N_T = 20$ was used. Even when this is a relatively small size of MRBN, the effects of modularity can be already appreciated. The size of networks severely limits the statistical explorations, since each additional node doubles the size of the state space $S = 2^{N_T}$.

For each case and each K_T , one thousand networks were generated randomly, exploring one thousand randomly chosen initial states for ten thousand steps. This implies at least 10^{10} updates per MRBN ensemble [28].

We performed two sets of experiments: one to explore the statistical properties of different

families of MRBNs and another to measure the sensitivity to initial conditions of different families of MRBNs. In each set of experiments, five cases were studied in two groups. In the first group, κ (percentage of internal inputs) is explored, while leaving μ (node-to-module ratio) fixed. In the second group, μ is varied while $\langle K \rangle = \langle L \rangle$. For both sets of experiments, the following five cases were considered, varying $\langle K_T \rangle = \{1, 2, 3, 4\}$:

1. $\langle K \rangle = \langle L \rangle$, $\mu \rightarrow 1$
2. $\langle K \rangle = 1$, $\mu \rightarrow 1$
3. $\langle L \rangle = 1$, $\mu \rightarrow 1$
4. $N = 20$, $M = 1$, $\langle L \rangle = 0$, $\langle K \rangle = \langle K_T \rangle$
5. $N = 1$, $M = 20$, $\langle L \rangle = \langle K \rangle$

For cases 1, 2 and 3, μ remains fixed ($\mu = \frac{N}{M} \rightarrow 1$) while κ is explored. Case 2 favors intermodular (external) links, while keeping intramodular links fixed at $\langle K \rangle = 1$. Case 3 favors intramodular (internal) links, while keeping intermodular links fixed at $\langle L \rangle = 1$. Case 1 is intermediate, balancing intermodular and intramodular links, restricting $\langle K \rangle = \langle L \rangle$.

Cases 1, 4 and 5 are compared to explore the effect of μ on MRBN properties. Case 4 is equivalent to the classical RBN model, since there is only one module ($M = 1$) and no intermodular links ($\langle L \rangle = 0$). Case 5 is the opposite extreme, where there are N_T modules of a single node. In this case, intramodular links are self-links, and when $\langle K \rangle > 1$ there are in practice fictitious inputs, since the dynamic behavior is equivalent to that of $\langle K \rangle = 1$. This is because having more than one input from the same node is equivalent to having only one input (zero or one), as the same node cannot have different states at the same time. Case 5 is different from classical RBNs with only self-links since $\langle L \rangle > 0$.

In the following, the variables representing averages such as $\langle K \rangle$ and $\langle L \rangle$ will be used without the average symbols for simplicity.

4.1 Statistical Properties

For the statistical experiments, the following properties were studied:

Average Number of Attractors A . This indicates how many distinct sets of states can “attract” the dynamics of the MRBN. When $A > 1$ it is considered that the system is *multistable* [44]. There is evidence that in real genetic regulatory networks, attractors correspond to cell types [23], confirming Kauffman’s original hypothesis [25].

Average Attractor Lengths Le . When $Le = 1$, there are only point attractors in the network. Larger values of Le indicate longer cycle attractors.

Average Percentage of States in Attractors $\%SIA$. This reflects how much “complexity reduction” is performed by the network, i.e. from all possible 2^{N_T} states, the percentage of states that “capture” the dynamics. Even when complexity reduction is relevant, larger values of $\%SIA$ indicate a more complex potential functionality of the network, i.e. richer dynamics. A large $\%SIA$ can be given by large attractor lengths Le and/or a high number of attractors A . The more and longer attractors a network has, it can exhibit a richer behavior.

$$\%SIA = 100 \cdot \frac{A \cdot Le}{2^{N_T}} \quad (8)$$

Statistical results often give very high standard deviations σ . This is because some networks might have a single point attractor, while others might have several cycle attractors. Still, the averaged values are informative, showing the effect of different MRBN parameters on the network properties and dynamics. Nevertheless, the potential implications of very high standard deviations should not be forgotten. For example, in classic RBNs $K = N$ with $p = 0.5$ implies chaotic dynamics. Still, it is possible to construct within this ensemble RBNs with ordered dynamics, e.g. having a large number of canalizing functions [21, 41, 29].

4.1.1 Number of Attractors

The A results for cases 1, 2, and 3 are shown as boxplots² in Figure 5. The primary result is that higher values of κ yield more attractors. Detailed results (including means and standard deviations) and κ values can be seen in Tables A.1, A.2, and A.3 in Appendix A. Notice that for $K_T = 1$, case 2 has the highest $\kappa = 1$, since the restriction $K = 1$ implies $L = 0$. For $K_T \geq 2$, case 2 has the lowest κ , and also the lowest A . Case 3 has the highest κ for $K_T \geq 2$, and also the highest A .

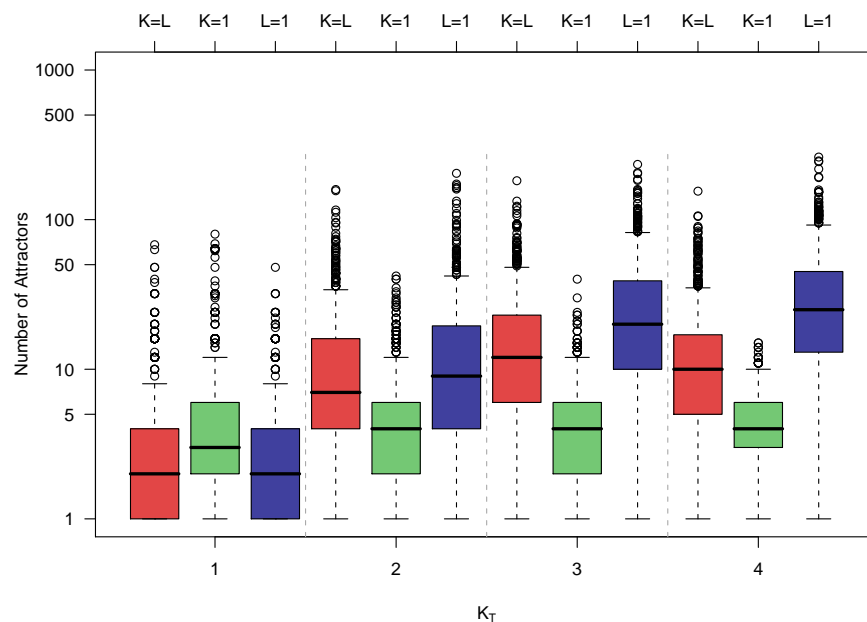


Figure 5: Number of Attractors for different K_T for cases 1, 2 & 3 ($K = L$, $K = 1$, and $L = 1$, respectively). Notice logarithmic scale.

These results suggest that favoring intramodular (K) over intermodular (L) links results in a higher number of attractors. This can be explained as follows: if there is a maximum $\kappa = 1 \Rightarrow L = 0$,

²A boxplot is a non-parametric representation of a statistical distribution. Each box contains the following information: The median ($Q2 = x_{0.50}$) is represented by the horizontal line inside the box. The lower edge of the box represents the lower quartile ($Q1 = x_{0.25}$) and the upper edge represents the upper quartile ($Q3 = x_{0.75}$). The interquartile range ($IQR = x_{0.75} - x_{0.25}$) is represented by the height of the box. Data which is less than $Q1 - 1.5 \cdot IQR$ or greater than $Q3 + 1.5 \cdot IQR$ is considered an “outlier”, and is indicated with circles. The “whiskers” (horizontal lines connected to the box) show the smallest and largest values that are not outliers.

i.e. there are no intermodular links. This means that modules are isolated and can be seen as independent classic RBNs, with different attractors of different lengths. However, the MRBN will consider different combinations of the same modular attractors as different attractors. This can be better understood with an example. Let us have a small MRBN $M = 2, N = 3, K = 2, L = 0$. Since modules have no interaction ($L = 0$), this MRBN is equivalent to two separate classical RBNs. Let us assume that the first module has a point attractor: $001 \rightarrow 001$ and an attractor of period 2: $000 \rightarrow 111 \rightarrow 000$; and the second module has a point attractor: $000 \rightarrow 000$ and an attractor of period 3: $100 \rightarrow 010 \rightarrow 001 \rightarrow 100$. Thus, the combinations of these RBN attractors will yield four attractors in the MRBN:

1. The two point attractors: $001000 \rightarrow 001000$.
2. The first point attractor and the period three attractor: $001100 \rightarrow 001010 \rightarrow 001001 \rightarrow 001100$.
3. The period two attractor and the second point attractor: $000000 \rightarrow 111000 \rightarrow 000000$.
4. The period two and period three attractors: $000100 \rightarrow 111010 \rightarrow 000001 \rightarrow 111100 \rightarrow 000010 \rightarrow 111001 \rightarrow 000100$.

Considering that in RBNs A grows algebraically with N [16], MRBNs with several modules M and $\kappa = 1$ will tend to have much more attractors on average than a RBN with the same N_T and K_T . This is because the MRBN will have as different attractors all the possible combinations of all modular attractors. As intermodular links L are added and κ decreases, changes in the states of nodes which have L links as outputs might perturb and even destroy attractors. When κ is minimal, the organization of the MRBN is more similar to a classical RBN, since there are less restrictions on where to assign links (in general (for $M > 2$), there are more possible intermodular links ($M \cdot (M - 1) \cdot N^2$) than possible intramodular links ($M \cdot N^2$)).

The A results for cases 4, 5, and 1 are compared in Figure 6. It can be seen that μ is also relevant for A . More modules (low μ) imply more potential combinations of modular attractors, which implies a higher A for MRBNs. Case 4, which is equivalent to a classic RBN has a maximum

$\mu = N_T$, i.e. a single module, so there is no possible combination of attractors. Case 4 has the lowest A of all five cases. The extreme case 5 has a minimum $\mu = \frac{1}{N_T}$, i.e. $N = 1$, giving the highest A of all five cases. Notice that in case 5 A decreases for $K_T > 2$. This is because even when κ is constant in theory, in practice κ decreases as K_T increases, given the fact that if $K > N$ is equivalent in practice to $K = N$ because of fictitious inputs ($N = 1$ in this case, see Table A.5 in Appendix A).

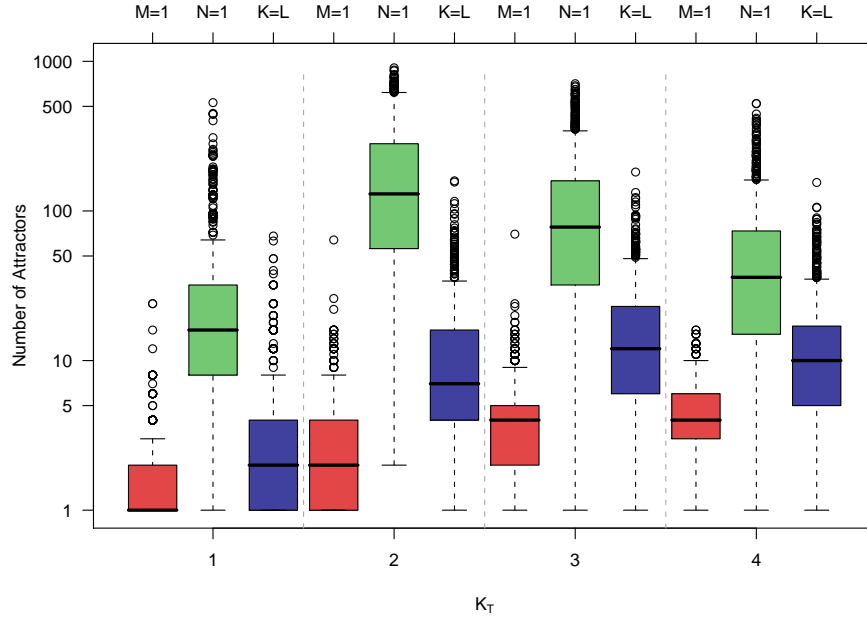


Figure 6: Number of Attractors for different K_T for cases 4, 5 & 1 ($M = 1$, $N = 1$, and $K = L$, respectively). Notice logarithmic scale.

4.1.2 Attractor Lengths

The effect of κ on Le seems to be minimal, as the average attractor lengths is very similar for cases 1, 2, and 3, exponentially increasing with K_T , as it can be seen in Figure 7.

The effect of μ on Le is seen in Figure 8. For $K \geq 3$, classical RBNs ($\mu = 1$) have a higher Le

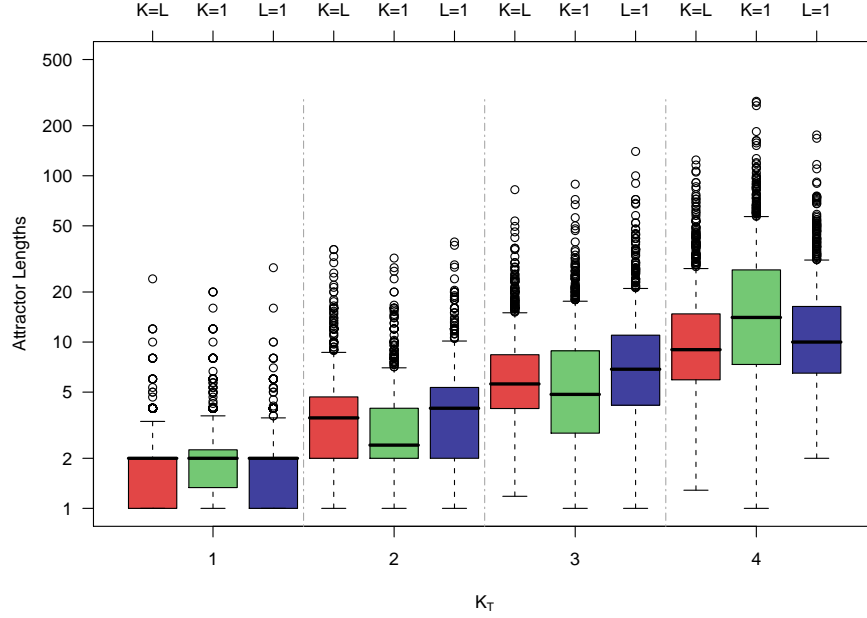


Figure 7: Attractor Lengths for cases 1, 2 & 3 ($K = L$, $K = 1$, and $L = 1$, respectively). Notice logarithmic scale.

than a balanced MRBN (case 1), which have a higher Le than extreme MRBNs with a minimal $\mu = \frac{1}{N_T}$ (case 5). This can be explained by the fact that in practice attractor lengths grow algebraically with N (for deterministic updating schemes, as the one used in this paper) [17]. For the same value of N_T , higher values of μ imply a higher N per module. Having more nodes per module allows the possibility of more combinations of states in an attractor, increasing its length. It is not so much that a large N favors longer attractors, but a small N restricts their possibility.

For $K \leq 2$, classical RBNs have the lowest Le . Here the modular cases can have longer attractors because of the combination of modular attractors is possible with a low L , as explained for A .

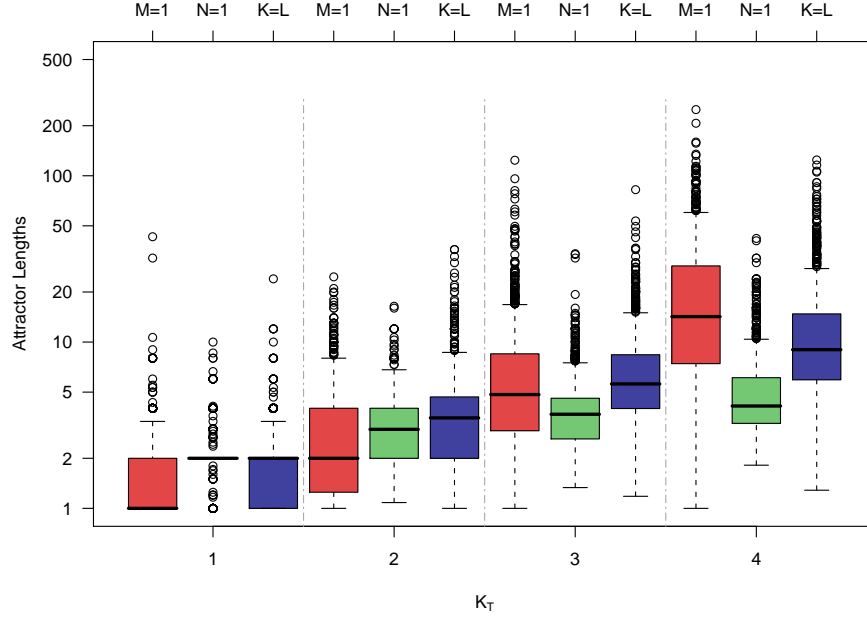


Figure 8: Attractor Lengths for cases 4, 5 & 1 ($M = 1$, $N = 1$, and $K = L$, respectively). Notice logarithmic scale.

4.1.3 % of States in Attractors

Since all cases have a constant $N_T = 20$, the $\%SIA$ depends only on A and Le , as shown by equation 8.

For cases where κ was varied (1, 2, and 3), it was shown that Le did not vary much depending on κ . Thus, the results for $\%SIA$ shown in Figure 9 are very similar to those of A in Figure 5: a higher κ yields a higher $\%SIA$ (also seen in the means shown in Tables A.1, A.2, and A.3 in Appendix A).

For cases where μ was varied (4, 5, and 1), shown in Figure 10, the results of $\%SIA$ also resemble those of A . This is because the differences in the number of attractors (Figure 6) are greater than those of attractor lengths (Figure 8).

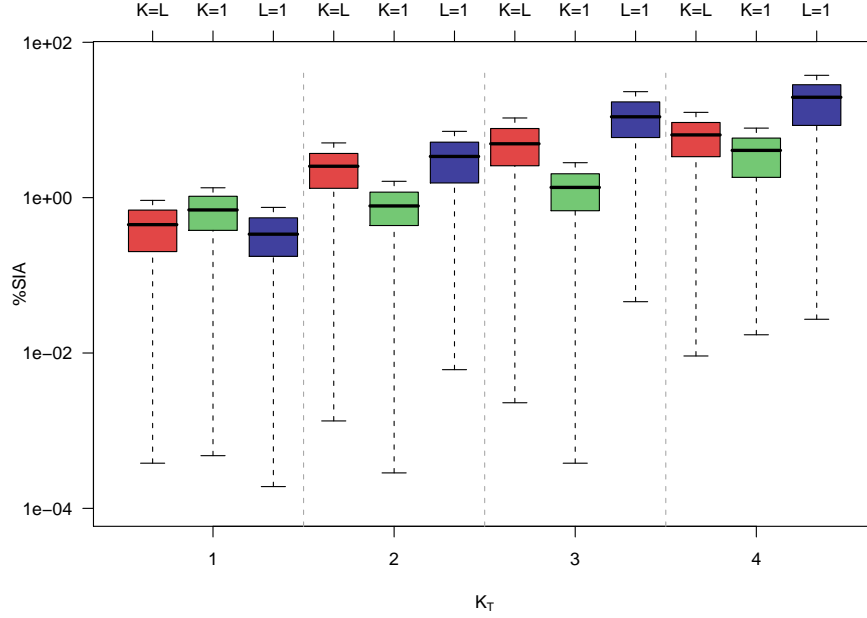


Figure 9: Percentage of States in Attractors for cases 1, 2 & 3 ($K = L$, $K = 1$, and $L = 1$, respectively). Notice logarithmic scale.

4.2 Sensitivity to Initial Conditions

One way to characterize the dynamical regime of an ensemble of discrete dynamical systems such as MRBNs is by measuring the sensitivity to initial conditions. This is done by measuring how small differences in initial states lead to similar or different states: if the system is sensitive to small differences, it is considered chaotic. This method is similar to damage spreading [43] or stability analysis of dynamical systems [40]. There are also equivalents to Lyapunov exponents in RBNs [33]. The rationale is similar in all of these methods: if perturbations do not propagate, then the system is in the ordered dynamical phase. If perturbations propagate through the system, then it is in the chaotic dynamical phase. The phase transition (critical regime) lies where the size of the perturbation remains constant in time.

To measure statistically the sensitivity to initial conditions of MRBNs, we used the following

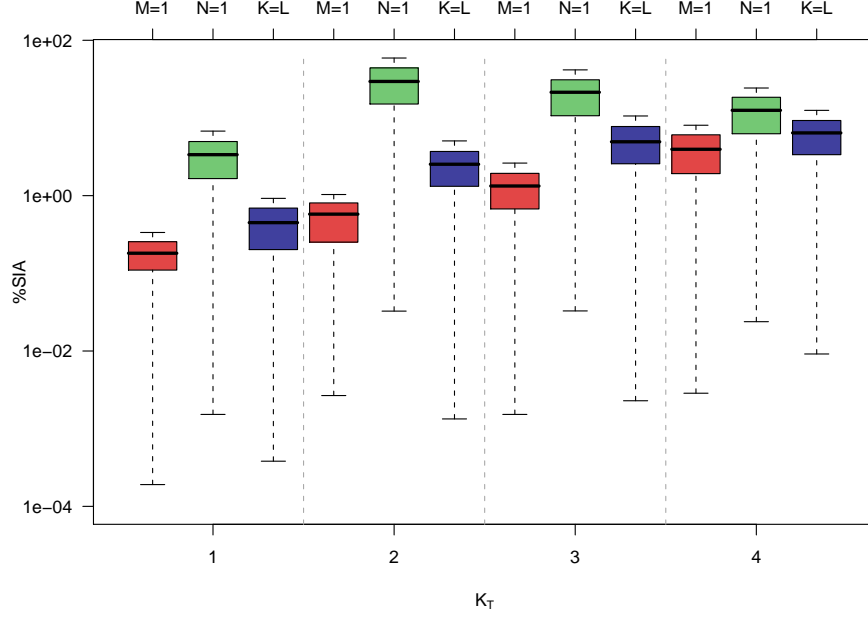


Figure 10: Percentage of States in Attractors for cases 4, 5 & 1 ($M = 1$, $N = 1$, and $K = L$, respectively). Notice logarithmic scale.

method [17]: For a randomly generated network, pick a random initial state S_i , and let it run for a large number of steps t_{max} ($t_{max} = 10000$ in our present experiments), to reach a final state S_f . Now, apply a random point “mutation” to initial state S_i to obtain S'_i , i.e. do a random bit flip. Then, let the network run for t_{max} from S'_i to obtain another final state S'_f . The difference between states can be calculated with the normalized Hamming distance:

$$H(A, B) = \frac{1}{N_T} \sum_i^{N_T} |a_i - b_i| \quad (9)$$

If states A and B are equal, then $H(A, B) = 0$. The maximum $H = 1$ is given when A is the complementary state of B , i.e. every node with state one in A has a state zero in B and every node with state zero in A has a state one in B , i.e. full anticorrelation. $H = 0.5$ implies no correlation between A and B . The smaller H is, the more similar A and B are. As H increases (up to $H = 0.5$),

it implies that differences between A and B also increase.

Since there is only one bit difference between S_i and S'_i and each state has N_T bits:

$$H_i = H(S_i, S'_i) = \frac{1}{N_T} \quad (10)$$

Now, to measure the sensitivity to initial conditions, the difference between the final and initial Hamming distances ΔH is used:

$$\Delta H = H_f - H_i \quad (11)$$

where

$$H_f = H(S_f, S'_f) \quad (12)$$

A large number of random initial states for a large number of MRBNs are used to calculate an average ΔH for an ensemble.

If $\Delta H < 0$, then different initial states converge to the same final state. This is a characteristic of the ordered regime, where trajectories in state space tend to converge. If $\Delta H > 0$, then small differences in initial states tend to increase, a characteristic of the chaotic regime, where trajectories in state space tend to diverge. If $\Delta H = 0$, then small initial differences are maintained, a characteristic of the critical regime, where trajectories in state space neither converge nor diverge (in practice, $\Delta H \approx 0$). Thus, the average ΔH can indicate the regime of a MRBN.

Boxplots of the results for cases 1, 2 and 3 are shown in Figure 11. Notice that boxplots show medians. Means can be compared in Tables A.6, A.7, and A.8; found in Appendix A.

For $K_T = 1$, the dynamics are in the ordered regime for all cases, since small differences in initial states tend to be reduced, indicated by a negative $\Delta H = -\frac{1}{N_T}$. For $K_T = 2$, Tables A.6, A.7, and A.8 in Appendix A show that the average ΔH is close to zero for all cases, suggesting a critical regime. The difference caused by modularity is clearly seen for $K_T > 2$, i.e. in the chaotic regime. The sensitivity to initial conditions is inversely correlated with κ . This can be explained as follows: the higher the κ , the more “isolated” modules are. Thus, it is more difficult for damage to spread

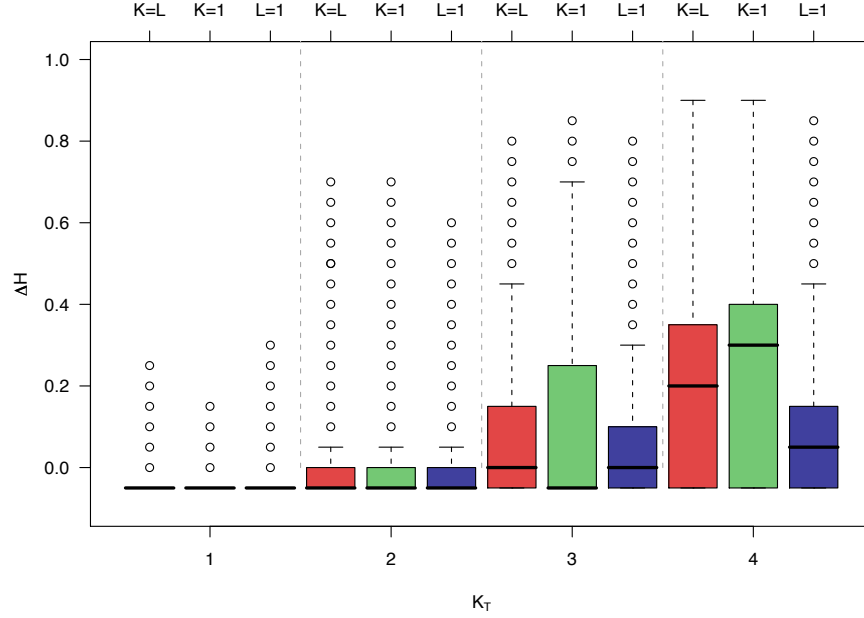


Figure 11: Sensitivity to initial conditions for cases 1, 2 & 3 ($K = L$, $K = 1$, and $L = 1$, respectively).

between modules, even when average connectivities K_T are high. It can be said that modularity in MRBNs brings the dynamics of the chaotic regime closer to criticality. Notice that the phase transition ($K_T = 2$, $\Delta H = 0$) does not move with κ . Rather, the properties of the critical regime are expanded into the chaotic regime by higher values of κ .

From Figure 12 it can be seen that μ is also relevant for the sensitivity to initial conditions within the chaotic regime ($K_T > 2$). Case 4 (equivalent to a classical RBN) has the highest sensitivity, since damage can equally spread among all nodes in the MRBN. The extreme case 5 has a very low sensitivity to initial conditions. On the one hand, it is because of the fictitious links already explained. On the other hand, since all nodes have self-connections when $K \geq 1$, damage will have a lower probability of spreading to other nodes (modules). The intermediate case 1 shows that some modularity prevents damage from spreading between modules, bringing the chaotic dynamics

closer to the critical regime.

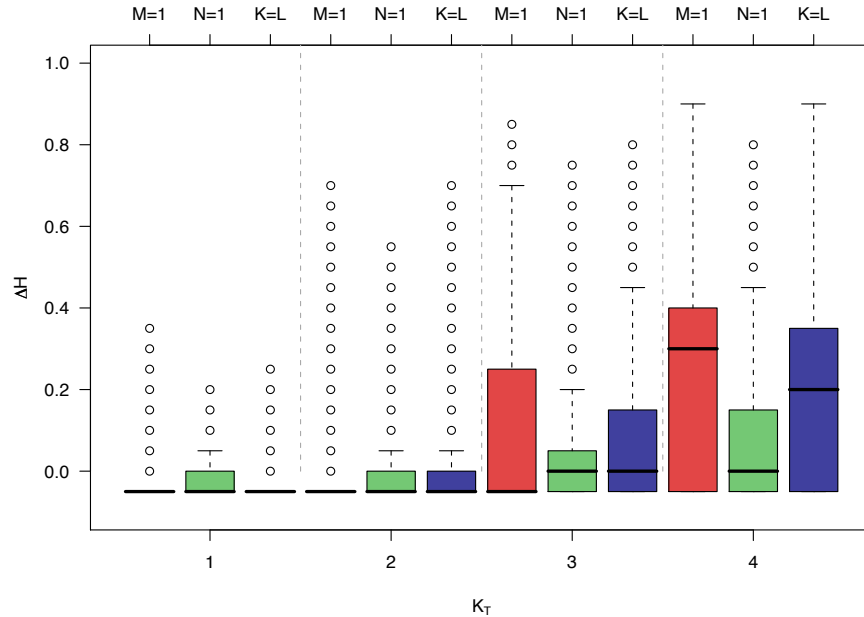


Figure 12: Sensitivity to initial conditions for cases 4, 5 & 1 ($M = 1$, $N = 1$, and $K = L$, respectively).

4.2.1 Larger Networks

To ensure that the results presented above were not an artifact of the small size of the networks ($N_T = 20$) specific experiments were performed to compare cases 3 and 4 with large networks of $N_T = 400$. For case 3, $N = M = 20$ and $L = 1$. For case 4, $M = 1$, $N = N_T = 400$, $K = K_T$, and $L = 0$. For each MRBN family, only one hundred networks were generated and only one hundred state pairs were explored for ten thousand steps. These experiments are less statistically significant, but they clearly show that the difference in sensitivity to initial conditions is due to modularity and not to network size. Results can be observed in Figure 13. It can be seen that the advantage of modularity is increased for larger networks.

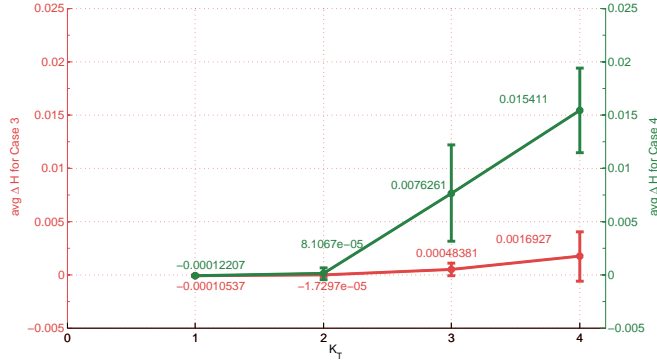


Figure 13: Mean sensitivity to initial conditions for cases 3 & 4 ($M = N, L = 1$ and $M = 1, L = 0$, respectively) for large networks ($N_T = 400$). Error bars indicate standard deviations.

5 Discussion

In the previous section, the statistical results showed that MRBNs are more robust than classic RBNs for the same K_T values, since modularity reduces the probability of damage to spread. This can also be confirmed analytically.

The method of Luque and Solé [32] can be extended to MRBNs. Instead of focussing on a single node with a Boolean state, one can focus on a single module m with internal dynamics. The probability that the internal dynamics of m may be perturbed will depend mainly on $\langle L \rangle$ (as well as p). If $p = 0.5$, then $L < 2$ implies that on average damage will not propagate between modules, even if the internal dynamics of m are chaotic, i.e. $K > 2$. Still, if $K \gg 2$, i.e. m is deep within the chaotic phase because of a high number of intramodular links, then the fragility of the network will be noticeable in the MRBN ($\Delta H \gg 0$) even if damage does not spread outside m . It is clear that damage spreading will depend on the value of K as well, e.g. if K is small, damage will have a lower probability of propagating within modules, affecting the probability of spread across modules.

Since damage across the whole MRBN can spread through internal (K) or external (L) links, it can be seen that there is the following relationship between critical L and K , extending equation 1:

$$\langle L_c \rangle \langle K_c \rangle = \frac{1}{2p(1-p)} \quad (13)$$

$$\langle L_c \rangle = \frac{1}{2 \langle K_c \rangle p(1-p)} \quad (14)$$

and for $p = 0.5$:

$$\langle L_c \rangle = \frac{2}{\langle K_c \rangle} \quad (15)$$

and

$$\langle K_c \rangle = \frac{2}{\langle L_c \rangle} \quad (16)$$

A plot of equation 16 can be seen in Figure 14, with simulation averages for cases 1, 2, 3, and 5³. Even when the analysis presented above assumes infinitely-sized modules and networks, the simulation results with small networks match the theoretical analysis.

It can be seen that a higher κ implies lower L , i.e. lower values in Figure 14. When $\kappa = 1$, $L = 0$, damage cannot propagate between modules, even for the highest local connectivities ($K = N$). Thus, in principle κ can be used to modulate the sensitivity to initial conditions of MRBNs [19].

There is a negative correlation between κ and ΔH , and a positive correlation between κ and A . However, the explanations for the effect on sensitivity to initial conditions and on the number of attractors seem to be also related to different effects of the topology of MRBNs. Still, it would be interesting to study whether it is always the case that RBNs with more attractors on average are more robust to damage spread, as it is the case for MRBNs. Alternatively, finding counterexamples would be illustrative as well.

6 Conclusions and Future Work

We have presented a generalization of random Boolean networks, where modules can be constructed. With statistical studies on ensembles of MRBNs and an analytical study, it could be seen that different parameters that define MRBNs affect most of the properties of the networks and their dynamics. Thus, it can be said that modularity is one way of guiding the self-organization of RBNs

³Case 4 is omitted because there is only one module, so the results are not related to how damage propagates across modules. Moreover, $L = 0$ for case 4.

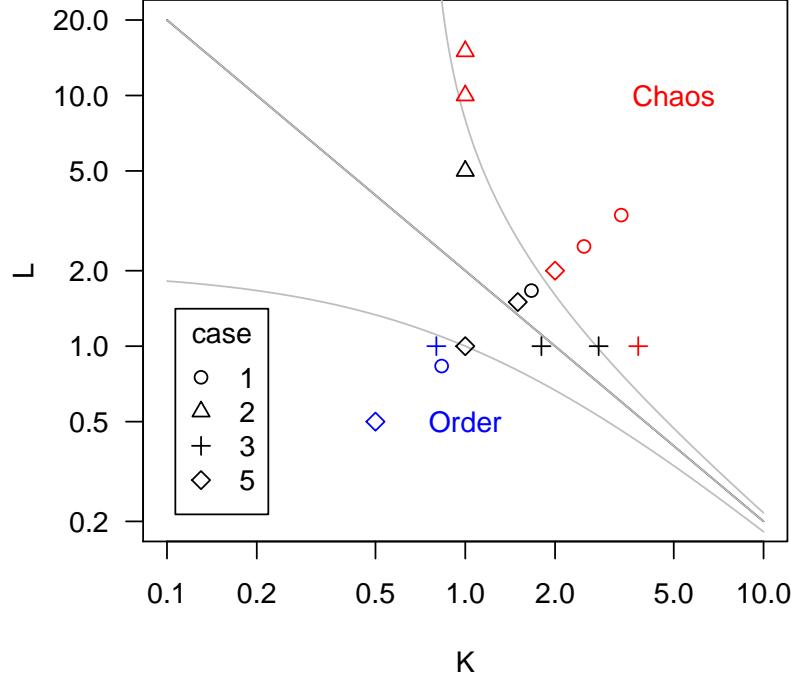


Figure 14: Theoretical criticality of MRBNs (line) depending on K and L . Above the line there is the chaotic phase, while the ordered phase lies below the line. Notice logarithmic scales. Experimental averages are shown, except when $L = 0$ (See Tables A.6–A.10). Different shapes denote different cases (see legend), while different colors denote different regimes, obtained from ΔH (blue for ordered, black for critical, red for chaotic; color in online version). Due to finite-size effects ($N_T = 20$), criticality is considered when $-0.0333 < \Delta H < 0.0333$. The experimental results that are considered as critical can be fitted between the curves $L = \frac{2}{K-0.75}$ and $L = \frac{2}{K+1}$, shown in gray. The deviations from $L = \frac{2}{K}$ are also due to finite sized effects. Results for larger networks are closer to $L = \frac{2}{K}$ and to $\Delta H = 0$.

[19].

A drawback of the studies of DDN criticality based on sensitivity to initial conditions is that it restricts the critical regime to a phase transition. Information-theoretical measures [31, 49] might offer an alternative to better characterize the critical regime and the effect of modularity and other

properties on criticality.

It was shown here that a high κ (high percentage of internal inputs) and a low μ (node-to-module ratio) promote criticality in what otherwise would be a chaotic regime. However, is there an “optimal” value of κ and/or μ for particular systems? It would be also interesting to measure the modularity of real GRNs, and measure to what extent the modularity plays a role in their criticality [5]. Modularity might help explain why real GRNs tend to have a high average connectivity that would set them in the chaotic regime [21], while exhibiting critical behavior [5].

The results presented here are encouraging to study modularity at multiple scales, i.e. nested modules or hierarchies. RBNs have two scales: nodes and network, with no modularity. MRBNs have three scales: nodes, modules, and networks. The MRBN model can be generalized to have an arbitrary number of intermediate scales, i.e. modules of modules, with different coupling preferences. In this way, a multi-scaled modular network could have in principle different dynamical regimes at different scales, i.e. damage could propagate at one scale but not at another. A general way of defining multiple scales might be with recursive RBNs.

A scale-free topology has been shown to promote criticality in what otherwise would be ordered networks [1]. Scale-free topology and criticality are also present in natural networks [2, 34]. It would be interesting to study how modular and scale free topologies could be combined, and whether their effects on criticality are cumulative: for abstract RBNs and for real GRNs. For example, in our present studies N is constant for all modules, while the module size could have a scale-free distribution (few large modules and several small modules).

The redundancy of nodes [20] and modules [7] has shown to promote robustness in RBNs. MRBNs can be general models to study the relationship between modularity, robustness, evolvability, and criticality. Also, degeneracy can play an important role in robustness [46, 47] and evolvability [51], although the role of degeneracy in the criticality of RBNs still remains to be explored.

The potential avenues of research are several. The topics related to modularity and criticality are many. We believe that MRBNs can contribute to illuminate these interesting questions.

Acknowledgments

We should like to thank Joseph Lizier, Rosalind Wang, and Borys Wrobel for useful comments and suggestions. R.P.B. was supported by CONACyT scholarship 268628 and PAEP, UNAM. C.G. was partially supported by SNI membership 47907 of CONACyT, Mexico.

References

- [1] Aldana, M. (2003) Boolean dynamics of networks with scale-free topology. *Physica D*, **185**, 45–66.
- [2] Aldana, M. and Cluzel, P. (2003) A natural class of robust networks. *Proceedings of the National Academy of Sciences of the United States of America*, **100**, 8710–8714.
- [3] Aldana-González, M., Coppersmith, S., and Kadanoff, L. P. (2003) Boolean dynamics with random couplings. Kaplan, E., Marsden, J. E., and Sreenivasan, K. R. (eds.), *Perspectives and Problems in Nonlinear Science. A Celebratory Volume in Honor of Lawrence Sirovich*, Springer Applied Mathematical Sciences Series.
- [4] Andrecut, M. (2005) Mean field dynamics of random Boolean networks. *Journal of Statistical Mechanics*, **P02003**.
- [5] Balleza, E., Alvarez-Buylla, E. R., Chaos, A., Kauffman, S., Shmulevich, I., and Aldana, M. (2008) Critical dynamics in genetic regulatory networks: Examples from four kingdoms. *PLoS ONE*, **3**, e2456.
- [6] Bastolla, U. and Parisi, G. (1998) The modular structure of Kauffman networks. *Physica D: Nonlinear Phenomena*, **115**, 219–233.
- [7] Benítez, M. and Alvarez-Buylla, E. R. (2010) Dynamic-module redundancy confers robustness to the gene regulatory network involved in hair patterning of *Arabidopsis* epidermis. *Biosystems*, **102**, 11–15.

- [8] Callebaut, W. and Rasskin-Gutman, D. (2005) *Modularity: Understanding the Development and Evolution of Natural Complex Systems*. Vienna Series in Theoretical Biology, The MIT Press.
- [9] Crutchfield, J. (1994) Critical computation, phase transitions, and hierarchical learning. Yamaguti, M. (ed.), *Towards the Harnessing of Chaos*, pp. 29–46, Elsevier.
- [10] Csermely, P. (2006) *Weak Links: Stabilizers of Complex Systems from Proteins to Social Networks*. Springer.
- [11] Damiani, C., Kauffman, S., Serra, R., Villani, M., and Colacci, A. (2010) Information transfer among coupled random Boolean networks. Bandini, S., Manzoni, S., Umeo, H., and Vizzari, G. (eds.), *Cellular Automata*, vol. 6350 of *Lecture Notes in Computer Science*, pp. 1–11, Springer Berlin / Heidelberg.
- [12] Derrida, B. and Pomeau, Y. (1986) Random networks of automata: A simple annealed approximation. *Europhys. Lett.*, **1**, 45–49.
- [13] Espinoza-Soto, C. and Wagner, A. (2010) Specialization can drive the evolution of modularity. *PLoS Computational Biology*, **6**, e1000719.
- [14] Fernández, P. and Solé, R. (2004) The role of computation in complex regulatory networks. Koonin, E. V., Wolf, Y. I., and Karev, G. P. (eds.), *Power Laws, Scale-Free Networks and Genome Biology*, Landes Bioscience.
- [15] Gershenson, C. (2002) Classification of random Boolean networks. Standish, R. K., Bedau, M. A., and Abbass, H. A. (eds.), *Artificial Life VIII: Proceedings of the Eight International Conference on Artificial Life*, pp. 1–8, MIT Press.
- [16] Gershenson, C. (2004) Introduction to random Boolean networks. Bedau, M., Husbands, P., Hutton, T., Kumar, S., and Suzuki, H. (eds.), *Workshop and Tutorial Proceedings, Ninth International Conference on the Simulation and Synthesis of Living Systems (ALife IX)*, Boston, MA, pp. 160–173.

- [17] Gershenson, C. (2004) Updating schemes in random Boolean networks: Do they really matter? Pollack, J., Bedau, M., Husbands, P., Ikegami, T., and Watson, R. A. (eds.), *Artificial Life IX Proceedings of the Ninth International Conference on the Simulation and Synthesis of Living Systems*, pp. 238–243, MIT Press.
- [18] Gershenson, C. (2005), RBNLab. <http://rbn.sourceforge.net>.
- [19] Gershenson, C. (In Press) Guiding the self-organization of random Boolean networks. *Theory in Biosciences*.
- [20] Gershenson, C., Kauffman, S. A., and Shmulevich, I. (2006) The role of redundancy in the robustness of random Boolean networks. Rocha, L. M., Yaeger, L. S., Bedau, M. A., Floreano, D., Goldstone, R. L., and Vespignani, A. (eds.), *Artificial Life X, Proceedings of the Tenth International Conference on the Simulation and Synthesis of Living Systems.*, pp. 35–42, MIT Press.
- [21] Harris, S. E., Sawhill, B. K., Wuensche, A., and Kauffman, S. (2002) A model of transcriptional regulatory networks based on biases in the observed regulation rules. *Complexity*, **7**, 23–40.
- [22] Ho, M., Hung, Y., and Jiang, I. (2005) Stochastic coupling of two random Boolean networks. *Physics Letters A*, **344**, 36–42.
- [23] Huang, S. and Ingber, D. E. (2000) Shape-dependent control of cell growth, differentiation, and apoptosis: Switching between attractors in cell regulatory networks. *Exp. Cell Res.*, **261**, 91–103.
- [24] Hung, Y.-C., Ho, M.-C., Lih, J.-S., and Jiang, I.-M. (2006) Chaos synchronization of two stochastically coupled random Boolean networks. *Physics Letters A*, **356**, 35 – 43.
- [25] Kauffman, S. A. (1969) Metabolic stability and epigenesis in randomly constructed genetic nets. *Journal of Theoretical Biology*, **22**, 437–467.
- [26] Kauffman, S. A. (1993) *The Origins of Order*. Oxford University Press.

- [27] Kauffman, S. A. (2000) *Investigations*. Oxford University Press.
- [28] Kauffman, S. A. (2004) The ensemble approach to understand genetic regulatory networks. *Physica A: Statistical Mechanics and its Applications*, **340**, 733–740.
- [29] Kauffman, S. A., Peterson, C., Samuelsson, B., and Troein, C. (2004) Genetic networks with canalizing Boolean rules are always stable. *Proceedings of the National Academy of Sciences of the United States of America*, **101**, 17102–17107.
- [30] Langton, C. (1990) Computation at the edge of chaos: Phase transitions and emergent computation. *Physica D*, **42**, 12–37.
- [31] Lizier, J., Prokopenko, M., and Zomaya, A. (2008) The information dynamics of phase transitions in random Boolean networks. Bullock, S., Noble, J., Watson, R., and Bedau, M. A. (eds.), *Artificial Life XI - Proceedings of the Eleventh International Conference on the Simulation and Synthesis of Living Systems*, pp. 374–381, MIT Press.
- [32] Luque, B. and Solé, R. V. (1997) Phase transitions in random networks: Simple analytic determination of critical points. *Physical Review E*, **55**, 257–260.
- [33] Luque, B. and Solé, R. V. (2000) Lyapunov exponents in random Boolean networks. *Physica A*, **284**, 33–45.
- [34] Oikonomou, P. and Cluzel, P. (2006) Effects of topology on network evolution. *Nature Physics*, **2**, 532–536.
- [35] Poblanno-Balp, R. (2011) *Coupled Random Boolean Networks and Their Criticality*. Master’s thesis, Universidad Nacional Autónoma de México, Ciudad Universitaria, México.
- [36] Poblanno-Balp, R. and Gershenson, C. (2010) Modular random Boolean networks. Fellermann, H., Dörr, M., Hanczyc, M. M., Laursen, L. L., Maurer, S., Merkle, D., Monnard, P.-A., Støy, K., and Rasmussen, S. (eds.), *Artificial Life XII Proceedings of the Twelfth International Conference on the Synthesis and Simulation of Living Systems*, pp. 303–304, MIT Press.

- [37] Schlosser, G. and Wagner, G. P. (2004) *Modularity in Development and Evolution*. The University of Chicago Press.
- [38] Segal, E., Shapira, M., Regev, A., Pe’er, D., Botstein, D., Koller, D., and Friedman, N. (2003) Module networks: identifying regulatory modules and their condition-specific regulators from gene expression data. *Nature Genetics*, **34**, 166–176.
- [39] Serra, R., Villani, M., Damiani, C., Graudenzi, A., and Colacci, A. (2008) The diffusion of perturbations in a model of coupled random boolean networks. Umeo, H., Morishita, S., Nishinari, K., Komatsuzaki, T., and Bandini, S. (eds.), *Cellular Automata*, vol. 5191 of *Lecture Notes in Computer Science*, pp. 315–322, Springer Berlin – Heidelberg.
- [40] Seydel, R. (1994) *Practical bifurcation and stability analysis: from equilibrium to chaos*. Springer.
- [41] Shmulevich, I. and Kauffman, S. A. (2004) Activities and sensitivities in Boolean network models. *Phys. Rev. Lett.*, **93**, 048701.
- [42] Simon, H. A. (1996) *The Sciences of the Artificial*. MIT Press, 3rd edn.
- [43] Stauffer, D. (1994) Evolution by damage spreading in Kauffman model. *Journal of Statistical Physics*, **74**, 1293–1299.
- [44] Thomas, R. (1978) Logical analysis of systems comprising feedback loops. *J. Theor. Biol.*, **73**, 631–656.
- [45] Villani, M., Serra, R., Kauffman, S. A., and Ingrami, P. (2006) Coupled random Boolean network forming an artificial tissue. *Cellular Automata*, vol. 4173 of *Lecture Notes in Computer Science*, pp. 548–556, Springer.
- [46] Wagner, A. (2005) Distributed robustness versus redundancy as causes of mutational robustness. *BioEssays*, **27**, 176–188.
- [47] Wagner, A. (2005) *Robustness and Evolvability in Living Systems*. Princeton University Press.

- [48] Wagner, G. P., Pavlicev, M., and Cheverud, J. M. (2007) The road to modularity. *Nature reviews. Genetics*, **8**, 921–931.
- [49] Wang, X. R., Lizier, J., and Prokopenko, M. (2010) A Fisher information study of phase transitions in random Boolean networks. Fellermann, H., Dörr, M., Hanczyc, M. M., Laursen, L. L., Maurer, S., Merkle, D., Monnard, P.-A., Støy, K., and Rasmussen, S. (eds.), *Artificial Life XII Proceedings of the Twelfth International Conference on the Synthesis and Simulation of Living Systems*, pp. 305–312, MIT Press.
- [50] Watson, R. A. (2006) *Compositional Evolution: The Impact of Sex, Symbiosis, and Modularity on the Gradualist Framework of Evolution*. MIT Press.
- [51] Whitacre, J. M. and Bender, A. (2010) Degeneracy: a design principle for robustness and evolvability. *Journal of Theoretical Biology*, **263**, 143–153.
- [52] Wolfram, S. (1986) *Theory and Application of Cellular Automata*. World Scientific.
- [53] Wuensche, A. (1998) Discrete dynamical networks and their attractor basins. Standish, R., Henry, B., Watt, S., Marks, R., Stocker, R., Green, D., Keen, S., and Bossomaier, T. (eds.), *Complex Systems '98*, University of New South Wales, Sydney, Australia, pp. 3–21.

A Tables

Table A.1: Statistical results for case 1: $K = L$, $\mu \rightarrow 1$.

N	K=L	M	T	K_T	A	Le	%SIA	μ	κ	σA	σLe	$\sigma \%SIA$
5	0.83333	4	20	1	4.03	2	0.0009	1.25	0.83333	5.722	1.435	0.0019
5	1.66666	4	40	2	12.65	4	0.0051	1.25	0.83333	16.073	3.619	0.0083
5	2.5	4	60	3	18.06	7	0.0106	1.25	0.83333	18.618	6.140	0.0122
5	3.33333	4	80	4	14.10	13	0.0125	1.25	0.83333	14.789	13.468	0.0129

Table A.2: Statistical results for case 2: $K = 1$, $\mu \rightarrow 1$.

N	K	M	L	T	K_T	A	Le	%SIA	μ	κ	σA	σL	$\sigma\%SIA$
5	1	4	0	20	1	5.38	2	0.0013	1.25	1	8.063	1.848	0.0025
5	1	4	5	40	2	4.89	3	0.0016	1.25	0.5	5.045	3.012	0.0026
5	1	4	10	60	3	4.66	7	0.0028	1.25	0.33333	3.583	7.573	0.0029
5	1	4	15	80	4	4.39	22	0.0079	1.25	0.25	2.312	26.448	0.0080

Table A.3: Statistical results for case 3: $L = 1$, $\mu \rightarrow 1$.

N	K	M	L	T	K_T	A	Le	%SIA	μ	κ	σA	σL	$\sigma\%SIA$
5	0.8	4	1	20	1	3.45	2	0.0007	1.25	0.8	4.155	1.508	0.0013
5	1.8	4	1	40	2	15.77	5	0.0071	1.25	0.9	20.528	3.792	0.0123
5	2.8	4	1	60	3	29.30	10	0.0231	1.25	0.933333	28.898	10.294	0.0338
5	3.8	4	1	80	4	34.36	14	0.0376	1.25	0.95	31.973	14.615	0.0432

Table A.4: Statistical results for case 4: $M = 1$, $N = 20$, $L = 0$, $K = K_T$.

N	K	M	L	T	K_T	A	Le	%SIA	μ	κ	σA	σL	$\sigma\%SIA$
20	1	1	0	20	1	1.68	2	0.0003	20	1	1.667	1.997	0.0011
20	2	1	0	40	2	3.15	3	0.0010	20	1	3.371	2.762	0.0016
20	3	1	0	60	3	4.23	8	0.0026	20	1	3.563	9.586	0.0027
20	4	1	0	80	4	4.43	22	0.0081	20	1	2.407	23.662	0.0078

Table A.5: Statistical results for case 5: $N = 1$, $L = K$, $M = 20$.

N	K	M	L	T	K_T	A	Le	%SIA	μ	κ	σA	σL	$\sigma\%SIA$
1	0.5	20	0.5	20	1	31.67	2	0.0068	0.05	0.5	51.596	0.870	0.0122
1	1	20	1	40	2	197.17	3	0.0591	0.05	0.5	182.155	1.615	0.0600
1	1.5	20	1.5	60	3	119.84	4	0.0416	0.05	0.5	124.516	2.668	0.0446
1	2	20	2	80	4	59.44	5	0.0243	0.05	0.5	69.834	4.101	0.0281

Table A.6: Sensitivity to initial conditions for case 1: $K = L$, $\mu \rightarrow 1$.

N	K	M	L	T	K_T	ΔH	μ	κ	σ
5	0.8333	4	0.8333	20	1	-0.0402	1.25	0.8333	0.0293
5	1.6666	4	1.6666	40	2	-0.0067	1.25	0.8333	0.0798
5	2.5	4	2.5	60	3	0.0582	1.25	0.8333	0.1406
5	3.3333	4	3.3333	80	4	0.1799	1.25	0.8333	0.1936

Table A.7: Sensitivity to initial conditions for case 2: $K = 1$, $\mu \rightarrow 1$.

N	K	M	L	T	K_T	ΔH	μ	κ	σ
5	1	4	0	20	1	-0.0390	1.25	1	0.0293
5	1	4	5	40	2	-0.0081	1.25	0.5	0.0915
5	1	4	10	60	3	0.0933	1.25	0.33333	0.1781
5	1	4	15	80	4	0.2368	1.25	0.25	0.2051

Table A.8: Sensitivity to initial conditions for case 3: $L = 1$, $\mu \rightarrow 1$.

N	K	M	L	T	K_T	ΔH	μ	κ	σ
5	0.8	4	1	20	1	-0.0386	1.25	0.8	0.0350
5	1.8	4	1	40	2	-0.0107	1.25	0.9	0.0698
5	2.8	4	1	60	3	0.0327	1.25	0.93333	0.1062
5	3.8	4	1	80	4	0.0832	1.25	0.95	0.1413

Table A.9: Sensitivity to initial conditions for case 4: $M = 1$, $N = 20$, $L = 0$, $K = K_T$.

N	K	M	L	T	K_T	ΔH	μ	κ	σ
20	1	1	0	20	1	-0.04536	20	1	0.0231
20	2	1	0	40	2	-0.0111	20	1	0.0930
20	3	1	0	60	3	0.0964	20	1	0.1806
20	4	1	0	80	4	0.2381	20	1	0.2076

Table A.10: Sensitivity to initial conditions for case 5: $N = 1$, $L = K$, $M = 20$.

N	K	M	L	T	K_T	ΔH	μ	κ	σ
1	0.5	20	0.5	20	1	-0.0334	0.05	0.5	0.0329
1	1	20	1	40	2	-0.0059	0.05	0.5	0.0632
1	1.5	20	1.5	60	3	0.0241	0.05	0.5	0.1027
1	2	20	2	80	4	0.0606	0.05	0.5	0.1358