


Experiment-7

Aim: Rollback and Commit commands Create Teacher table with the following fields (Name, DeptNo, Date of joining, DeptName, Location, Salary)

CODE:


```
1 • create database Teacher;  
2 • use Teacher;
```

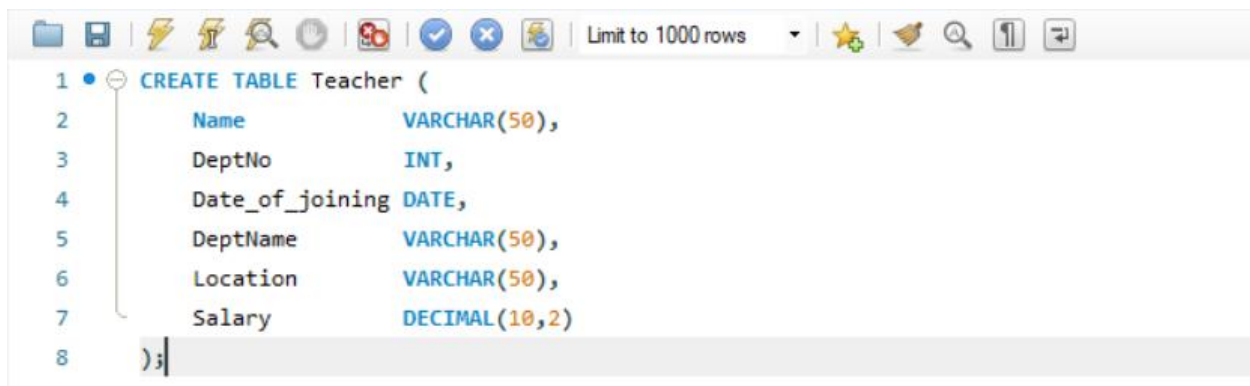

The screenshot shows the SQL Developer interface with a toolbar at the top. The main window displays the following SQL code:

```
1 • CREATE TABLE Teacher (  
2     Name          VARCHAR(50),  
3     DeptNo        INT,  
4     Date_of_joining DATE,  
5     DeptName       VARCHAR(50),  
6     Location       VARCHAR(50),  
7     Salary        DECIMAL(10,2)  
8 );
```

(a) Insert 5 Records

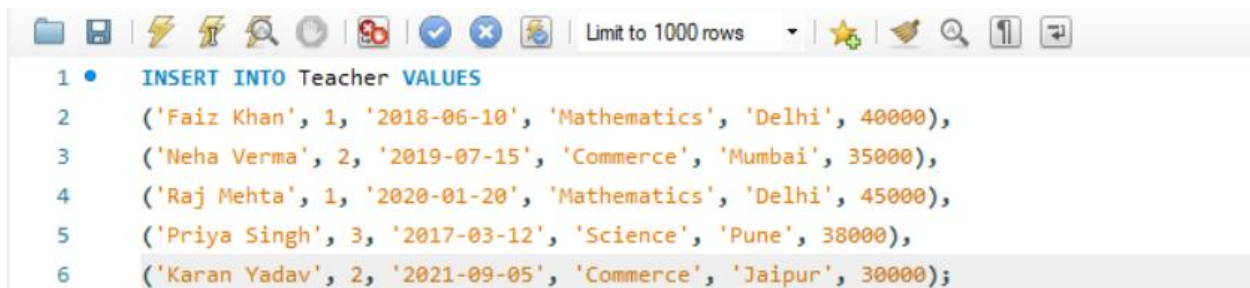

The screenshot shows the SQL Developer interface with the following SQL code:

```
1 • INSERT INTO Teacher VALUES  
2     ('Faiz Khan', 1, '2018-06-10', 'Mathematics', 'Delhi', 40000),  
3     ('Neha Verma', 2, '2019-07-15', 'Commerce', 'Mumbai', 35000),  
4     ('Raj Mehta', 1, '2020-01-20', 'Mathematics', 'Delhi', 45000),  
5     ('Priya Singh', 3, '2017-03-12', 'Science', 'Pune', 38000),  
6     ('Karan Yadav', 2, '2021-09-05', 'Commerce', 'Jaipur', 30000);
```


(b) Increase salary by 25% for Mathematics department



The screenshot shows the SQL Developer interface with the following SQL code:

```
1 UPDATE Teacher  
2 SET Salary = Salary + (Salary * 0.25)  
3 WHERE DeptName = 'Mathematics';
```

(c) Perform ROLLBACK




The screenshot shows the SQL Developer interface with the following SQL code:

```
1 • ROLLBACK;
```

(d) Increase salary by 15% for Commerce department

```
1  UPDATE Teacher
2  SET Salary = Salary + (Salary * 0.15)
3  WHERE DeptName = 'Commerce';
```

(e) Perform COMMIT



The screenshot shows a SQL query editor interface. At the top, there is a toolbar with various icons for file operations, execution, and search. Below the toolbar, a text input field contains the SQL statement: `1 • COMMIT;`. The interface is clean and modern, with a light gray background.