

# Extraction of tabular data from annual reports with LLMs

Using in context learning with open source models and RAG

submitted by

Simon Schäfer

Matr.-Nr.: 944 521

Department VI – Informatics and Media  
Berliner Hochschule für Technik Berlin  
presented Master Thesis  
to acquire the academic degree

**Master of Science (M.Sc.)**

in the field of

**Data Science**

Date of submission September 1, 2025



**Studiere Zukunft**

## **Gutachter**

Prof. Dr. Alexander Löser  
Prof. Dr. Felix Gers

Berliner Hochschule für Technik  
Berliner Hochschule für Technik



## Abstract

Content of this thesis is a benchmark on information extraction from PDFs. The focus are annual reports of German companies. Special characteristic of the task is handling hierarchies in tables with financial data to prepare the data for import into a relational database.

The benchmark is composed of three sub tasks and the performance of different open source large language models is tested with different prompting approaches and compared to alternative methods.

This can be seen as a reimplementation study of “Extracting Financial Data from Unstructured Sources: Leveraging Large Language Models” - a paper published by Li et al. (2023). The key differences are the application on German documents using open source large language models.

## Zusammenfassung

Gegenstand dieser Arbeit ist ein Benchmark zur Informationsextraktion aus PDF-Dateien. Dabei wird sich auf das Auslesen der Bilanzen und Gewinn- und Verlustrechnungen aus Jahresabschlüssen deutscher Unternehmen beschränkt. Ein besonderer Aspekt der Aufgabe ist die Berücksichtigung der Hierarchie innerhalb der Tabellen, um die Werte einem festen Schema zuzuordnen und so den Import in eine relationale Datenbank vorzubereiten.


## Notes

- Qwen 2.5 hat zweiseitige GuV von IBB entdeckt und zur Anpassung der Ground Truth

---

---

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Motivation . . . . .	1
1.2	Objectives . . . . .	2
1.3	Methodology (1 p) . . . . .	2
1.4	Thesis Outline (0.5 p) . . . . .	2
1.5	To place in chapters above  2	2
1.6	RHvB . . . . .	3
1.7	Datenverfügbarkeit . . . . .	3
1.8	Unstrukturierte Daten . . . . .	3
1.8.1	Portable Document Format . . . . .	3
<b>2</b>	<b>Literature review (less than 10 p)</b>	<b>5</b>
2.1	Basic terms . . . . .	5
2.2	Technological topic (related work) . . . . .	5
2.2.1	Extraction of numeric values . . . . .	5
2.3	optinal more topics like previous . . . . .	5
2.4	Summary (0.5 p) . . . . .	5
2.5	To place in chapters above . . . . .	6
2.6	Table extraction tasks . . . . .	6
2.6.1	Difficulties . . . . .	6
2.7	Document Exrttraction Process . . . . .	6
2.7.1	Document Layout Analysis . . . . .	6
2.7.2	. . . . .	6
2.8	Tools . . . . .	6
2.8.1	TableFormer . . . . .	6
<b>3</b>	<b>Implementation (max 5p)</b>	<b>7</b>
3.1	Speedup with vLLM and batching . . . . .	7
3.2	Setup (Dockerfile and PV) . . . . .	7

---

<b>4</b>	<b>Methods</b>	<b>9</b>
4.1	Data . . . . .	9
4.2	Page identification . . . . .	9
4.2.1	Baselines . . . . .	9
4.3	Table detection . . . . .	10
4.3.1	LLM . . . . .	10
4.3.2	Vision Model . . . . .	10
4.3.3	Docling and Co . . . . .	10
4.4	Information extraction . . . . .	10
4.4.1	Baselines . . . . .	10
4.4.2	Simple pipeline . . . . .	10
4.4.3	Sophisticated approaches . . . . .	11
<b>5</b>	<b>Results</b>	<b>13</b>
5.1	Page identification . . . . .	13
5.1.1	Baseline: Regex . . . . .	13
5.1.2	Advanced techniques . . . . .	13
5.1.3	Comparison . . . . .	14
5.2	Table extraction . . . . .	14
<b>6</b>	<b>Discussion</b>	<b>15</b>
6.1	Not covered . . . . .	15
<b>7</b>	<b>Conclusion</b>	<b>17</b>
	<b>References</b>	<b>19</b>
<b>A</b>	<b>Appendix</b>	<b>21</b>
A.1	Local machine . . . . .	21
	System Details Report . . . . .	21
A.2	Benchmarks . . . . .	22
A.2.1	Text extraction . . . . .	22
A.2.2	Table detection . . . . .	22
A.2.3	Large language model process speed . . . . .	26
A.2.4	Table identification with LLMs . . . . .	26
A.3	Regular expressions . . . . .	26

---

# Chapter 1

## Introduction

### 1.1 Motivation

- market: public administration, companies with data of special requirements for treating (secret and personal data (high risk data)) <- DSGVO, AI act

– next market for hyper scalers might be public administration with local computing clusters

- whom is it helping
- why now: digital sovereignty, AI act; people want NLP AI products, frameworks get easier
- is the problem easier solvable then years ago? why?

missing law to access digital data and no law to choose the format of the data extensible Business Reporting Language as a standard changing from HGB to IFSR

Land Berlin							
Kredit- und Versicherungswirtschaft	Wohnungswirtschaft	Landesentwicklung und Grundstücksverwaltung	Verkehr und Dienstleistungen	Ver- und Entsorgungswirtschaft	Kultur und Freizeit	Wissenschaft und Ausbildung	Gesundheit und Soziales
BSB Unternehmensverwaltung Gewährträger: Berlin	degewo AG 100%	Berlinovo Immobilien Ges. mbH 100%	Amt für Statistik Berlin-Brandenburg Gewährträger: Bln. u. Brandenburg	BEN Berlin Energie und Netzholding GmbH 100%	BBB Infrastruktur. Verw. GmbH 100%	Di. Film- u. Fernsehakad. GmbH 100%	Berliner Werkstatt Bth. GmbH 70%
	GESOBAU AG 100%	BIM GmbH 100%	BEHALA GmbH 100%	Berl. Stadtreinigungsbetriebe Gewährträger: Berlin	BBB Infrastruktur. GmbH & Co. KG 100 % Kommanditist: Berlin	Deutsches Zentrum f. Hochschul- u. Wiss.forschung GmbH 1,85%	Vivantes GmbH 100%
	Gewobag AG 96,69%	Berliner Stadtgüter GmbH 100%	Berlin Tourismus & Kongress GmbH 15%	Berliner Wasserbetriebe Gewährträger: Berlin	Berliner Bäder-Betriebe Gewährträger: Berlin	Ferdinand-Braun-Institut gGmbH 100%	
	HOWOGE GmbH 100%	Campus Berlin-Buch GmbH 90,1%	Berliner Energieagentur GmbH 25%	Berlinwasser Holding GmbH 100%	Friedrichstadt-Palast GmbH 100%	FWU Institut für Film GmbH 6,25%	
	STADT U. LAND GmbH 100%	Grün Berlin GmbH 100%	Berliner Großmarkt GmbH 100%	MEAB GmbH 50%	Hebbel-Theater GmbH 100%	Heinrich-Zentrum Bln. GmbH 10%	
	WBM GmbH 100%	Liegenschaftsfonds GmbH 100%	Berliner Verkehrsbetriebe Gewährträger: Berlin	SBB Sonderabfall GmbH 25%	KuJ Wuhlheide gGmbH 100%	Wissenschaftszentrum gGmbH 25%	
		Liegenschaftsfonds KG 100 % Kommanditist: Berlin	BOZ GmbH 60%		Kulturprojekte Berlin GmbH 100%		
		Liegenschaftsfonds Projekt KG 100 % Kommanditist: Berlin	DEGES Dt. Einheit Fernstraßenplanungs- u. -bau GmbH 5,91%		Kunsthalle BR Deutschld. GmbH 2,44%		
		Olympiastadion Berlin GmbH 100%	Deutsche Klassenstaffette Gewährträger: Berlin		Musicboard Berlin GmbH 100%		
		Tegel Projekt GmbH 100%	Flughafen Berlin-Brandb. GmbH 37%		Rundfunk-Orchester gGmbH 20%		
		Tempelhof Projekt GmbH 100%	IT-Dienstleistungszentrum Berlin Gewährträger: Berlin		Zoologischer Garten Berlin AG 0,03%		
		WISTA Management GmbH 100%	Landesanal. Schienenfahrzeuge Berlin Gewährträger: Berlin				
			Messe Berlin GmbH 100%				
			Partner für Deutschland 1%				
			VBB GmbH 33,33%				

Figure 1.1: Companies Berlin has holds share at

Land Berlin							
Kredit- und Versicherungswirtschaft	Wohnungswirtschaft	Landesentwicklung und Grundstücksverwaltung	Verkehr und Dienstleistungen	Ver- und Entsorgungswirtschaft	Kultur und Freizeit	Wissenschaft und Ausbildung	Gesundheit und Soziales
IBB Unternehmensverwaltung Gewährträger: Berlin	degewo AG	Berlinovo Immobilien Ges. mbH	Amf für Statistik Berlin-Brandenbg. Gewährträger: Bln. u. Brandenbg.	BEN Berlin Energie und Netz- holding GmbH	BBB Infrastrukt. Verw. GmbH	Di. Film- u. Fernsehakad. GmbH	Berliner Werkst. f. Beh. GmbH
	GESOBALU AG	BIM GmbH	BEHALA GmbH	Berl. Stadtrangungsbehörden Gewährträger: Berlin	BBB Infrastrukt. GmbH & Co. KG	Deutsches Zentrum f. Hochschul- u. Wissenschaft GmbH	Vivantes GmbH
	Gewobag AG	Berliner Stadtgüter GmbH	Berlin Tourismus & Kongress GmbH	Berliner Wasserbetriebe Gewährträger: Berlin	Berliner Bäder-Betriebe Gewährträger: Berlin	Ferdinand-Braun-Institut gGmbH	
	HOWOGE GmbH	Campus Berlin-Buch GmbH	Berliner Energieagentur GmbH	Berlinwasser Holding GmbH	Friedrichstadt-Palast GmbH	FWU Institut für Film GmbH	
	STADT U. LAND GmbH	Grün Berlin GmbH	Berliner Großmarkt GmbH	MEAB GmbH	Hebbel-Theater GmbH	Heinrich-Zentrum Bln. GmbH	
	WBM GmbH	Liegenschaftsfonds GmbH	Berliner Verkehrsbetriebe Gewährträger: Berlin	SBB Sonderabfall GmbH	KuJ Wahlheide gGmbH	Wissenschaftszentrum gGmbH	
		Liegenschaftsfonds KG	BOZ GmbH		Kulturprojekte Berlin GmbH		
		100 % Kommanditist: Berlin	60%		100%		
		Liegenschaftsfonds Projekt KG	DEGES Dt. Einzel Fernstraßen- planungs- u. -bau GmbH		Kunsthalle BR Deutschld. GmbH		
		100 % Kommanditist: Berlin	5,91%		2,44%		
		Olympiastadion Berlin GmbH	Deutsche Klassenlotterie Gewährträger: Berlin		Musicboard Berlin GmbH		
		100%	37%		100%		
		Tegel Projekt GmbH	Flughafen Berlin-Brandb. GmbH		Rundfunk-Orchester gGmbH		
		100%	37%		20%		
		Tempelhof Projekt GmbH	IT-Dienstleistungszentrum Berlin Gewährträger: Berlin		Zoologischer Garten Berlin AG		
		100%			0,03%		
		WISTA-Management GmbH	Landesanst. Schienenfahrzeuge Berlin Gewährträger: Berlin				
		100%					
			Messe Berlin GmbH				
			100%				
			Partner für Deutschland				
			1%				
			VBB GmbH				
			33,33%				

## 1.2 Objectives

The sixth division at RHvB is auditing the companies Berlin is a stakeholder of. Basic information they have to process are the balance sheets and profit and loss accounting. Those information is provided via their annual reports in form of PDF files. The provided annual reports often differ from the publicly available ones in matter of information granularity and design and are treated as non public information. Automate the extraction of those information would be a good starting point for AI assisted information retrieval from PDFs for the RHvB overall.

It is important to get numeric values totally accurate; numeric values are difficult to handle for language models

- special part of big problem? central question
- two sentences: why this problem? new problem or just a part in the big task? hard to solve of straight forward? research or application? what was not done and why?
- building a system? what task to solve? core functionality? typical use cases?

## 1.3 Methodology (1 p)

- how to solve the problem?
- what foundations to have in mind?
- proceeding?

## 1.4 Thesis Outline (0.5 p)

## 1.5 To place in chapters above [http://127.0.0.1:29003/rmd\\_output/4/images/bete](http://127.0.0.1:29003/rmd_output/4/images/bete)

This master thesis is motivated by a use case from practical work at the Berlin court of audit (Rechnungshof von Berlin; RHvB). The auditors often are faced with the problem that they need information that is provided as natural language or in tables inside of unstructured documents, i.e. in PDF files. The goal of this thesis is benchmarking methods for automated information extraction from specific tables from PDF files.

Ideally, the data extraction pipeline is able to autonomously \* identify the pages with the tables of interest. \* identify the tables of interest on these pages. \* extract the information as provided into a structured table (e.g. as JSON, a csv file or HTML code). \* transform the data into a given schema, stripping all aggregated values.



It should extract the values without errors. It would be nice if the computation time and energy consumption is as low as possible.

A more realistic approach, that is also beneficial to satisfy the AI Act (keine Entscheidung ohne menschliche Beteiligung), is an assistant system, that helps extracting information. Key features to get the human into the loop already at the step of information extraction for such an assistant might be:

- showing the results together with the systems confidence.
- showing the results next to the values of the source.
- allowing in place adjustments to the extracted data.

A sound decision making is only possible if the information the decision is based on is valid.

## 1.6 RHvB

- what does the RHvB do
- why is this important
- what does it not do yet (because data source is missing)

## 1.7 Datenverfügbarkeit

- keine Regelung, in welcher Form der Rechnungshof die Daten, die er benötigt, bereitgestellt zu bekommen hat

Das Gesetz zur Förderung der elektronischen Verwaltung (EGovG) wurde erlassen, “um die Verwaltung effektiver, bürgerfreundlicher und effizienter zu gestalten.” (BMI, Referat O2, 2013)

§ 12 EGovG

- Vorhaben zur Datenkatalogisierung innerhalb der Verwaltung angestoßen, aber noch nicht richtig gestartet
- Vornehmlich für Bürger\*innen Zugang

## 1.8 Unstrukturierte Daten

- Beispielbilder

### 1.8.1 Portable Document Format

- print optimized
  - Table structure information gets lost
  - Bild und Textextract
-



# Chapter 2

## Literature review (less than 10 p)

(5 to 10 lines)

- overview of subchapters
- relevance for reader (Gutachter)
- link to previous chapter
- relevant basic tasks

### 2.1 Basic terms

### 2.2 Technological topic (related work)

- most important papers
- connection of papers (timeline)
- what used, what not?
- extending existing paper?

#### 2.2.1 Extraction of numeric values

99.5 % or 96 % accuracy for extracting financial data from Annual Comprehensive Financial Reports (Li et al., 2023) In the untabulated test, GPT-4 achieved an average accuracy rate of 96.8%, and Claude 2 achieved 93.7%. Gemini had the lowest accuracy rate at 69%. (ebd.)

Too many hallucinated values when it was NA instead (Grandini et al., 2020)

### 2.3 optimal more topics like previous

### 2.4 Summary (0.5 p)

- lessons learned
  - link to goal thesis
  - link to next chapter
-

## 2.5 To place in chapters above

## 2.6 Table extraction tasks

### 2.6.1 Difficulties

- Beispielbilder

## 2.7 Document Extrtaction Process

### 2.7.1 Document Layout Analysis

An important step in the process of extracting information from documents is to recognize the layout of a document (Zhong et al., 2019).

Getting the order of texts correct align captions to tables and figure identify headings, tables and figures

One of the most popular datasets used for training and benchmarking is PubLayNet (see PubLayNet on paperswithcode.com). It contains over 360\_000 document automatically annotated images from scientific articles publicly available on PubMed Central (Zhong et al., 2019, p. 1). This was possible, because the articles have been provided in PDF and XML format. For the annotations most text categories (e.g. text, caption, footnote) have been aggregated into one category. <- is this a problem for later approaches where a visual and textual model work hand in hand to identify e.g. table captions?

Manual annotated datasets often were limited to several hundred pages. Deep learning methods need a much larger training dataset. Previously optical character recognition (OCR) methods were used.

Identify potentially interesting pages with text / regex search. Check if there is a table present on this page.

Object detection

#### 2.7.1.1 Vision Grid Transformer

#### 2.7.2

## 2.8 Tools

### 2.8.1 TableFormer

SynthTabNet <- has it: - nested / hierarchical tables, where rows add up to another row? - identifying units and unit cols/rows

## **Chapter 3**

# **Implementation (max 5p)**

**3.1 Speedup with vLLM and batching**

**3.2 Setup (Dockerfile and PV)**



# Chapter 4

## Methods

### 4.1 Data

- companies Beteiligungsbericht
- number found Jahresberichte
- number used Jahresberichte first rows
- number used Jahresberichte Aktiva Tabellen

### 4.2 Page identification

The first task to solve, for a fully autonomous solution, is to identify the pages where the tables of interest are located. For benchmarking 74 annual reports from 7 companies have been used. For this benchmark we limit the tables of interest to those that show **Aktiva**, **Passiva** and **Gewinn- und Verlustrechnung**.

In those documents there are 252 pages of interest holding 265 relevant tables. On 13 pages there have been two tables (**Aktiva** and **Passiva**) on a single page. 21 tables are spread over two pages. In 8 documents there have been multiple tables per type of interest, distributed among the three types of tables as following:

type	count
Aktiva	7
GuV	8
Passiva	7

As a baseline a simple regex approach was used.

#### 4.2.1 Baselines

##### 4.2.1.1 Regex based

results potentially depend on package used for text extraction (Auer et al., 2024, p. 2 f.)

- PyMuPDF
- pypdf
- docling-parse
- pypdfium
- pdfminer.six

pdfminer informs that some pdfs should not be extracted based on their authors will (meta data field)

results depend on regex pattern

---

start with pypdf backend and simple regex developed more sophisticated regex based on missed pages  
took wrong identified pages as base for a table detection benchmark and n-shot base for llm classification (contrasts)

some tables can't be found without previous ocr; some pages hold image of table and machine readable text

#### **4.2.1.1.1 LLM based**

#### **4.2.1.2 Term frequency based**

#### **4.2.1.2.1 VLLM based** was not implemented

### **4.3 Table detection**

Can be used to narrow down set of possible pages

Can be used to focus only on the table content (measure if correct area was identified would be necessary)

Vision model as baseline

#### **4.3.1 LLM**

- table: yes/no
- akiva: yes/no
- multiclass

#### **4.3.2 Vision Model**

Yolo

#### **4.3.3 Docling and Co**

#### **4.3.3.0.1 VLLM based** was not implemented

### **4.4 Information extraction**

#### **4.4.1 Baselines**

simple regex?

#### **4.4.2 Simple pipeline**

- extract text (if document can't be passed directly)
  - query LLM directly
-



### 4.4.3 Sophisticated approaches

not implemented

- with pipelines
- Nougat
- maker
- Azure
- docling



# Chapter 5

## Results

### 5.1 Page identification

As described in A.2.1 open source libraries have been used to extract the text from the annual reports.

#### 5.1.1 Baseline: Regex

Building a sound regular expression often is an iterative process. In a first approach a very simple one was implemented.

The regular expressions can be found in the appendix (see A.3).

5.1

#### 5.1.2 Advanced techniques

##### 5.1.2.1 Table of Contents understanding

- top 1
- top k
- toc analysis
- cleaned measures

Table 5.1: Comparing page identification metrics for different regular expressions for classification task 'Aktiva'

method	stat	precision	recall	F1
simple regex	mean	<b>0.267</b>	0.778	<b>0.397</b>
simple regex	sd	0.005	0.01	0.005
exhaustive regex restricted	mean	0.19	0.98	0.32
exhaustive regex restricted	sd	NA	NA	NA
exhaustive regex	mean	0.13	<b>0.993</b>	0.23
exhaustive regex	sd	0	0.01	0

### **5.1.2.2 Classification with LLMs**

#### **5.1.2.2.1 Binary classification**

- f1
- multiple models
- best model detail (different methods / settings)

#### **5.1.2.2.2 Multi classification**

- f1
- multiple models
- best model detail (different methods / settings)

### **5.1.3 Comparison**

#### **5.1.3.1 F1**

#### **5.1.3.2 Energy usage and runtime**

## **5.2 Table extraction**

---

## **Chapter 6**

# **Discussion**

### **6.1 Not covered**

- OCR



## **Chapter 7**

## **Conclusion**





# References

- Auer, C., Lysak, M., Nassar, A., Dolfi, M., Livathinos, N., Vagenas, P., Ramis, C. B., Omenetti, M., Lindlbauer, F., Dinkla, K., Mishra, L., Kim, Y., Gupta, S., Lima, R. T. de, Weber, V., Morin, L., Meijer, I., Kuropiatnyk, V., & Staar, P. W. J. (2024). *Docling Technical Report*. arXiv. <https://doi.org/10.48550/arXiv.2408.09869>
- BMI, Referat O2 (Ed.). (2013). *Minikommentar zum Gesetz zur Förderung der elektronischen Verwaltung sowie zur Änderung weiterer Vorschriften*.
- Grandini, M., Bagli, E., & Visani, G. (2020). *Metrics for Multi-Class Classification: An Overview*. arXiv. <https://doi.org/10.48550/arXiv.2008.05756>
- Li, H., Gao, H. (Harry), Wu, C., & Vasarhelyi, M. A. (2023). *Extracting Financial Data from Unstructured Sources: Leveraging Large Language Models* [SSRN] [Scholarly] [Paper]. Social Science Research Network. <https://doi.org/10.2139/ssrn.4567607>
- Zhong, X., Tang, J., & Yepes, A. J. (2019). *PubLayNet: Largest dataset ever for document layout analysis*. arXiv. <https://doi.org/10.48550/arXiv.1908.07836>
-



# Chapter A

## Appendix

### A.1 Local machine

One can find the specifications of the local machine used to run the less computationally demanding tasks below. It is a lightweight laptop device. Its performance cores support hyperthreading and have a clock range between 2.1 and 4.7 GHz. However, due to the flat design, there is little active cooling. Thus, thermal throttling starts rather quickly. It is therefore a reasonable assumption that most locally benchmarked tasks are running at 2.1 GHz. Despite this handicap, it has a sufficiently large RAM of 32 GB and 3 GB of NVMe disk space.

#### System Details Report

##### Report details

- **Date generated:** 2025-07-19 13:56:16

##### Hardware Information:

- **Hardware Model:** LG Electronics 17ZB90Q-G.AD79G
- **Memory:** 32.0 GiB
- **Processor:** 12th Gen Intel® Core™ i7-1260P × 16
- **Graphics:** Intel® Graphics (ADL GT2)
- **Disk Capacity:** 3.0 TB

##### Software Information:

- **Firmware Version:** A2ZG0150 X64
  - **OS Name:** Ubuntu 24.04.2 LTS
  - **OS Build:** (null)
  - **OS Type:** 64-bit
  - **GNOME Version:** 46
  - **Windowing System:** Wayland
  - **Kernel Version:** Linux 6.11.0-29-generic
-

Table A.1: Comparing extraction time (in seconds) for different libraries

library	runtime in s
pdfium	<b>14</b>
pymupdf	22
pypdf	218
pdfplumber	675
pdfminer	752
docling-parse	1621

## A.2 Benchmarks

### A.2.1 Text extraction

A basic requirement for all succeeding tasks is, that the text gets extracted from the PDF files. As written in doclings technical report (Auer et al., 2024) the available open source libraries differ in their speed and restrictiveness of licensing. Since there are no benchmark results this report multiple libraries have been tested here.

The benchmark ran on the local machine described in section A.1. There have been 5256 pages to extract the text from.

The result of docling-parse is not formatted as markdown yet but also just plain text.



For implementation in a system where the text has to get extracted live or frequently the speed of the library might be paramount. But in special cases it can be important to invest more computational power into text extraction if this assures extraction according a more complicated document layout. E.g. some of the tables have been parsed by pdfium in such a manner that first all row descriptors have been extracted (first row) and thereafter all numeric columns (rowwise) ADD REFERENCE / EXAMPLE.


### A.2.2 Table detection

- yolo benchmark and table transformer
- skip classification with llm

not so important anymore

---

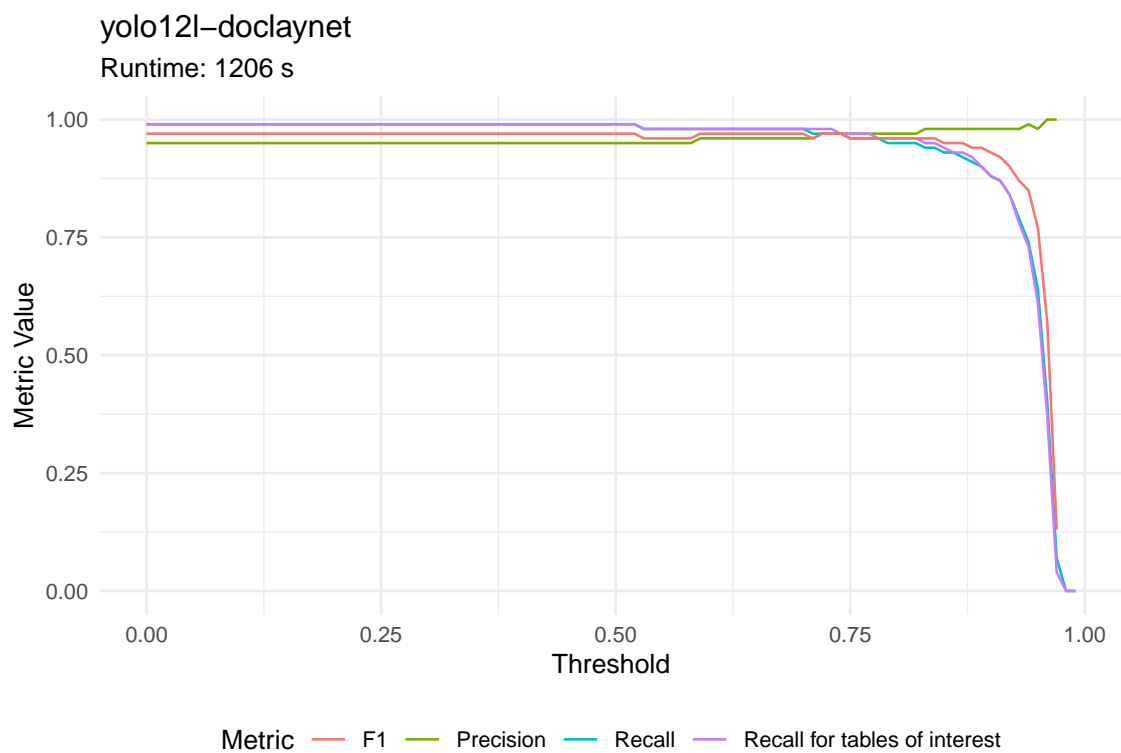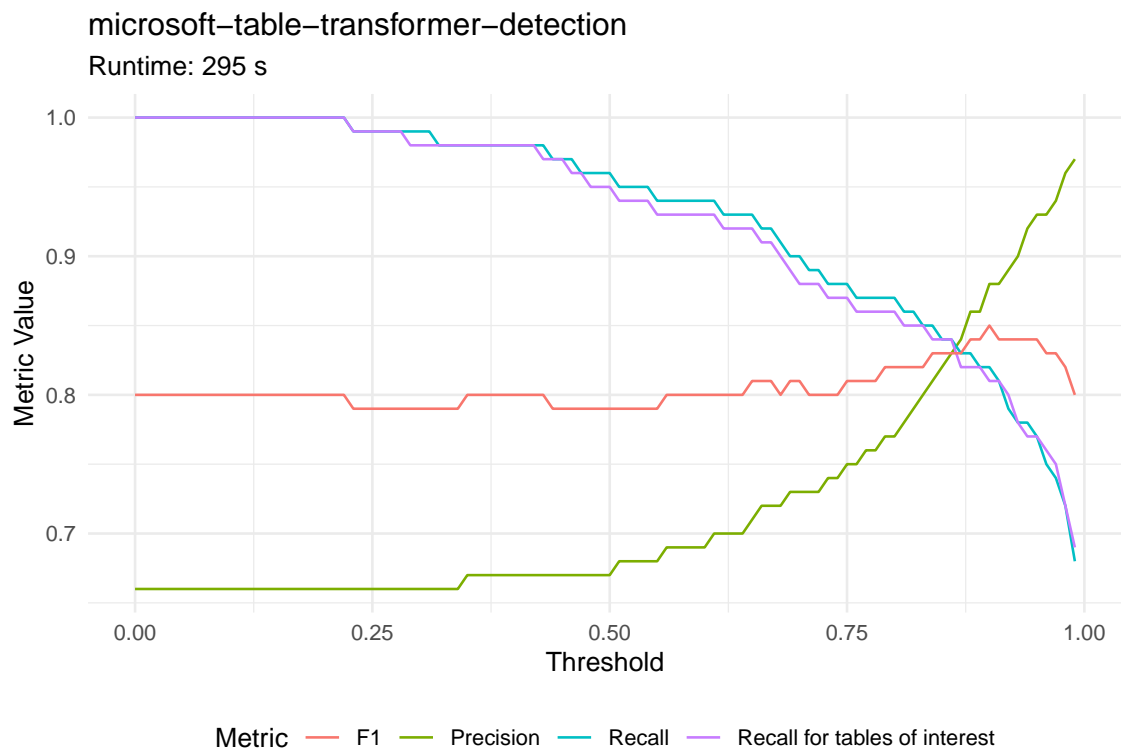

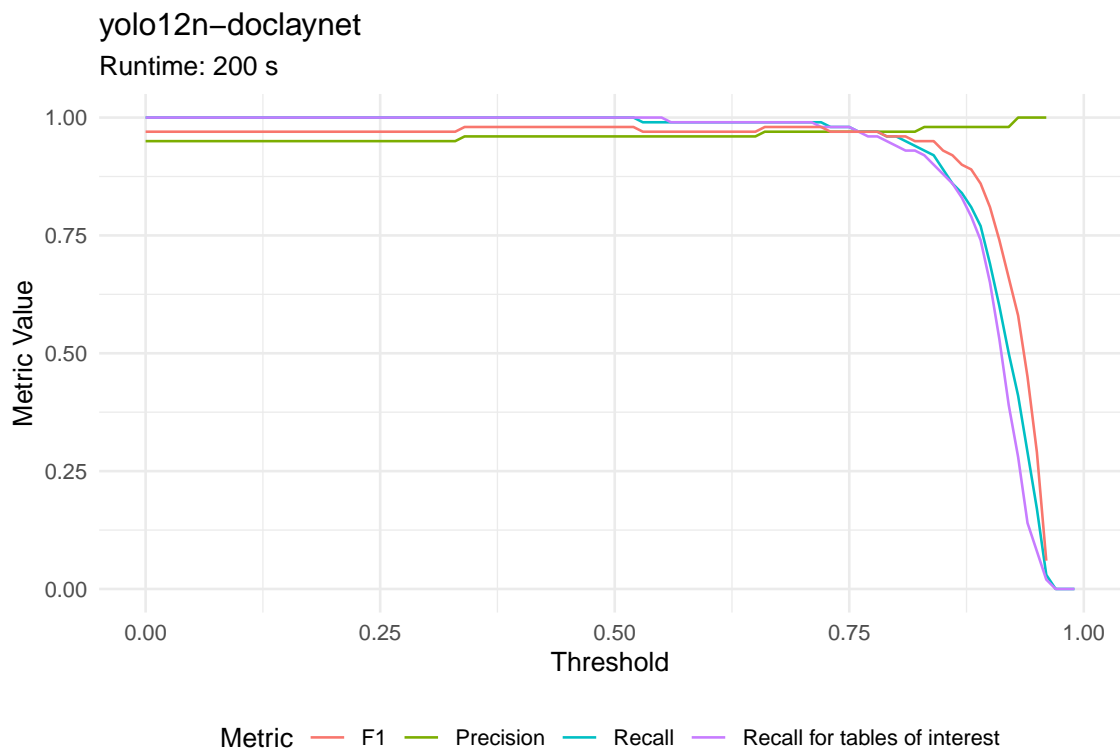

llm	parameters	method	loop	F1_Aktiva	runtime_in_s
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	law_context	0	0.2173913	238.30
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	law_context	1	0.2078580	238.17
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	law_context	2	0.2111959	238.66
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	law_context	3	0.2120051	238.52
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	law_context	4	0.2138365	238.47
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	rag_examples	0	0.2187500	289.46
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	rag_examples	1	0.2164276	280.12
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	rag_examples	2	0.2034346	285.80
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	rag_examples	3	0.2018349	343.86
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	rag_examples	4	0.2127108	321.34
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	random_examples	0	0.2114650	211.59
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	random_examples	1	0.2109375	211.00
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	random_examples	2	0.2167742	220.06
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	random_examples	3	0.2190352	214.12
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	random_examples	4	0.2182285	216.64
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	top_n_rag_examples	0	0.2210797	226.02
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	top_n_rag_examples	1	0.2167742	224.53
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	top_n_rag_examples	2	0.2210663	225.72
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	top_n_rag_examples	3	0.2185515	271.77
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	top_n_rag_examples	4	0.2113402	235.59
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	zero_shot	0	0.2180851	122.94
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	zero_shot	1	0.2145695	123.13
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	zero_shot	2	0.2198675	123.00
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	zero_shot	3	0.2207622	123.20
deepseek-ai_DeepSeek-R1-Distill-Qwen-32B	32B	zero_shot	4	0.2198391	123.08
google_gemma-3-27b-it	NA	law_context	0	0.7407407	455.92
google_gemma-3-27b-it	NA	law_context	1	0.7441860	625.80
google_gemma-3-27b-it	NA	law_context	2	0.7476636	626.03
google_gemma-3-27b-it	NA	law_context	3	0.7465438	625.90
google_gemma-3-27b-it	NA	law_context	4	0.7383178	626.01
google_gemma-3-27b-it	NA	rag_examples	0	0.8000000	3827.93
google_gemma-3-27b-it	NA	rag_examples	1	0.7960199	3908.06
google_gemma-3-27b-it	NA	rag_examples	2	0.7980296	3896.02
google_gemma-3-27b-it	NA	rag_examples	3	0.7960199	3895.44
google_gemma-3-27b-it	NA	rag_examples	4	0.7920792	3880.57
google_gemma-3-27b-it	NA	random_examples	0	0.8526316	2653.36
google_gemma-3-27b-it	NA	random_examples	1	0.8404255	2921.28
google_gemma-3-27b-it	NA	random_examples	2	0.8350515	2920.58
google_gemma-3-27b-it	NA	random_examples	3	0.8350515	2933.60
google_gemma-3-27b-it	NA	random_examples	4	0.8125000	2930.62
google_gemma-3-27b-it	NA	top_n_rag_examples	0	0.7902439	1436.34
google_gemma-3-27b-it	NA	top_n_rag_examples	1	0.7980296	1443.84
google_gemma-3-27b-it	NA	top_n_rag_examples	2	0.7941176	1435.03
google_gemma-3-27b-it	NA	top_n_rag_examples	3	0.7941176	1434.89
google_gemma-3-27b-it	NA	top_n_rag_examples	4	0.7941176	1434.64
google_gemma-3-27b-it	NA	zero_shot	0	0.6952790	134.25
google_gemma-3-27b-it	NA	zero_shot	1	0.6952790	206.05
google_gemma-3-27b-it	NA	zero_shot	2	0.6986900	206.14
google_gemma-3-27b-it	NA	zero_shot	3	0.6956522	206.08
google_gemma-3-27b-it	NA	zero_shot	4	0.6982759	206.11
google_gemma-3-4b-it	NA	law_context	0	0.6153846	317.37
google_gemma-3-4b-it	NA	law_context	1	0.6293103	421.29
google_gemma-3-4b-it	NA	law_context	2	0.6127660	421.03
google_gemma-3-4b-it	NA	law_context	3	0.6075949	421.67
google_gemma-3-4b-it	NA	law_context	4	0.6127660	421.01
google_gemma-3-4b-it	NA	rag_examples	0	0.5882353	2445.47
google_gemma-3-4b-it	NA	rag_examples	1	0.5779817	2546.31
google_gemma-3-4b-it	NA	rag_examples	2	0.5777778	2537.95
google_gemma-3-4b-it	NA	rag_examples	3	0.5909091	2548.47
google_gemma-3-4b-it	NA	rag_examples	4	0.5765766	2529.68
google_gemma-3-4b-it	NA	random_examples	0	0.7263158	1705.17
google_gemma-3-4b-it	NA	random_examples	1	0.6868687	1863.38

Table A.2: Comparing time (in seconds) for processing ten asset tables using different libraries and approaches

Model parameters (in B)	Transformers	vLLM	vLLM batched
0.5	330	65	NA
3.0	628	130	20
7.0	940	217	30

### A.2.3 Large language model process speed

In April 2025 there have been issues with running vllm within the Python framework. Thus the first experiments have been conducted using the transformers library. When the problems of building a working vllm based docker image for the experiments it was measured how long the same task takes with the transformers and the vllm library and how the batched processing competes versus a loop approach. The model family used was Qwen 2.5 Instruct. The task was to extract the assets table for ten real example pages.

Table A.2 shows that the experiments with vllm library run are around four to five times faster. Processing the messages in a batched mode again is six to seven times faster.

The change of the experimental setup from transformers loop-based to vllm batched mode made is possible run the benchmark on whole PDF documents giving a sound estimate of the false positive rate in the page identification task (see section 5.1.2.2). Previous experiments have only been using a subset of pages that have been selected with the baseline regex approach (see section A.3). One can find the former results in section A.2.4.

### A.2.4 Table identification with LLMs

## A.3 Regular expressions

```
simple_regex_patterns = {
    "Aktiva": [
        r"aktiva",
        r"((20\d{2}).*(20\d{2}))"
    ],
    "Passiva": [
        r"passiva",
        r"((20\d{2}).*(20\d{2}))"
    ],
    "GuV": [
        r"gewinn",
        r"verlust",
        r"rechnung",
        r"((20\d{2}).*(20\d{2}))"
    ]
}
```