

# Data Structures and Dynamic Optimization with Matlab

Fan Wang

2020-06-08



# Contents

|                                           |           |
|-------------------------------------------|-----------|
| <b>Preface</b>                            | <b>5</b>  |
| <b>1 Data Structures</b>                  | <b>7</b>  |
| 1.1 Matrices and Arrays . . . . .         | 7         |
| 1.2 Cells . . . . .                       | 27        |
| 1.3 Characters and Strings . . . . .      | 31        |
| 1.4 Map Containers . . . . .              | 35        |
| <b>2 Functions</b>                        | <b>39</b> |
| 2.1 varargin Default Parameters . . . . . | 39        |
| <b>3 Graphs</b>                           | <b>45</b> |
| 3.1 Figure Components . . . . .           | 45        |
| 3.2 Basic Figure Types . . . . .          | 58        |
| 3.3 Write and Read Plots . . . . .        | 65        |
| <b>4 Tables</b>                           | <b>67</b> |
| 4.1 Basic Table Generation . . . . .      | 67        |
| 4.2 Table Joining . . . . .               | 69        |
| <b>A Index and Code Links</b>             | <b>73</b> |
| A.1 Data Structures links . . . . .       | 73        |
| A.2 Functions links . . . . .             | 74        |
| A.3 Graphs links . . . . .                | 74        |
| A.4 Tables links . . . . .                | 75        |



# Preface

This is a work-in-progress [website](#) of support files for using matlab. Materials gathered from various [projects](#) in which matlab is used. Matlab files are linked below by section with livescript files. Tested with [Matlab](#) 2019a ([The MathWorks Inc, 2019](#)). This is not a Matlab package, but a list of examples in PDF/HTML/Mlx formats. [MEconTools](#) is a package that can be installed with tools used in projects involving matlab code.

Bullet points in the Appendix show which matlab functions/commands are used to achieve various objectives. The goal of this repository is to make it easier to find/re-use codes produced for various projects. Some functions also rely on or correspond to functions from [MEconTools](#) ([Wang, 2020](#)).

From other repositories: For dynamic borrowing and savings problems, see [Dynamic Asset Repository](#); For code examples, see also [R Example Code](#), and [Stata Example Code](#); For intro stat with R, see [Intro Statistics for Undergraduates](#), and intro Math with Matlab, see [Intro Mathematics for Economists](#). See [here](#) for all of [Fan](#)'s public repositories.

The site is built using [Bookdown](#) ([Xie, 2020](#)).

Please contact [FanWangEcon](#) for issues or problems.



# Chapter 1

## Data Structures

### 1.1 Matrices and Arrays

#### 1.1.1 Accumarray Examples

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

##### 1.1.1.1 Accumarray Basic Example

There are three unique values in `ar_a`, sum up the probabilities for each of the unique states. This is equivalent to sorting a matrix with `a` and `prob`, and computing sum for each.

```
ar_a = [3,2,1,3]';
ar_prob = [0.1,0.2,0.31,0.39]';
ar_sumprob = accumarray(ar_a, ar_prob);
tb_summed_prob = table(sort(unique(ar_a)), ar_sumprob);
disp(tb_summed_prob);
```

| Var1 | ar_sumprob |
|------|------------|
| 1    | 0.31       |
| 2    | 0.2        |
| 3    | 0.49       |

##### 1.1.1.2 Accumarray For Discrete Random Variable

Upon solving a model, if we look for the mass at certain choices or states, `accumarray` could help aggregate up probabilities

```
a1 = [1,1,2,2]
```

```
a1 = 1x4
     1     1     2     2
```

```
a2 = [3,2,1,3]
```

```
a2 = 1x4
     3     2     1     3
```

```
a3 = [1,2,3,3]
```

```
a3 = 1x4
```

```

1      2      3      3

a = [a1;a2;a3]'/2

a = 4x3
    0.5000    1.5000    0.5000
    0.5000    1.0000    1.0000
    1.0000    0.5000    1.5000
    1.0000    1.5000    1.5000

prob_a = zeros(size(a)) + 1/12

prob_a = 4x3
    0.0833    0.0833    0.0833
    0.0833    0.0833    0.0833
    0.0833    0.0833    0.0833
    0.0833    0.0833    0.0833

[ar_idx_full, ~, ar_idx_of_unique] = unique(a)

ar_idx_full = 3x1
    0.5000
    1.0000
    1.5000

ar_idx_of_unique = 12x1
     1
     1
     2
     2
     3
     2
     1
     3
     1
     2

mt_idx_of_unique = reshape(ar_idx_of_unique, size(a))

mt_idx_of_unique = 4x3
     1     3     1
     1     2     2
     2     1     3
     2     3     3

accumarray(mt_idx_of_unique(:,1), prob_a(:,1))

ans = 2x1
    0.1667
    0.1667

accumarray(mt_idx_of_unique(:,2), prob_a(:,2))

ans = 3x1
    0.0833

```



```

0.0833
0.1667

accumarray(mt_idx_of_unique(:,3), prob_a(:,3))

ans = 3x1
    0.0833
    0.0833
    0.1667

```

### 1.1.2 Array Broadcast and Expansion Examples

back to [Fan's Reusable Matlab Repository](#) or [Dynamic Asset Repository](#).

Matrix broadcasting was added to matlab's recent editions. This is an important step for vectorizing codes. Proper usage of broadcasting reduces memory allocation requirements for matrix matrix operations.

#### 1.1.2.1 Broadcasting with A Row and a Column

Below we add together a 1 by 3 and 4 by 1 array, that should not work. With broadcasting, it is assumed that we will mesh the arrays and then sum up the meshed matrixes.

```

clear all
ar_A = [1,2,3];
ar_B = [4,3,2,1]';
disp(size(ar_A));

    1     3

disp(size(ar_B));

    4     1

mt_A_B_broadcast = ar_A + ar_B;
disp(mt_A_B_broadcast);

    5     6     7
    4     5     6
    3     4     5
    2     3     4

mt_A_B_broadcast_product = ar_A.*ar_B;
disp(mt_A_B_broadcast_product);

    4     8    12
    3     6     9
    2     4     6
    1     2     3

```

#### 1.1.2.2 Broadcasting with One Row and One Matrix

Below we add together a 1 by 3 and 4 by 3 matrix, that should not work. With broadcasting, it is assumed that we will repeat the array four times, duplicating the single row four times, so the matrix dimensions match up.

```

clear all
ar_A = [1,2,3];
mt_B = [4,3,2,1;5,4,3,2;6,5,4,3]';
disp(size(ar_A));

```

```

1      3

disp(size(mt_B));

4      3

mt_A_B_broadcast = ar_A + mt_B;
disp(mt_A_B_broadcast);

5      7      9
4      6      8
3      5      7
2      4      6

mt_A_B_broadcast_product = ar_A.*mt_B;
disp(mt_A_B_broadcast_product);

4      10     18
3      8      15
2      6      12
1      4      9

```

### 1.1.2.3 Broadcasting with One Column and One Matrix

Below we add together a 4 by 1 and 4 by 3 matrix, that should not work. With broadcasting, it is assumed that we will repeat the column three times, duplicating the single column three times, so the matrix dimensions match up.

```

clear all
ar_A = [4,3,2,1]';
mt_B = [4,3,2,1;5,4,3,2;6,5,4,3]';
disp(size(ar_A));

4      1

disp(size(mt_B));

4      3

mt_A_B_broadcast = ar_A + mt_B;
disp(mt_A_B_broadcast);

8      9      10
6      7      8
4      5      6
2      3      4

mt_A_B_broadcast_product = ar_A.*mt_B;
disp(mt_A_B_broadcast_product);

16     20     24
9      12     15
4      6      8
1      2      3

```

### 1.1.2.4 Expand with Broadcast, Percentage Choice grids

```

clear all

```

```

ar_w_perc = [0.1,0.5,0.9]

ar_w_perc = 1x3
    0.1000    0.5000    0.9000

ar_w_level = [-2,0,2]

ar_w_level = 1x3
    -2     0     2

fl_b_bd = -4

fl_b_bd = -4

ar_k_max = ar_w_level - fl_b_bd

ar_k_max = 1x3
     2     4     6

ar_ak_perc = [0.1,0.3,0.7,0.9]

ar_ak_perc = 1x4
    0.1000    0.3000    0.7000    0.9000

mt_k = (ar_k_max'*ar_ak_perc)'

mt_k = 4x3
    0.2000    0.4000    0.6000
    0.6000    1.2000    1.8000
    1.4000    2.8000    4.2000
    1.8000    3.6000    5.4000

mt_a = (ar_w_level - mt_k)

mt_a = 4x3
   -2.2000   -0.4000    1.4000
   -2.6000   -1.2000    0.2000
   -3.4000   -2.8000   -2.2000
   -3.8000   -3.6000   -3.4000

```

#### 1.1.2.5 Expand Matrix Twice

```

clear all
% Same as above
ar_w_level = [-2,-1,-0.1]

ar_w_level = 1x3
   -2.0000   -1.0000   -0.1000

fl_b_bd = -4

fl_b_bd = -4

ar_k_max = ar_w_level - fl_b_bd

ar_k_max = 1x3
    2.0000    3.0000    3.9000

```

```
ar_ak_perc = [0.001, 0.1,0.3,0.7,0.9, 0.999]
```

```
ar_ak_perc = 1x6
```

```
    0.0010    0.1000    0.3000    0.7000    0.9000    0.9990
```

```
mt_k = (ar_k_max'*ar_ak_perc)'
```

```
mt_k = 6x3
```

```
    0.0020    0.0030    0.0039
    0.2000    0.3000    0.3900
    0.6000    0.9000    1.1700
    1.4000    2.1000    2.7300
    1.8000    2.7000    3.5100
    1.9980    2.9970    3.8961
```

```
mt_a = (ar_w_level - mt_k)
```

```
mt_a = 6x3
```

```
   -2.0020   -1.0030   -0.1039
   -2.2000   -1.3000   -0.4900
   -2.6000   -1.9000   -1.2700
   -3.4000   -3.1000   -2.8300
   -3.8000   -3.7000   -3.6100
   -3.9980   -3.9970   -3.9961
```

```
% fraction of borrowing for bridge loan
```

```
ar_coh_bridge_perc = [0, 0.5, 0.999];
```

```
% Expand matrix to include coh percentage dimension
```

```
mt_k = repmat(mt_k, [1, length(ar_coh_bridge_perc)])
```

```
mt_k = 6x9
```

```
    0.0020    0.0030    0.0039    0.0020    0.0030    0.0039    0.0020    0.0030    0.0039
    0.2000    0.3000    0.3900    0.2000    0.3000    0.3900    0.2000    0.3000    0.3900
    0.6000    0.9000    1.1700    0.6000    0.9000    1.1700    0.6000    0.9000    1.1700
    1.4000    2.1000    2.7300    1.4000    2.1000    2.7300    1.4000    2.1000    2.7300
    1.8000    2.7000    3.5100    1.8000    2.7000    3.5100    1.8000    2.7000    3.5100
    1.9980    2.9970    3.8961    1.9980    2.9970    3.8961    1.9980    2.9970    3.8961
```

```
mt_a = repmat(mt_a, [1, length(ar_coh_bridge_perc)])
```

```
mt_a = 6x9
```

```
   -2.0020   -1.0030   -0.1039   -2.0020   -1.0030   -0.1039   -2.0020   -1.0030   -0.1039
   -2.2000   -1.3000   -0.4900   -2.2000   -1.3000   -0.4900   -2.2000   -1.3000   -0.4900
   -2.6000   -1.9000   -1.2700   -2.6000   -1.9000   -1.2700   -2.6000   -1.9000   -1.2700
   -3.4000   -3.1000   -2.8300   -3.4000   -3.1000   -2.8300   -3.4000   -3.1000   -2.8300
   -3.8000   -3.7000   -3.6100   -3.8000   -3.7000   -3.6100   -3.8000   -3.7000   -3.6100
   -3.9980   -3.9970   -3.9961   -3.9980   -3.9970   -3.9961   -3.9980   -3.9970   -3.9961
```

```
mt_a = mt_a
```

```
mt_a = 6x9
```

```
   -2.0020   -1.0030   -0.1039   -2.0020   -1.0030   -0.1039   -2.0020   -1.0030   -0.1039
   -2.2000   -1.3000   -0.4900   -2.2000   -1.3000   -0.4900   -2.2000   -1.3000   -0.4900
   -2.6000   -1.9000   -1.2700   -2.6000   -1.9000   -1.2700   -2.6000   -1.9000   -1.2700
   -3.4000   -3.1000   -2.8300   -3.4000   -3.1000   -2.8300   -3.4000   -3.1000   -2.8300
   -3.8000   -3.7000   -3.6100   -3.8000   -3.7000   -3.6100   -3.8000   -3.7000   -3.6100
```

```

-3.9980    -3.9970    -3.9961    -3.9980    -3.9970    -3.9961    -3.9980    -3.9970    -3.9961

% bridge loan component of borrowing
ar_brdige_a = (ar_coh_bridge_perc'*ar_w_level)'

ar_brdige_a = 3x3
    0    -1.0000    -1.9980
    0    -0.5000    -0.9990
    0    -0.0500    -0.0999

ar_brdige_a = ar_brdige_a(:)

ar_brdige_a = 1x9
    0         0         0    -1.0000    -0.5000    -0.0500    -1.9980    -0.9990    -0.0999

% borrowing choices excluding bridge loan
mt_a_nobridge = mt_a - ar_brdige_a

mt_a_nobridge = 6x9
   -2.0020   -1.0030   -0.1039   -1.0020   -0.5030   -0.0539   -0.0040   -0.0040   -0.0040
   -2.2000   -1.3000   -0.4900   -1.2000   -0.8000   -0.4400   -0.2020   -0.3010   -0.3901
   -2.6000   -1.9000   -1.2700   -1.6000   -1.4000   -1.2200   -0.6020   -0.9010   -1.1701
   -3.4000   -3.1000   -2.8300   -2.4000   -2.6000   -2.7800   -1.4020   -2.1010   -2.7301
   -3.8000   -3.7000   -3.6100   -2.8000   -3.2000   -3.5600   -1.8020   -2.7010   -3.5101
   -3.9980   -3.9970   -3.9961   -2.9980   -3.4970   -3.9461   -2.0000   -2.9980   -3.8962

```

### 1.1.3 Array Draw Random Index and Find Combinations or Permutations

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 1.1.3.1 Matlab Draw Random with and without Replacement

```

%Generate a matrix named foo, with limited numbers
rng(1234);
foo = unique((round((randn(5,1)+1)*100)));
disp(foo);

    5
    78
   154
   219
   232

```

```

% draw 10 random samples without replacement
index = randsample(1:length(foo), 4);
bar_rand_noreplace = foo(index,:);

```

```

% draw 1000 random samples with replacement
index = randsample(1:length(foo), 4, true);
bar_rand_replace = foo(index,:);

```

```

% Display
disp(table(bar_rand_noreplace, bar_rand_replace));

```

```

    bar_rand_noreplace    bar_rand_replace

```

```

-----
      5      78
     78     154
    154     219
    232     219

```

### 1.1.3.2 Matrix Meshgrid to Loop Permutated Vectors

Meshgrid to generate all permutations of arrays.

```

k = linspace(1,10,10);
kp = linspace(1,10,10);
z = linspace(0,1,10);

```

```

[kM kpM zM] = meshgrid(k,kp,z);
kMVec = kM(:);
kpMVec = kpM(:);
zMVec = zM(:);

```

```

outputVec = zeros(size(zMVec));
for a=1:length(zMVec)
    outputVec(a) = kMVec(a)+kpMVec(a)+zMVec(a);
end

```

```

outputTens = reshape(outputVec,size(kM));
disp(outputTens);

```

```

(:, :, 1) =

```

|    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|
| 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 |
| 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 |
| 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 |
| 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 |
| 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |

```

(:, :, 2) =

```

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 2.1111  | 3.1111  | 4.1111  | 5.1111  | 6.1111  | 7.1111  | 8.1111  | 9.1111  | 10.1111 | 11.1111 |
| 3.1111  | 4.1111  | 5.1111  | 6.1111  | 7.1111  | 8.1111  | 9.1111  | 10.1111 | 11.1111 | 12.1111 |
| 4.1111  | 5.1111  | 6.1111  | 7.1111  | 8.1111  | 9.1111  | 10.1111 | 11.1111 | 12.1111 | 13.1111 |
| 5.1111  | 6.1111  | 7.1111  | 8.1111  | 9.1111  | 10.1111 | 11.1111 | 12.1111 | 13.1111 | 14.1111 |
| 6.1111  | 7.1111  | 8.1111  | 9.1111  | 10.1111 | 11.1111 | 12.1111 | 13.1111 | 14.1111 | 15.1111 |
| 7.1111  | 8.1111  | 9.1111  | 10.1111 | 11.1111 | 12.1111 | 13.1111 | 14.1111 | 15.1111 | 16.1111 |
| 8.1111  | 9.1111  | 10.1111 | 11.1111 | 12.1111 | 13.1111 | 14.1111 | 15.1111 | 16.1111 | 17.1111 |
| 9.1111  | 10.1111 | 11.1111 | 12.1111 | 13.1111 | 14.1111 | 15.1111 | 16.1111 | 17.1111 | 18.1111 |
| 10.1111 | 11.1111 | 12.1111 | 13.1111 | 14.1111 | 15.1111 | 16.1111 | 17.1111 | 18.1111 | 19.1111 |
| 11.1111 | 12.1111 | 13.1111 | 14.1111 | 15.1111 | 16.1111 | 17.1111 | 18.1111 | 19.1111 | 20.1111 |

```

(:, :, 3) =

```

|        |        |        |        |        |        |        |        |         |         |
|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|
| 2.2222 | 3.2222 | 4.2222 | 5.2222 | 6.2222 | 7.2222 | 8.2222 | 9.2222 | 10.2222 | 11.2222 |
|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.2222  | 4.2222  | 5.2222  | 6.2222  | 7.2222  | 8.2222  | 9.2222  | 10.2222 | 11.2222 | 12.2222 |
| 4.2222  | 5.2222  | 6.2222  | 7.2222  | 8.2222  | 9.2222  | 10.2222 | 11.2222 | 12.2222 | 13.2222 |
| 5.2222  | 6.2222  | 7.2222  | 8.2222  | 9.2222  | 10.2222 | 11.2222 | 12.2222 | 13.2222 | 14.2222 |
| 6.2222  | 7.2222  | 8.2222  | 9.2222  | 10.2222 | 11.2222 | 12.2222 | 13.2222 | 14.2222 | 15.2222 |
| 7.2222  | 8.2222  | 9.2222  | 10.2222 | 11.2222 | 12.2222 | 13.2222 | 14.2222 | 15.2222 | 16.2222 |
| 8.2222  | 9.2222  | 10.2222 | 11.2222 | 12.2222 | 13.2222 | 14.2222 | 15.2222 | 16.2222 | 17.2222 |
| 9.2222  | 10.2222 | 11.2222 | 12.2222 | 13.2222 | 14.2222 | 15.2222 | 16.2222 | 17.2222 | 18.2222 |
| 10.2222 | 11.2222 | 12.2222 | 13.2222 | 14.2222 | 15.2222 | 16.2222 | 17.2222 | 18.2222 | 19.2222 |
| 11.2222 | 12.2222 | 13.2222 | 14.2222 | 15.2222 | 16.2222 | 17.2222 | 18.2222 | 19.2222 | 20.2222 |

(:, :, 4) =

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 2.3333  | 3.3333  | 4.3333  | 5.3333  | 6.3333  | 7.3333  | 8.3333  | 9.3333  | 10.3333 | 11.3333 |
| 3.3333  | 4.3333  | 5.3333  | 6.3333  | 7.3333  | 8.3333  | 9.3333  | 10.3333 | 11.3333 | 12.3333 |
| 4.3333  | 5.3333  | 6.3333  | 7.3333  | 8.3333  | 9.3333  | 10.3333 | 11.3333 | 12.3333 | 13.3333 |
| 5.3333  | 6.3333  | 7.3333  | 8.3333  | 9.3333  | 10.3333 | 11.3333 | 12.3333 | 13.3333 | 14.3333 |
| 6.3333  | 7.3333  | 8.3333  | 9.3333  | 10.3333 | 11.3333 | 12.3333 | 13.3333 | 14.3333 | 15.3333 |
| 7.3333  | 8.3333  | 9.3333  | 10.3333 | 11.3333 | 12.3333 | 13.3333 | 14.3333 | 15.3333 | 16.3333 |
| 8.3333  | 9.3333  | 10.3333 | 11.3333 | 12.3333 | 13.3333 | 14.3333 | 15.3333 | 16.3333 | 17.3333 |
| 9.3333  | 10.3333 | 11.3333 | 12.3333 | 13.3333 | 14.3333 | 15.3333 | 16.3333 | 17.3333 | 18.3333 |
| 10.3333 | 11.3333 | 12.3333 | 13.3333 | 14.3333 | 15.3333 | 16.3333 | 17.3333 | 18.3333 | 19.3333 |
| 11.3333 | 12.3333 | 13.3333 | 14.3333 | 15.3333 | 16.3333 | 17.3333 | 18.3333 | 19.3333 | 20.3333 |

(:, :, 5) =

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 2.4444  | 3.4444  | 4.4444  | 5.4444  | 6.4444  | 7.4444  | 8.4444  | 9.4444  | 10.4444 | 11.4444 |
| 3.4444  | 4.4444  | 5.4444  | 6.4444  | 7.4444  | 8.4444  | 9.4444  | 10.4444 | 11.4444 | 12.4444 |
| 4.4444  | 5.4444  | 6.4444  | 7.4444  | 8.4444  | 9.4444  | 10.4444 | 11.4444 | 12.4444 | 13.4444 |
| 5.4444  | 6.4444  | 7.4444  | 8.4444  | 9.4444  | 10.4444 | 11.4444 | 12.4444 | 13.4444 | 14.4444 |
| 6.4444  | 7.4444  | 8.4444  | 9.4444  | 10.4444 | 11.4444 | 12.4444 | 13.4444 | 14.4444 | 15.4444 |
| 7.4444  | 8.4444  | 9.4444  | 10.4444 | 11.4444 | 12.4444 | 13.4444 | 14.4444 | 15.4444 | 16.4444 |
| 8.4444  | 9.4444  | 10.4444 | 11.4444 | 12.4444 | 13.4444 | 14.4444 | 15.4444 | 16.4444 | 17.4444 |
| 9.4444  | 10.4444 | 11.4444 | 12.4444 | 13.4444 | 14.4444 | 15.4444 | 16.4444 | 17.4444 | 18.4444 |
| 10.4444 | 11.4444 | 12.4444 | 13.4444 | 14.4444 | 15.4444 | 16.4444 | 17.4444 | 18.4444 | 19.4444 |
| 11.4444 | 12.4444 | 13.4444 | 14.4444 | 15.4444 | 16.4444 | 17.4444 | 18.4444 | 19.4444 | 20.4444 |

(:, :, 6) =

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 2.5556  | 3.5556  | 4.5556  | 5.5556  | 6.5556  | 7.5556  | 8.5556  | 9.5556  | 10.5556 | 11.5556 |
| 3.5556  | 4.5556  | 5.5556  | 6.5556  | 7.5556  | 8.5556  | 9.5556  | 10.5556 | 11.5556 | 12.5556 |
| 4.5556  | 5.5556  | 6.5556  | 7.5556  | 8.5556  | 9.5556  | 10.5556 | 11.5556 | 12.5556 | 13.5556 |
| 5.5556  | 6.5556  | 7.5556  | 8.5556  | 9.5556  | 10.5556 | 11.5556 | 12.5556 | 13.5556 | 14.5556 |
| 6.5556  | 7.5556  | 8.5556  | 9.5556  | 10.5556 | 11.5556 | 12.5556 | 13.5556 | 14.5556 | 15.5556 |
| 7.5556  | 8.5556  | 9.5556  | 10.5556 | 11.5556 | 12.5556 | 13.5556 | 14.5556 | 15.5556 | 16.5556 |
| 8.5556  | 9.5556  | 10.5556 | 11.5556 | 12.5556 | 13.5556 | 14.5556 | 15.5556 | 16.5556 | 17.5556 |
| 9.5556  | 10.5556 | 11.5556 | 12.5556 | 13.5556 | 14.5556 | 15.5556 | 16.5556 | 17.5556 | 18.5556 |
| 10.5556 | 11.5556 | 12.5556 | 13.5556 | 14.5556 | 15.5556 | 16.5556 | 17.5556 | 18.5556 | 19.5556 |
| 11.5556 | 12.5556 | 13.5556 | 14.5556 | 15.5556 | 16.5556 | 17.5556 | 18.5556 | 19.5556 | 20.5556 |

(:, :, 7) =

|        |        |        |        |        |        |         |         |         |         |
|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|
| 2.6667 | 3.6667 | 4.6667 | 5.6667 | 6.6667 | 7.6667 | 8.6667  | 9.6667  | 10.6667 | 11.6667 |
| 3.6667 | 4.6667 | 5.6667 | 6.6667 | 7.6667 | 8.6667 | 9.6667  | 10.6667 | 11.6667 | 12.6667 |
| 4.6667 | 5.6667 | 6.6667 | 7.6667 | 8.6667 | 9.6667 | 10.6667 | 11.6667 | 12.6667 | 13.6667 |

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 5.6667  | 6.6667  | 7.6667  | 8.6667  | 9.6667  | 10.6667 | 11.6667 | 12.6667 | 13.6667 | 14.6667 |
| 6.6667  | 7.6667  | 8.6667  | 9.6667  | 10.6667 | 11.6667 | 12.6667 | 13.6667 | 14.6667 | 15.6667 |
| 7.6667  | 8.6667  | 9.6667  | 10.6667 | 11.6667 | 12.6667 | 13.6667 | 14.6667 | 15.6667 | 16.6667 |
| 8.6667  | 9.6667  | 10.6667 | 11.6667 | 12.6667 | 13.6667 | 14.6667 | 15.6667 | 16.6667 | 17.6667 |
| 9.6667  | 10.6667 | 11.6667 | 12.6667 | 13.6667 | 14.6667 | 15.6667 | 16.6667 | 17.6667 | 18.6667 |
| 10.6667 | 11.6667 | 12.6667 | 13.6667 | 14.6667 | 15.6667 | 16.6667 | 17.6667 | 18.6667 | 19.6667 |
| 11.6667 | 12.6667 | 13.6667 | 14.6667 | 15.6667 | 16.6667 | 17.6667 | 18.6667 | 19.6667 | 20.6667 |

(:,:,8) =

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 2.7778  | 3.7778  | 4.7778  | 5.7778  | 6.7778  | 7.7778  | 8.7778  | 9.7778  | 10.7778 | 11.7778 |
| 3.7778  | 4.7778  | 5.7778  | 6.7778  | 7.7778  | 8.7778  | 9.7778  | 10.7778 | 11.7778 | 12.7778 |
| 4.7778  | 5.7778  | 6.7778  | 7.7778  | 8.7778  | 9.7778  | 10.7778 | 11.7778 | 12.7778 | 13.7778 |
| 5.7778  | 6.7778  | 7.7778  | 8.7778  | 9.7778  | 10.7778 | 11.7778 | 12.7778 | 13.7778 | 14.7778 |
| 6.7778  | 7.7778  | 8.7778  | 9.7778  | 10.7778 | 11.7778 | 12.7778 | 13.7778 | 14.7778 | 15.7778 |
| 7.7778  | 8.7778  | 9.7778  | 10.7778 | 11.7778 | 12.7778 | 13.7778 | 14.7778 | 15.7778 | 16.7778 |
| 8.7778  | 9.7778  | 10.7778 | 11.7778 | 12.7778 | 13.7778 | 14.7778 | 15.7778 | 16.7778 | 17.7778 |
| 9.7778  | 10.7778 | 11.7778 | 12.7778 | 13.7778 | 14.7778 | 15.7778 | 16.7778 | 17.7778 | 18.7778 |
| 10.7778 | 11.7778 | 12.7778 | 13.7778 | 14.7778 | 15.7778 | 16.7778 | 17.7778 | 18.7778 | 19.7778 |
| 11.7778 | 12.7778 | 13.7778 | 14.7778 | 15.7778 | 16.7778 | 17.7778 | 18.7778 | 19.7778 | 20.7778 |

(:,:,9) =

|         |         |         |         |         |         |         |         |         |         |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 2.8889  | 3.8889  | 4.8889  | 5.8889  | 6.8889  | 7.8889  | 8.8889  | 9.8889  | 10.8889 | 11.8889 |
| 3.8889  | 4.8889  | 5.8889  | 6.8889  | 7.8889  | 8.8889  | 9.8889  | 10.8889 | 11.8889 | 12.8889 |
| 4.8889  | 5.8889  | 6.8889  | 7.8889  | 8.8889  | 9.8889  | 10.8889 | 11.8889 | 12.8889 | 13.8889 |
| 5.8889  | 6.8889  | 7.8889  | 8.8889  | 9.8889  | 10.8889 | 11.8889 | 12.8889 | 13.8889 | 14.8889 |
| 6.8889  | 7.8889  | 8.8889  | 9.8889  | 10.8889 | 11.8889 | 12.8889 | 13.8889 | 14.8889 | 15.8889 |
| 7.8889  | 8.8889  | 9.8889  | 10.8889 | 11.8889 | 12.8889 | 13.8889 | 14.8889 | 15.8889 | 16.8889 |
| 8.8889  | 9.8889  | 10.8889 | 11.8889 | 12.8889 | 13.8889 | 14.8889 | 15.8889 | 16.8889 | 17.8889 |
| 9.8889  | 10.8889 | 11.8889 | 12.8889 | 13.8889 | 14.8889 | 15.8889 | 16.8889 | 17.8889 | 18.8889 |
| 10.8889 | 11.8889 | 12.8889 | 13.8889 | 14.8889 | 15.8889 | 16.8889 | 17.8889 | 18.8889 | 19.8889 |
| 11.8889 | 12.8889 | 13.8889 | 14.8889 | 15.8889 | 16.8889 | 17.8889 | 18.8889 | 19.8889 | 20.8889 |

(:,:,10) =

|    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|
| 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 |
| 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 |
| 6  | 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 |
| 7  | 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| 8  | 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| 9  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 |
| 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 |

### 1.1.3.3 Given integer arrays, all possible combinations

given any sizes arrays, N of them, create all possible combinations

```

ar_it_a = 1:3;
ar_it_b = 1:2;
ar_it_c = 2:4;
ar_it_d = -1:-1:-2;
ar_it_e = 0.1;

```



```

cl_ar_all = {ar_it_a, ar_it_b, ar_it_c, ar_it_d, ar_it_e};
cl_mt_all = cl_ar_all;
[cl_mt_all{:}] = ndgrid(cl_ar_all{:});
mt_it_allcombo = cell2mat(cellfun(@(m) m(:), cl_mt_all, 'uni', 0));

```

```
disp(mt_it_allcombo)
```

```

1.0000    1.0000    2.0000   -1.0000    0.1000
2.0000    1.0000    2.0000   -1.0000    0.1000
3.0000    1.0000    2.0000   -1.0000    0.1000
1.0000    2.0000    2.0000   -1.0000    0.1000
2.0000    2.0000    2.0000   -1.0000    0.1000
3.0000    2.0000    2.0000   -1.0000    0.1000
1.0000    1.0000    3.0000   -1.0000    0.1000
2.0000    1.0000    3.0000   -1.0000    0.1000
3.0000    1.0000    3.0000   -1.0000    0.1000
1.0000    2.0000    3.0000   -1.0000    0.1000
2.0000    2.0000    3.0000   -1.0000    0.1000
3.0000    2.0000    3.0000   -1.0000    0.1000
1.0000    1.0000    4.0000   -1.0000    0.1000
2.0000    1.0000    4.0000   -1.0000    0.1000
3.0000    1.0000    4.0000   -1.0000    0.1000
1.0000    2.0000    4.0000   -1.0000    0.1000
2.0000    2.0000    4.0000   -1.0000    0.1000
3.0000    2.0000    4.0000   -1.0000    0.1000
1.0000    1.0000    2.0000   -2.0000    0.1000
2.0000    1.0000    2.0000   -2.0000    0.1000
3.0000    1.0000    2.0000   -2.0000    0.1000
1.0000    2.0000    2.0000   -2.0000    0.1000
2.0000    2.0000    2.0000   -2.0000    0.1000
3.0000    2.0000    2.0000   -2.0000    0.1000
1.0000    1.0000    3.0000   -2.0000    0.1000
2.0000    1.0000    3.0000   -2.0000    0.1000
3.0000    1.0000    3.0000   -2.0000    0.1000
1.0000    2.0000    3.0000   -2.0000    0.1000
2.0000    2.0000    3.0000   -2.0000    0.1000
3.0000    2.0000    3.0000   -2.0000    0.1000
1.0000    1.0000    4.0000   -2.0000    0.1000
2.0000    1.0000    4.0000   -2.0000    0.1000
3.0000    1.0000    4.0000   -2.0000    0.1000
1.0000    2.0000    4.0000   -2.0000    0.1000
2.0000    2.0000    4.0000   -2.0000    0.1000
3.0000    2.0000    4.0000   -2.0000    0.1000

```

### 1.1.4 Check Imaginary Numbers

back to [Fan's Reusable Matlab Repository](#) or [Dynamic Asset Repository](#).

#### 1.1.4.1 Basic Examples

```
rng(123);
```

```
% Imaginary array
```

```
ar_img = rand([1,7]) + 1i*rand([1,7]);
```

```
% Regular Array
```

```
ar_real = rand([1,10]);
```

```
% Combine arrays
ar_full = [ar_real ar_img];
ar_full = ar_full(randperm(length(ar_full)));
disp(ar_full);

Columns 1 through 7

    0.6344 + 0.0000i    0.1755 + 0.0000i    0.5316 + 0.0000i    0.2861 + 0.4809i    0.7380 + 0.0000i    0.

Columns 8 through 14

    0.2269 + 0.3921i    0.7245 + 0.0000i    0.8494 + 0.0000i    0.6110 + 0.0000i    0.4231 + 0.4386i    0.

Columns 15 through 17

    0.3980 + 0.0000i    0.5513 + 0.3432i    0.7195 + 0.7290i

% real index
disp(~imag(ar_full));

    1    1    1    0    1    1    0    0    1    1    1    0    0    1    1    0    0

% Get Real and not real Components
disp(ar_full(imag(ar_full) == 0));

    0.6344    0.1755    0.5316    0.7380    0.1825    0.7245    0.8494    0.6110    0.5318    0.3980

disp(ar_full(imag(ar_full) ~= 0));

    0.2861 + 0.4809i    0.6965 + 0.6848i    0.2269 + 0.3921i    0.4231 + 0.4386i    0.9808 + 0.0597i    0.
```

### 1.1.5 Array Reshape, Repeat and Expand Examples

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 1.1.5.1 Basic Examples of Reshape

```
a = [1,2,3,4,5,6]';
b = reshape(a, [3,2])

b = 3x2
     1     4
     2     5
     3     6

b(:)

ans = 6x1
     1
     2
     3
     4
     5
     6

a = [1,2,3;4,5,6;7,8,9;10,11,12]'
```

```
a = 3x4
    1     4     7    10
    2     5     8    11
    3     6     9    12
```

```
b = reshape(a, [6,2])
```

```
b = 6x2
    1     7
    2     8
    3     9
    4    10
    5    11
    6    12
```

### 1.1.5.2 Stack Two Matrix of Equal Column Count Together

```
a = [1,2;3,4];
a_stacked = [a;a;a];
disp(a_stacked);
```

```
    1     2
    3     4
    1     2
    3     4
    1     2
    3     4
```

### 1.1.5.3 Repeat/Duplicate Matrix Downwards

There is a 2 by 3 matrix, to be repeated 4 times, downwards. This is useful for replicating data matrix for say counterfactual purposes.

Below, we have two ways of repeating a matrix downwards. Copy as whole, or copy row by row.

```
row_count = 2;
col_count = 3;
repeat_mat_count = 2;
```

```
data_vec = 1:(row_count*col_count);
searchMatrix = reshape(data_vec,row_count,col_count);
```

```
% To repeat matrix downwards
rep_rows_idx = [1:row_count]*ones(1,repeat_mat_count);
rep_rows_idx = rep_rows_idx(:);
```

```
rep_cols_idx = [1:col_count];
rep_cols_idx = rep_cols_idx(:);
```

```
searchMatrixRep_stack = searchMatrix(rep_rows_idx, rep_cols_idx);
```

```
% To insert repeated rows following original rows
rep_rows_idx = ([1:row_count]*ones(1,repeat_mat_count))';
rep_rows_idx = rep_rows_idx(:);
```

```
searchMatrixRep_dup = searchMatrix(rep_rows_idx, rep_cols_idx);
```

```
disp(searchMatrix)
```

```

1      3      5
2      4      6

disp(searchMatrixRep_stack)

1      3      5
2      4      6
1      3      5
2      4      6

disp(searchMatrixRep_dup)

```

```

1      3      5
1      3      5
2      4      6
2      4      6

```

#### 1.1.5.4 Index Dimension Transform

```

it_inner_fin = 5; it_outter_fin = 3;
it_inner_cur = it_outter_fin it_outter_cur = it_inner_fin
ar_it_cols_idx = 1:1:(it_inner_fin*it_outter_fin) ar_it_cols_inner_dim = repmat(1:it_inner_cur,
                                         it_outter_cur,1
) ar_it_cols_inner_dim(:)'
mt_it_cols_idx = reshape(ar_it_cols_idx,
                                         it_inner_cur,it_outter_cur
)' mt_it_cols_idx(:)'

it_inner_fin = 5;
it_outter_fin = 3;

ar_it_cols_idx = 1:1:(it_inner_fin*it_outter_fin)

ar_it_cols_idx = 1x15
1      2      3      4      5      6      7      8      9      10      11      12      13      14      15

mt_it_cols_idx = reshape(ar_it_cols_idx, [it_outter_fin, it_inner_fin])'

mt_it_cols_idx = 5x3
1      2      3
4      5      6
7      8      9
10     11     12
13     14     15

mt_it_cols_idx(:)'

ans = 1x15
1      4      7      10     13     2      5      8      11     14     3      6      9      12     15

```

#### 1.1.6 Array Index Slicing and Subsetting to Replace and Expand

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

## 1.1.6.1 Matlab Index based Replacement of Subset of Matrix Values

```

clear all;
close all;
rng(123);
randMatZ = rand(3,6)+1

randMatZ = 3x6
    1.6965    1.5513    1.9808    1.3921    1.4386    1.7380
    1.2861    1.7195    1.6848    1.3432    1.0597    1.1825
    1.2269    1.4231    1.4809    1.7290    1.3980    1.1755

randMat = rand(3,6)-0.5

randMat = 3x6
    0.0316    0.3494    0.2224   -0.2717   -0.4079   -0.0063
    0.0318    0.2245   -0.1770   -0.2063   -0.0663   -0.0742
    0.1344    0.1110   -0.1382    0.1310   -0.0691   -0.1877

output = max(-randMat,0)

output = 3x6
     0         0         0    0.2717    0.4079    0.0063
     0         0    0.1770    0.2063    0.0663    0.0742
     0         0    0.1382         0    0.0691    0.1877

randMatZ(output==0) = 999

randMatZ = 3x6
   999.0000   999.0000   999.0000    1.3921    1.4386    1.7380
   999.0000   999.0000    1.6848    1.3432    1.0597    1.1825
   999.0000   999.0000    1.4809   999.0000    1.3980    1.1755

min(randMatZ,[],2)

ans = 3x1
    1.3921
    1.0597
    1.1755

randMatZ((max(-randMat,0))==0) = 999

randMatZ = 3x6
   999.0000   999.0000   999.0000    1.3921    1.4386    1.7380
   999.0000   999.0000    1.6848    1.3432    1.0597    1.1825
   999.0000   999.0000    1.4809   999.0000    1.3980    1.1755

min(randMatZ,[],2)

ans = 3x1
    1.3921
    1.0597
    1.1755

```

### 1.1.6.2 Matlab Matrix Index Based Matrix Expansion (Manual)

In the example below, we start with a 4 by 2 matrix, than we expand specific rows and columns of the matrix. Specifically, we expand the matrix such that the result matrix repeats the 1st, 2nd, 1st, 2nd, then 3rd, than 1st, 1st, and 1st rows. And repeats column 1, then 2nd, then 2nd, then 2nd, and finally the first column.

```
% Original Matrix
Z = 2;
N = 2;
Q = 2;
base_mat = reshape(1:(Z*N*Q),Z*N,Q);
disp(base_mat);
```

|   |   |
|---|---|
| 1 | 5 |
| 2 | 6 |
| 3 | 7 |
| 4 | 8 |

```
% Expanded Matrix
base_expand = base_mat([1,2,1,2,3,1,1,1],[1,2,2,2,1]);
disp(base_expand);
```

|   |   |   |   |   |
|---|---|---|---|---|
| 1 | 5 | 5 | 5 | 1 |
| 2 | 6 | 6 | 6 | 2 |
| 1 | 5 | 5 | 5 | 1 |
| 2 | 6 | 6 | 6 | 2 |
| 3 | 7 | 7 | 7 | 3 |
| 1 | 5 | 5 | 5 | 1 |
| 1 | 5 | 5 | 5 | 1 |
| 1 | 5 | 5 | 5 | 1 |

### 1.1.6.3 Duplicate Matrix Downwards N times Using Index

The example here has the same idea, but we do the operations above in a more automated way. This could be done using alternative methods.

```
% Original Matrix
Z = 2;
N = 2;
Q = 2;
base_mat = reshape(1:(Z*N*Q),Z*N,Q);
disp(base_mat);
```

|   |   |
|---|---|
| 1 | 5 |
| 2 | 6 |
| 3 | 7 |
| 4 | 8 |

```
% Generate row Index many times automatically depending on how many times
% to replicate
vmat_repeat_count = 3;
vmat_reindex_rows_repeat = [1:(Z*N)]'* ones(1,vmat_repeat_count);
vmat_reindex_rows_repeat = vmat_reindex_rows_repeat(:);
disp(vmat_reindex_rows_repeat);
```

|   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 | 1 | 2 | 3 | 4 |
|---|---|---|---|---|---|---|---|---|---|---|---|

```
% Duplicate Matrix by the Rows specified above, and using the same number
% of columns.
```

```
mat_repdwn = base_mat(vmat_reindex_rows_repeat(:), 1:Q);
disp(mat_repdwn');
```

```

1      2      3      4      1      2      3      4      1      2      3      4
5      6      7      8      5      6      7      8      5      6      7      8
```

#### 1.1.6.4 Max of Matrix column by Column Linear to 2d Index

Finding max of matrix column by column, then obtain the linear index associated with the max values.

```
randMat = rand(5,3);
disp(randMat);
```

```

0.4264    0.1156    0.4830
0.8934    0.3173    0.9856
0.9442    0.4148    0.5195
0.5018    0.8663    0.6129
0.6240    0.2505    0.1206
```

```
[maxVal maxIndex] = max(randMat);
linearIndex = sub2ind(size(randMat),maxIndex,(1:1:size(randMat,2)))
```

```
linearIndex = 1x3
3          9      12
```

```
randMat(linearIndex)
```

```
ans = 1x3
0.9442    0.8663    0.9856
```

```
t_pV = [1,2;3,4;5,6];
t_pV_Ind = [1,1;0,0;1,1];
[maxVal maxIndex] = max(t_pV(t_pV_Ind==1))
```

```
maxVal = 6
maxIndex = 4
```

#### 1.1.6.5 Given Array of size M, Select N somewhat equi-distance elements

```
% Subset count
it_n = 5;
```

```
% Example 1, long array
ar_fl_a = 1:1.1:100;
ar_it_subset_idx = unique(round(((0:1:(it_n-1))/(it_n-1))*(length(ar_fl_a)-1)+1));
ar_fl_a_subset = ar_fl_a(ar_it_subset_idx);
disp(ar_fl_a_subset);
```

```

1.0000    26.3000    50.5000    75.8000   100.0000
```

```
% Example 2, Short Array
ar_fl_a = 1:1.1:3;
ar_it_subset_idx = unique(round(((0:1:(it_n-1))/(it_n-1))*(length(ar_fl_a)-1)+1));
ar_fl_a_subset = ar_fl_a(ar_it_subset_idx);
disp(ar_fl_a_subset);
```

```

1.0000    2.1000
```

```
% Write As function
f_subset = @(it_subset_n, it_ar_n) unique(round(((0:1:(it_subset_n-1))/(it_subset_n-1))*(it_ar_n-1)+

% Select 5 out of 10
disp(f_subset(5, 10));

    1      3      6      8     10

% Select 10 out of 5
disp(f_subset(10, 5));

    1      2      3      4      5

% Select 5 out of 5
disp(f_subset(5, 5));

    1      2      3      4      5
```

### 1.1.7 Grid States, Choices and Optimal Choices Example

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 1.1.7.1 Generate State Grid

There many multiple individuals, each individual's value for each state space variable is different. We duplicate that by shockCount and choicecount:

```
stateCount = 2;
shockCount = 3;
choiceCount = 4;

state1 = rand(1,stateCount)

state1 = 1x2
    0.0571    0.6694

states1ShkDup = state1(ones(shockCount*choiceCount,1),:))

states1ShkDup = 12x2
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694
    0.0571    0.6694

states1ShkDup(:)

ans = 24x1
    0.0571
    0.0571
```



```

0.0571
0.0571
0.0571
0.0571
0.0571
0.0571
0.0571
0.0571
0.0571

```

### 1.1.7.2 Generate Choices

Generate Choice Grid, Example: Each individual has minimal protein and maximal protein they can get. Generate a evenly set grid of choices for each individual from min to max. Individual min and max choice is a function of some component of their state-space, such as wealth/income level, and choice is the quantity of good to purchase.

```

stateCount = 2;
shockCount = 3;
choiceCount = 4;

```

```

% 1. Min and Max Choices for each state
minprot_n = floor(rand(1,stateCount)*10)

```

```

minprot_n = 1x2
          7      7

```

```

maxprot_n = minprot_n + floor(rand(1,stateCount)*10)

```

```

maxprot_n = 1x2
          14     12

```

```

% 2. Choice Ratios, ratios of max-min difference
protChoiceGrid = linspace(0,1,choiceCount)

```

```

protChoiceGrid = 1x4
                0      0.3333      0.6667      1.0000

```

```

% 3. Each column is a different state.

```

```

searchMatrix = (protChoiceGrid.*(maxprot_n-minprot_n)+minprot_n(ones(choiceCount,1),:))

```

```

searchMatrix = 4x2
    7.0000    7.0000
    9.3333    8.6667
   11.6667   10.3333
   14.0000   12.0000

```

```

% 4. Each column is a different state, each set of rows is a different shock% for the state. In this
searchMatrix = searchMatrix([1:choiceCount]' * ones(1,shockCount), [1:stateCount]' * ones(1,1))

```

```

searchMatrix = 12x2
    7.0000    7.0000
    9.3333    8.6667
   11.6667   10.3333
   14.0000   12.0000
    7.0000    7.0000
    9.3333    8.6667
   11.6667   10.3333
   14.0000   12.0000
    7.0000    7.0000

```

```

9.3333    8.6667

searchMatrix(:)

ans = 24x1
    7.0000
    9.3333
   11.6667
   14.0000
    7.0000
    9.3333
   11.6667
   14.0000
    7.0000
    9.3333

```

### 1.1.7.3 Average Utility over Shocks

Average of Shocks,  $E(\text{value})$  For each STATE and CHOICE, x number of shocks. Need to average over shocks; The raw value output is: STATES \* SHOCKS \* CHOICES; Code below turn into various things, see MATLAB CODE STRUCTURE in oneNOTE GCC working notes

```

shockCount = 2;
choiceCount = 3;
stateCount = 4;

```

```

% 1. VALUE vector (STATES * SHOCKS * CHOICES by 1), this is generated by utility% evaluation function
valuesOri = sort(rand(choiceCount*shockCount*stateCount,1))

```

```

valuesOri = 24x1
    0.0296
    0.1141
    0.1472
    0.1514
    0.1826
    0.1936
    0.2526
    0.2911
    0.3257
    0.3352

```

```

% 2. CHOICES by STATES * SHOCKS (ST1 SK1, ST1 SK2; ST2 SK1, etc), each% column are values for different
values = reshape(valuesOri,[choiceCount,shockCount*stateCount])

```

```

values = 3x8
    0.0296    0.1514    0.2526    0.3352    0.5939    0.7065    0.8791    0.9204
    0.1141    0.1826    0.2911    0.3480    0.5992    0.7267    0.9001    0.9508
    0.1472    0.1936    0.3257    0.4578    0.6576    0.7792    0.9018    0.9658

```

```

% 3. SHOCKS by CHOICES * STATES (CH1 ST1, CH1 ST2; CH2 ST1, etc), each% column are two shocks for each
values = reshape(values',[shockCount, choiceCount*stateCount])

```

```

values = 2x12
    0.0296    0.2526    0.5939    0.8791    0.1141    0.2911    0.5992    0.9001    0.1472    0.3257
    0.1514    0.3352    0.7065    0.9204    0.1826    0.3480    0.7267    0.9508    0.1936    0.4578

```

```

% 4. AVG: 1 by CHOICES * STATES (CH1 ST1, CH1 ST2; CH2 ST1, etc), take% average over shocks for each
valuesMn = mean(values,1)

```

```

valuesMn = 1x12
    0.0905    0.2939    0.6502    0.8997    0.1483    0.3196    0.6629    0.9254    0.1704    0.3918

% 5. AVG: CHOICES * STATES. From this matrix, one can now pick maximum% utility, and match that to t
valuesMn = reshape(valuesMn, [stateCount, choiceCount])'

valuesMn = 3x4
    0.0905    0.2939    0.6502    0.8997
    0.1483    0.3196    0.6629    0.9254
    0.1704    0.3918    0.7184    0.9338

```

#### 1.1.7.4 Pick Optimal Choice

```

choiceCount = 3;
stateCount = 4;

% 1. Matrix, each column is a state, each row is a choice
randMat = rand(choiceCount, stateCount)

randMat = 3x4
    0.0733    0.5905    0.1731    0.1795
    0.0550    0.8539    0.1340    0.3175
    0.3232    0.2871    0.9947    0.5683

% 2. Maximum Value and Maximum Index
[maxVal maxIndex] = max(randMat)

maxVal = 1x4
    0.3232    0.8539    0.9947    0.5683

maxIndex = 1x4
     3     2     3     3

% 3. Linear index
linearIdx = maxIndex + ((1:stateCount)-1)*choiceCount

linearIdx = 1x4
     3     5     9    12

% 4. Optimal Choices
randMat(linearIdx)

ans = 1x4
    0.3232    0.8539    0.9947    0.5683

```

## 1.2 Cells

### 1.2.1 List Comprehension with Cells

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 1.2.1.1 Find Index of Elements of String Cells in a larger String Cells

the function below returns the position of `cl_st_param_keys` in `ls_st_param_key` should only include in `cl_st_param_keys` strings that also exist in `ls_st_param_key`.

```

ls_st_param_key = {'fl_crra', 'fl_beta', ...
                  'fl_w', 'fl_r_save', ...

```

```

        'fl_a_max', 'it_z_n', 'it_a_n'};

cl_st_param_keys = {'fl_w', 'fl_beta', 'it_z_n'};

cell2mat(cellfun(@(m) find(strcmp(ls_st_param_key, m)), ...
                cl_st_param_keys, 'UniformOutput', false))

ans = 1x3
      3      2      6

```

### 1.2.1.2 Given Container of Arrays, Find Total Length of All Arrays for Selected Keys

```

cl_st_param_keys = {'fl_crra', 'fl_beta'};

param_tstar_map = containers.Map('KeyType','char', 'ValueType','any');
it_simu_vec_len = 5;

param_tstar_map('fl_crra') = linspace(1, 2, 5);
param_tstar_map('fl_beta') = linspace(0.94, 0.98, 10);
param_tstar_map('w') = linspace(1.1, 1.4, it_simu_vec_len);
param_tstar_map('r') = linspace(0.01, 0.04, it_simu_vec_len);

ar_it_array_len = cell2mat(cellfun(@(m) length(param_tstar_map(m)), ...
                                cl_st_param_keys, 'UniformOutput', false));

it_total_length = sum(ar_it_array_len);
disp(['ar_it_array_len: ' num2str(ar_it_array_len)])

ar_it_array_len: 5  10

disp(['it_total_length: ' num2str(it_total_length)])

it_total_length: 15

```

### 1.2.1.3 Given Container of Arrays, Find Min and Max of Each and Draw Random N sets

```

cl_st_param_keys = {'fl_crra', 'fl_beta'};

param_tstar_map = containers.Map('KeyType','char', 'ValueType','any');
it_simu_vec_len = 5;

param_tstar_map('fl_crra') = linspace(1, 2, 5);
param_tstar_map('fl_beta') = linspace(0.94, 0.98, 10);
param_tstar_map('w') = linspace(1.1, 1.4, it_simu_vec_len);
param_tstar_map('r') = linspace(0.01, 0.04, it_simu_vec_len);

rng(123);
it_simu_length = 20;
mt_param_rand = cell2mat(cellfun(@(m) ...
                                rand([it_simu_length,1]).*(max(param_tstar_map(m)) - min(param_tstar_map(m))
                                + min(param_tstar_map(m))), ...
                                cl_st_param_keys, 'UniformOutput', false));

tb_rand_draws = array2table(mt_param_rand, 'VariableNames', cl_st_param_keys);

disp(tb_rand_draws);

    fl_crra    fl_beta
    -----    -

```

```

1.6965    0.96538
1.2861    0.97398
1.2269    0.96898
1.5513    0.96444
1.7195    0.9689
1.4231    0.95292
1.9808    0.95447
1.6848    0.94913
1.4809    0.95175
1.3921    0.96524
1.3432    0.94368
1.729     0.95735
1.4386    0.95723
1.0597    0.95975
1.398     0.95703
1.738     0.95249
1.1825    0.95705
1.1755    0.97574
1.5316    0.97777
1.5318    0.96007

```

## 1.2.2 All Possible Combinations of Multiple Arrays

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

### 1.2.2.1 Given Several Arrays of Possibly different Length in Container, all Possible combinations

```

param_tstar_map = containers.Map('KeyType','char', 'ValueType','any');
param_tstar_map('a') = linspace(1, 5, 5);
param_tstar_map('b') = linspace(0.87, 0.97, 6);
param_tstar_map('c') = linspace(0, 0.5, 10);

cl_st_param_keys = {'a','c'};
cl_ar_param_subset_values = values(param_tstar_map, {'a','c'});

cl_mt_all = cl_ar_param_subset_values;
[cl_mt_all{:}] = ndgrid(cl_ar_param_subset_values{:});
mt_param_vals_combi = cell2mat(cellfun(@(m) m(:), cl_mt_all, 'uni', 0));

tb_all_combi = array2table(mt_param_vals_combi, 'VariableNames', cl_st_param_keys);

disp(tb_all_combi);

```

```

a      c
-      -
1      0
2      0
3      0
4      0
5      0
1  0.055556
2  0.055556
3  0.055556
4  0.055556
5  0.055556

```

```

1      0.11111
2      0.11111
3      0.11111
4      0.11111
5      0.11111
1      0.16667
2      0.16667
3      0.16667
4      0.16667
5      0.16667
1      0.22222
2      0.22222
3      0.22222
4      0.22222
5      0.22222
1      0.27778
2      0.27778
3      0.27778
4      0.27778
5      0.27778
1      0.33333
2      0.33333
3      0.33333
4      0.33333
5      0.33333
1      0.38889
2      0.38889
3      0.38889
4      0.38889
5      0.38889
1      0.44444
2      0.44444
3      0.44444
4      0.44444
5      0.44444
1          0.5
2          0.5
3          0.5
4          0.5
5          0.5

```

### 1.2.3 Combine Cells Together

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 1.2.3.1 String Combine with string cell

```

ls_st_param_key = {'fl_crra', 'fl_beta', ...
                  'fl_w', 'fl_r_save', ...
                  'fl_a_max', 'it_z_n', 'it_a_n'};

cl_st_param_keys = {'fl_wad', 'fl_betart', 'it_z_nfg'};

st_param = 'asdjfl';

[{'st_param'}, ls_st_param_key, cl_st_param_keys]

ans =

```

```
{'asdjfl'}    {'fl_crra'}    {'fl_beta'}    {'fl_w'}    {'fl_r_save'}    {'fl_a_max'}    {'it_z_
```

### 1.2.4 Nested Cells

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 1.2.4.1 Nested Cells and access

```
cl_st_param_keys = {'fl_crra', 'fl_beta'};

it_simu_vec_len = 3;
clns_parm_tstar = cell([4,1]);
clns_parm_tstar{1} = {'fl_crra', 'CRRa', linspace(1, 2, it_simu_vec_len)};
clns_parm_tstar{2} = {'fl_beta', 'Discount', linspace(0.94, 0.98, it_simu_vec_len)};
clns_parm_tstar{3} = {'w', 'Wage', linspace(1.1, 1.4, it_simu_vec_len)};
clns_parm_tstar{4} = {'r', 'Save Interest', linspace(0.01, 0.04, it_simu_vec_len)};

disp(clns_parm_tstar(1));

    {1x3 cell}

disp(clns_parm_tstar{1}{1})

fl_crra

disp(clns_parm_tstar{1}{2});

CRRa

disp(clns_parm_tstar{1}{3});

    1.0000    1.5000    2.0000
```

## 1.3 Characters and Strings

### 1.3.1 Single String Element Manipulation

back to [Fan's Reusable Matlab Repository](#) or [Dynamic Asset Repository](#).

#### 1.3.1.1 Change File Name MLX to M

```
st_file_name_mlx = 'continuous_differentiable.mlx';
at_st_split_file_name = split(st_file_name_mlx, ".");
st_file_name_m = strcat(at_st_split_file_name{1}, '_m.m');
disp(st_file_name_m);

continuous_differentiable_m.m
```

### 1.3.2 String Manipulations with Arrays

back to [Fan's Reusable Matlab Repository](#) or [Dynamic Asset Repository](#).

#### 1.3.2.1 Duplicate String

```
it_duplicate_n = 10;
disp(repmat({'String'}, [1, it_duplicate_n]));

    'String'    'String'    'String'    'String'    'String'    'String'    'String'    'String'
```

### 1.3.2.2 Combine Two Numeric Arrays to a Single String Array

```
ar_fl_abc1 = [0.4 0.1 0.25 0.3 0.4];
disp([num2str(ar_fl_abc1', 'zw=%3.2f;'), num2str(ar_fl_abc1', 'zr=%3.2f')]);

zw=0.40;zr=0.40
zw=0.10;zr=0.10
zw=0.25;zr=0.25
zw=0.30;zr=0.30
zw=0.40;zr=0.40
```

### 1.3.2.3 Convert Numeric Array to String, Apeend Prefix to all elements.

```
ar_fl_abc1 = [0.4 0.1 0.25 0.3 0.4];
ar_st_wth_prefix = strcat('row=', string(ar_fl_abc1));
disp(ar_st_wth_prefix);

"row=0.4"    "row=0.1"    "row=0.25"    "row=0.3"    "row=0.4"

% Does Array Exist in Longer Array as Subset
ar_abc1 = [0.4 0.1 0.25 0.3 0.4];
ar_abc2 = [0.4 0.1 0.2 0.3 0.4];
ar_efg = [0.1 0.2 0.3 0.4 0.1 0.2 0.3 0.4 0.1 0.2 0.3 0.4 0.1 0.2 0.3 0.4];
st_abc1 = strjoin(string(num2str(ar_abc1)));
st_abc2 = strjoin(string(num2str(ar_abc2)));
st_efg = strjoin(string(num2str(ar_efg)));
contains(st_efg, st_abc1)

ans =
    0

contains(st_efg, st_abc2)

ans =
    1
```

```
% Display Convert to String
fprintf('Display string [%s]', num2str([1,2,3]));

Display string [1 2 3]

fprintf('Display string [%s]', num2str(1.1));

Display string [1.1]

fprintf('Display string [%s]', 'abc');

Display string [abc]
```

### 1.3.2.4 String Join to form Single Element

```
using char() is safe

st_var_name = "abc"

st_var_name = "abc"

st_var_name = [st_var_name ' percentile values']
```



```

st_var_name =
    "abc"      " percentile values"

strjoin(st_var_name)

ans = "abc percentile values"

st_var_name = "abc"

st_var_name = "abc"

st_var_name = [char(st_var_name) ' percentile values']

st_var_name = 'abc percentile values'

st_var_name = 'abc'

st_var_name = 'abc'

st_var_name = [char(st_var_name) ' percentile values']

st_var_name = 'abc percentile values'

```

#### 1.3.2.5 String Join dash

using char() is safe

```

st_var_name = "abc"

st_var_name = "abc"

st_var_name = [st_var_name 'efg']

st_var_name =
    "abc"      "efg"

strjoin(st_var_name, "_")

ans = "abc_efg"

```

#### 1.3.2.6 Numeric Array to String without Space

String replace

```

ar_it_test_grp = [3, 8, 9];
strrep(num2str(ar_it_test_grp), ' ', '_')

ans = '3_8_9'

```

#### 1.3.2.7 Substring replace in Cell Array

```

ar_st_cells = {'shock=0.35','shock=0.40','shock=0.46'};
ar_st_updated_cells = strrep(ar_st_cells, 'shock', '$\epsilon$');

```

#### 1.3.2.8 Find position of String in String Cell

```

ls_st_param_key = {'fl_crra', 'fl_beta', ...

```

```

        'fl_w', 'fl_r_save', ...
        'fl_a_max', 'it_z_n', 'it_a_n'};
st_param_key = 'fl_a_max';
find(strcmp(ls_st_param_key, st_param_key))

ans = 5

```

### 1.3.2.9 Find the positions of String Cells in Full String Cells

```

ls_st_param_key = {'fl_crra', 'fl_beta', ...
                  'fl_w', 'fl_r_save', ...
                  'fl_a_max', 'it_z_n', 'it_a_n'};

cl_st_param_keys = {'fl_w', 'fl_beta', 'it_z_n'};

cell2mat(cellfun(@(m) find(strcmp(ls_st_param_key, m)), ...
                 cl_st_param_keys, 'UniformOutput', false))

ans = 1x3
      3      2      6

find(strcmp(ls_st_param_key, st_param_key))

ans = 5

```

### 1.3.2.10 Cell to string Paste and Replace dash

```

cl_st_param_keys = {'fl_crra', 'fl_beta'};
display(strrep(strjoin(cl_st_param_keys, '-'), '-', '\_'));

fl\_crra-fl\_beta

```

## 1.3.3 Concatenate Strings Arrays with Numbers and Number Arrays with Strings

back to [Fan's Reusable Matlab Repository](#) or [Dynamic Asset Repository](#).

### 1.3.3.1 Combine String with Numeric Array

```

close all;

rng(123);
ar_z_r_borr_mesh_wage = rand([1,5]);
ar_z_wage_mesh_r_borr = rand([1,5]);
ar_it_rows = round(rand([1,5])*10);
cl_st_full_rowscols = cellstr([num2str(ar_z_r_borr_mesh_wage', 'zr=%3.2f;'), ...
                               num2str(ar_z_wage_mesh_r_borr', 'zw=%3.2f')]);
cl_col_names = strcat('zi=', num2str(ar_it_rows([1,3,5])), ':', cl_st_full_rowscols([1,3,5]));

disp(ar_z_r_borr_mesh_wage)

    0.6965    0.2861    0.2269    0.5513    0.7195

disp(ar_z_wage_mesh_r_borr)

    0.4231    0.9808    0.6848    0.4809    0.3921

disp(cl_st_full_rowscols)

```

```

'zr=0.70;zw=0.42'
'zr=0.29;zw=0.98'
'zr=0.23;zw=0.68'
'zr=0.55;zw=0.48'
'zr=0.72;zw=0.39'

disp(cl_col_names)

'zi=3:zr=0.70;zw=0.42'
'zi=4:zr=0.23;zw=0.68'
'zi=4:zr=0.72;zw=0.39'

```

### 1.3.3.2 Combine Number with String Cell Array

We have a string cell array we created from the previous section, now append numbers to it

```

% Append Common Numbers
cl_col_names_append = strcat(cl_col_names, '-String-Cell-With-Numeric-', num2str(123));

disp(cl_col_names_append)

'zi=3:zr=0.70;zw=0.42-String-Cell-With-Numeric-123'
'zi=4:zr=0.23;zw=0.68-String-Cell-With-Numeric-123'
'zi=4:zr=0.72;zw=0.39-String-Cell-With-Numeric-123'

```

### 1.3.3.3 Combine Numeric Array with String Cell Array

Append an array of numeric values

```

% Append Common Numbers
cl_col_names_append = strcat(cl_col_names, '-String-Cell-With-Numeric-Array-', ...
    num2str(transpose(1:length(cl_col_names))));

disp(cl_col_names_append)

'zi=3:zr=0.70;zw=0.42-String-Cell-With-Numeric-Array-1'
'zi=4:zr=0.23;zw=0.68-String-Cell-With-Numeric-Array-2'
'zi=4:zr=0.72;zw=0.39-String-Cell-With-Numeric-Array-3'

```

## 1.4 Map Containers

### 1.4.1 Container Map Basics

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 1.4.1.1 If key is in container

```

param_map_a = containers.Map('KeyType','char', 'ValueType','any');
param_map_a('fl_b_bd') = -3;
param_map_a('fl_w_max') = 50;
param_map_a('fl_kp_min') = 0;
param_map_a('it_w_i') = 100;

disp(isKey(param_map_a, 'it_w_i'));

1

disp(isKey(param_map_a, 'it_w_i1'));

```

0

### 1.4.1.2 Container Key Loop

Generate new container key within loop dynamically

```
param_map_a = containers.Map('KeyType', 'char', 'ValueType','any');

rng(123);
for st_cur = ["abc", "efg", "qqq"]

    if (strcmp(st_cur, "abc"))
        data = rand([1,1]);
    elseif (strcmp(st_cur, "efg"))
        data = 123.123;
    elseif (strcmp(st_cur, "qqq"))
        data = -123;
    end

    % common function
    fl_sh_0p1pc_j = data*2 + 1;
    fl_sh_5pc_j = data/2 - 1;

    % generate map keys
    st_key_sh_0p1pc_j = strjoin([st_cur, 'sh_0p1pc_j'], "_");
    st_key_sh_5pc_j = strjoin([st_cur, 'sh_5pc_j'], "_");

    % store
    param_map_a(st_key_sh_0p1pc_j) = fl_sh_0p1pc_j;
    param_map_a(st_key_sh_5pc_j) = fl_sh_5pc_j;

end

disp(param_map_a.keys);

'abc_sh_0p1pc_j'    'abc_sh_5pc_j'    'efg_sh_0p1pc_j'    'efg_sh_5pc_j'    'qqq_sh_0p1pc_j'

disp(param_map_a.values);

[2.3929]    [-0.6518]    [247.2460]    [60.5615]    [-245]    [-62.5000]
```

## 1.4.2 Container Map Display Map Keys and Values

Go back to [fan's CodeDynaAsset](#) Package, [Matlab Code Examples](#) Repository ([bookdown site](#)), or [Math for Econ with Matlab](#) Repository ([bookdown site](#)).

### 1.4.2.1 Print Keys and Values

Define container

```
% Define Container
```

```
param_map = containers.Map('KeyType','char', 'ValueType','any');
param_map('share_unbanked_j') = 12;
param_map('equi_r_j') = 2;
param_map('equi_w_j') = 'abc';
param_map('equi_P_j') = 1.2;
```

Print

```
param_map_keys = keys(param_map);
```

```

param_map_vals = values(param_map);
for i = 1:length(param_map)
    st_display = strjoin(['pos = ' num2str(i) ' ; key = ' string(param_map_keys{i}) ' ; val = ' string(pa
    disp(st_display);
end

pos = 1 ; key = equi_P_j ; val = 1.2
pos = 2 ; key = equi_r_j ; val = 2
pos = 3 ; key = equi_w_j ; val = abc
pos = 4 ; key = share_unbanked_j ; val = 12

```

### 1.4.3 Generate Container Maps

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 1.4.3.1 Generate a Container map with any time of data

Create a container map with float, int, string, and matrix

```

close all;
clear all;

% Create A Map with String Keys and any values
param_map = containers.Map('KeyType','char', 'ValueType','any');
param_map('share_unbanked_j') = 12;
param_map('equi_r_j') = 2;
param_map('equi_w_j') = 'abc';
param_map('equi_P_j') = zeros(2,3);
param_map.keys

ans =
    {'equi_P_j'}    {'equi_r_j'}    {'equi_w_j'}    {'share_unbanked_j'}

param_map.values

ans =
    {2x3 double}    {[2]}    {'abc'}    {[12]}

```

#### 1.4.3.2 Access Multiple Values of a container map

Values been accessed need to be of the same type

```

% Parameter Dealing from Map
params_group = values(param_map, {'share_unbanked_j', 'equi_r_j'});
[equi_P_j, equi_r_j] = params_group{:}

equi_P_j = 12
equi_r_j = 2

% Access Scalar Elements of Map and Convert the Array
cell2mat(values(param_map, {'share_unbanked_j', 'equi_r_j'}))

ans = 1x2
    12     2

```

### 1.4.4 Container Map Example Overriding

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 1.4.4.1 Update Container Map

There is one map with values, Container Map A. There is another container Map, Container Map B. Container Maps A and B share keys. For keys that exist in B and A, B Key value supercede values for the same keys in A. For new keys in B, they superced keys in A.

```
param_map_a = containers.Map('KeyType','char', 'ValueType','any');
param_map_a('fl_b_bd') = -3;
param_map_a('fl_w_max') = 50;
param_map_a('fl_kp_min') = 0;
param_map_a('it_w_i') = 100;

param_map_b = containers.Map('KeyType','char', 'ValueType','any');
param_map_b('fl_w_max') = 77;
param_map_b('fl_kp_min') = -231;
param_map_b('it_z_n') = 5;
param_map_b('fl_z_mu') = 0;

param_map_c = [param_map_a; param_map_b];
param_map_c.keys

ans =
    'fl_b_bd'    'fl_kp_min'    'fl_w_max'    'fl_z_mu'    'it_w_i'    'it_z_n'

param_map_c.values

ans =
    [-3]    [-231]    [77]    [0]    [100]    [5]
```

# Chapter 2

## Functions

### 2.1 varargin Default Parameters

#### 2.1.1 varargin as a Function Parameter

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

##### 2.1.1.1 Call Function with Two Parameters and Defaults

Call function below without overriding

```
ff_varargin(1.1, 2)

fl_a = 1.1000
it_b = 2
mt_data = 3x4
    0.6965    0.5513    0.9808    0.3921
    0.2861    0.7195    0.6848    0.3432
    0.2269    0.4231    0.4809    0.7290

ar_st_colnames = 1x4 string array
"col1"         "col2"         "col3"         "col4"

ar_st_rownames = 1x4 string array
"row1"         "row2"         "row3"         "row4"

st_table_name = "Table Name"
it_table_ctr = 1021
```

##### 2.1.1.2 Override Subset of Varargin

```
rng(789);
mt_data_ext = rand(5,2);
ar_st_colnames = ["col1", "col2"];
ar_st_rownames = ["row1", "row2", "row3", "row4", "row5"];
ff_varargin(param_map, support_map, mt_data_ext, ar_st_colnames, ar_st_rownames);

fl_a =
    Map with properties:
        Count: 2
        KeyType: char
        ValueType: any
```

```

it_b =
    Map with properties:

        Count: 1
        KeyType: char
        ValueType: any

mt_data = 5x2
    0.3233    0.7589
    0.2302    0.0106
    0.7938    0.0247
    0.6244    0.1110
    0.9754    0.5381

ar_st_colnames = 1x2 string array
"col1"         "col2"

ar_st_rownames = 1x5 string array
"row1"         "row2"         "row3"         "row4"         "row5"

st_table_name = "Table Name"
it_table_ctr = 1021

```

### 2.1.1.3 Function with varargin as Inputs

Basic default structure with varargin.

```

function ff_varargin(fl_a, it_b, varargin)
% This is an example of how to use varargin:
% 1. includes array matrix
% 2. includes array
% 3. includes scalar
% 4. includes string
% 5. includes cell array

%% Catch Error
cl_params_len = length(varargin);
if cl_params_len > 5
    error('ff_mat2tab:TooManyOptionalParameters', ...
        'allows at most 5 optional parameters');
end

%% Default Folder Parameters
% by default all go to Sandbox folder with sub folders by dates
rng(123);
mt_data = rand(3,4);
% String array requires double quotes
ar_st_colnames = ["col1", "col2", "col3", "col4"];
ar_st_rownames = ["row1", "row2", "row3", "row4"];
% Others
st_table_name = "Table Name";
it_table_ctr = 1021;
cl_params = {mt_data ar_st_colnames ar_st_rownames ...
            st_table_name it_table_ctr};

%% Parse Parameters
% numvarargs is the number of varargin inputted
[cl_params{1:cl_params_len}] = varargin{:};

```



```
% cell2mat(cl_params(1)) works with array
mt_data = cell2mat(cl_params(1));
% The structure below works with cell array
ar_st_colnames = cl_params{2};
ar_st_rownames = cl_params{3};
% Others
st_table_name = cl_params{4};
it_table_ctr = cl_params{5};

% Build Basic Matlab Table
% Suppose we want to store matrix results in a table,
% there are Q columns and N rows, The Q columns each is a different variable.
fl_a
it_b
mt_data
ar_st_colnames
ar_st_rownames
st_table_name
it_table_ctr

end
```

## 2.1.2 Map Based Default Parameter Structure with varargin

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

### 2.1.2.1 Call Function with Default Parameters

Call function below without overriding

```
ff_defaultmap()
```

| 'c_gap'      | 'c_max' | 'c_min'      | 'c_min_for_util' | 'fl_crra' | 'it_rown' | 'st_single_double' |
|--------------|---------|--------------|------------------|-----------|-----------|--------------------|
| [1.0000e-03] | [60]    | [1.0000e-03] | [1.0000e-03]     | [1.5000]  | [100]     | 'double'           |

Elapsed time is 0.000896 seconds.

### 2.1.2.2 Call Function overriding some Parameters

```
param_map = containers.Map('KeyType','char', 'ValueType','any');
param_map('fl_w_max') = 1.11;
param_map('it_w_i') = 2.22;
```

```
support_map = containers.Map('KeyType','char', 'ValueType','any');
support_map('bl_display') = true;
ff_defaultmap(param_map, support_map)
```

| 'c_gap'      | 'c_max' | 'c_min'      | 'c_min_for_util' | 'fl_crra' | 'fl_w_max' | 'it_rown' | 'it_w_i' |
|--------------|---------|--------------|------------------|-----------|------------|-----------|----------|
| [1.0000e-03] | [60]    | [1.0000e-03] | [1.0000e-03]     | [1.5000]  | [1.1100]   | [100]     | [2.2200] |

Elapsed time is 0.000667 seconds.

### 2.1.2.3 Function with Map Defaults and Overriding

This default parameter style is fairly succinct, allows for program testability, and easy adjustments/addition of additional parameters to models.

```

function ff_defaultmap(varargin)

% Parameters
params_len = length(varargin);
if params_len > 3
    error('ff_defaultmap:Can only have 3 container map parameters');
end
bl_input_override = 0;
if (params_len == 3)
    bl_input_override = varargin{3};
end

% Defaults
if (bl_input_override)
    % this relies on externally generated parameters, defaults do not have to be generated
    % if this file has to be invoked many times, then this saves time by avoiding
    % regenerating defaults over and over again
    [param_map, support_map, ~] = varargin{:};
else
    param_map = containers.Map('KeyType','char', 'ValueType','any');
    param_map('fl_crra') = 1.5;
    param_map('c_min') = 0.001;
    param_map('c_min_for_util') = 0.001;
    param_map('c_gap') = 10^-3;
    param_map('c_max') = 60;
    param_map('it_rown') = 100;
    param_map('st_single_double') = 'double';

    support_map = containers.Map('KeyType','char', 'ValueType','any');
    support_map('bl_display') = true;
    support_map('bl_graph') = true;
    support_map('bl_graph_onebyones') = true;
    support_map('bl_time') = true;
    support_map('bl_profile') = false;
    support_map('st_profile_path') = [pwd '/profile'];
    default_maps = {param_map, support_map};
end

% Parse Parameters
% see: C:\Users\fan\M4Econ\support\dtype\map_override.m
[default_maps{1:params_len}] = varargin{:};
param_map = [param_map; default_maps{1}];
support_map = [support_map; default_maps{2}];

params_group = values(param_map, {'fl_crra', 'c_min', 'c_min_for_util', 'c_gap', 'c_max'});
[fl_crra, c_min, c_min_for_util, c_gap, c_max] = params_group{:};
params_group = values(param_map, {'it_rown'});
[it_rown] = params_group{:};
params_group = values(param_map, {'st_single_double'});
[st_single_double] = params_group{:};

% support
params_group = values(support_map, {'bl_display', 'bl_graph', 'bl_graph_onebyones'});
[bl_display, bl_graph, bl_graph_onebyones] = params_group{:};
params_group = values(support_map, {'bl_time', 'bl_profile', 'st_profile_path'});
[bl_time, bl_profile, st_profile_path] = params_group{:};

% Tic toc starts

```

```
if (bl_time); tic; end

% Print Parameters
if (bl_display)
    disp(param_map.keys);
    disp(param_map.values);
end

% Profile On
if (bl_profile)
    close all;
    profile off;
    profile on;
end

%% Profiling
if (bl_profile)
    profile off
    profile viewer
    profsave(profile('info'), st_profile_path);
end

if (bl_time); toc; end

end
```



# Chapter 3

## Graphs

### 3.1 Figure Components

#### 3.1.1 Matlab Graph Safe Colors for Web, Presentation and Publications Examples

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

##### 3.1.1.1 Good Colors to Use Darker

Nice darker light colors to use in matlab.



```
close all



blue = [57 106 177]./255;
red = [204 37 41]./255;
black = [83 81 84]./255;
green = [62 150 81]./255;
brown = [146 36 40]./255;
purple = [107 76 154]./255;
cl_colors = {blue, red, black, ...
             green, brown, purple};
cl_str_clr_names = ["blue", "red", "black", "green", "brown", "purple"];



for it_color=1:length(cl_colors)

    figure();
    x = [0 1 1 0];
    y = [0 0 1 1];
    fill(x, y, cl_colors{it_color});
    st_text = [cl_str_clr_names(it_color) num2str(round(cl_colors{it_color}*255))];
    hText = text(.10,.55, st_text);
    hText.Color = 'white';
    hText.FontSize = 30;
    snapnow;

end
```

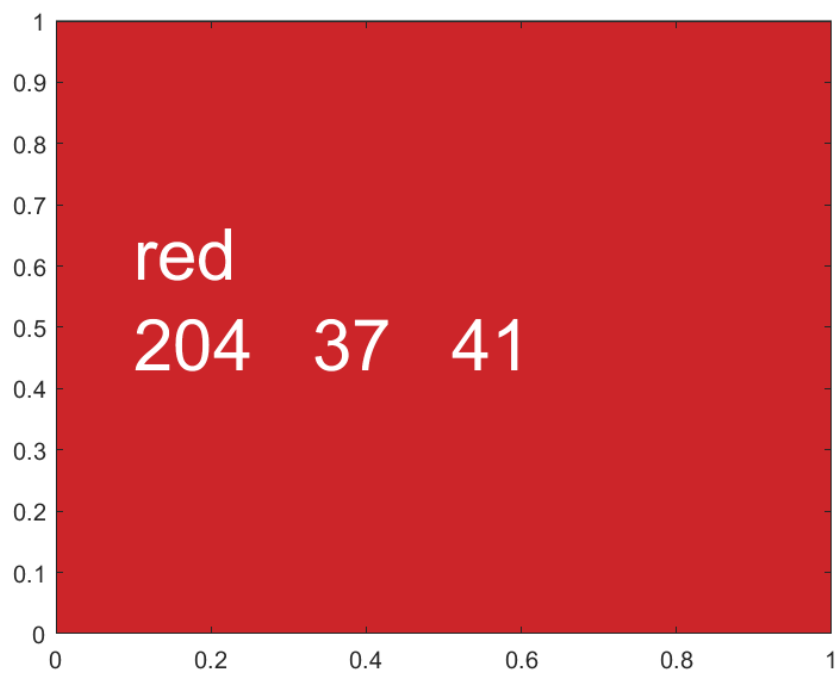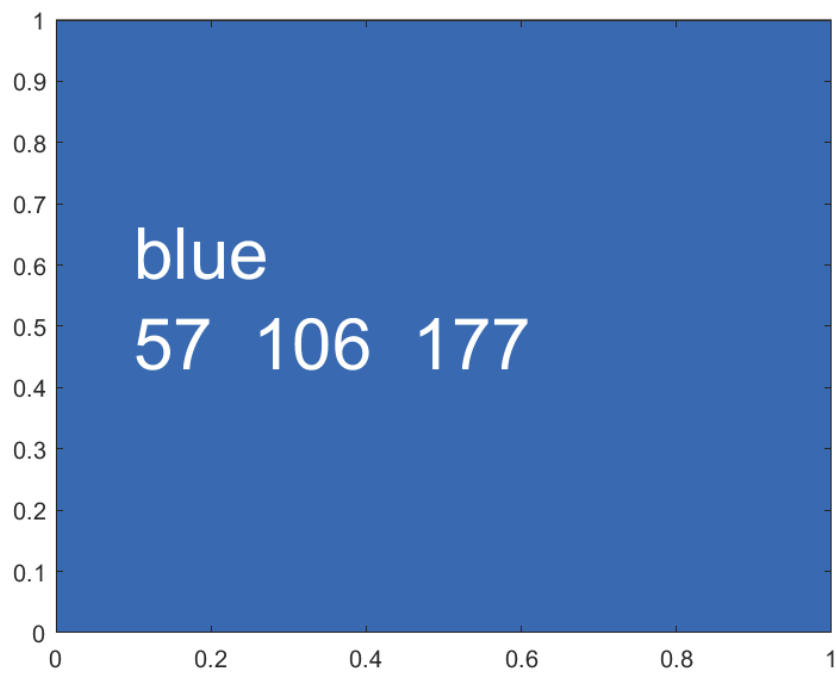

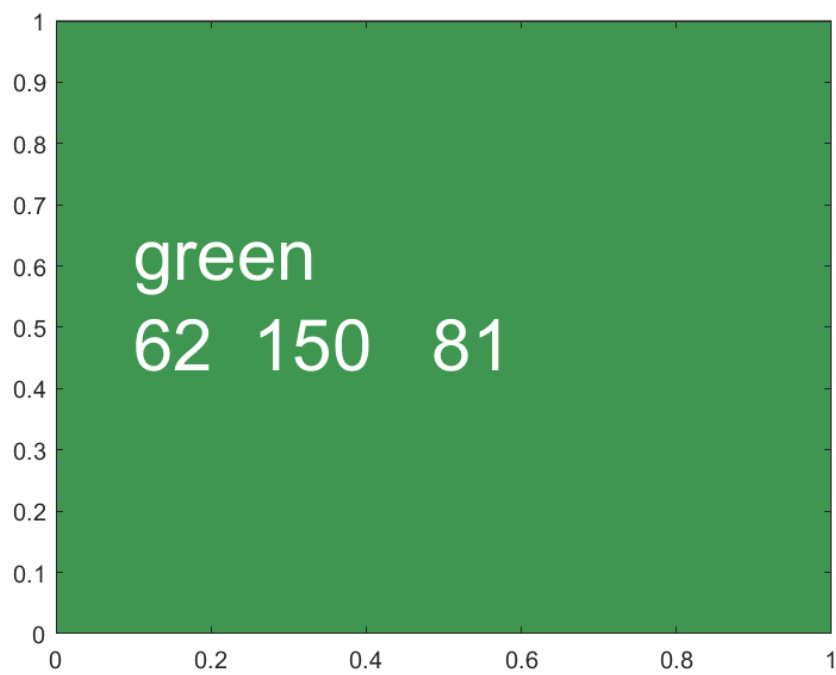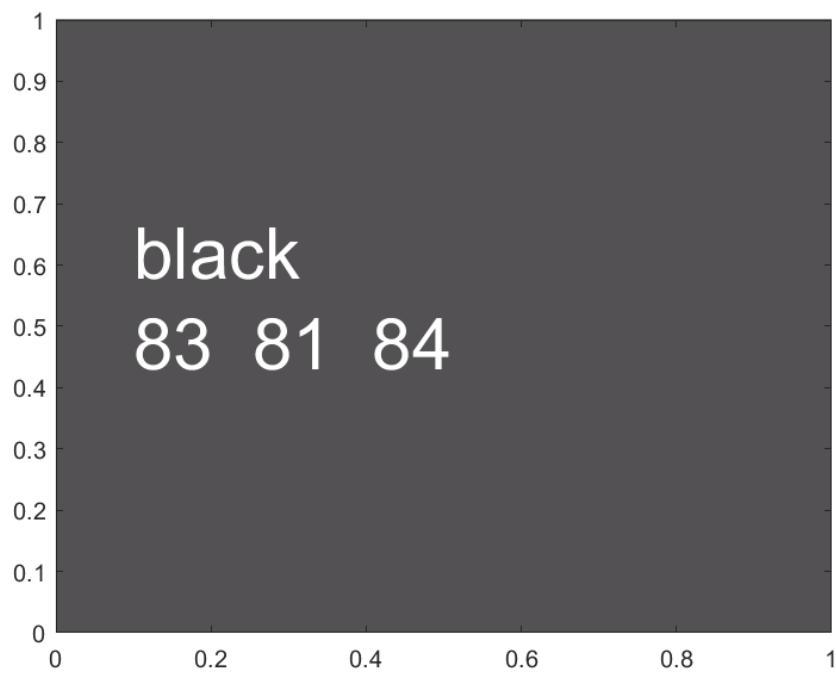

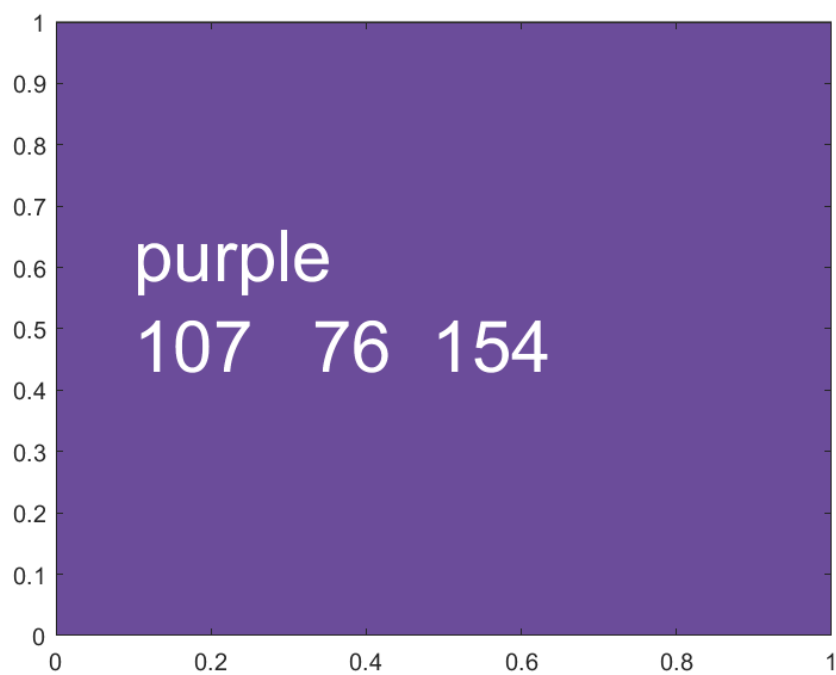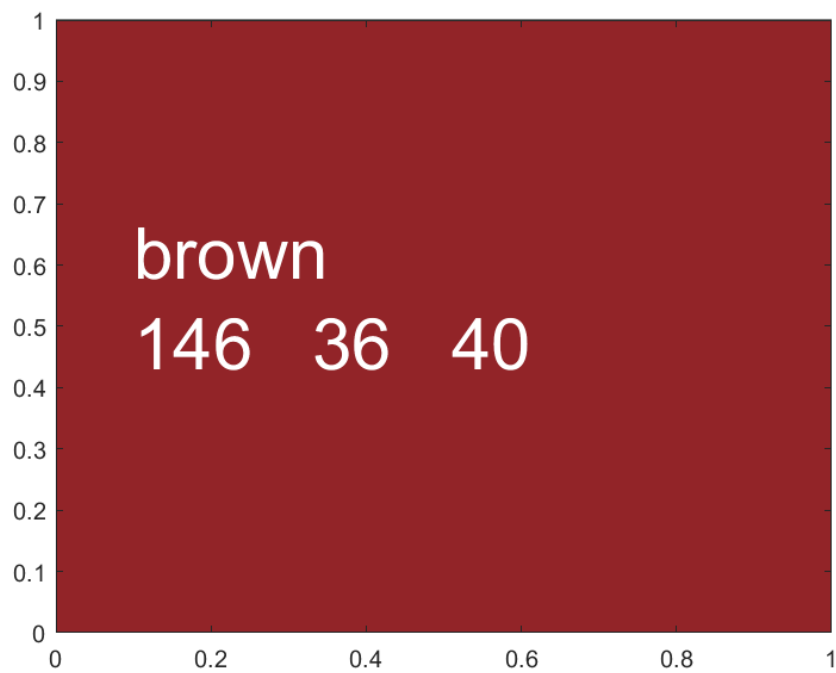

### 3.1.1.2 Good Colors to Use Lighter

Nice lighter colors to use in matlab.

```
close all
```

```
blue = [114 147 203]./255;  
red = [211 94 96]./255;  
black = [128 133 133]./255;  
green = [132 186 91]./255;
```



```

brown = [171 104 87]./255;
purple = [144 103 167]./255;
cl_colors = {blue, red, black, ...
             green, brown, purple};
cl_str_clr_names = ["blue", "red", "black", "green", "brown", "purple"];


for it_color=1:length(cl_colors)



    figure();
    x = [0 1 1 0];
    y = [0 0 1 1];
    fill(x, y, cl_colors{it_color});



    st_text = [cl_str_clr_names(it_color) num2str(round(cl_colors{it_color}*255))];
    hText = text(.10,.55, st_text);
    hText.Color = 'white';
    hText.FontSize = 30;
    snapnow;


end

```

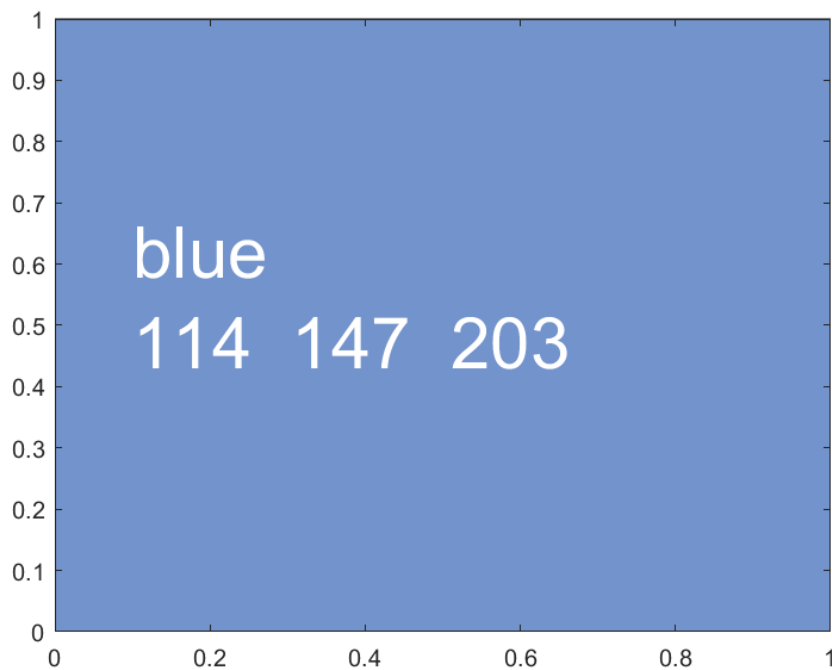

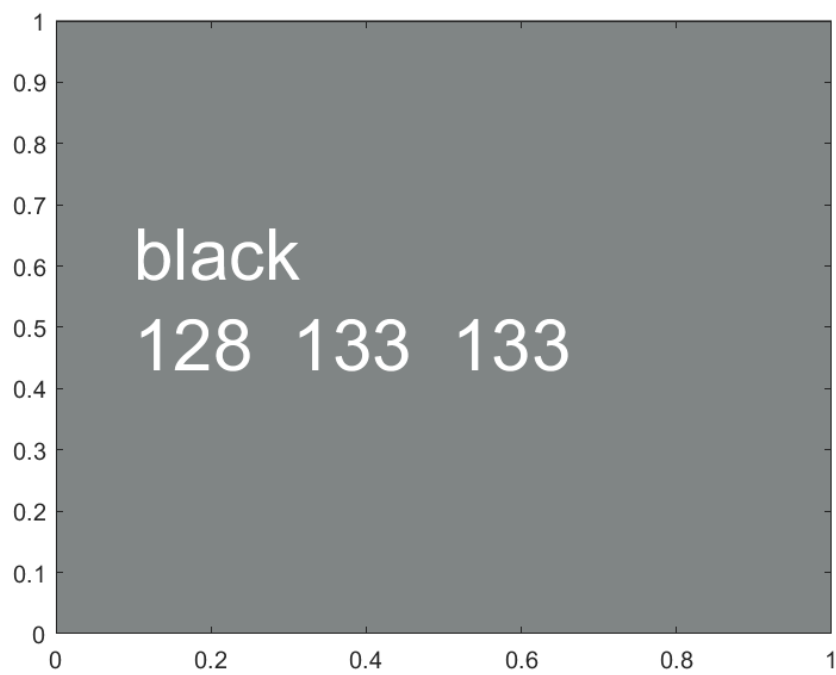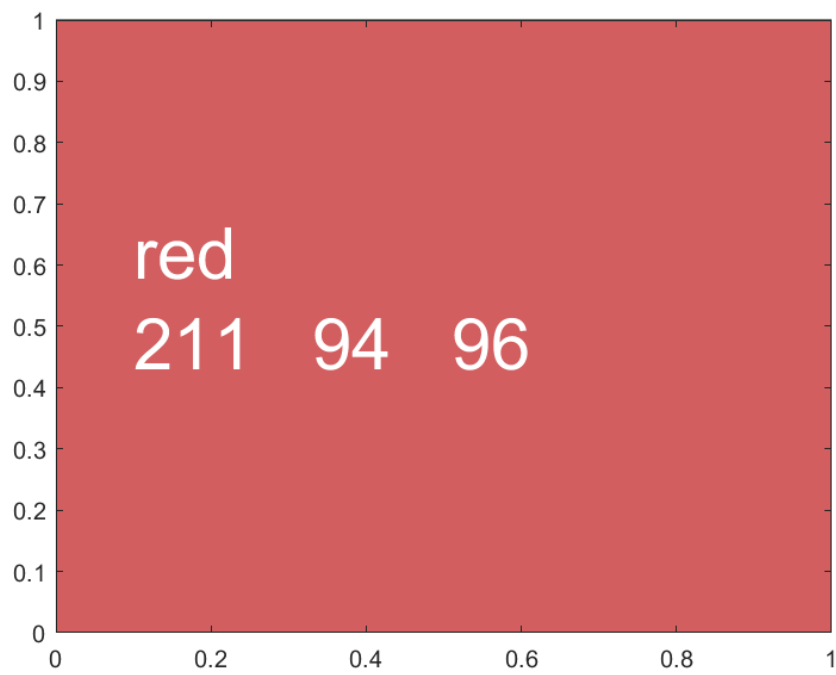

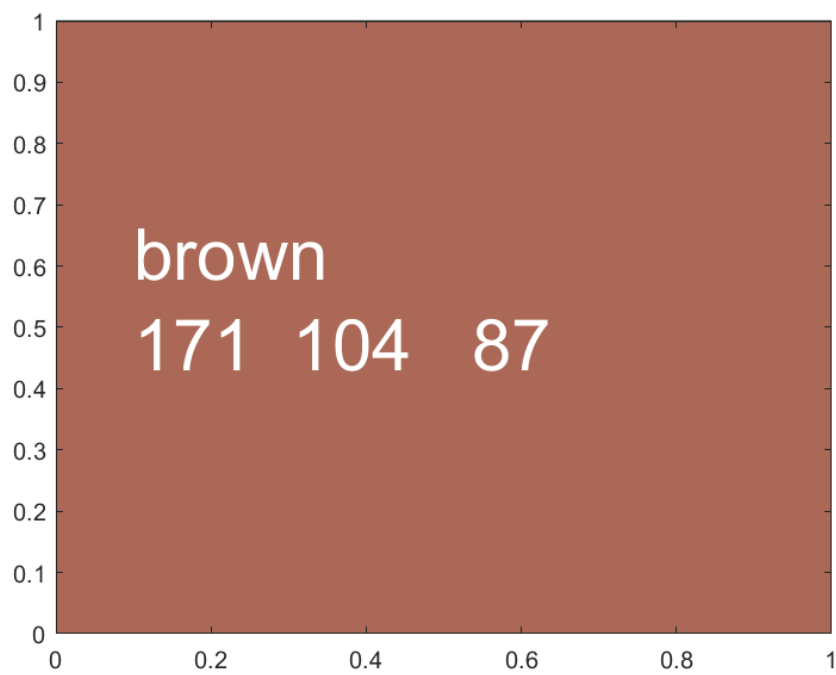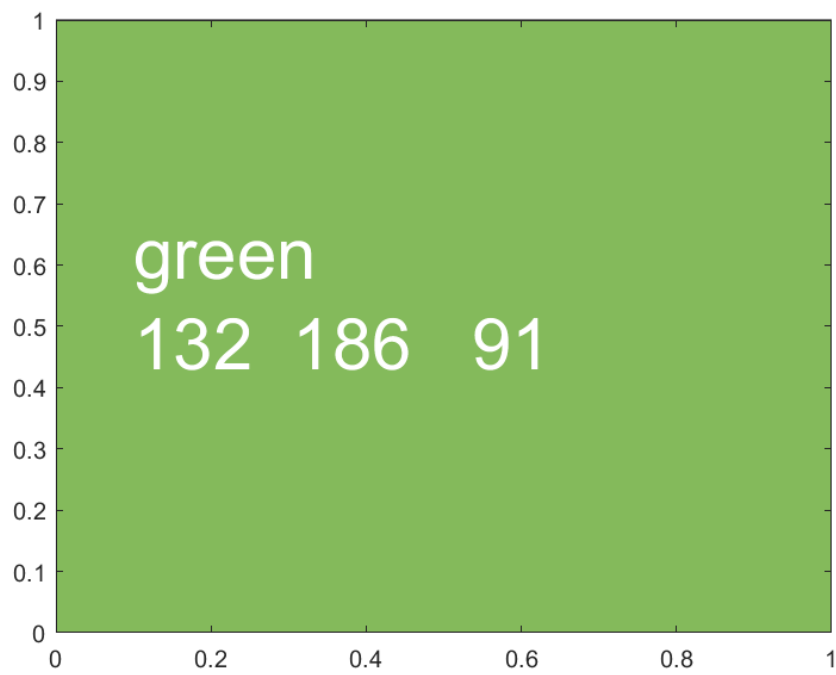

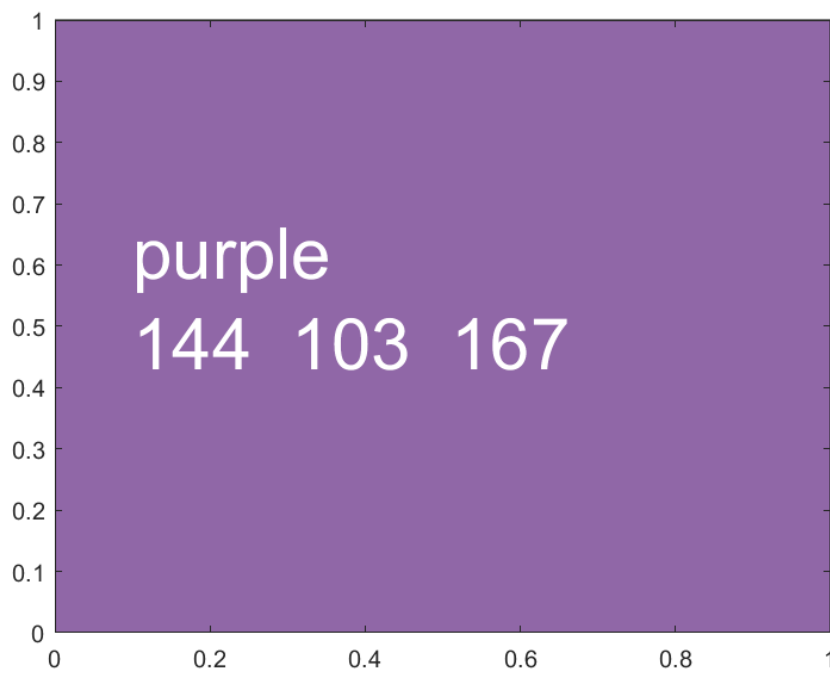

### 3.1.1.3 Matlab has a graphical tool for picking color

Enter `uigetcolor` pick color from new window and color values will appear `uigetcolor`

```
% Color Pickers
% uigetcolor
```


Picked Color use

```
figure();
hold on;

x = rand([10,1]);
y = rand([10,1]);

% Then can use for plot
plot(x,y,'Color',[.61 .51 .74]);

% Can use for Scatter
scatter(x, y, 10, ...
    'MarkerEdgeColor', [.61 .51 .74], 'MarkerFaceAlpha', 0.1, ...
    'MarkerFaceColor', [.61 .51 .74], 'MarkerEdgeAlpha', 0.1);
```

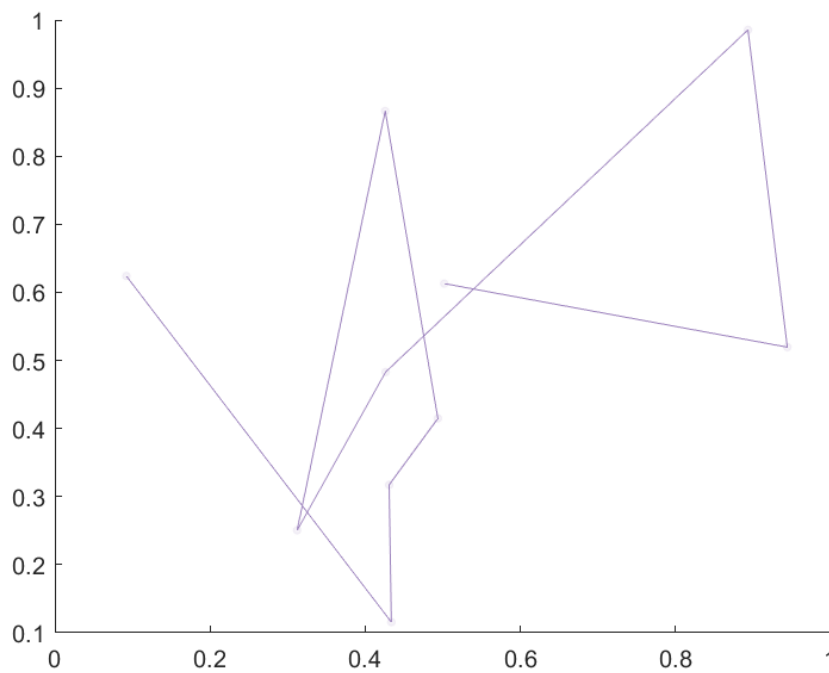

### 3.1.2 Matlab Graph Titling, Labels and Legends Examples

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).


#### 3.1.2.1 Draw A figure Label Title, X and Y Axes with Latex Equations

```
clear all;
close all;
figure();

% draw some lines
xline0 = xline(0);
xline0.HandleVisibility = 'off';
yline0 = yline(0);
yline0.HandleVisibility = 'off';
hline = reffline([1 0]);
hline.Color = 'k';
hline.LineStyle = ':';
hline.HandleVisibility = 'off';

% Titling with multiple lines
title({'Cash-on-Hand given w(k+b),k,z' '$\alpha + \beta = \zeta$'}, 'Interpreter', 'latex');
ylabel({'Cash-on-Hand' 'line 2 $\frac{1}{2}$'}, 'Interpreter', 'latex');
xlabel({'Index of Cash-on-Hand Discrete Point'...
' $\frac{1}{2} + \alpha + \max + \sum_1^B$ Each Segment is a w=k+b; within segment increas
'For each w and z, coh maximizing k is different'}, 'Interpreter', 'latex');

grid on;
grid minor;
```

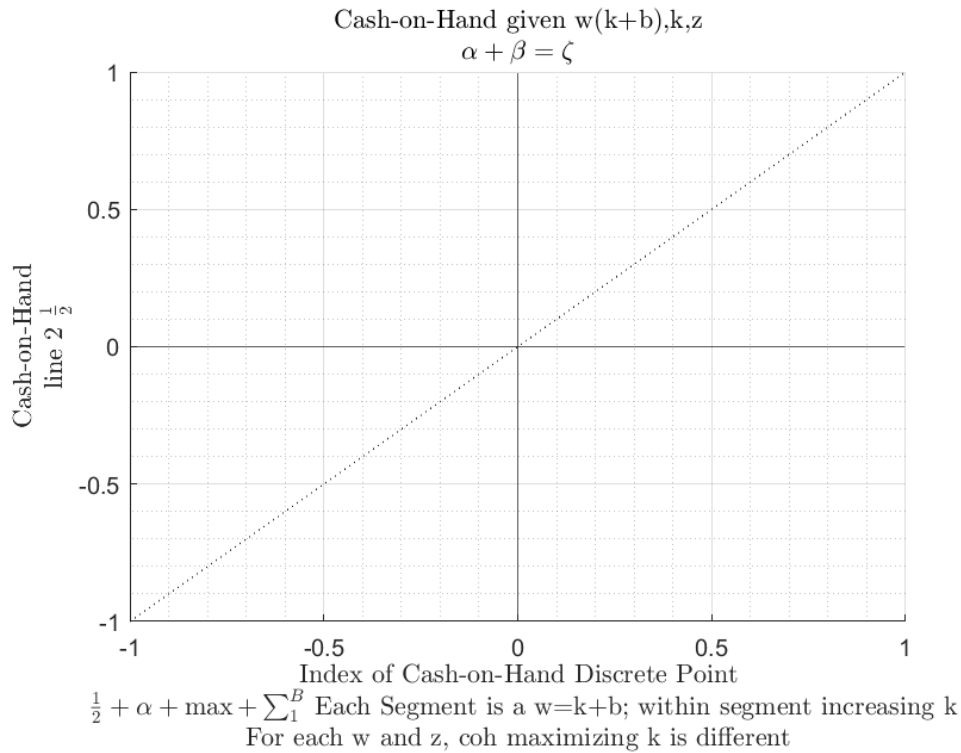

### 3.1.2.2 Matlab Graph Specify Legends Manually

Specify labels manually, note we can use `HandleVisibility` to control what part of figure show up in legends.

```
% Generate Random Data
rng(123);
it_x_n = 10;
it_x_groups_n = 3;
mat_y = rand([it_x_n, it_x_groups_n]);
mat_y = mat_y + sqrt(1:it_x_groups_n);
mat_y = mat_y + log(1:it_x_n)';
ar_x = 1:1:it_x_n;

% Start Figure
figure('PaperPosition', [0 0 10 10]);

hold on;

g1 = scatter(ar_x, mat_y(:,1), 30, 'filled');
g2 = scatter(ar_x, mat_y(:,2), 30, 'filled');
g3 = scatter(ar_x, mat_y(:,3), 30, 'filled');


legend([g1, g2, g3], {'near','linear','spline'}, 'Location','best',...
    'NumColumns',1,'FontSize',12,'TextColor','black');

% PLOT this line, but this line will not show up in legend
hline = reline([1 0]);
hline.Color = 'k';
hline.LineStyle = ':';
% not to show up in legend
hline.HandleVisibility = 'off';
grid on;
grid minor;
```

```

title(sprintf('griddedInterpolant comparison, crra utility approximation, interp grid n=%d', it_x_n))
ylabel('Actual Utility Evaluated at c')
xlabel('Approximated Util based on Interpolation')

```

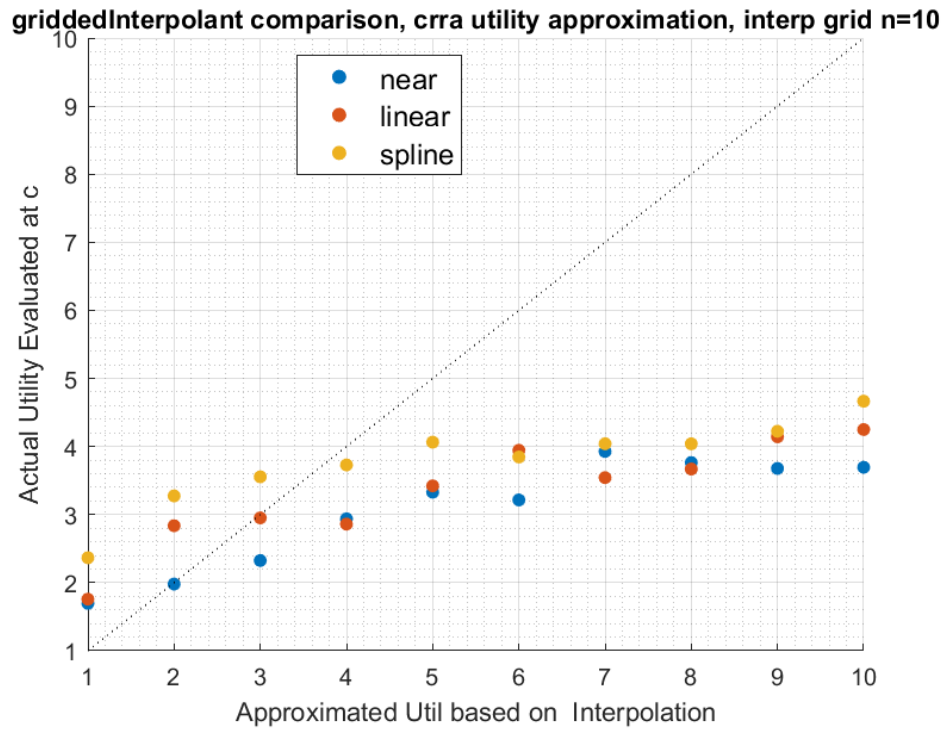

```

snapnow;

```

### 3.1.2.3 Given Graph, Graph Subset of Lines and Add Extra Line with Legend


Same plot as before, except we plot only 2 of the three lines and add another line with associated legend entry.

```

legendCell = cellstr(num2str(ar_x', 'shock=%3.2f'));
xlinemax = xline(min(mat_y, [], 'all'));
xlinemax.Color = 'b';
xlinemax.LineWidth = 1.5;

legendCell[length(legendCell) + 1] = 'max-agg-save';
legend([g1, g3, xlinemax], legendCell([1,3,length(legendCell)]), 'Location', 'best');

```

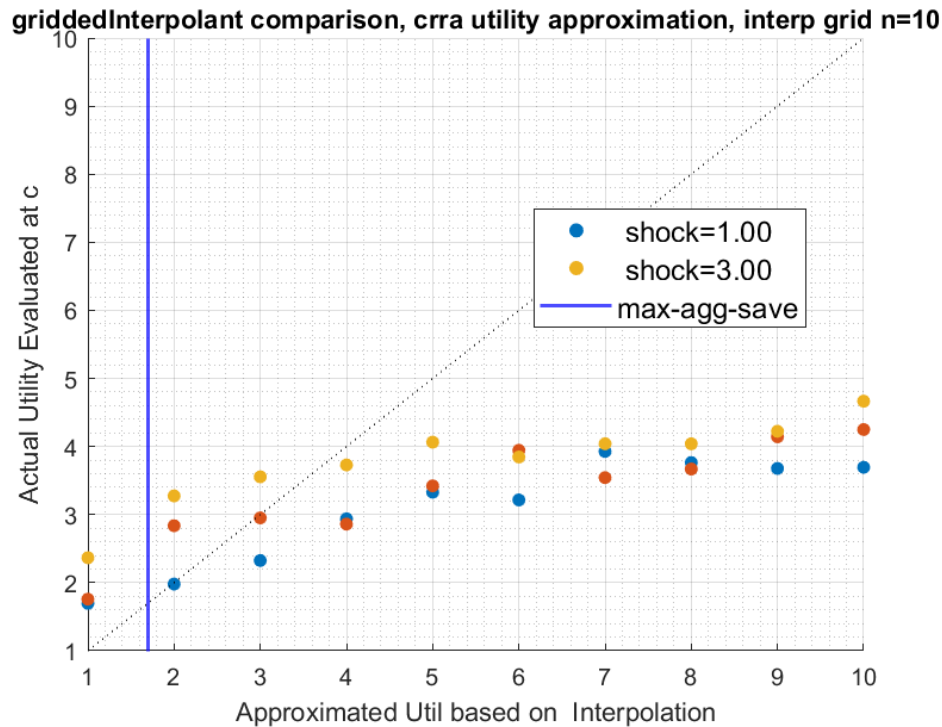

```
snapnow;
```

### 3.1.3 Matlab Graph Matrix with Jet Spectrum Color, Label a Subset Examples

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 3.1.3.1 Plot a Subset of Data Matrix with Appropriate Legends

Sometimes we solve a model across many states, but we can only plot at a subset of states, or perhaps we plot at all states, but only show legends/labels for a subset.

In the example below, many lines are plotted, however, only a subset of lines are labeled in the legend.

```
clear all;
close all;

% Generate Random Data
rng(123);
it_x_n = 10;
it_y_groups_n = 100;
ar_y = linspace(1,2,it_y_groups_n);
mat_y = rand([it_x_n, it_y_groups_n]);
mat_y = mat_y + sqrt(1:it_y_groups_n);
mat_y = mat_y + log(1:it_x_n)' + ar_y;
ar_x = 1:1:it_x_n;

% Jet color Graph All
figure('PaperPosition', [0 0 7 4]);
chart = plot(mat_y);
clr = jet(numel(chart));
for m = 1:numel(chart)
    set(chart(m),'Color',clr(m,:))
end
```



```

% zero lines
xline(0);
yline(0);

% invalid points separating lines
yline_borrbound = yline(3);
yline_borrbound.HandleVisibility = 'on';
yline_borrbound.LineStyle = ':';
yline_borrbound.Color = 'black';
yline_borrbound.LineWidth = 3;


% Titling
title('Cash-on-Hand given w(k+b),k,z');
ylabel('Cash-on-Hand');
xlabel({'Index of Cash-on-Hand Discrete Point'...
    'Each Segment is a w=k+b; within segment increasing k'...
    'For each w and z, coh maximizing k is different'});

% Xlim controls
xlim([min(ar_x), max(ar_x)]);

% Grid ons
grid on;
grid minor;
% Legends
legend2plot = fliplr([1 round(numel(chart))/3 round((2*numel(chart))/4) numel(chart)]);
legendCell = cellstr(num2str(ar_y', 'shock=%3.2f'));

legendCell{length(legendCell) + 1} = 'borrow-constraint';
chart(length(chart)+1) = yline_borrbound;
legend(chart([legend2plot length(legendCell)]), ...
    legendCell([legend2plot length(legendCell)]), ...
    'Location', 'best');

```

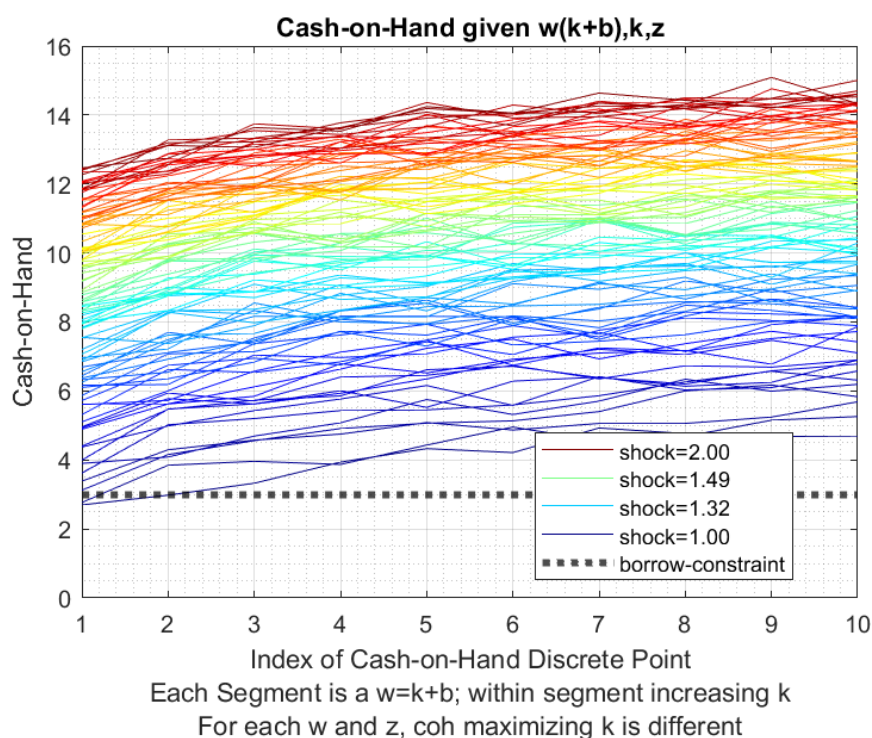

## 3.2 Basic Figure Types

### 3.2.1 Matlab Graph Scatter Plot Examples


Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 3.2.1.1 Scatter Plot Example

The plot below as square scatter points, each one with thick border. Can set transparency of border/edge and inside separately.

```
close all;
figure();
size = 100;
s = scatter(1:10,1:10,size);

s.Marker = 's';
% color picked by using: uisetcolor
s.MarkerEdgeColor = [0 0.4471 0.7412];
s.MarkerEdgeAlpha = 0.5;
s.MarkerFaceColor = [.61 .51 .74];
s.MarkerFaceAlpha = 1.0;
s.LineWidth = 10;
grid on;
grid minor;
```

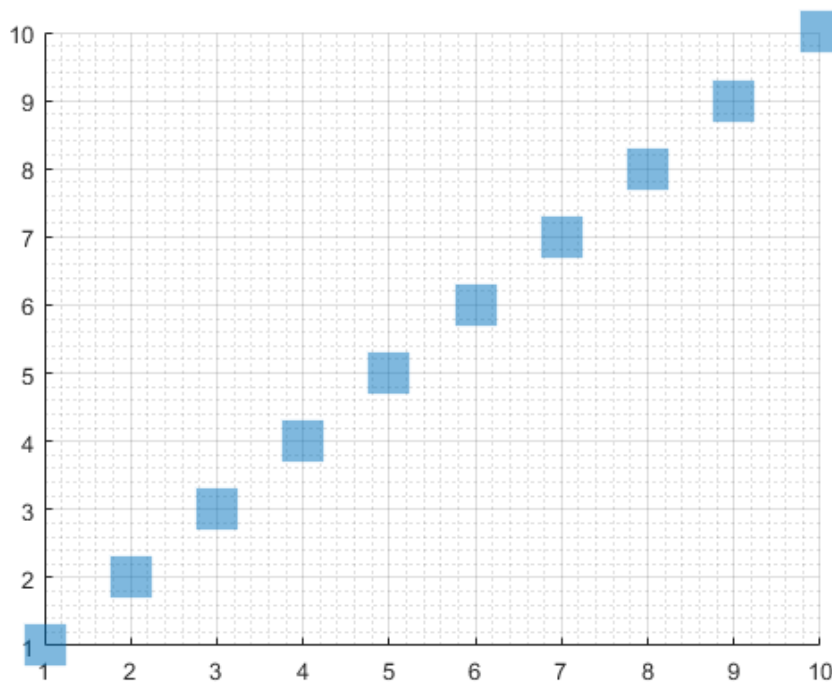

```
% 'o'   Circle
% '+'   Plus sign
% '*'   Asterisk
% '.'   Point
% 'x'   Cross
% 'square' or 's'   Square
% 'diamond' or 'd'   Diamond
% '^'   Upward-pointing triangle
% 'v'   Downward-pointing triangle
```

```
% '>'   Right-pointing triangle
% '<'   Left-pointing triangle
% 'pentagram' or 'p'   Five-pointed star (pentagram)
% 'hexagram' or 'h'   Six-pointed star (hexagram)
% 'none'   No markers
```

### 3.2.1.2 Scatter with Edge and Face Color and Transparency


Here is another way to Set Scatter Edge and Fac Colors and Transparencies.

```
% Generate Data
rng(123);
it_x_n = 10;
it_x_groups_n = 3;
mat_y = rand([it_x_n, it_x_groups_n]);
mat_y = mat_y + sqrt(1:it_x_groups_n);
mat_y = mat_y + log(1:it_x_n)';
ar_x = 1:1:it_x_n;

% Colors
blue = [57 106 177]./255;
red = [204 37 41]./255;
black = [83 81 84]./255;
green = [62 150 81]./255;
brown = [146 36 40]./255;
purple = [107 76 154]./255;
cl_colors = {blue, red, black, ...
             green, brown, purple};

% Scatter Shapes
cl_scatter_shapes = {'s','x','o','d','p','*'};
% Scatter Sizes
cl_scatter_sizes = {100,100,50,50,50,50};
% Legend Keys
cl_legend = {'For Borr', 'Inf Borr', 'For+Inf Br'};

% Plot
figure();
hold on;
for it_m = 1:it_x_groups_n
    scatter(ar_x, mat_y(:,it_m), cl_scatter_sizes{it_m}, ...
           'Marker', cl_scatter_shapes{it_m}, ...
           'MarkerEdgeColor', cl_colors{it_m}, 'MarkerFaceAlpha', 0.8, ...
           'MarkerFaceColor', cl_colors{it_m}, 'MarkerEdgeAlpha', 0.8);
    cl_legend{it_m} = cl_legend{it_m};
end
legend(cl_legend, 'Location', 'best');
grid on;
grid minor;
```

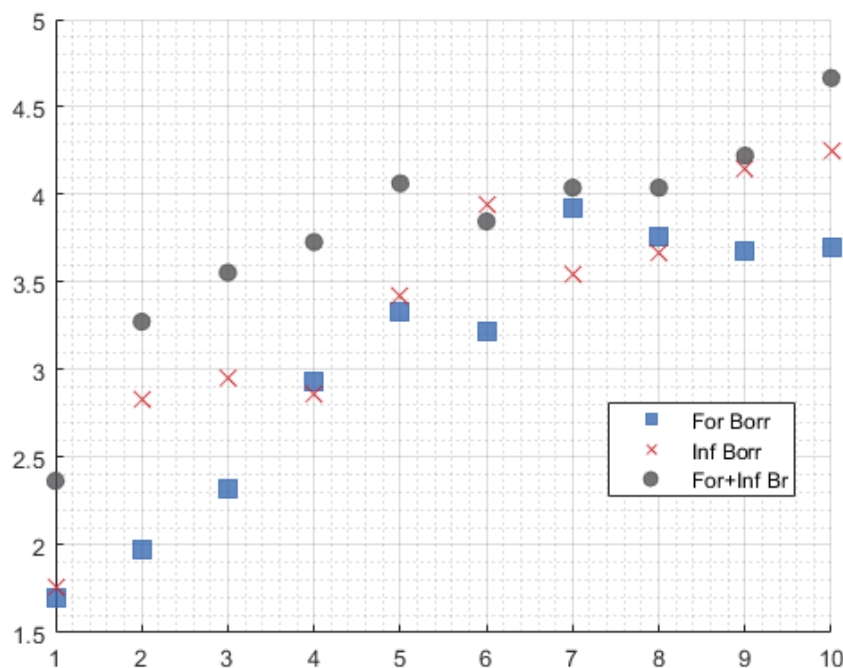

### 3.2.2 Matlab Line and Scatter Plot with Multiple Lines and Axis Lines

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 3.2.2.1 Six lines Plot

Colors from [optimal colors](#). Generate A line plot with multiple lines using safe colors, with differencing shapes. Figures include lines as well as scatter overlayed jointly.

```
close all
figure();
hold on;

blue = [57 106 177]./255;
red = [204 37 41]./255;
black = [83 81 84]./255;
green = [62 150 81]./255;
brown = [146 36 40]./255;
purple = [107 76 154]./255;
cl_colors = {blue, red, black, ...
             green, brown, purple};
cl_legend = {'For Borr', 'Inf Borr', 'For+Inf Br', 'For+Br+Save', 'Bridge Loan', 'For Save'};
cl_scatter_shapes = {'s','x','o','d','p','*'};
cl_linestyle = {'--','-',':','-.-','--','-'};
it_sca_bs = 20;
cl_scatter_csizes = {10*it_sca_bs, 20*it_sca_bs, 10*it_sca_bs, 10*it_sca_bs, 5*it_sca_bs, 8*it_sca_bs};
it_line_bs = 2;
cl_line_csizes = {1*it_line_bs, 2*it_line_bs, 1*it_line_bs, 1*it_line_bs, 1*it_line_bs, 2*it_line_bs};

it_x_groups_n = length(cl_scatter_csizes);
it_x_n = 10;

% Generate Random Data
```

```

rng(123);
mat_y = rand([it_x_n, it_x_groups_n]);
mat_y = mat_y + sqrt(1:it_x_groups_n);
mat_y = mat_y + log(1:it_x_n)';
ar_x = 1:1:it_x_n;

ar_it_graphs_run = 1:6;
it_graph_counter = 0;
ls_chart = [];
for it_fig = ar_it_graphs_run

    % Counter
    it_graph_counter = it_graph_counter + 1;

    % Y Outcome
    ar_y = mat_y(:, it_fig)';

    % Color and Size etc
    it_csize = cl_scatter_csizes{it_fig};
    ar_color = cl_colors{it_fig};
    st_shape = cl_scatter_shapes{it_fig};
    st_lnsty = cl_linestyle{it_fig};
    st_lnwth = cl_line_csizes{it_fig};

    % plot scatter and include in legend
    ls_chart(it_graph_counter) = scatter(ar_x, ar_y, it_csize, ar_color, st_shape);


    % plot line do not include in legend
    line = plot(ar_x, ar_y);
    line.HandleVisibility = 'off';
    line.Color = ar_color;
    line.LineStyle = st_lnsty;
    line.HandleVisibility = 'off';
    line.LineWidth = st_lnwth;

    % Legend to include
    cl_legend{it_graph_counter} = cl_legend{it_fig};
end

% Legend
legend(ls_chart, cl_legend, 'Location', 'southeast');

% labeling
title('Optimal Savings');
ylabel('Savings Levels');
xlabel('Cash-on-Hand Today');
grid on;

```

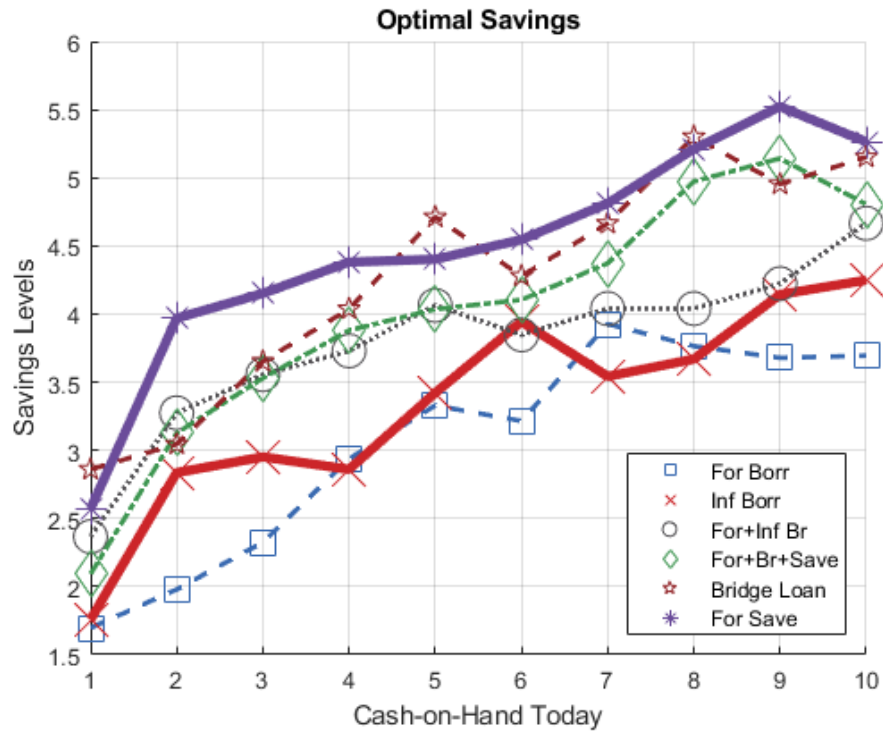

```
snapnow;
```

### 3.2.2.2 Horizontal and Vertical Lines and 45 Degree


Draw x and y axis, and draw a 45 degree line.

```
figure();

xline0 = xline(0);
xline0.HandleVisibility = 'off';
xline0.Color = red;
xline0.LineStyle = '--';
yline0 = yline(0);
yline0.HandleVisibility = 'off';
yline0.LineWidth = 1;

hline = refile([1 0]);
hline.Color = 'k';
hline.LineStyle = ':';
hline.HandleVisibility = 'off';

snapnow;
grid on;
grid minor;
```

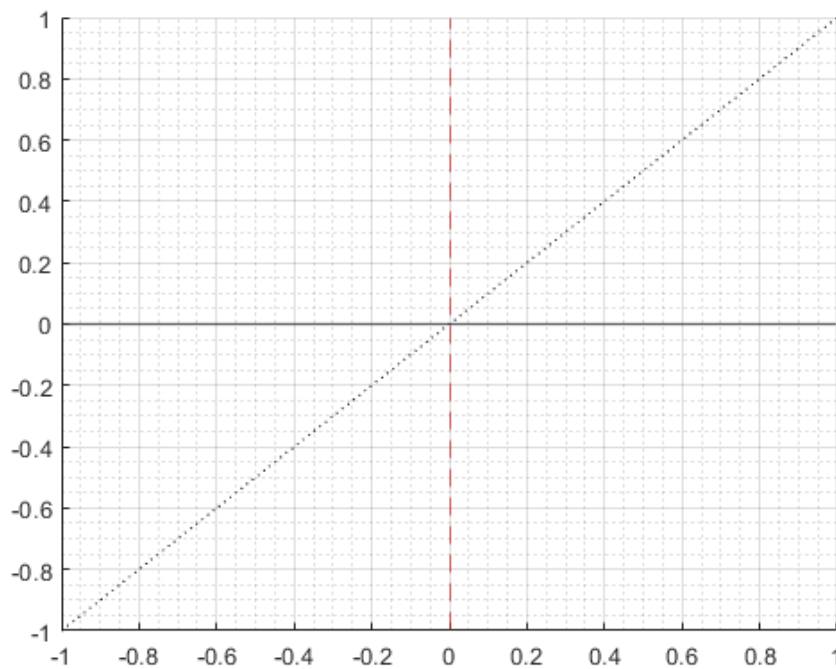

### 3.2.3 Matlab Graph Scatter and Line Spectrum with Three Variables

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

Generate  $k + b = w$ , color for each  $w$ , vectors of  $k$  and  $b$  such that  $k + b = w$  for each  $w$

There are two  $N$  by  $M$  matrix,  $A$  and  $B$ .

Values in Matrix  $A$  correspond to the x-axis, values in Matrix  $B$  correspond to the y-axis.

The rows and columns in matrix  $A$  and  $B$  have some other meanings. In this case, we will give color to the columns.

The columns is represented by vector  $C$ , which is another variable.

1. Each line a different color representing variable 3
2. Legend labeling a subset of colors
3.  $X$  and  $Y$  could be asset choices, color could be utility, consumption etc.

#### 3.2.3.1 Setting Up Data

```
close all
clear all

% Bounds
fl_b_bd = -10;
% Max and Mins
fl_w_max = 50;
fl_w_min = fl_b_bd;
fl_kp_max = fl_w_max - fl_b_bd;
fl_kp_min = 0;

% Grid Point Counts
it_w_i = 30;
it_kb_j = 30;
```

```
% Grids
ar_w = linspace(fl_w_min, fl_w_max, it_w_i);
ar_kp = linspace(fl_kp_min, fl_kp_max, it_kb_j);
mt_bp = ar_w - ar_kp';
mt_kp = ar_w - mt_bp;
mt_bl_constrained = (mt_bp < fl_b_bd);
mt_bp_wth_na = mt_bp;
mt_kp_wth_na = mt_kp;
mt_bp_wth_na(mt_bl_constrained) = nan;
mt_kp_wth_na(mt_bl_constrained) = nan;

% Flatten
ar_bp_mw_wth_na = mt_bp_wth_na(:);
ar_kp_mw_wth_na = mt_kp_wth_na(:);
ar_bp_mw = ar_bp_mw_wth_na(~isnan(ar_bp_mw_wth_na));
ar_kp_mw = ar_kp_mw_wth_na(~isnan(ar_kp_mw_wth_na));
```

### 3.2.3.2 Graphing

```
figure('PaperPosition', [0 0 7 4]);
hold on;


chart = plot(mt_bp_wth_na, mt_kp_wth_na, 'blue');

clr = jet(numel(chart));
for m = 1:numel(chart)
    set(chart(m), 'Color', clr(m,:))
end
if (length(ar_w) <= 50)
    scatter(ar_bp_mw, ar_kp_mw, 5, 'filled');
end
xline(0);
yline(0);

title('Choice Grids Conditional on kp+bp=w')
ylabel('Capital Choice')
xlabel({'Borrowing or Saving'})
legend2plot = fliplr([1 round(numel(chart)/3) round((2*numel(chart))/4) numel(chart)]);
legendCell = cellstr(num2str(ar_w', 'kp+bp=%3.2f'));
legend(chart(legend2plot), legendCell(legend2plot), 'Location','northeast');

grid on;
```



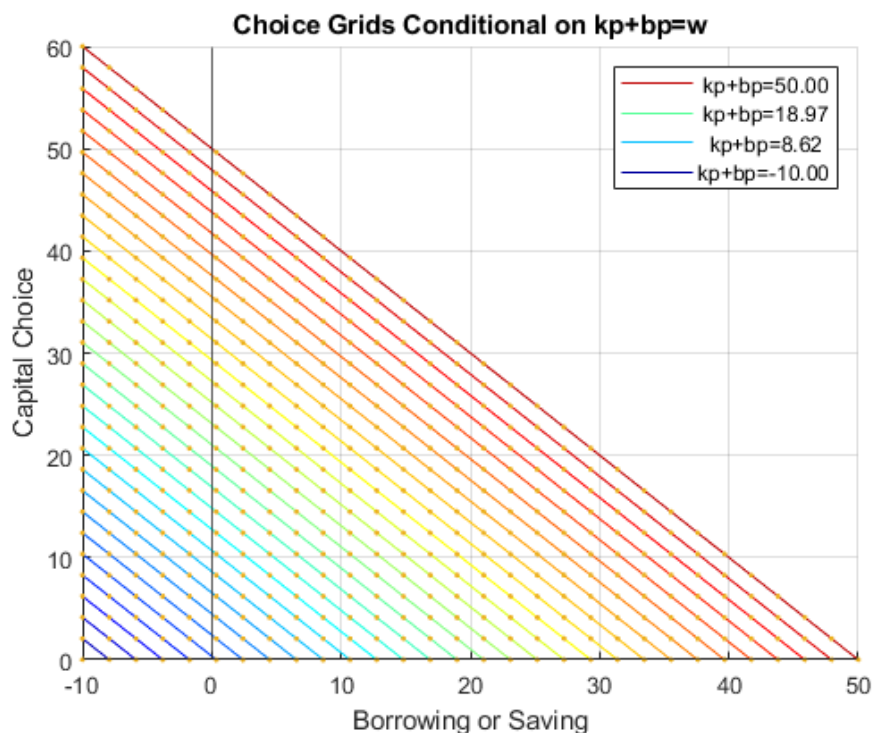

### 3.3 Write and Read Plots

#### 3.3.1 Matlab Graph Generate EPS postscript figures in matlab

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

##### 3.3.1.1 Properly Save EPS with Scatter and Other Graphing Methods: `Renderer = Painters`


scatter plot saving as eps seems to only work when `Renderer` is set to `Painters`

```
fl_fig_wdt = 3;
fl_fig_hgt = 2.65;

figure('PaperPosition', [0 0 fl_fig_wdt fl_fig_hgt], 'Renderer', 'Painters');
x = rand([10,1]);
y = rand([10,1]);
scatter(x, y, 'filled');
grid on;
grid minor;

st_img_path = 'C:/Users/fan/M4Econ/graph/export/_img/';
st_file_name = 'fs_eps_scatter_test';

% eps figure save with tiff preview
print(strcat(st_img_path, st_file_name), '-depsc', '-tiff');
```

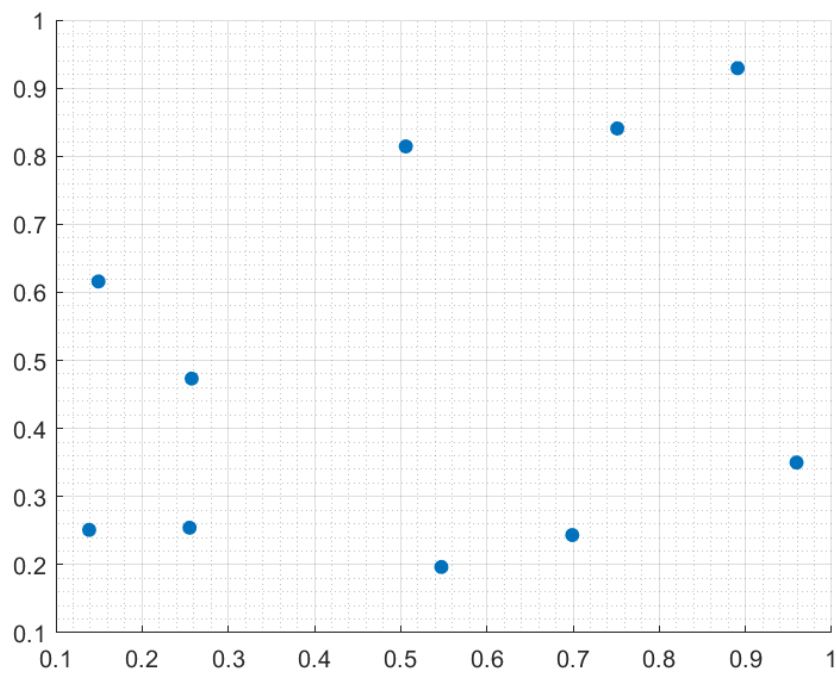

# Chapter 4

## Tables

### 4.1 Basic Table Generation

#### 4.1.1 Named Tables with Random Data

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

##### 4.1.1.1 Generate A Table with M Variables

Generate a numeric table with random varlues and a string column

```
% Numeric Matrix
it_num_cols = 4;
it_num_rows = 5;
mt_data = rand([it_num_rows, it_num_cols]);

% Generate Table
tb_test = array2table(mt_data);

% Generate Row and Column Names
cl_col_names = strcat('col_', string((1:it_num_cols)));
cl_row_names = strcat('row_', string((1:it_num_rows)));

tb_test.Properties.VariableNames = matlab.lang.makeValidName(cl_col_names);
tb_test.Properties.RowNames = matlab.lang.makeValidName(cl_row_names);

% Generate two string variable
rng(456);
cl_st_var1 = strcat('data=', string(rand([it_num_rows,1])));
cl_st_var2 = strcat('data=', string(rand([it_num_rows,1])));
tb_test = addvars(tb_test, cl_st_var1, cl_st_var2);

% Display Table
disp(tb_test);
```

|       | col_1   | col_2   | col_3     | col_4   | cl_st_var1     | cl_st_var2     |
|-------|---------|---------|-----------|---------|----------------|----------------|
|       | -----   | -----   | -----     | -----   | -----          | -----          |
| row_1 | 0.43568 | 0.4688  | 0.18092   | 0.14604 | "data=0.24876" | "data=0.60411" |
| row_2 | 0.38527 | 0.57    | 0.11816   | 0.54272 | "data=0.16307" | "data=0.8857"  |
| row_3 | 0.57571 | 0.6457  | 0.24273   | 0.8571  | "data=0.78364" | "data=0.75912" |
| row_4 | 0.14609 | 0.72334 | 0.0081834 | 0.20021 | "data=0.80852" | "data=0.18111" |
| row_5 | 0.68659 | 0.68067 | 0.36007   | 0.13463 | "data=0.62563" | "data=0.15017" |

### 4.1.2 Tables Order Columns and Sort

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 4.1.2.1 Given Table, Show Some Columns First

```
% Generate Table
it_num_cols = 4;
it_num_rows = 5;
mt_data = rand([it_num_rows, it_num_cols]);
tb_test = array2table(mt_data);
cl_col_names = strcat('col_', string((1:it_num_cols)));
cl_row_names = strcat('row_', string((1:it_num_rows)));
tb_test.Properties.VariableNames = matlab.lang.makeValidName(cl_col_names);
tb_test.Properties.RowNames = matlab.lang.makeValidName(cl_row_names);

rng(123);
mean = strcat('data=', string(rand([it_num_rows,1])));
sd = strcat('data=', string(rand([it_num_rows,1])));
tb_test_ori = addvars(tb_test, mean, sd);

% Move Variable
tb_test_varmove = movevars(tb_test_ori, {'mean', 'sd'}, 'Before', 'col_1');

% Display
disp(tb_test_ori);
```

|       | col_1    | col_2   | col_3   | col_4   | mean           | sd             |
|-------|----------|---------|---------|---------|----------------|----------------|
|       | -----    | -----   | -----   | -----   | -----          | -----          |
| row_1 | 0.34318  | 0.738   | 0.6344  | 0.32296 | "data=0.69647" | "data=0.42311" |
| row_2 | 0.72905  | 0.18249 | 0.84943 | 0.36179 | "data=0.28614" | "data=0.98076" |
| row_3 | 0.43857  | 0.17545 | 0.72446 | 0.22826 | "data=0.22685" | "data=0.68483" |
| row_4 | 0.059678 | 0.53155 | 0.61102 | 0.29371 | "data=0.55131" | "data=0.48093" |
| row_5 | 0.39804  | 0.53183 | 0.72244 | 0.63098 | "data=0.71947" | "data=0.39212" |

```
disp(tb_test_varmove);
```

|       | mean           | sd             | col_1    | col_2   | col_3   | col_4   |
|-------|----------------|----------------|----------|---------|---------|---------|
|       | -----          | -----          | -----    | -----   | -----   | -----   |
| row_1 | "data=0.69647" | "data=0.42311" | 0.34318  | 0.738   | 0.6344  | 0.32296 |
| row_2 | "data=0.28614" | "data=0.98076" | 0.72905  | 0.18249 | 0.84943 | 0.36179 |
| row_3 | "data=0.22685" | "data=0.68483" | 0.43857  | 0.17545 | 0.72446 | 0.22826 |
| row_4 | "data=0.55131" | "data=0.48093" | 0.059678 | 0.53155 | 0.61102 | 0.29371 |
| row_5 | "data=0.71947" | "data=0.39212" | 0.39804  | 0.53183 | 0.72244 | 0.63098 |

### 4.1.3 Row and Column names for Table based on Arrays

Go back to [fan's CodeDynaAsset Package](#), [Matlab Code Examples Repository](#) ([bookdown site](#)), or [Math for Econ with Matlab Repository](#) ([bookdown site](#)).

#### 4.1.3.1 Generate Table with Row and Column Names based on Multiple Numeric Array

Two numeric arrays describe the column names, combine numeric arrays together to form string array which becomes table variable/column names.

```
close all;
```

```
% Generate Table 1
ar_fl_abc1 = [0.4 0.1 0.25 0.3 0.4];
ar_fl_abc2 = [0.4 0.1 0.2 0.3 0.4];
number1 = '123';
number2 = '456';
mt_data_a = [ar_fl_abc1' ar_fl_abc2'];

tb_test_a = array2table(mt_data_a);
cl_col_names_a = {'col' num2str(number1)}, ['col' num2str(number2)]};
cl_row_names_a = strcat('rowA=', string((1:size(mt_data_a,1)))));

tb_test_a.Properties.VariableNames = cl_col_names_a;
tb_test_a.Properties.RowNames = cl_row_names_a;
disp(tb_test_a);
```

|        | col123 | col456 |
|--------|--------|--------|
|        | -----  | -----  |
| rowA=1 | 0.4    | 0.4    |
| rowA=2 | 0.1    | 0.1    |
| rowA=3 | 0.25   | 0.2    |
| rowA=4 | 0.3    | 0.3    |
| rowA=5 | 0.4    | 0.4    |

#### 4.1.3.2 Include Row Names as a Variable

```
% a and b must have the same row names
varrownames = tb_test_a.Properties.RowNames;
tb_test_a = addvars(tb_test_a, varrownames, 'Before', 1);

disp(tb_test_a);
```

|        | varrownames | col123 | col456 |
|--------|-------------|--------|--------|
|        | -----       | -----  | -----  |
| rowA=1 | {'rowA=1'}  | 0.4    | 0.4    |
| rowA=2 | {'rowA=2'}  | 0.1    | 0.1    |
| rowA=3 | {'rowA=3'}  | 0.25   | 0.2    |
| rowA=4 | {'rowA=4'}  | 0.3    | 0.3    |
| rowA=5 | {'rowA=5'}  | 0.4    | 0.4    |

## 4.2 Table Joining

### 4.2.1 Combining Tables and Matrixes Together

Go back to [fan's CodeDynaAsset Package, Matlab Code Examples Repository \(bookdown site\)](#), or [Math for Econ with Matlab Repository \(bookdown site\)](#).

#### 4.2.1.1 Generate Some Tables and Matrixes for Combination

```
close all;

% Generate Table 1
ar_fl_abc1 = [0.4 0.1 0.25 0.3 0.4];
ar_fl_abc2 = [0.4 0.1 0.2 0.3 0.4];
number1 = '123';
number2 = '456';
mt_data_a = [ar_fl_abc1' ar_fl_abc2'];
```

```
tb_test_a = array2table(mt_data_a);
cl_col_names_a = {'col' num2str(number1)}, ['col' num2str(number2)]};
cl_row_names_a = strcat('rowA=', string((1:size(mt_data_a,1))));
```

```
tb_test_a.Properties.VariableNames = cl_col_names_a;
tb_test_a.Properties.RowNames = cl_row_names_a;
disp(tb_test_a);
```

|        | col123 | col456 |
|--------|--------|--------|
|        | -----  | -----  |
| rowA=1 | 0.4    | 0.4    |
| rowA=2 | 0.1    | 0.1    |
| rowA=3 | 0.25   | 0.2    |
| rowA=4 | 0.3    | 0.3    |
| rowA=5 | 0.4    | 0.4    |

```
% Generate Table 2
```

```
rng(123);
ar_fl_abc3 = rand(size(ar_fl_abc1));
ar_fl_abc4 = rand(size(ar_fl_abc1));
ar_fl_abc5 = rand(size(ar_fl_abc1));
```

```
mt_data_b = [ar_fl_abc3' ar_fl_abc4' ar_fl_abc5'];
```

```
tb_test_b = array2table(mt_data_b);
cl_col_names_b = {'col' num2str(33)}, ['col' num2str(44)}, ['col' num2str(55)]};
cl_row_names_b = strcat('rowB=', string((1:size(mt_data_a,1))));
```

```
tb_test_b.Properties.VariableNames = cl_col_names_b;
tb_test_b.Properties.RowNames = cl_row_names_b;
disp(tb_test_b);
```

|        | col33   | col44   | col55    |
|--------|---------|---------|----------|
|        | -----   | -----   | -----    |
| rowB=1 | 0.69647 | 0.42311 | 0.34318  |
| rowB=2 | 0.28614 | 0.98076 | 0.72905  |
| rowB=3 | 0.22685 | 0.68483 | 0.43857  |
| rowB=4 | 0.55131 | 0.48093 | 0.059678 |
| rowB=5 | 0.71947 | 0.39212 | 0.39804  |

#### 4.2.1.2 Combine Tables Together Stack Columns

Tables with the same number of rows, add more columns with named variables

```
% a and b must have the same row names
```

```
tb_test_b_withArownames = tb_test_b;
tb_test_b_withArownames.Properties.RowNames = tb_test_a.Properties.RowNames;
tb_ab_col_stacked = [tb_test_a tb_test_b_withArownames];
```

```
display(tb_ab_col_stacked);
```

|          | col123 | col456 | col33  | col44  | col55  |
|----------|--------|--------|--------|--------|--------|
| 1 rowA=1 | 0.4000 | 0.4000 | 0.6965 | 0.4231 | 0.3432 |
| 2 rowA=2 | 0.1000 | 0.1000 | 0.2861 | 0.9808 | 0.7290 |

```
3 rowA=3 0.2500 0.2000 0.2269 0.6848 0.4386 4 rowA=4 0.3000 0.3000 0.5513 0.4809 0.0597 5
rowA=5 0.4000 0.4000 0.7195 0.3921 0.3980
```

#### 4.2.1.3 Combine Tables Together Stack Rows

Tables with the same number of columns, dd more rows variables

```
% Select only 2 columns to match table a column count
```

```
tb_test_b_subset = tb_test_b(:,1:2);
```

```
% Make Column Names consistent
```

```
tb_test_b_subset.Properties.VariableNames = cl_col_names_a;
```

```
% Reset Row Names, can not have identical row names
```

```
tb_test_a.Properties.RowNames = strcat('row=', string((1:size(mt_data_a,1))));
```

```
tb_test_b_subset.Properties.RowNames = ...
```

```
    strcat('row=', string(((size(mt_data_a,1)+1):(size(mt_data_a,1)+size(tb_test_b_subset,1)))));
```

```
% tb_test_b_subset.Properties.RowNames =
```

```
% Stack Rows
```

```
tb_ab_row_stacked = [tb_test_a; tb_test_b_subset];
```

```
display(tb_ab_row_stacked);
```

```
` `      `col123`      `col456`
```

|   |          |       |        |        |
|---|----------|-------|--------|--------|
| 1 | row=1 2  | row=2 | 0.4000 | 0.4000 |
| 3 | row=3 4  | row=4 | 0.1000 | 0.1000 |
| 5 | row=5 6  | row=6 | 0.2500 | 0.2000 |
| 7 | row=7 8  | row=8 | 0.3000 | 0.3000 |
| 9 | row=9 10 |       | 0.4000 | 0.4000 |
|   | row=10   |       | 0.6965 | 0.4231 |
|   |          |       | 0.2861 | 0.9808 |
|   |          |       | 0.2269 | 0.6848 |
|   |          |       | 0.5513 | 0.4809 |
|   |          |       | 0.7195 | 0.3921 |

```
## Combine Tables Together Stack Rows
with the same number of columns,
dd more rows
variables
to match
table a
column count
est_b(:,1:2);
consistent
ties.VariableNames
=
cl_col_names_a;
```

|           | <hr/>        |                    |                                                      |
|-----------|--------------|--------------------|------------------------------------------------------|
|           | % Reset Row  | Names, can         | not have                                             |
|           | tb_test_a.Pr | operties.Ro        | identical row                                        |
|           | tb_test_b_su | bset.Proper        | names                                                |
|           | strcat(' %   | row=', stri        | wNames =                                             |
|           | tb_test_b__  | subset.Prop        | strcat('row=',                                       |
|           |              |                    | string((1:size(mt_data_a,1))));                      |
|           |              |                    | ties.RowNames                                        |
|           |              |                    | = ...                                                |
|           |              |                    | ng(((size(mt_data_a,1)+1):(size(mt_data_a,1)+size(tb |
|           |              |                    | er-                                                  |
|           |              |                    | ties.RowNames                                        |
|           |              |                    | =                                                    |
|           | % Stack Rows | acked = [tb        | _test_a;                                             |
|           | tb_ab_row_st | tb_test_b_subset]; |                                                      |
|           | display(tb_a | b_row_stack        | ed);                                                 |
|           |              | col123             | col1456                                              |
|           | <hr/>        |                    |                                                      |
| `1 row=1` | `0.4000`     | `0.4000`           |                                                      |
| `2 row=2` | `0.1000`     | `0.1000`           |                                                      |
| `3 row=3` | `0.2500`     | `0.2000`           |                                                      |
| `4 row=4` | `0.3000`     | `0.3000`           |                                                      |
| `5 row=5` | `0.4000`     | `0.4000`           |                                                      |
| `6 row=6` | `0.6965`     | `0.4231`           |                                                      |
| `7 row=7` | `0.2861`     | `0.9808`           |                                                      |
| `8 row=8` | `0.2269`     | `0.6848`           |                                                      |
| `9 row=9` | `0.5513`     | `0.4809`           |                                                      |
| 10 row=10 | 0.7195       | 0.3921             |                                                      |



# Appendix A

## Index and Code Links

### A.1 Data Structures links

#### A.1.1 Section 1.1 Matrices and Arrays links

1. [Accumarray Examples](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Accumarray to sum up probabilities/values for discrete elements of arrays.
  - **m**: `unique() + reshape() + accumarray()`
2. [Array Broadcasting Examples](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - broadcast means: array + array' + matrix = matrix.
3. [Array Random Draws and Permutation](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Draw randomly from array, permute arrays.
  - **m**: `ndgrid() + cell2mat(cellfun(@(m) m(:), cl_mt_all, 'uni', 0))`
4. [Imaginary Elements of Array](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Find imaginary elements of array.
  - **m**: `imag()`
5. [Array Reshape, Repeat and Expand](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Reshape and flatten arrays.
  - **m**: `reshape()`
6. [Array Index Slicing and Subsetting to Replace and Expand](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Index based column and row expansions.
  - Anonymous function to slice array subsets.
  - **m**: `sub2ind() + @(it_subset_n, it_ar_n) unique(round(((0:1:(it_subset_n-1))/(it_subset_n-1)) times (it_ar_n-1)+1))`
7. [Grid States, Choices and Optimal Choices Example](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - States, choices, and find max.

#### A.1.2 Section 1.2 Cells links

1. [List Comprehension with Cells](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Cell2mat, cellfun, anonymous function list comprehension over cells.
  - Find min and max of all arrays in cells.
  - Find length of all arrays in cells; find index of elements of one array in another cell array.
  - **m**: `cell2mat() + cellfun() + strcmp() + find() + cell2mat(cellfun(@(m) find(strcmp(ls_st_param_key, m)), cl_st_param_keys, 'UniformOutput', false))`
2. [Permutate Cells](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Generate all possible combinations of various arrays contained in cell array.
  - **m**: `ndgrid() + cell2mat() + array2table() + cell2mat(cellfun(@(m) m(:), cl_mt_all, 'uni', 0))`
3. [Combine Cells](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Combine string cell arrays and string.
  - **m**: `[{st_param}, ls_st_param_key, cl_st_param_keys]`
4. [Nested Cells](#): [mlx](#) | [m](#) | [pdf](#) | [html](#)

- Cell of cells with inner cell having multiple types.
- **m**: `linspace()` + `cell([4,1])` + `clns_parm_tstar{1}` = `{'fl_crra', 'CRRRA', linspace(1, 2, it_simu_vec_len)}` + `disp(clns_parm_tstar(1))` + `disp(clns_parm_tstar{1}{1})`

### A.1.3 Section 1.3 Characters and Strings links

1. String Basics: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Cut string suffix and append new suffix.
  - **m**: `*str_sub = split(string, ".") + strcat(str_sub{1}, '_m.m')*`
2. String Arrays: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Concatenate string arrays, find string in string cell array, print display numerics as strings.
  - String with numeric arrays, numeric arrays together as strings, combine numeric arrays and append string.
  - **m**: `repmat()` + `num2str()` + `strcat()` + `strjoin()` + `fprintf()` + `strcmp()` + `strcmp()` + `cel2mat(cellfun(@(m) find(strcmp())))`
3. String Concatenations: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Concatenate multiple numeric arrays together with strings and format.
  - **m**: `cellstr()` + `strcat()`

### A.1.4 Section 1.4 Map Containers links

1. Container Map Basics: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Numeric container map, dynamically filled container map.
  - **m**: `isKey()` + `strjoin()` + `containers.Map('KeyType', 'char', 'ValueType', 'any')`
2. Display Container Map Keys and Values: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Loop over map, display keys and values.
  - **m**: `strjoin()` + `keys(map)` + `values(map)`
3. Container Map Varied Value Type: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Numeric scalar, string, matrix as values for map container.
  - Get values for multiple keys in map.
  - **m**: `map.keys()` + `map.values()` + `values(param_map, {'share_unbanked_j', 'equi_r_j'})`
4. Cell Override: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Override default map with externally fed map, update existing and add new keys.
  - **m**: `param_map_updated = [param_map_old; param_map_updates_new]`

## A.2 Functions links

### A.2.1 Section 2.1 varargin Default Parameters links

1. Use varargin as a Function Parameter: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Default parameters allow for maintaining code testability.
  - Use varargin for functions with limited parameters.
  - **m**: `varargin` + `cell2mat()` + `function [out_put] = func_name(varargin)`
2. Use varargin as a Function Parameter: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - The varargin structure could lead to excessive code lines. Container Map works well with large parameter structure.
  - Core model functions with potentially many parameters, possibly override default generation to save time.
  - **m**: `varargin` + `function [out_put] = func_name(varargin) + cm_defaults = {cm_a, cm_b} + [cm_defaults{1:optional_params_len}] = varargin{:} + cm_c = [cm_a;cm_b]`

## A.3 Graphs links

### A.3.1 Section 3.1 Figure Components links

1. Image Pick Safe Colors: [mlx](#) | [m](#) | [pdf](#) | [html](#)
  - Display safe colors.
  - **m**: `blue = [57 106 177]./255 + fill(x, y, cl_colors{it_color})`

2. [Figure Titling and Legend: `mlx` | `m` | `pdf` | `html`](#)
  - Multi-line titles, add legend lines.
  - Add to legend, select legend to show.
  - **m:** `title({'Cash-on-Hand' 'α + β = ζ'}, 'Interpreter', 'latex') + legend([g1, g2, g3], {'near', 'linear', 'spline'}, 'Location', 'best', 'NumColumns', 1, 'FontSize', 12, 'TextColor', 'black');`
3. [Graph Many Lines Legend for Subset: `mlx` | `m` | `pdf` | `html`](#)
  - State-space plots with color spectrum: can not show all states in legend, show subset, add additional line to plot and legend.
  - **m:** `jet() + numel() + fliplr() + jet(numel(chart)), set(chart(m), 'Color', clr(m,:))`

### A.3.2 Section 3.2 Basic Figure Types links

1. [Scatter Plot Examples: `mlx` | `m` | `pdf` | `html`](#)
  - Scatter multiple lines different colors, shapes and sizes.
  - **m:** `scatter(x, y, size) + Marker + MarkerEdgeColor + MarkerEdgeAlpha + MarkerFaceColor + MarkerFaceAlpha`
2. [Scatter Plot Examples: `mlx` | `m` | `pdf` | `html`](#)
  - Scatter and lines multiple lines different colors, shapes and sizes.
  - X axis, Y axis, and 45 degree line.
  - **m:** `xline(0) + yline(0) + reline([1 0]) + plot(x,y) + HandleVisibility + Color + LineStyle + LineWidth`
3. [Three variables Scatter and Lines with Color Spectrum: `mlx` | `m` | `pdf` | `html`](#)
  - Two dimensional matrix for x and y, a third variable with color spectrum set via loop.
  - **m:** `plot(2d, 2d) + jet + set(chart(m), 'Color', clr)`

### A.3.3 Section 3.3 Write and Read Plots links

1. [Graph Generate EPS Postscript Figures: `mlx` | `m` | `pdf` | `html`](#)
  - EPS vector graphics, avoid bitmap (jpg, png), use vector graphics.
  - **m:** `figure('Renderer', 'Painters')`

## A.4 Tables links

### A.4.1 Section 4.1 Basic Table Generation links

1. [Named Tables with Random Data: `mlx` | `m` | `pdf` | `html`](#)
  - Convert a random matrix to a table with column and row names defined with arrays.
  - **m:** `array2table() + strcat() + addvars() + matlab.lang.makeValidName()`
2. [Order and Sort Columns: `mlx` | `m` | `pdf` | `html`](#)
  - Convert a matrix to table with mean and sd columns. Rearrange columns.
  - **m:** `array2table() + rng() + movevars() + matlab.lang.makeValidName() + tb.Properties.VariableNames + tb.Properties.RowNames`
3. [Array Based Row and Column Names: `mlx` | `m` | `pdf` | `html`](#)
  - Generate a column and row named table. Convert row names to a column.
  - **m:** `array2table() + strcat('rowA=', string((1:size(mt, 1)))) + tb_test_a.Properties.VariableNames + tb_test_a.Properties.RowNames + addvars(tb, rownames, 'Before', 1)`

### A.4.2 Section 4.2 Table Joining links

1. [Stack Matlab Tables: `mlx` | `m` | `pdf` | `html`](#)
  - Append columns to existing table. Stack tables vertically and horizontally.
  - **m:** `array2table() + [tb_a tb_b] + [tb_a; tb_b] + tb.Properties.VariableNames + tb.Properties.RowNames`



# Bibliography

The MathWorks Inc (2019). *MATLAB*. Matlab package version 2019b.

Wang, F. (2020). *MEconTools: Tools for Analyzing Matlab Data Structures and Dynamic Programming*. M package version 0.0.0.9000.

Xie, Y. (2020). *bookdown: Authoring Books and Technical Documents with R Markdown*. R package version 0.18.